

LIDL US, LLC

LIDL 1517 NORCROSS, GA

4990 JIMMY CARTER BLVD. NORCROSS, GA 30093



RENDERING IS FOR ILLUSTRATIVE PURPOSES ONLY AND NOT TO BE USED FOR CONSTRUCTION

PROJECT DIRECTORY

|                                                                                           |                                                                                                        |                                                                                         |                                                                                                                                                                 |                                                                                                       |                                                                                                  |                                                                                                         |                                                                                     |
|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>OWNER</b><br>LIDL US OPERATIONS, LLC<br>3500 SOUTH CLARK STREET<br>ARLINGTON, VA 22202 | <b>ARCHITECT</b><br>PROGRESSIVE COMPANIES<br>1801 N. GRAHAM STREET<br>SUITE 200<br>CHARLOTTE, NC 28206 | <b>CIVIL ENGINEER</b><br>CHA<br>3700 CRESTWOOD PARKWAY<br>SUITE 700<br>DULUTH, GA 30096 | <b>MECHANICAL, PLUMBING, ELECTRICAL,<br/>AND FIRE PROTECTION ENGINEER</b><br>PROGRESSIVE COMPANIES<br>1801 N. GRAHAM STREET<br>SUITE 200<br>CHARLOTTE, NC 28206 | <b>STRUCTURAL ENGINEER</b><br>DEVITA & ASSOCIATES<br>33 VILLA RD<br>SUITE 300<br>GREENVILLE, SC 29615 | <b>BMS</b><br>PROGRESSIVE COMPANIES<br>1801 N. GRAHAM STREET<br>SUITE 200<br>CHARLOTTE, NC 28206 | <b>TECHNOLOGY</b><br>PROGRESSIVE COMPANIES<br>1801 N. GRAHAM STREET<br>SUITE 200<br>CHARLOTTE, NC 28206 | <b>REFRIGERATION</b><br>HUSSMANN CORPORATION<br>13770 RAMONA AVE<br>CHINO, CA 91710 |
|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|


Civil development plan approval: EPN# 2024-00519

SPECIAL INSPECTIONS NOTES:  
1. SPECIAL INSPECTION REPORTS AND FINAL REPORT IN ACCORDANCE WITH SECTION 1704.2.4 SHALL BE SUBMITTED TO THE BUILDING OFFICIAL PRIOR TO THE TIME THAT PHASE WORK IS APPROVED FOR OCCUPANCY.


| ISSUANCE |            |                |
|----------|------------|----------------|
| 1        | 11/07/2025 | PERMIT CYCLE 1 |
| 1        | 12/17/2025 | PERMIT CYCLE 2 |
| 2        | 01/14/2026 | PERMIT CYCLE 3 |

PROJECT NUMBER  
79650191  
PROJECT MANAGER  
A. HENGSTEBECK  
PROFESSIONAL  
D. WURL  
DRAWN BY:  
G. CAMARILLO  
CHECKED BY:  
A. HENGSTEBECK

## SYMBOLS LEGEND

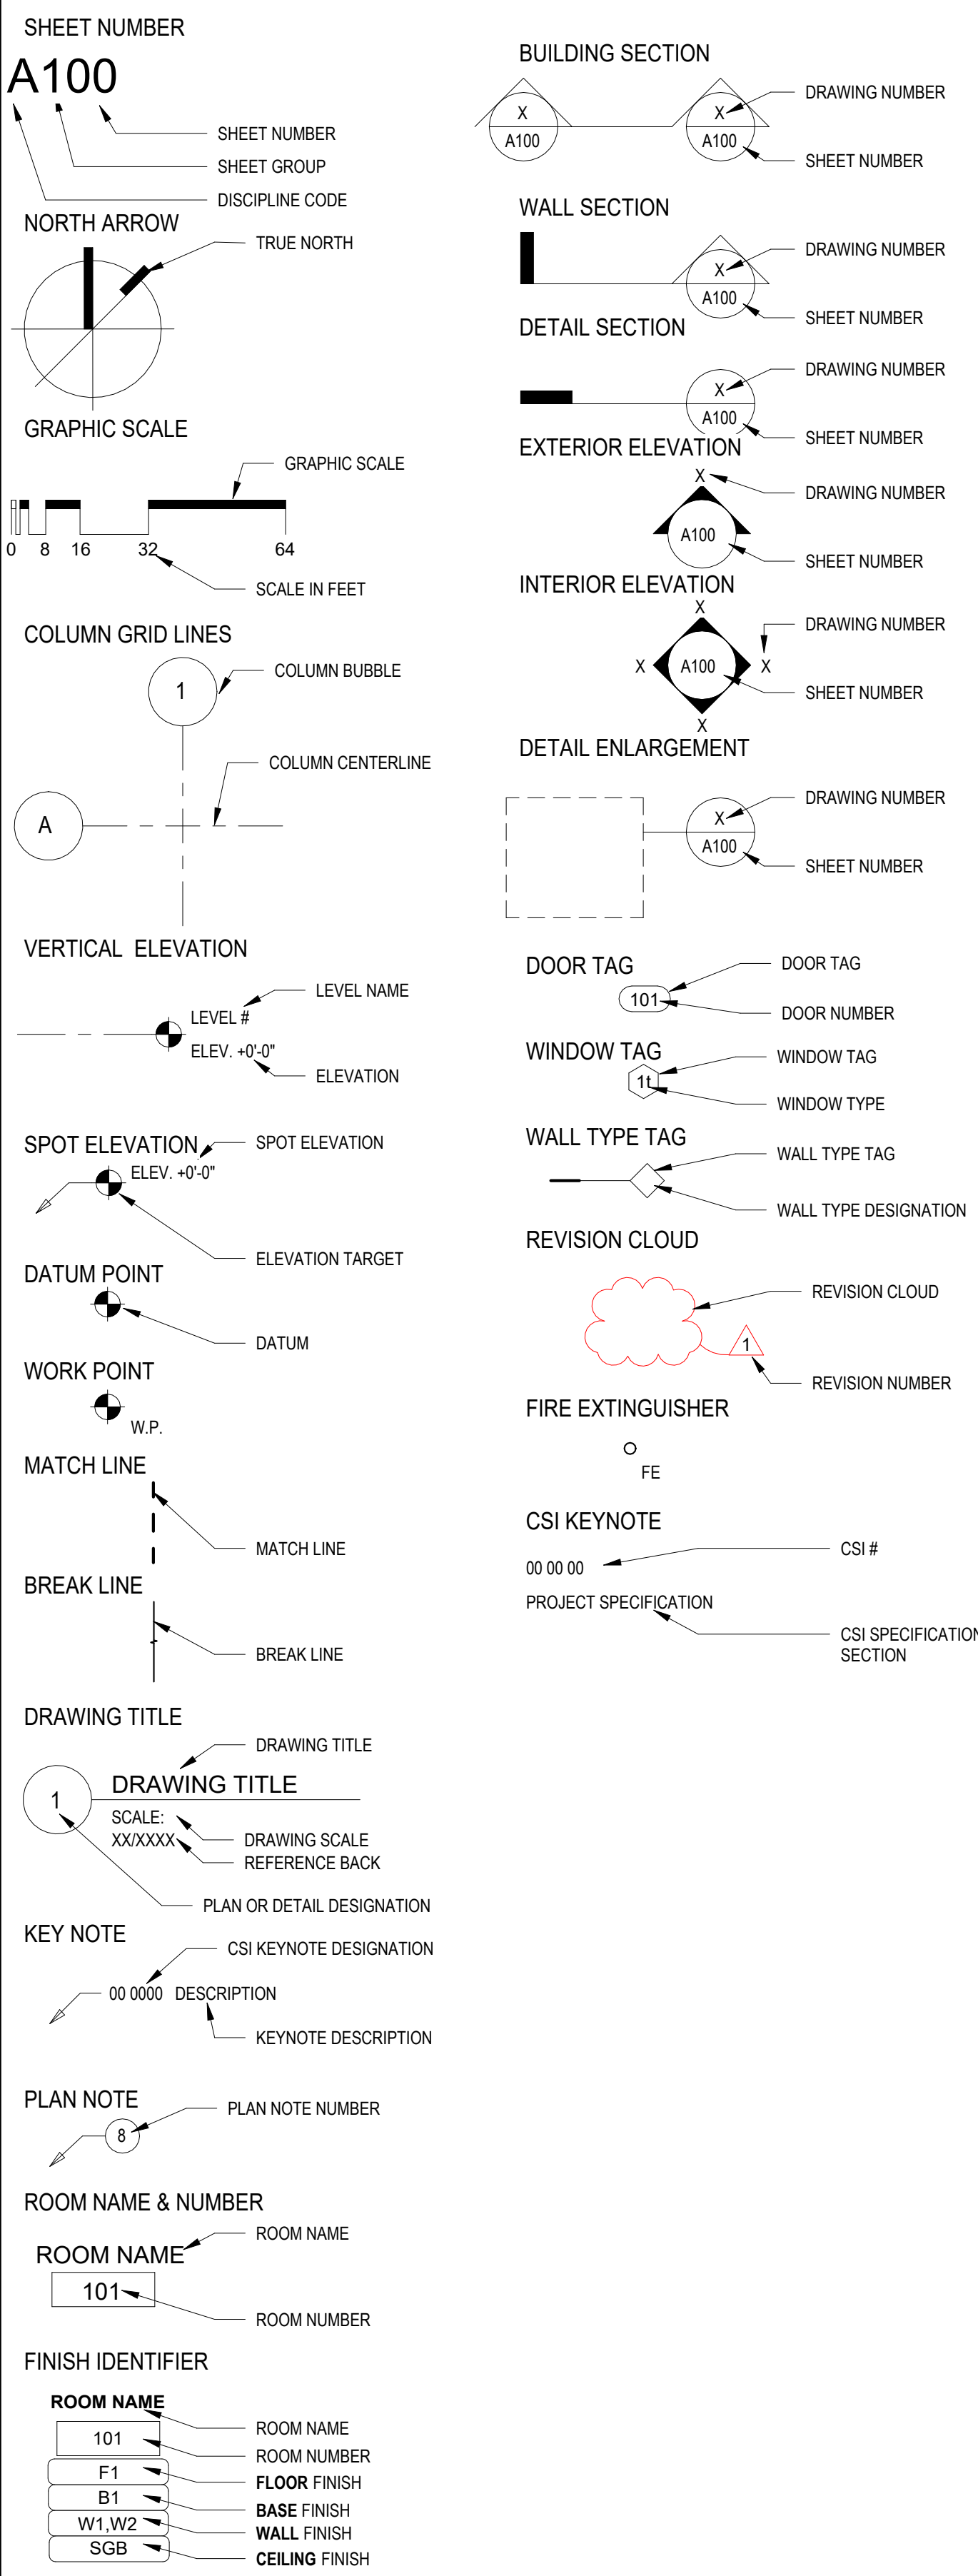

## MATERIALS LEGEND

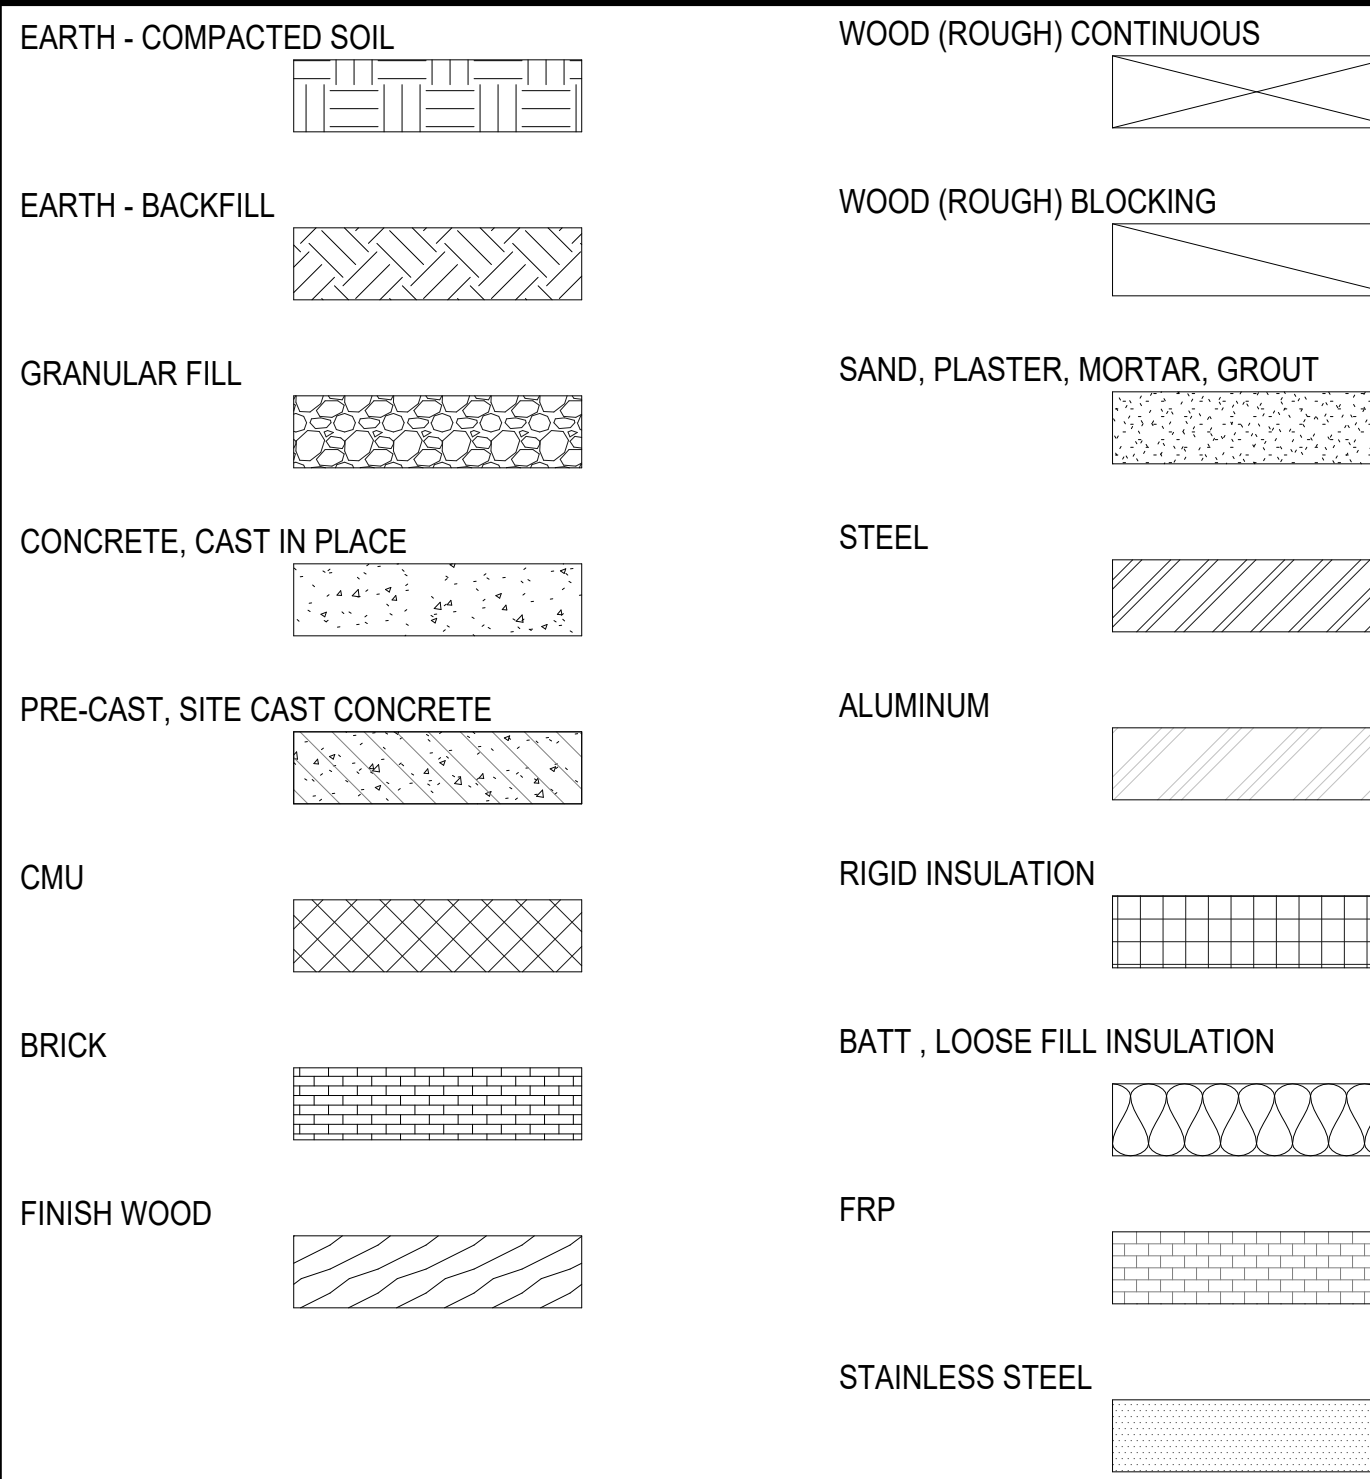

## ARCHITECTURAL ABBREVIATIONS

|         |                                             |      |                                        |
|---------|---------------------------------------------|------|----------------------------------------|
| ACT     | ACOUSTIC CEILING TILE                       | TPO  | THERMOPLASTIC POLYOLEFIN               |
| ADJ     | ADJUSTABLE                                  | TYP  | TYPICAL                                |
| AFF     | ABOVE FINISHED FLOOR                        | UTO  | TOP OF UNDERWRITERS LABORATORY UTILITY |
| ALT     | ALTERNATE                                   | UL   | UNDERWRITERS LABORATORY                |
| ANCH    | ANCHOR                                      | UNO  | UNLESS NOTED OTHERWISE                 |
| ARCH    | ARCHITECT OR ARCHITECTURAL                  | VAR  | VARIABLE OR VARIES                     |
| BD      | BOARD                                       | VF   | VERIFY IN FIELD                        |
| BLDG    | BUILDING                                    | VERT | VERTICAL                               |
| BLKG    | BLOCKING                                    | W    | WITH                                   |
| BOT     | BOTTOM                                      | WAP  | WALKWAY ACCESS POINT                   |
| CL      | CENTER LINE                                 | WD   | WOOD                                   |
| CLG     | CLEAR                                       | W/O  | WITHOUT                                |
| CLR     | CLEAR                                       | WP   | WORKING POINT                          |
| CONC    | CONCRETE                                    | WT   | WEIGHT                                 |
| CONN    | CONNECTION                                  | X    | TIMES                                  |
| CONST   | CONSTRUCTION                                |      |                                        |
| CONT    | CONTINUOUS                                  |      |                                        |
| CORR    | CORROSION                                   |      |                                        |
| CMU     | CONCRETE MASONRY UNIT                       |      |                                        |
| CFIC    | CONTRACTOR FURNISHED / CONTRACTOR INSTALLED |      |                                        |
| DEPT    | DEPARTMENT                                  |      |                                        |
| DIA     | DIAMETER                                    |      |                                        |
| DIM     | DIMENSION                                   |      |                                        |
| DISP    | DISPENSER                                   |      |                                        |
| DIV     | DIVISION                                    |      |                                        |
| DS      | DOWNSPOUT                                   |      |                                        |
| DWG     | DRAWING                                     |      |                                        |
| DL      | DEADLOAD                                    |      |                                        |
| E       | EAST                                        |      |                                        |
| EACH    | EACH                                        |      |                                        |
| ELEC    | ELECTRIC                                    |      |                                        |
| ELEV    | ELEVATION                                   |      |                                        |
| EMER    | EMERGENCY                                   |      |                                        |
| ENCL    | ENCLOSURE                                   |      |                                        |
| ENG     | ENGINEER                                    |      |                                        |
| EQ      | EQUAL                                       |      |                                        |
| EQUIP   | EQUIPMENT                                   |      |                                        |
| EXIST   | EXISTING                                    |      |                                        |
| EXT     | EXTERIOR                                    |      |                                        |
| FA      | FIRE ALARM                                  |      |                                        |
| FABR    | FABRICATE                                   |      |                                        |
| FDC     | FIRE DEPARTMENT CONNECTION                  |      |                                        |
| FDN     | FOUNDATION                                  |      |                                        |
| FEN     | FIRE EXTINGUISHER                           |      |                                        |
| FF      | FINISH FLOOR                                |      |                                        |
| FIN     | FINISH                                      |      |                                        |
| FL      | FLUSH OR FLOOR                              |      |                                        |
| FOIC    | FURNISHED BY OWNER, INSTALLED BY CONTRACTOR |      |                                        |
| FIF     | FACE OF FINISH                              |      |                                        |
| FIMP    | FACE OF INSULATED METAL PANEL               |      |                                        |
| FM      | FACE OF MASONRY                             |      |                                        |
| FIS     | FACE OF STUD                                |      |                                        |
| FT      | FIRE PROTECTION                             |      |                                        |
| FTG     | FOOTING                                     |      |                                        |
| GA      | GAUGE                                       |      |                                        |
| GALV    | GALVANIZED                                  |      |                                        |
| GWB     | GYPSPUM WALL BOARD                          |      |                                        |
| GYP     | GYPSPUM                                     |      |                                        |
| HC      | ACCESSIBLE                                  |      |                                        |
| HD      | HEAD                                        |      |                                        |
| HT      | HEIGHT                                      |      |                                        |
| HNI     | HOLLOW METAL                                |      |                                        |
| HP      | HIGH POINT                                  |      |                                        |
| HDWR    | HARDWARE                                    |      |                                        |
| HW      | HARDWOOD                                    |      |                                        |
| HOWD    | HOLLOW CORE WOOD DOOR                       |      |                                        |
| HORIZ   | HORIZONTAL                                  |      |                                        |
| HR      | HOUR                                        |      |                                        |
| HVAC    | HEATING, VENTILATION & AIR CONDITIONING     |      |                                        |
| HW      | HARDWARE                                    |      |                                        |
| ID      | INSIDE DIAMETER                             |      |                                        |
| INCL    | INCLUDE                                     |      |                                        |
| INSUL   | INSULATION                                  |      |                                        |
| INT     | INTERIOR                                    |      |                                        |
| LAM     | LAMINATE                                    |      |                                        |
| LAV     | LAVATORY                                    |      |                                        |
| LB      | LOAD                                        |      |                                        |
| LL      | LIVE LOAD                                   |      |                                        |
| LT      | LIGHT                                       |      |                                        |
| MATL    | MATERIAL                                    |      |                                        |
| MAX     | MAXIMUM                                     |      |                                        |
| MED     | MEDIUM                                      |      |                                        |
| MECH    | MECHANICAL                                  |      |                                        |
| MTL     | METAL                                       |      |                                        |
| MEZZ    | MEZZANINE                                   |      |                                        |
| MFR     | MANUFACTURER                                |      |                                        |
| MGR     | MANAGER                                     |      |                                        |
| MIN     | MINIMUM                                     |      |                                        |
| MISC    | MISCELLANEOUS                               |      |                                        |
| MTD     | MOUNTED                                     |      |                                        |
| N       | NORTH                                       |      |                                        |
| NAT     | NATURAL                                     |      |                                        |
| NEG     | NEGATIVE                                    |      |                                        |
| NIC     | NOT IN CONTRACT                             |      |                                        |
| NO (#)  | NUMBER                                      |      |                                        |
| NOM     | NOMINAL                                     |      |                                        |
| NRC     | NOISE REDUCTION COEFFICIENT                 |      |                                        |
| NTS     | NOT TO SCALE                                |      |                                        |
| OC      | ON CENTER                                   |      |                                        |
| OD      | OUTSIDE DIAMETER                            |      |                                        |
| OH      | OPPOSITE HAND                               |      |                                        |
| OPNG    | OPENING                                     |      |                                        |
| OPP     | OPPOSITE                                    |      |                                        |
| ORIG    | ORIGINAL                                    |      |                                        |
| OVHD    | OVERHEAD                                    |      |                                        |
| QUINC   | QUINCE                                      |      |                                        |
| OFICI   | OWNER FURNISHED / OWNER INSTALLED           |      |                                        |
| OFICI   | OWNER FURNISHED / OWNER INSTALLED           |      |                                        |
| P       | PART                                        |      |                                        |
| PART BD | PARTICLE BOARD                              |      |                                        |
| PL      | PLASTIC LAMINATE                            |      |                                        |
| PLUMB   | PLUMBING                                    |      |                                        |
| PLYWD   | PLYWOOD                                     |      |                                        |
| PREFAB  | PREFABRICATED                               |      |                                        |
| PROJ    | PROJECT                                     |      |                                        |
| PT      | PRESSURE TREATED OR PORCELAIN TILE          |      |                                        |
| PVC     | POLYVINYL CHLORIDE                          |      |                                        |
| RAD     | RADIUS                                      |      |                                        |
| RB      | RESILIENT BASE                              |      |                                        |
| RO      | ROOF DRAIN                                  |      |                                        |
| REBAR   | REINFORCING BAR                             |      |                                        |
| REF     | REFERENCE                                   |      |                                        |
| REFL    | REFLECTED                                   |      |                                        |
| REINF   | REINFORCED                                  |      |                                        |
| RESIL   | RESILIENT                                   |      |                                        |
| REQD    | REQUIRED                                    |      |                                        |
| REV     | REVISION                                    |      |                                        |
| RH      | RIGHT HAND                                  |      |                                        |
| RM      | ROOM                                        |      |                                        |
| RO      | ROUGH OPENING                               |      |                                        |
| RTU     | ROOFTOP UNIT                                |      |                                        |
| S       | SOUTH                                       |      |                                        |
| SAN     | SANITARY                                    |      |                                        |
| SC      | SOLID CORE                                  |      |                                        |
| SCHED   | SCHEDULE                                    |      |                                        |
| SPEC    | SPECIFICATIONS                              |      |                                        |
| SPKR    | SPEAKER                                     |      |                                        |
| SF      | SQUARE FEET                                 |      |                                        |
| SOLS    | SOLID SURFACE                               |      |                                        |
| SS      | STAINLESS STEEL                             |      |                                        |
| STC     | SOUND TRANSMISSION CLASS                    |      |                                        |
| STD     | STANDARD                                    |      |                                        |
| STL     | STEEL                                       |      |                                        |
| STRUCT  | STRUCTURAL                                  |      |                                        |
| SUSP    | SUSPENDED                                   |      |                                        |
| SM      | SIMILAR                                     |      |                                        |
| TAN     | TANGENT                                     |      |                                        |
| TECH    | TECHNICAL                                   |      |                                        |
| TEL     | TELEPHONE                                   |      |                                        |
| TEMP    | TEMPORARY                                   |      |                                        |
| TPO     | THERMOPLASTIC POLYOLEFIN                    |      |                                        |
| TYP     | TYPICAL                                     |      |                                        |
| UTO     | TOP OF UNDERWRITERS LABORATORY UTILITY      |      |                                        |
| UL      | UNDERWRITERS LABORATORY                     |      |                                        |
| UNO     | UNLESS NOTED OTHERWISE                      |      |                                        |
| VAR     | VARIABLE OR VARIES                          |      |                                        |
| VF      | VERIFY IN FIELD                             |      |                                        |
| VERT    | VERTICAL                                    |      |                                        |
| W       | WITH                                        |      |                                        |
| WAP     | WALKWAY ACCESS POINT                        |      |                                        |
| WD      | WOOD                                        |      |                                        |
| W/O     | WITHOUT                                     |      |                                        |
| WP      | WORKING POINT                               |      |                                        |
| WT      | WEIGHT                                      |      |                                        |
| X       | TIMES                                       |      |                                        |

## DEFERRED SUBMITTALS

- REFRIGERATION
- BDA SYSTEM (IF REQUIRED)
- SPRINKLER

## GENERAL NOTES

- THE DRAWINGS WHICH COMPREHEND THIS SET OF CONSTRUCTION DOCUMENTS ARE ADDRESSED TO THE GENERAL CONTRACTOR AND ARE CONSIDERED TO BE ONE WHOLE. INFORMATION INCLUDED ON ONE SHEET SHALL BE AS BINDING AS IF INCLUDED ON ALL, REGARDLESS OF TRADE ASSIGNMENTS. WHERE A CONFLICT OCCURS WITHIN THESE CONSTRUCTION DOCUMENTS, THE MORE EXPENSIVE OR TIME CONSUMING REQUIREMENT SHALL GOVERN. ANY DOUBT AS TO WHETHER ANY WORK IS WITHIN THE SCOPE OF THE CONTRACT SHALL BE RESOLVED IN FAVOR OF AN INTERPRETATION THAT THE WORK IS WITHIN THE SCOPE OF THE CONTRACT. IMMEDIATELY UPON DISCOVERY, NOTIFY THE ARCHITECT OF ANY CONFLICTS IN WRITING.
- UNLESS SPECIFICALLY NOTED OTHERWISE, HEREIN INSTALL MATERIALS, EQUIPMENT, PRODUCTS, AND SYSTEMS FOR THIS PROJECT IN STRICT ACCORDANCE WITH THE MANUFACTURER'S LATEST PUBLISHED SPECIFICATIONS / RECOMMENDATIONS.
- WHERE A DIMENSION IS SPECIFICALLY NOTED WITH A "V" DESIGNATION, THE DIMENSION IS TO BE CONTROLLED BY FIELD VERIFIED CONDITIONS. NOTIFY THE ARCHITECT IMMEDIATELY UPON CONFIRMATION OF THE ACTUAL DIMENSION. NO REFERENCE OR DESIGNATION WITHIN THESE DOCUMENTS SHALL BE CONSIDERED TO ESTABLISH A CONSTRUCTION TOLERANCE. THE DIMENSIONS ARE PRECISE AS STATED.
- PERFORM WORK IN STRICT ACCORDANCE WITH FEDERAL, STATE AND LOCAL CODES, ORDINANCES, AND OSHA REQUIREMENTS.
- WHERE REFERENCE IS MADE TO "BUILDING SYSTEMS", THIS SHALL INCLUDE MECHANICAL, ELECTRICAL, PLUMBING, HVAC, FIRE PROTECTION, TELEPHONE, SECURITY, INTERCOM, AND FIRE ALARM / LIFE SAFETY COMPONENTS.
- COORDINATE MOUNTING / INSTALLATION OF LIGHTING FIXTURES, SMOKE DETECTORS, SPRINKLER HEADS AND OTHER DEVICES WITH TYPE OF CEILING TO BE PROVIDED. PROVIDE HANGERS, SUPPORTS, SEISMIC STRUTS AND CLIPS, CUT-OUTS, TRIM RINGS, AND EDGE TRIM REQUIRED FOR A COMPLETE INSTALLATION.
- CONTRACTOR SHALL PROVIDE ALL MATERIAL AND LABOR REQUIRED TO PRODUCE A COMPLETED FINISHED PROJECT. FAILURE TO INCLUDE ITEMS INDICATED TO BE PROVIDED, THOUGH NOT DETAILED, SHALL NOT CONSTITUTE THE BASIS FOR A CHANGE ORDER.
- ALL CONSTRUCTION PENETRATIONS THROUGH FIRE RATED PARTITIONS SHALL BE FIRE STOPPED PER U.L. LISTED DETAILS COMPLYING WITH APPLICABLE CODES AND COUNTY FIRE MARSHAL REQUIREMENTS. CONTRACTOR SHALL SELECT, PROVIDE AND INSTALL SUCH FIRE STOPPING SYSTEMS / DETAILS AND SHALL BE RESPONSIBLE FOR SELECTING AND OBTAINING THE NECESSARY APPROVAL(S) FROM THE AUTHORITIES HAVING JURISDICTION.
- WHERE DISSIMILAR METALS WOULD COME IN CONTACT WITH ONE ANOTHER, G.C. SHALL UTILIZE NEOPRENE GASKETS AND / OR WASHERS AS APPROPRIATE TO ENSURE GALVANIC CORROSION OF THE METALS OR FASTENERS IS AVOIDED. SUCH DISSIMILAR METALS INCLUDE BUT ARE NOT LIMITED TO COATED COPPER, STEEL, GALVANIZED STEEL, AND ALUMINUM. AT SUCH CONNECTIONS REQUIRING FASTENERS, STAINLESS STEEL FASTENERS WITH NEOPRENE WASHERS TO ISOLATE THE METALS SHALL BE UTILIZED.
- DIMENSIONS INDICATED ARE TO FINISHED WALL SURFACES, OR COLUMN CENTER LINES, UNLESS NOTED OTHERWISE.
- WORK SHALL INCLUDE ALL LABOR, ASSEMBLIES, AND FINISH WORK INCLUDING ALL PARTS AND MATERIALS NECESSARY TO MAKE A COMPLETE, IN-PLACE, PROPERLY WORKING AND FINISHED INSTALLATION.
- ALL CONTRACTORS SHALL VISIT THE PROJECT TO FAMILIARIZE THEMSELVES WITH SITE CONDITIONS PRIOR TO BIDDING OR CONSTRUCTION. BY SUBMITTING A BID, THE CONTRACTOR AND HIS SUBCONTRACTORS ARE CONFIRMING THAT THEY HAVE VISITED THE SITE AND HAVE INCLUDED IN THEIR BID ANY ADDITIONAL ITEMS OF CONSTRUCTION THAT MAY BE REQUIRED DUE TO EXISTING SITE CONDITIONS.
- PRIOR TO PROCEEDING WITH ANY WORK THAT MAY RESULT IN ADDITIONAL COST OR ADDITIONAL TIME TO THE PROJECT, THE CONTRACTOR SHALL DETERMINE THE ADDITIONAL COST OR TIME OR, IF THE EXACT COSTS OR TIME CANNOT BE DETERMINED, THE CONTRACTOR SHALL MAKE HIS MOST REASONABLE ESTIMATE (AN ESTIMATE OF THE WORST CASE) AND SUBMIT THE ADDITIONS TO THE OWNERS REPRESENTATIVE FOR APPROVAL. SHOULD THE CONTRACTOR FAIL TO ADVISE THE OWNERS REPRESENTATIVE PRIOR TO PROCEEDING WITH THE WORK, ADDITIONAL COST OR TIME SHALL NOT BE APPROVED.
- BUILDING SPRINKLER SYSTEMS SHALL COMPLY WITH ALL APPLICABLE CODES, NFPA 13, AND THE WFO FIRE PROTECTION ENGINEER. EXACT LAYOUT OF SPRINKLER HEADS IN AREAS WITH GYPSPUM BOARD CEILINGS AND SOFFITS, ETC., SHALL BE APPROVED BY THE ARCHITECT PRIOR TO PROCEEDING WITH WORK.
- REMOVE ALL CONSTRUCTION DEBRIS AS REQUIRED TO MAINTAIN A CLEAN ENVIRONMENT AND TO PREVENT THE POSSIBILITY OF ACCIDENT OR FIRE. COORDINATE REMOVAL WORK WITH OWNER IN OCCUPIED SPACES. MAINTAIN WORKING FIRE EXTINGUISHERS IN THE PROJECT AREA DURING CONSTRUCTION WHEN SPRINKLER SYSTEM IS UNDERGOING MODIFICATIONS.
- HEIGHTS OF ELECTRICAL, DATA, AND COMMUNICATION OUTLETS WHEN SURROUNDED BY OR ABUTTING MILLWORK SHALL BE CONFIRMED WITH THE ARCHITECT PRIOR TO ROUGH-IN AND FABRICATION.
- DOWN LIGHTS, SPRINKLER HEADS, SMOKE DETECTORS AND EXIT SIGNS SHALL BE LOCATED IN THE CENTER OF THE CEILING TILE, UNLESS OTHERWISE NOTED.
- GC TO SEAL AROUND ALL VISIBLE PIPES AND AROUND ALL FURNITURE LIKE REFRIGERATE CASES ON THE WALLS.

## GENERAL ACOUSTICAL NOTES

- ELECTRICAL AND SERVICE OUTLETS FOR ADJACENT ROOMS ARE TO BE POSITIONED A MINIMUM OF 2 FEET APART AND IN SEPARATE STUD CAVITIES.
- PARTITIONS ARE TO BE BUILT FULL HEIGHT FROM BUILDING FLOOR TO BUILDING STRUCTURE ABOVE, UNLESS OTHERWISE DETAILED IN SPECIFIC PARTITION TYPE.
- PROVIDE CONTINUOUS ACOUSTICAL (NON-HARDENING) CAULKING BEADS ON EACH SIDE OF THE BOTTOM STUD RUNNER AT THE THREE WAY INTERSECTION BETWEEN THE RUNNER, FLOOR AND DRYWALL.
- PROVIDE ACOUSTICAL CAULKING TO CLOSE GAPS BETWEEN SERVICE OUTLETS (ELECTRICAL, TELEPHONE, DATA, ETC) AND DRYWALL. PROVIDE ACOUSTICAL SEALANT AT THE CONNECTION TO THE STRUCTURE ABOVE.
- MULTIPLE LAYERS OF DRYWALL ARE TO BE APPLIED WITH STAGGERED JOINTS.
- PARTITIONS SHALL BE CUT AND SEALED AROUND ALL STRUCTURAL ELEMENTS WITH ACOUSTICAL SEALANT.
- ALL PENETRATIONS LESS THAN 1.5 FT WIDE ARE TO BE BETWEEN FULL HEIGHT STUDS, OTHERWISE STUDS ARE TO BE FULLY FRAMED AROUND PENETRATION MAINTAINING A MINIMAL 1" GAP AROUND THE PENETRATING ELEMENT.
- ALL GAPS AROUND PENETRATIONS (PIPES, DUCTS, CONDUIT, ETC) SHALL BE SEALED AS FOLLOWS. NOTE THAT ANY FIRE RATED ASSEMBLY CONSTRUCTION REQUIREMENTS SHALL TAKE PRECEDENCE OVER ACOUSTICAL CONSIDERATIONS. 1" OR LESS GAP FILLED TIGHTLY WITH BATT INSULATION AND/OR FIRE SAFING. GAPS LARGER THAN 1" FILLED WITH HIGH DENSITY PUTTY SUCH AS NELSON FSP OR CLK SEALANT, 1-M. CLIPPER "DUKALAC", 3M "MODULAR PUTTY" (ADIC). PROVIDE AND INSTALL ALL DETAILS AND MATERIALS AS REQUIRED BY DRYWALL MANUFACTURER TO ACHIEVE LABORATORY SOUND TRANSMISSION CLASS (STC) RATINGS INDICATED.

## GENERAL CEILING NOTES

- CONTRACTOR TO COORDINATE MOUNTING FLANGES OF ALL FIXTURES WITH CEILING TYPE TO RECEIVE FIXTURES.
- CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF ALL MEP AND SPRINKLER WORK WITH HEIGHT AND TYPE OF CEILING FINISHES.
- REFER TO FINISH PLANS FOR CEILING FINISH DESIGNATIONS.
- COORDINATE W/MEP FOR CEILING ACCESS PANEL LOCATIONS. NOT ALL ARE SHOWN ON A.C.P.
- FOR CURVED WALLS AND BULKHEADS, FOLLOW GYP. BD. MANUFACTURER'S WRITTEN GUIDELINES FOR RADIUS APPLICATIONS

## GENERAL PARTITION NOTES

- RATED WALL ASSEMBLIES AND "SOUND" WALL ASSEMBLIES SHALL RUN CONTINUOUS AROUND ROOMS INDICATED AND SHALL TAKE PRECEDENCE OVER ADJACENT AND/OR PERPENDICULAR WALLS. RATED WALL ASSEMBLIES SHALL BE CONSTRUCTED PER THE REQUIREMENTS OF THE U.L. ASSEMBLY INDICATED.
- THE CONTRACTOR SHALL BEAR THE RESPONSIBILITY OF ALIGNING THE FACE OF GYPSPUM BOARD AND/OR GYPSPUM SHEATHING WHERE THE WALL THICKNESS VARIES DUE TO DIFFERENT PARTITION TYPES. TRANSITIONS ON THE OPPOSITE SIDE OF THESE WALLS SHALL BE HIDDEN AT INTERSECTIONS OF OTHER PARTITIONS OR CORNERS SUCH THAT NO REGULARITY EXISTS IN THE SURFACE OF THE WALL.
- PROVIDE 5/8" G.M.W.R. BOARD IN LIEU OF GYPSPUM BOARD ON WALL SURFACES TO RECEIVE CERAMIC OR PORCELAIN TILE.
- ALL FIRE & OR SMOKE BARRIER WALLS SHALL BE SEALED SMOKE-TIGHT (VIA PLASTER/FIRE STOP SEALANT OVER COAT. BACKING ROD) AT THE ENTIRE PERIMETER (FLOOR, ROOF & WALLS). PROVIDE MINERAL WOOL INSULATION IN INTERSTITIAL SPACE BEHIND SEALANT AND BACKING ROD, INCLUDING FLOOR AND ROOF DECK FLUTES ABOVE MET. WALL CHANNELS AT TOP OF WALL.
- ALL FIRE & OR SMOKE BARRIER WALLS SHALL BE CONSTRUCTED CONT. THROUGH BLDG. SOFFITS, OVERHANGS AND ANY MISC. INTERSTITIAL SPACES (INCLUDING OTHER PARTITIONS). PROVIDE SEALING OF UTILITY PENETRATIONS THROUGH BLDG. SMOKE BARRIER WALLS.
- THE GYPSPUM BOARD GAP AT THE FLOOR SHALL NOT EXCEED 1/4" AND SHALL NOT BE IN CONTACT WITH THE SLAB.
- NO GYP. BD. SHALL SPAN OVER 16" W/O FRAMING SUPPORT. ADDITIONAL SUPPORT WILL BE NECESSARY AT ALL OPENINGS AND FL. & CLG. JTS.
- ALL GYPSPUM WALL BOARD SHALL BE SINGULAR CONT. PIECES WITH NO BUTTED END JOINTS.
- PARTITION DESIGNATION TAG SHALL ALWAYS TAKE PRECEDENCE OVER GRAPHIC REPRESENTATION.
- UNLESS NOTED OTHERWISE, PARTITION DESIGNATION TAGS REPRESENT THE ENTIRE LENGTH OF THE PARTITION IN WHICH IT IS LOCATED.
- ALL PARTITIONS SHALL BE CONSTRUCTED PER THE GUIDELINES INDICATED IN THE ACOUSTICAL CONSTRUCTION NOTES.
- ALL PARTITIONS SHALL BE PARTITION TYPE "1" UNLESS NOTED OTHERWISE.
- ALL METAL STUDS INDICATED IN DETAILS SHALL BE 3-5/8" METAL STUDS AT 16" ON CENTER, UNLESS NOTED OTHERWISE (SEE PARTITION TYPES).
- METAL STUD CONTRACTOR SHALL BE, OR SHALL CONSULT WITH, A PROFESSIONAL STRUCTURAL ENGINEER REGISTERED IN THE STATE. METAL STUD CONTRACTOR SHALL BEAR THE RESPONSIBILITY TO ENGINEER THE STUD GAUGES AND ATTACHMENT METHODS NECESSARY TO PROVIDE THE FRAMING IN THE CONFIGURATIONS INDICATED. MINIMUM STUD GAUGE IS 22 GA. HOWEVER, ALL STUD GAUGES SHALL BE DETERMINED BY THE METAL STUD CONTRACTOR AND SHALL BE APPROPRIATE FOR THE APPLICATION. SUBMIT SIGNED AND SEALED FRAMING SHOP DRAWINGS FOR THE VARIOUS CONDITIONS INDICATING THE STUD SIZE, GAUGE AND CALCULATIONS TO SUPPORT THE DESIGN.
- SEE TYPICAL DETAILS FOR FRAMING AROUND OBSTRUCTIONS.

## GENERAL FINISH NOTES

- PROVIDE 24" X 24" WALL SAMPLE OF ALL PAINT COLORS FOR OWNER REVIEW AND APPROVAL. PRIOR TO PURCHASE/ INSTALLATION.
- PROVIDE 24" SAMPLE OF ALL WOOD CEILING, WALL, FLOOR, AND BASE PROFILES FOR OWNER APPROVAL PRIOR TO PURCHASE/ INSTALLATION.
- PROVIDE ALL FINISH ACCESSORY PIECES REQUIRED FOR FULL AND COMPLETE INSTALLATION OF FINISH MATERIALS.
- ALL PAINTED GYP. BD. CEILINGS TO HAVE A FLAT FINISH, U.N.O.
- ALL PAINTED WALLS TO HAVE AN EGGSHELL FINISH, U.N.O.
- INTERIOR FINISHES SHALL BE AT LEAST EQUAL TO (OR BETTER THAN) CLASS B WHERE INSTALLED IN CORRIDORS AND EXIT PASSAGEWAYS, AND CLASS C WHERE INSTALLED IN ROOMS / ENCLOSED SPACES.
- PROVIDE 3 PERCENT OVERAGE ON FINISH MATERIAL QUANTITIES AS ATTIC STOCK. COORDINATE STORAGE WITH OWNER PRIOR TO PROJECT COMPLETION.
- REFER TO SPECIFICATIONS AND FINISH SCHEDULE FOR ADDITIONAL FINISH INFORMATION.
- G.C. TO PROVIDE TRANSITION STRIPS AND THRESHOLDS AS REQUIRED. ARCHITECT TO APPROVE.
- ALL FINISH LOCATIONS AND STARTS/STOP POINTS TO BE REVIEWED BY ARCHITECT PRIOR TO INSTALLATION.
- USE LOW VOC ADHESIVE, FOLLOWING MANUFACTURERS RECOMMENDED PRODUCTS, FOR ALL CARPET AND LAMINATE FLOORING.
- USE LOW VOC PAINTS, AS SPECIFIED, THROUGHOUT, U.N.O.
- ADD CAULKING JOINT TO ALL DISSIMILAR MATERIALS.

## GENERAL ACCESSIBILITY NOTES

- IN ALL CASES THE GENERAL CONTRACTOR SHALL BEAR RESPONSIBILITY FOR COMPLIANCE WITH THE CLEARANCES AND DIMENSIONS INDICATED ON THE ACCESSIBILITY STANDARDS DRAWING AND WITHIN THE BALANCE OF THE CONTRACT DOCUMENTS.
- THE SPECIFIC DIMENSIONS AND/ OR RANGES INDICATED IN THE ACCESSIBILITY STANDARDS DRAWING ARE A REGULATORY REQUIREMENT. NO ADDITIONAL TOLERANCES EITHER PLUS OR MINUS WILL BE ACCEPTED.
- THE FULL TEXT OF ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES MAY BE FOUND ON THE ICC WEBSITE.

## SPECIAL INSPECTIONS NOTES

- SPECIAL INSPECTION REPORTS AND FINAL REPORT IN ACCORDANCE WITH SECTION 1704.2.4 SHALL BE SUBMITTED TO THE BUILDING OFFICIAL PRIOR TO THE TIME THAT PHASE WORK IS APPROVED FOR OCCUPANCY.

## DRAWING INDEX

## LIST OF SHEETS

| GENERAL | COVER SHEET                                     |
|---------|-------------------------------------------------|
| G001    | GENERAL NOTES                                   |
| G102    | ARCHITECTURAL SITE PLAN                         |
| G103    | ARCHITECTURAL SITE DETAILS                      |
| G104    | LIFE SAFETY PLAN                                |
| G105    | TYPICAL ACCESSIBILITY STANDARDS                 |
| G106    | WALL AND PARTITION TYPES                        |
| G107    | RATED ASSEMBLIES                                |
| G108    | COMCHECK                                        |
| G109    | NATIONAL ACCOUNT LIST AND RESPONSIBILITY MATRIX |

## ARCHITECTURE

|      |                                      |
|------|--------------------------------------|
| A101 | FLOOR PLAN                           |
| A102 | REFLECTED CEILING PLAN               |
| A103 | ROOF PLAN                            |
| A104 | BUILDING OUTLINE PLAN                |
| A105 | FINISH AND RAM PROTECTION PLAN       |
| A200 | EXTERIOR ELEVATIONS                  |
| A300 | BUILDING SECTIONS                    |
| A301 | BUILDING SECTIONS                    |
| A302 | WALL SECTIONS                        |
| A303 | WALL SECTIONS                        |
| A304 | WALL SECTIONS                        |
| A305 | WALL SECTIONS                        |
| A306 | WALL SECTIONS                        |
| A400 | ENLARGED PLANS & INTERIOR ELEVATIONS |
| A401 | ENLARGED PLANS & INTERIOR ELEVATIONS |
| A402 | INTERIOR ELEVATIONS                  |
| A403 | INTERIOR ELEVATIONS                  |
| A404 | INTERIOR ELEVATIONS                  |
| A500 | INTERIOR DETAILS                     |
| A501 | INTERIOR DETAILS                     |
| A502 | CASEWORK DETAILS                     |
| A600 | VERTICAL CIRCULATION                 |
| A601 | PLAN DETAILS                         |
| A602 | PLAN DETAILS                         |
| A603 | PLAN DETAILS                         |
| A604 | PLAN DETAILS                         |
| A605 | FOUNDATION DETAILS                   |
| A606 | FOUNDATION AND SILL DETAILS          |
| A607 | ROOF SECTION DETAILS                 |
| A608 | ROOF SECTION DETAILS                 |
| A609 | COPING DETAILS                       |
| A610 | ROOF PENETRATIONS                    |
| A611 | EXTERIOR DETAILS                     |
| A700 | WINDOW ELEVATIONS & DETAILS          |
| A701 | STOREFRONT DETAILS                   |
| A702 | DOOR SCHEDULE AND ELEVATIONS         |
| A703 | DOOR DETAILS                         |
| A801 | FIXTURE PLAN                         |
| A802 | POWER POLE AND FLOOR DRAIN PLAN      |
| A803 | POWER POLE DETAILS                   |

## STRUCTURAL

|      |                                  |
|------|----------------------------------|
| S001 | GENERAL NOTES                    |
| S002 | ISOMETRICS                       |
| S101 | GROUND FLOOR AND FOUNDATION PLAN |
| S102 | ROOF FRAMING PLAN                |
| S200 | STRUCTURAL ELEVATIONS            |
| S300 | FOUNDATION AND CONCRETE DETAILS  |
| S301 | FOUNDATION AND CONCRETE DETAILS  |
| S400 | MASONRY DETAILS                  |
| S500 | STEEL DETAILS                    |
| S501 | STEEL DETAILS                    |
| S502 | STEEL DETAILS                    |
| S503 | STEEL DETAILS                    |

## MECHANICAL

|      |                                             |
|------|---------------------------------------------|
| M000 | SYMBOLS LIST AND GENERAL NOTES - MECHANICAL |
| M101 | MECHANICAL PLAN                             |
| M102 | ENLARGED MECHANICAL PLAN                    |
| M103 | ROOF MECHANICAL PLAN                        |
| M500 | MECHANICAL SCHEDULES                        |
| M600 | MECHANICAL DETAILS                          |
| M601 | MECHANICAL DETAILS                          |
| M602 | MECHANICAL - BAKERY HOOD DETAILS            |
| M901 | COMCHECK - MECHANICAL                       |
| M902 | COMCHECK - MECHANICAL                       |

## LIST OF SHEETS

| PLUMBING | SYMBOLS LIST AND GENERAL NOTES - PLUMBING |
|----------|-------------------------------------------|
| P100     | UNDERGROUND - PLUMBING PLAN               |
| P101     | PLUMBING PLAN                             |
| P102     | ENLARGED PLUMBING PLAN                    |
| P500     | PLUMBING SCHEDULES                        |
| P600     | PLUMBING DETAILS                          |

## ELECTRICAL

|      |                                             |
|------|---------------------------------------------|
| E000 | SYMBOLS LIST AND GENERAL NOTES - ELECTRICAL |
| E001 | ELECTRICAL SITE PLAN                        |
| E101 | GROUND FLOOR - ELECTRICAL POWER PLAN        |
| E102 | GROUND FLOOR - CABLE WIREWAY PLAN           |
| E103 | ROOF - ELECTRICAL PLAN                      |
| E200 | COMCHECK - ELECTRICAL                       |
| E201 | GROUND FLOOR - LIGHTING PLAN                |
| E202 | LIGHTING CONTROL S & SCHEDULES              |
| E203 | ELECTRICAL - LIGHTING CONTRACTOR DETAIL     |
| E300 | ENLARGED ELECTRICAL DRAWINGS                |
| E301 | ENLARGED ELECTRICAL DRAWINGS                |
| E400 | ELECTRICAL RISER DIAGRAMS                   |
| E401 | ELECTRICAL - METERING DETAIL                |
| E500 | ELECTRICAL SCHEDULES - POWERED EQUIPMENT    |
| E501 | ELECTRICAL SCHEDULES                        |
| E502 | ELECTRICAL SCHEDULES                        |
| E600 | ELECTRICAL DETAILS                          |
| E601 | ELECTRICAL DETAILS                          |
| E602 | ELECTRICAL - PATHWAY DETAILS                |
| E603 | ELECTRICAL - PATHWAY DETAILS                |
| E604 | ELECTRICAL - PATHWAY DETAILS                |
| E605 | ELECTRICAL - PATHWAY DETAILS                |
| E606 | ELECTRICAL - BAKERY HOOD DETAILS            |
| E607 | DOOR DETAILS - ELECTRICAL                   |

## FIRE ALARM

|       |                                                     |
|-------|-----------------------------------------------------|
| FA101 | GROUND FLOOR - FIRE ALARM PLAN - FOR REFERENCE ONLY |
| FA102 | FIRE ALARM - GRAPHIC PANEL - FOR REFERENCE ONLY     |

## FIRE PROTECTION



|       |                                                          |
|-------|----------------------------------------------------------|
| FP000 | GENERAL FIRE PROTECTION INFORMATION - FOR REFERENCE ONLY |
| FP101 | FIRE PROTECTION PLAN - FOR REFERENCE ONLY                |
| FP800 | FIRE PROTECTION DETAILS - FOR REFERENCE ONLY             |







## BMS


|         |                                    |
|---------|------------------------------------|
| BMS-000 | BMS SYMBOLS, NOTES & ABBREVIATIONS |
| BMS-101 | BMS FLOOR PLAN                     |
| BMS-102 | BMS ROOF PLAN                      |
| BMS-401 | BMS NETWORK LAYOUT                 |
| BMS-402 | RTU-1 CONTROL DETAILS              |
| BMS-403 | RTU-2,3,4 CONTROL DETAILS          |
| BMS-404 | EXHAUST FANS & AC UNIT CONTROLS    |
| BMS-405 | INPUT-OUT POINT CONTROLS           |
| BMS-406 | CONTROL DETAILS                    |

## TECHNOLOGY

|      |                                             |
|------|---------------------------------------------|
| T000 | SYMBOLS LIST AND GENERAL NOTES - TECHNOLOGY |
| T101 | GROUND FLOOR - TECHNOLOGY PLAN              |
| T201 | GROUND FLOOR - SECURITY PLAN                |
| T300 | ENLARGED TECHNOLOGY PLANS                   |
| T600 | TECHNOLOGY DETAILS                          |

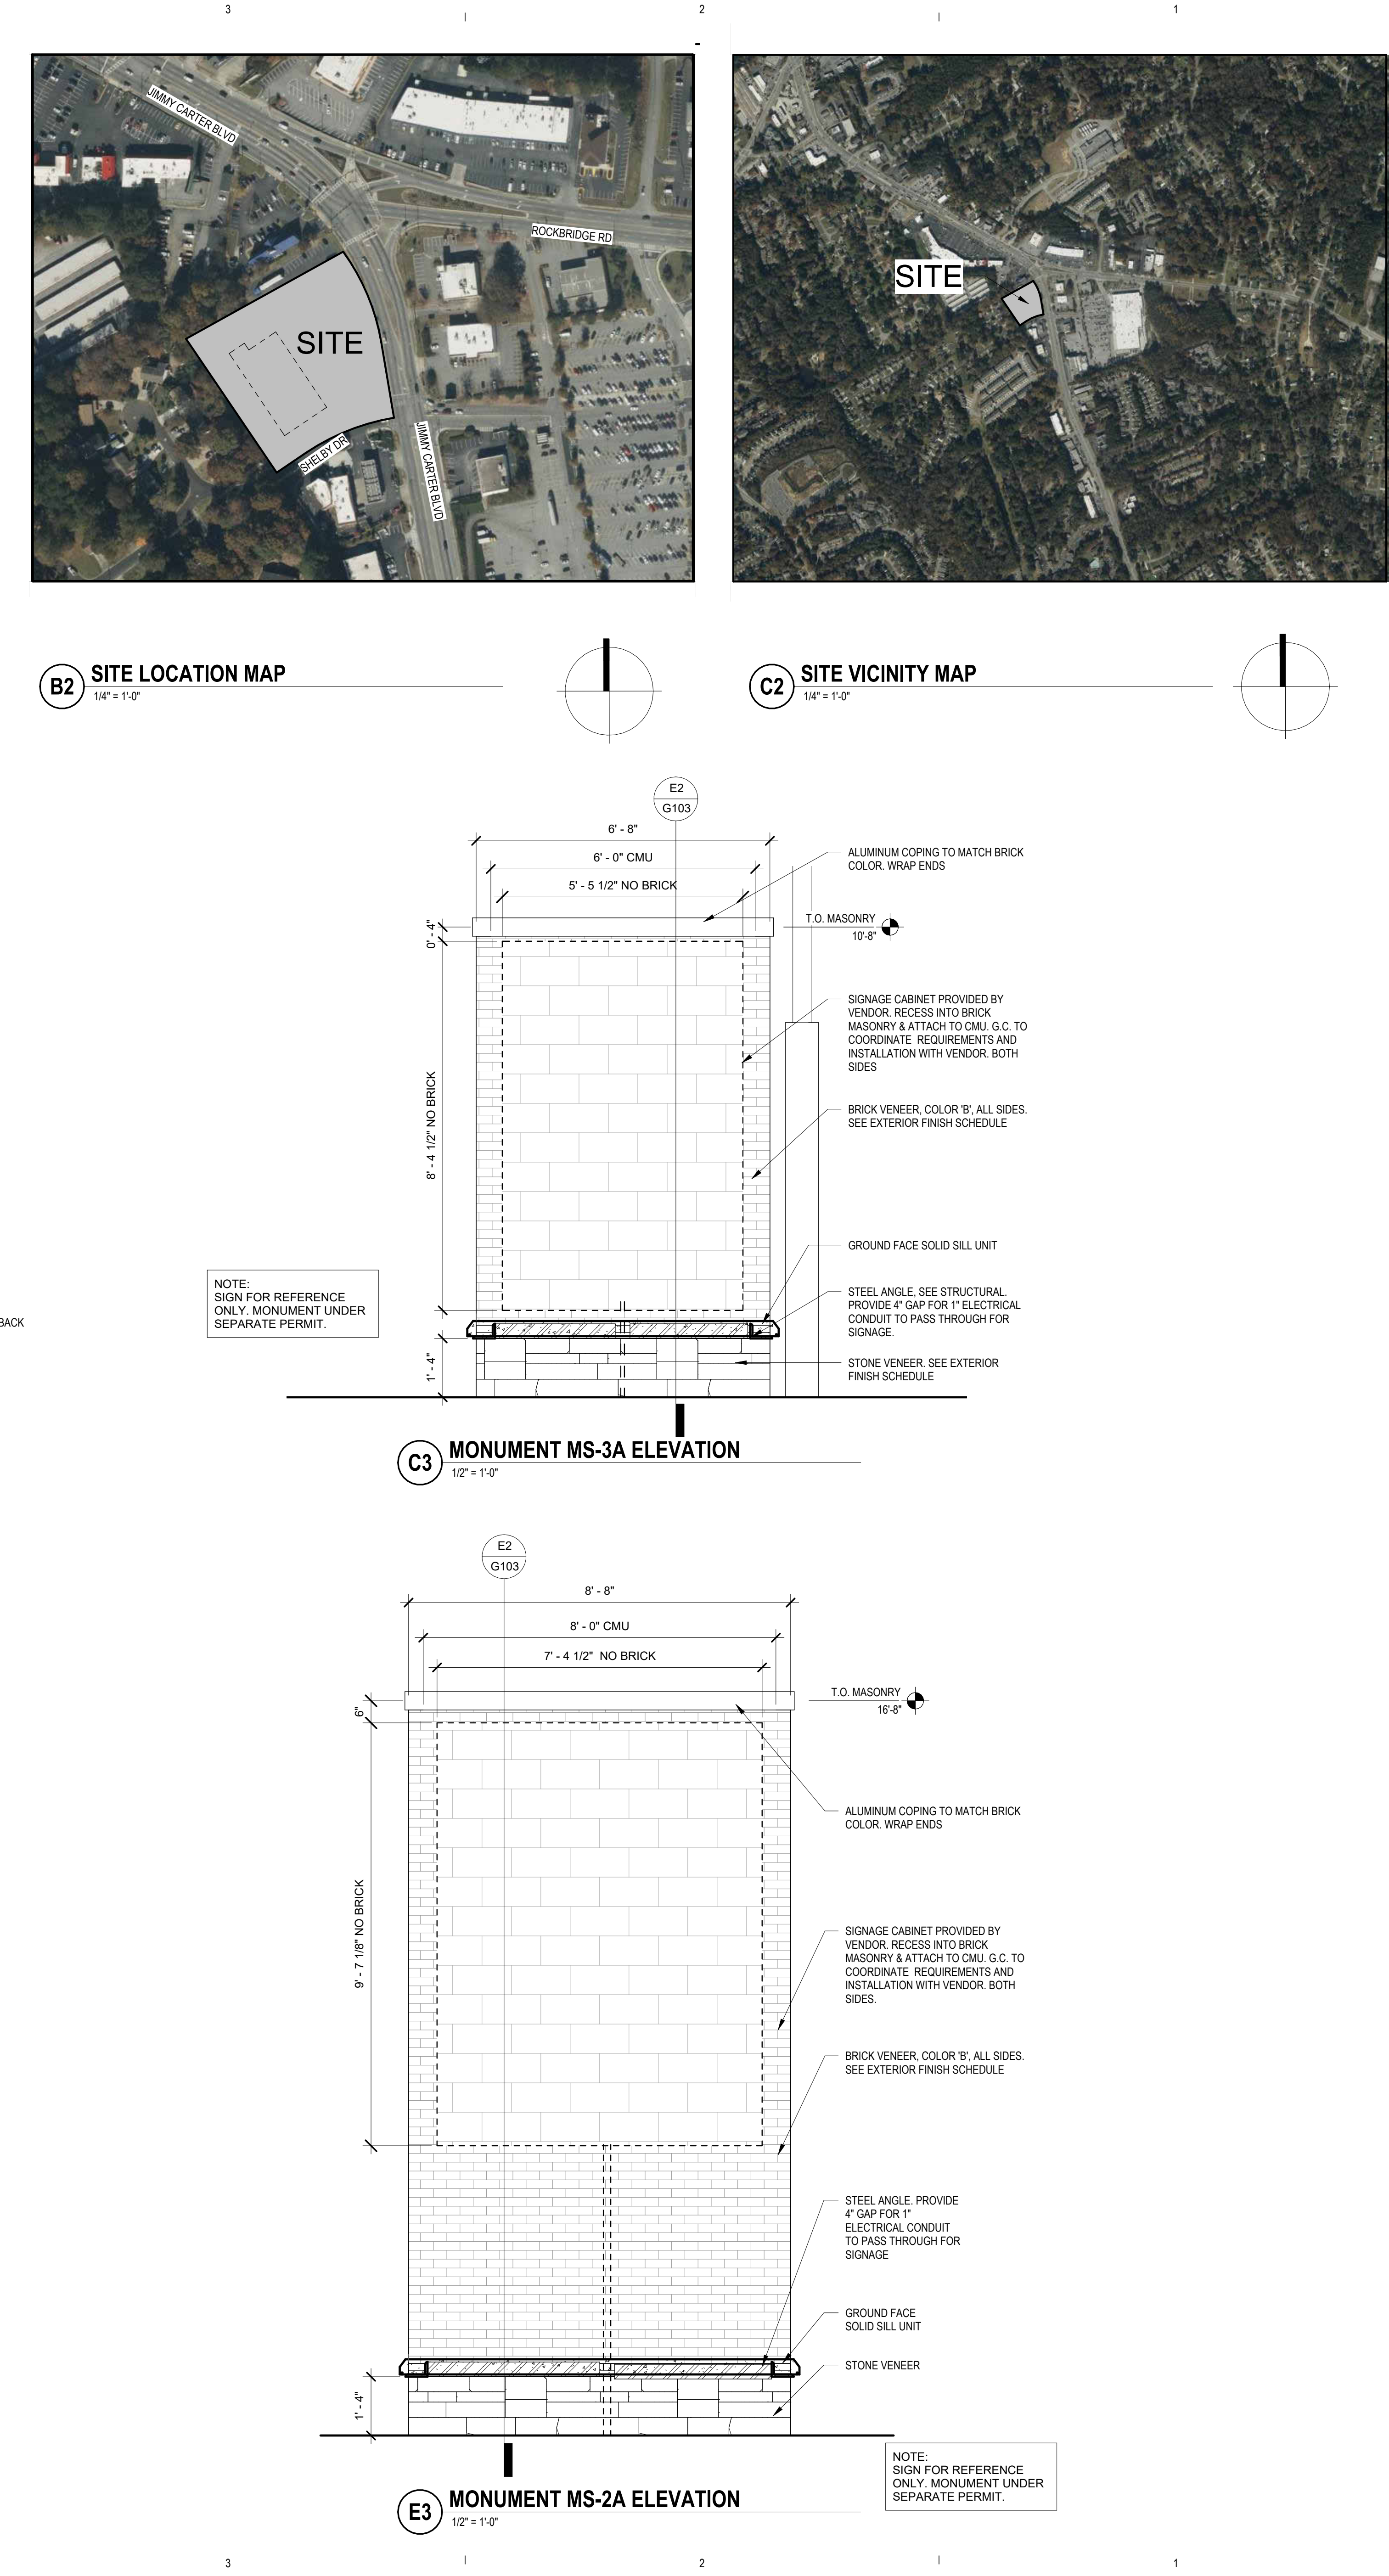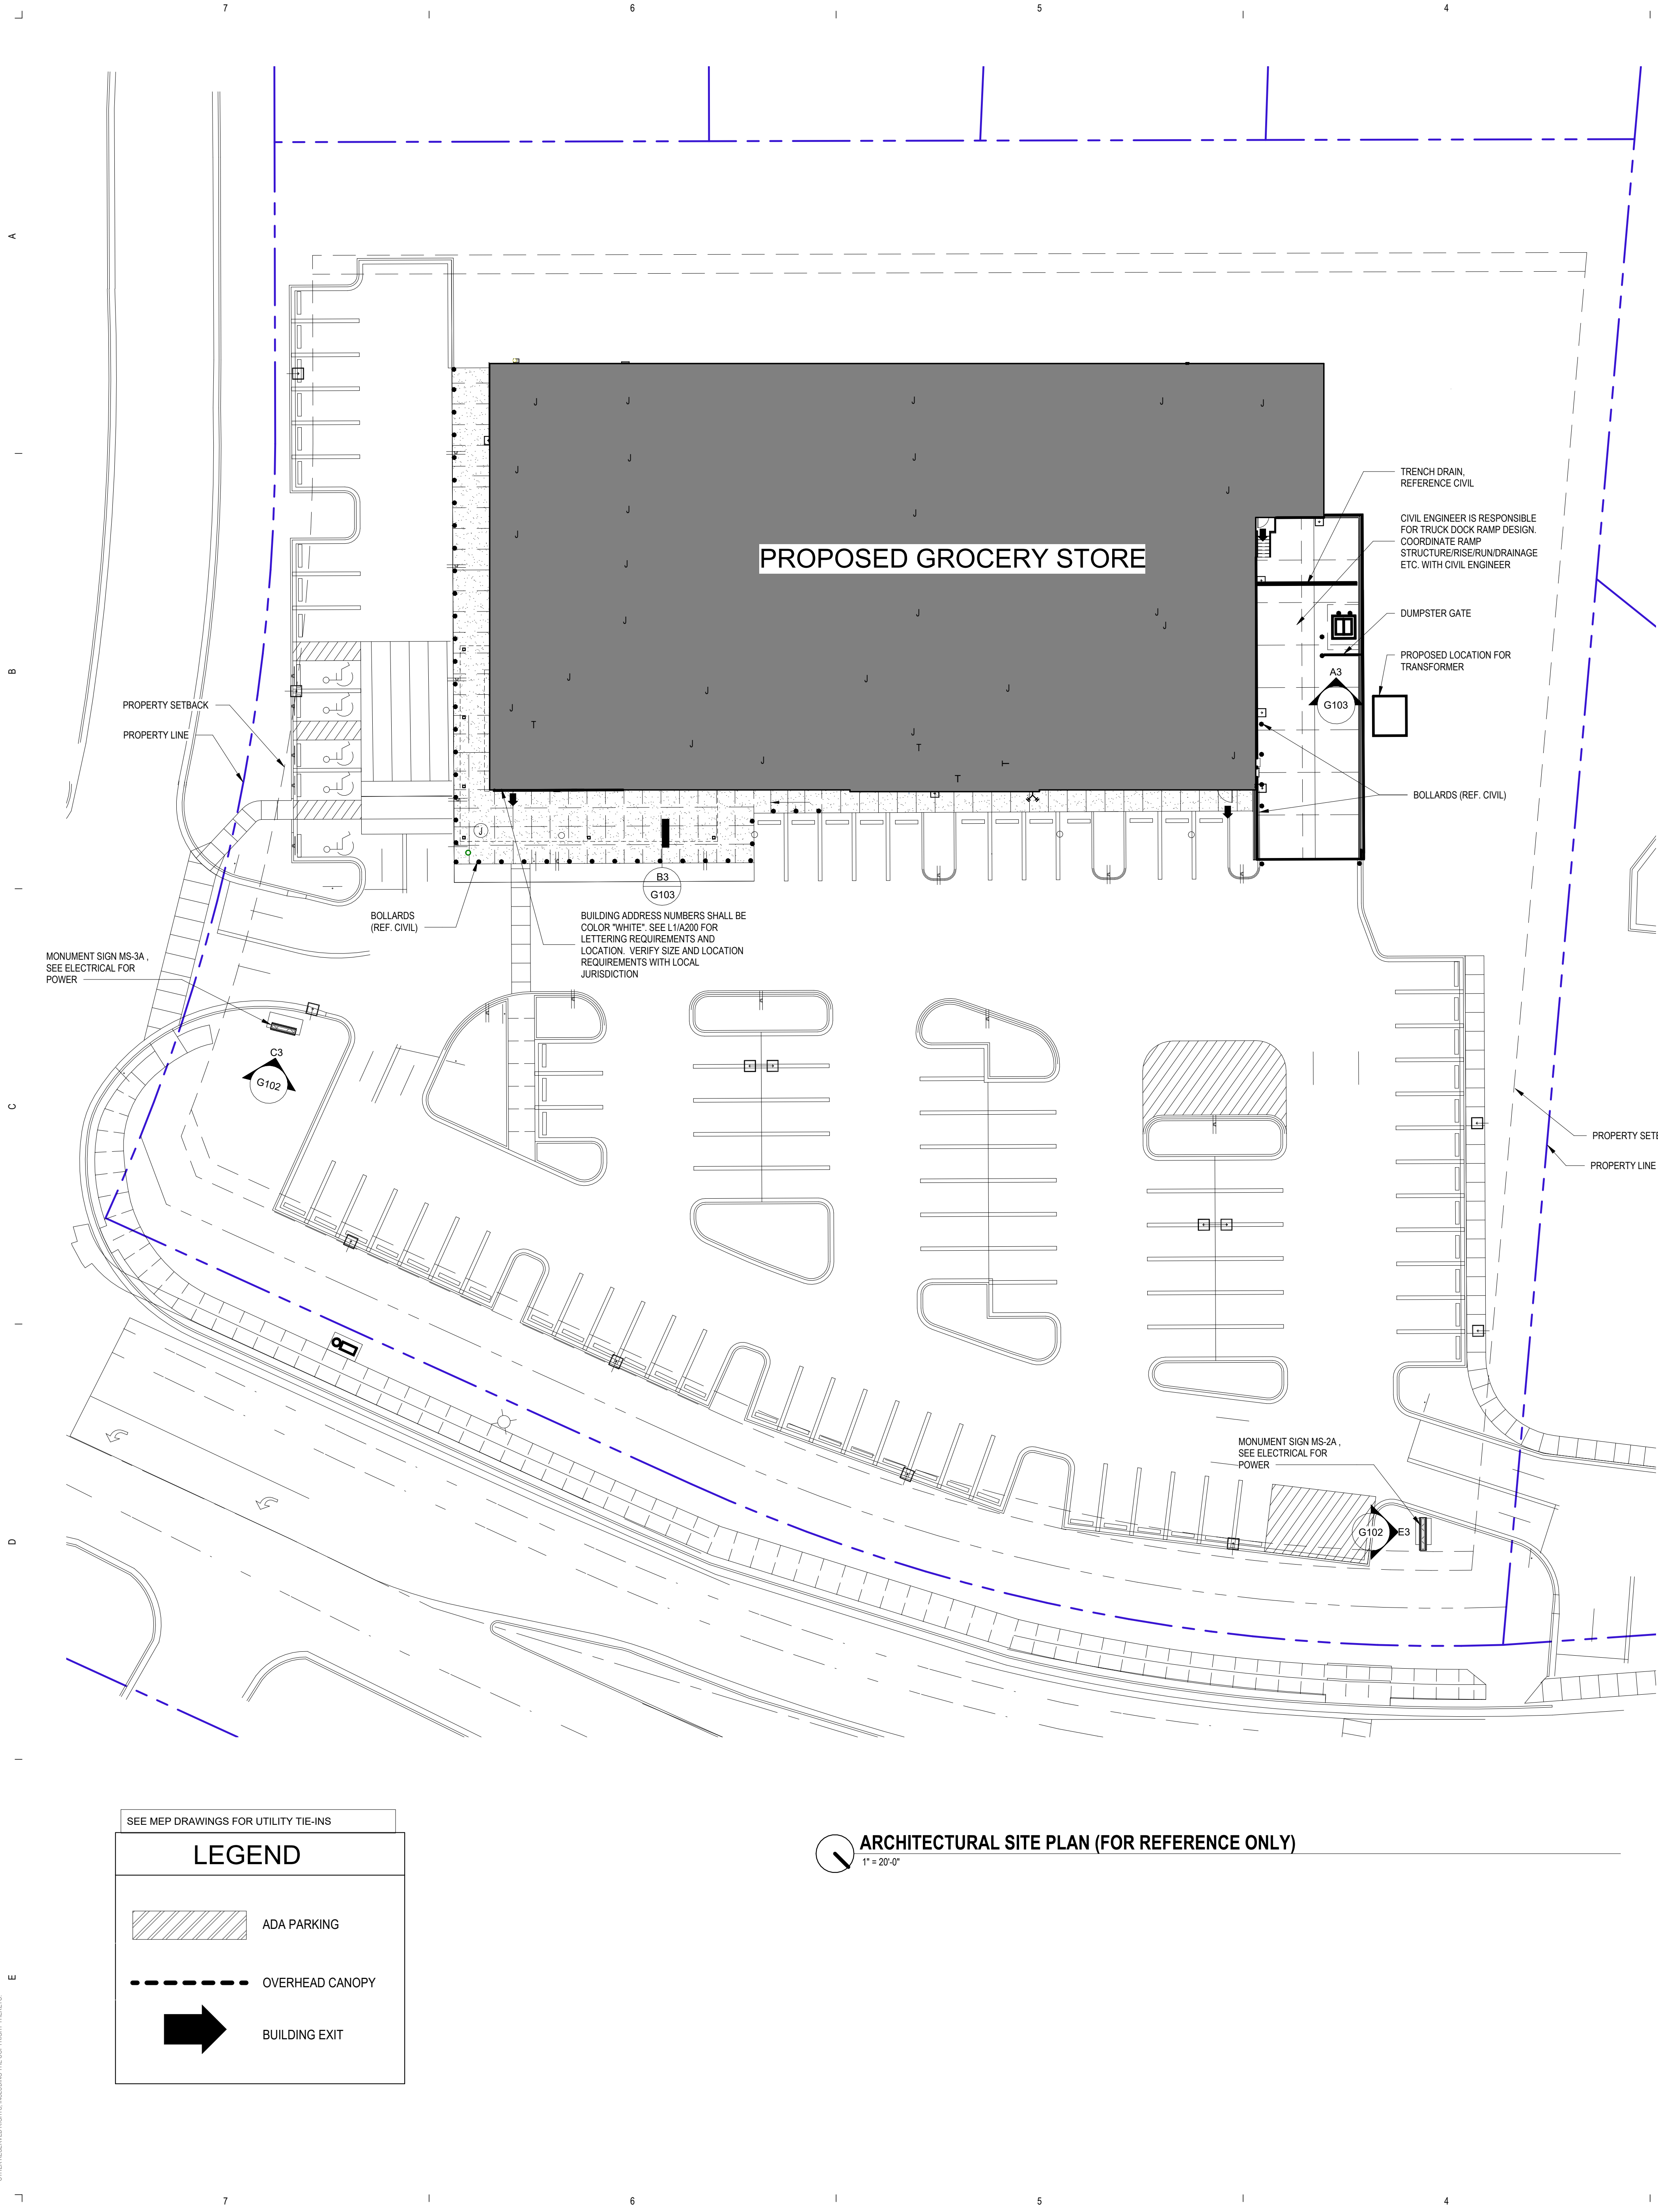

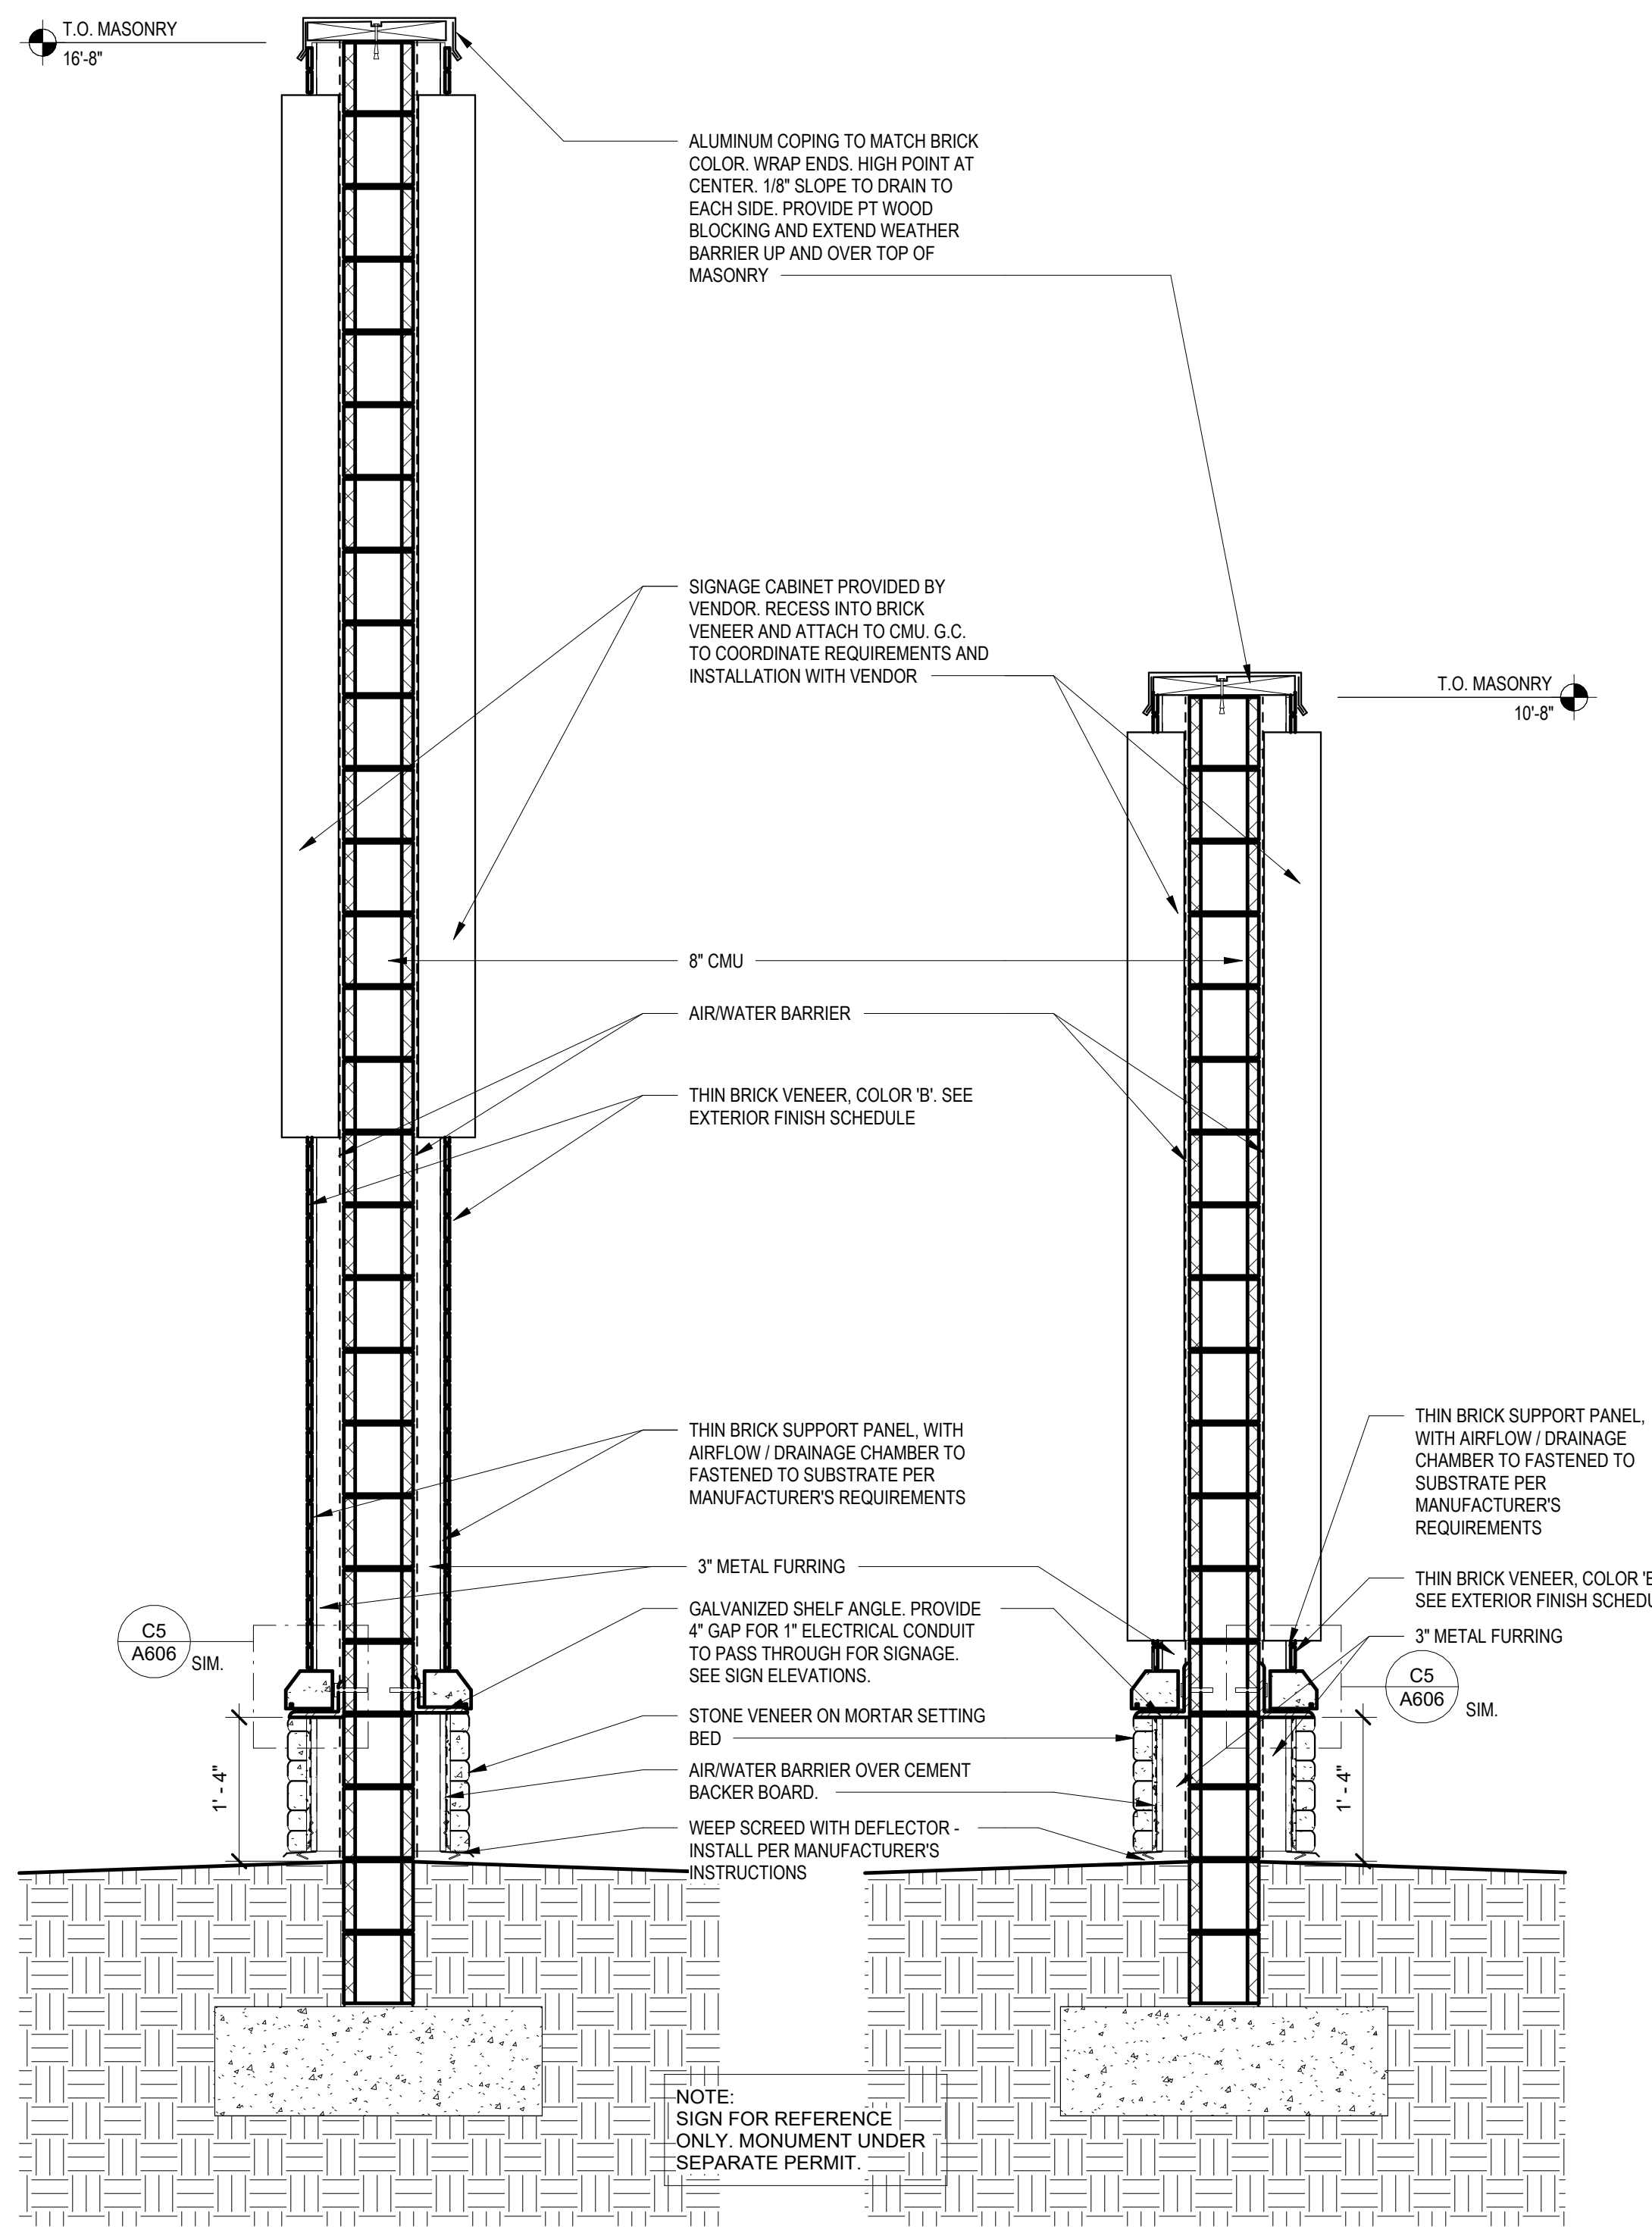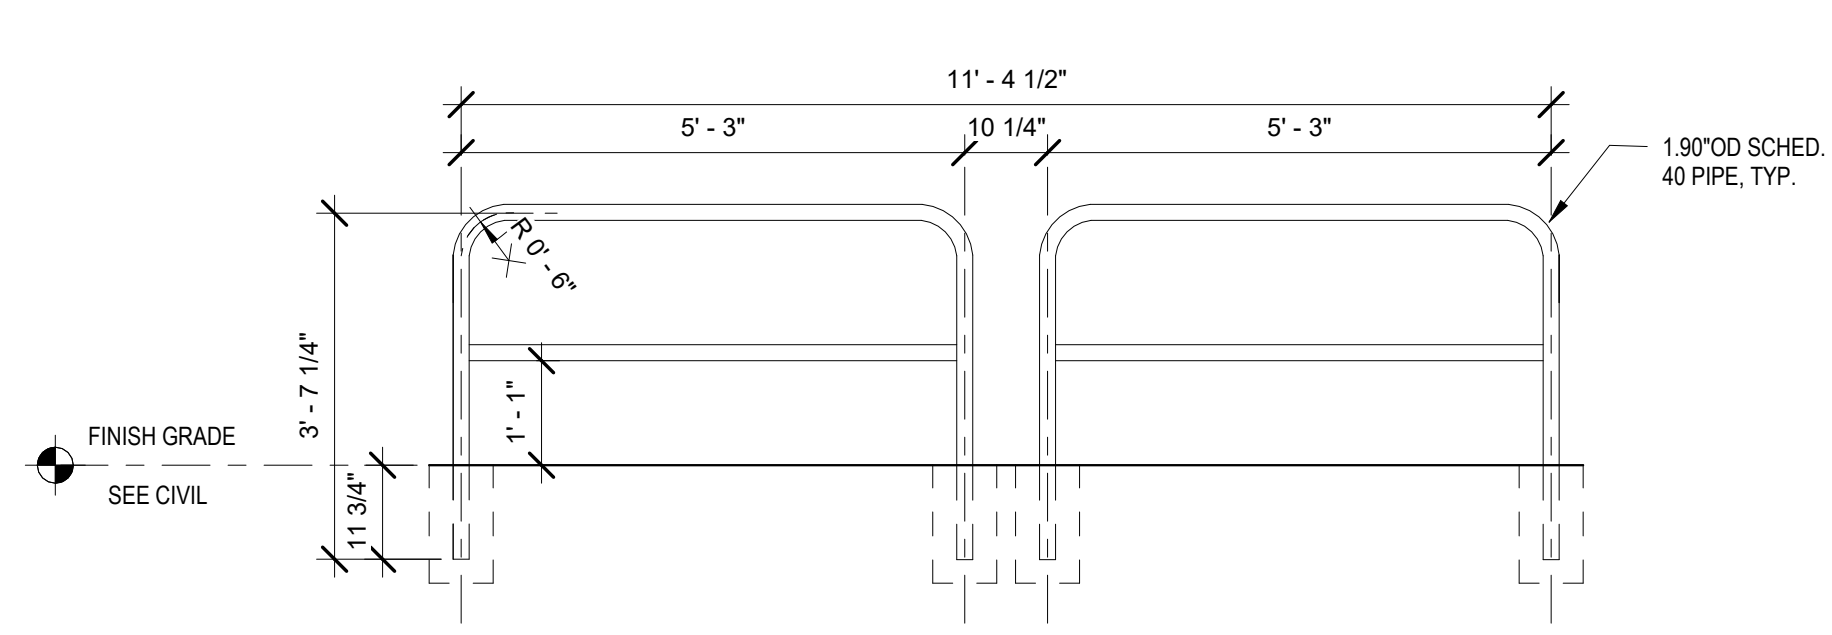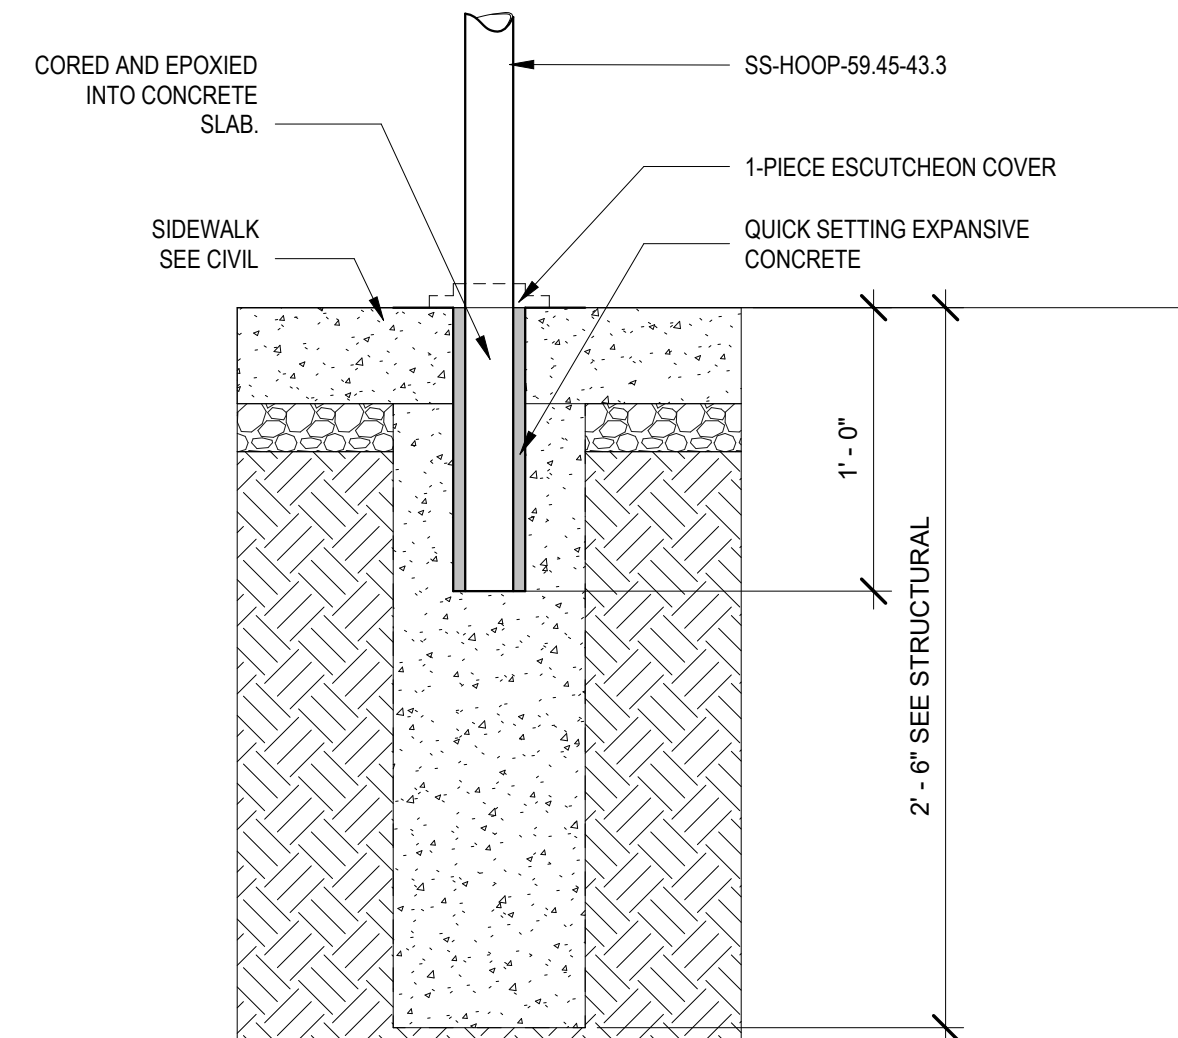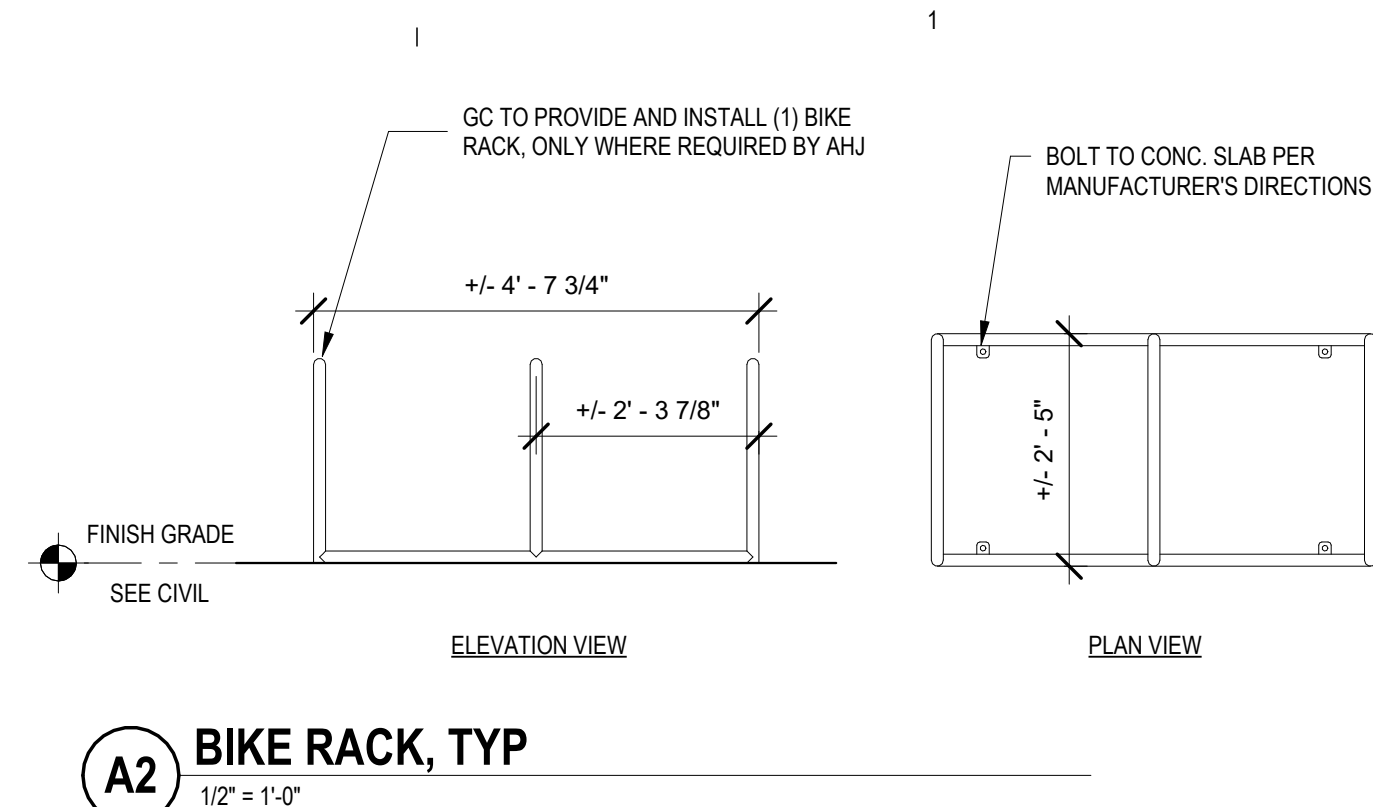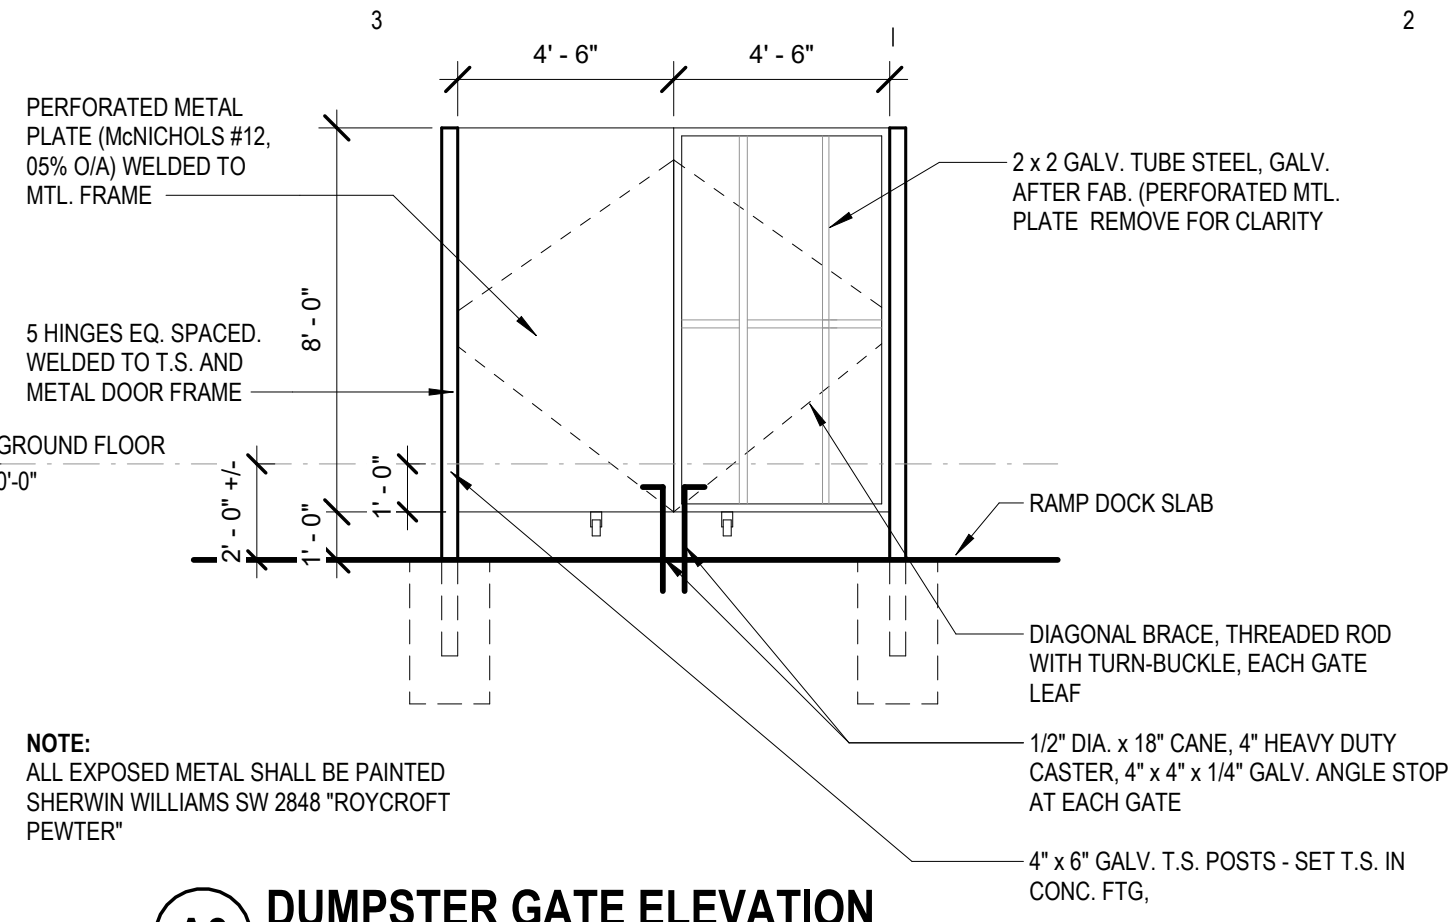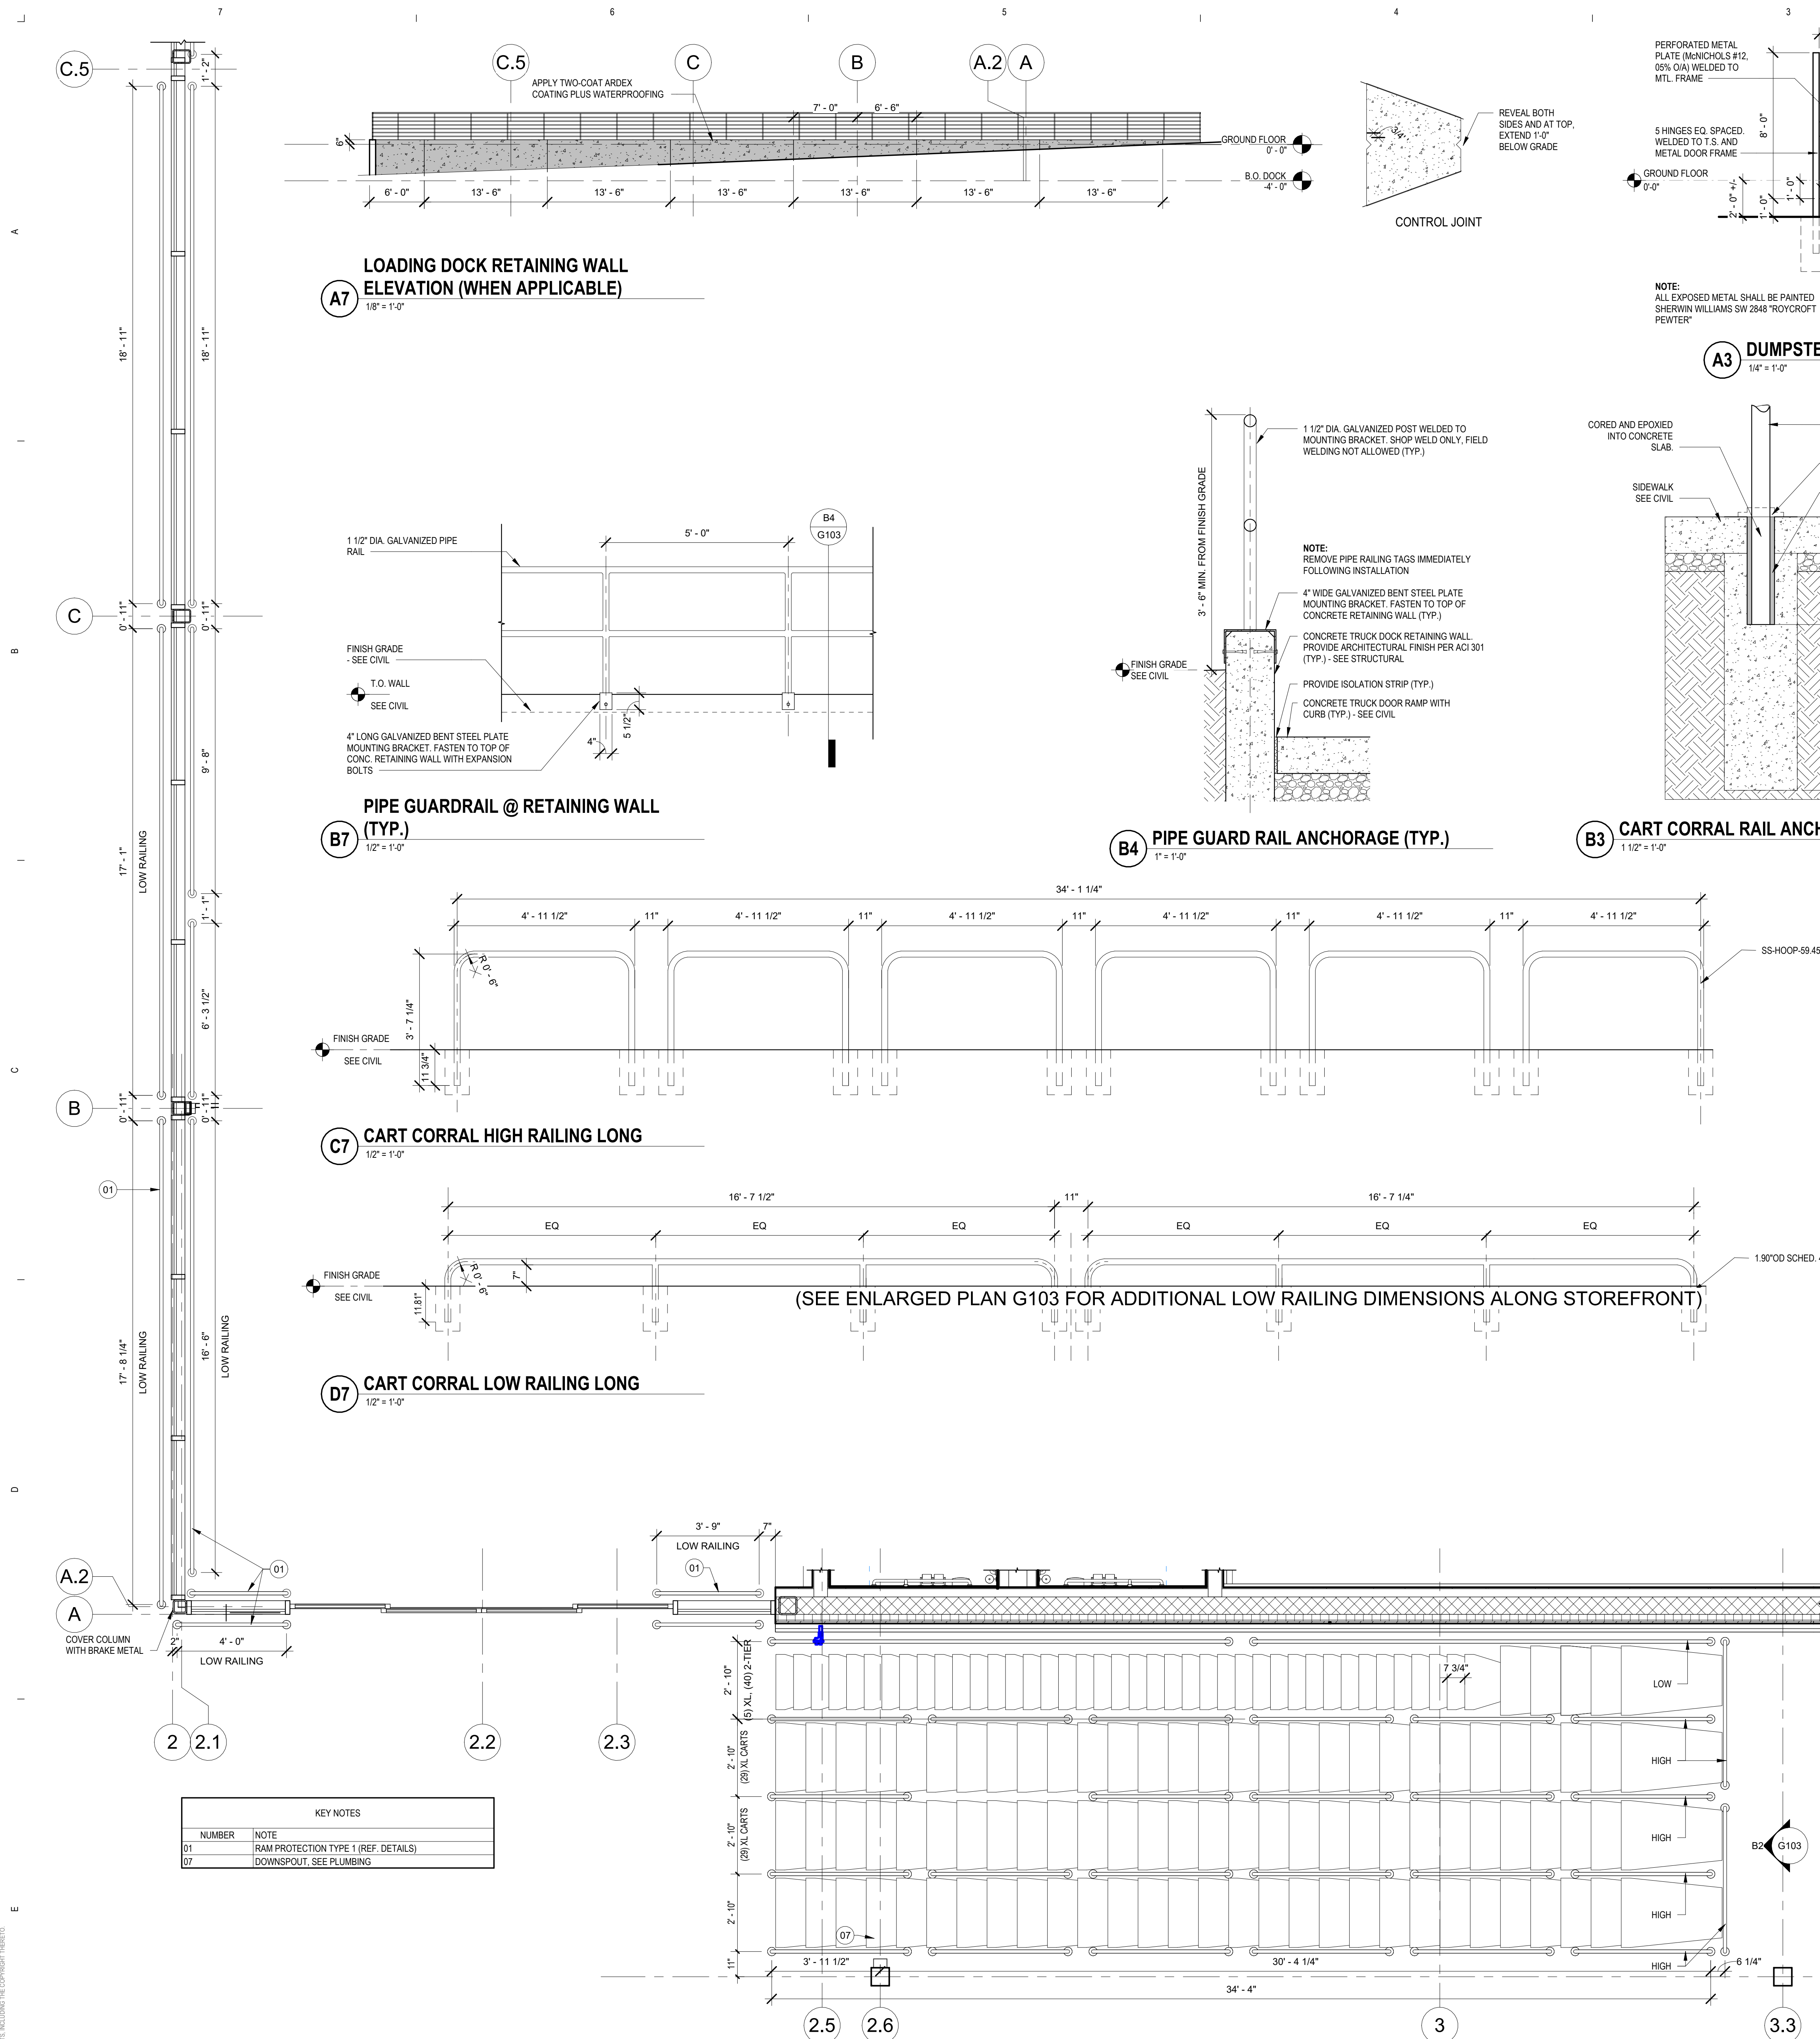

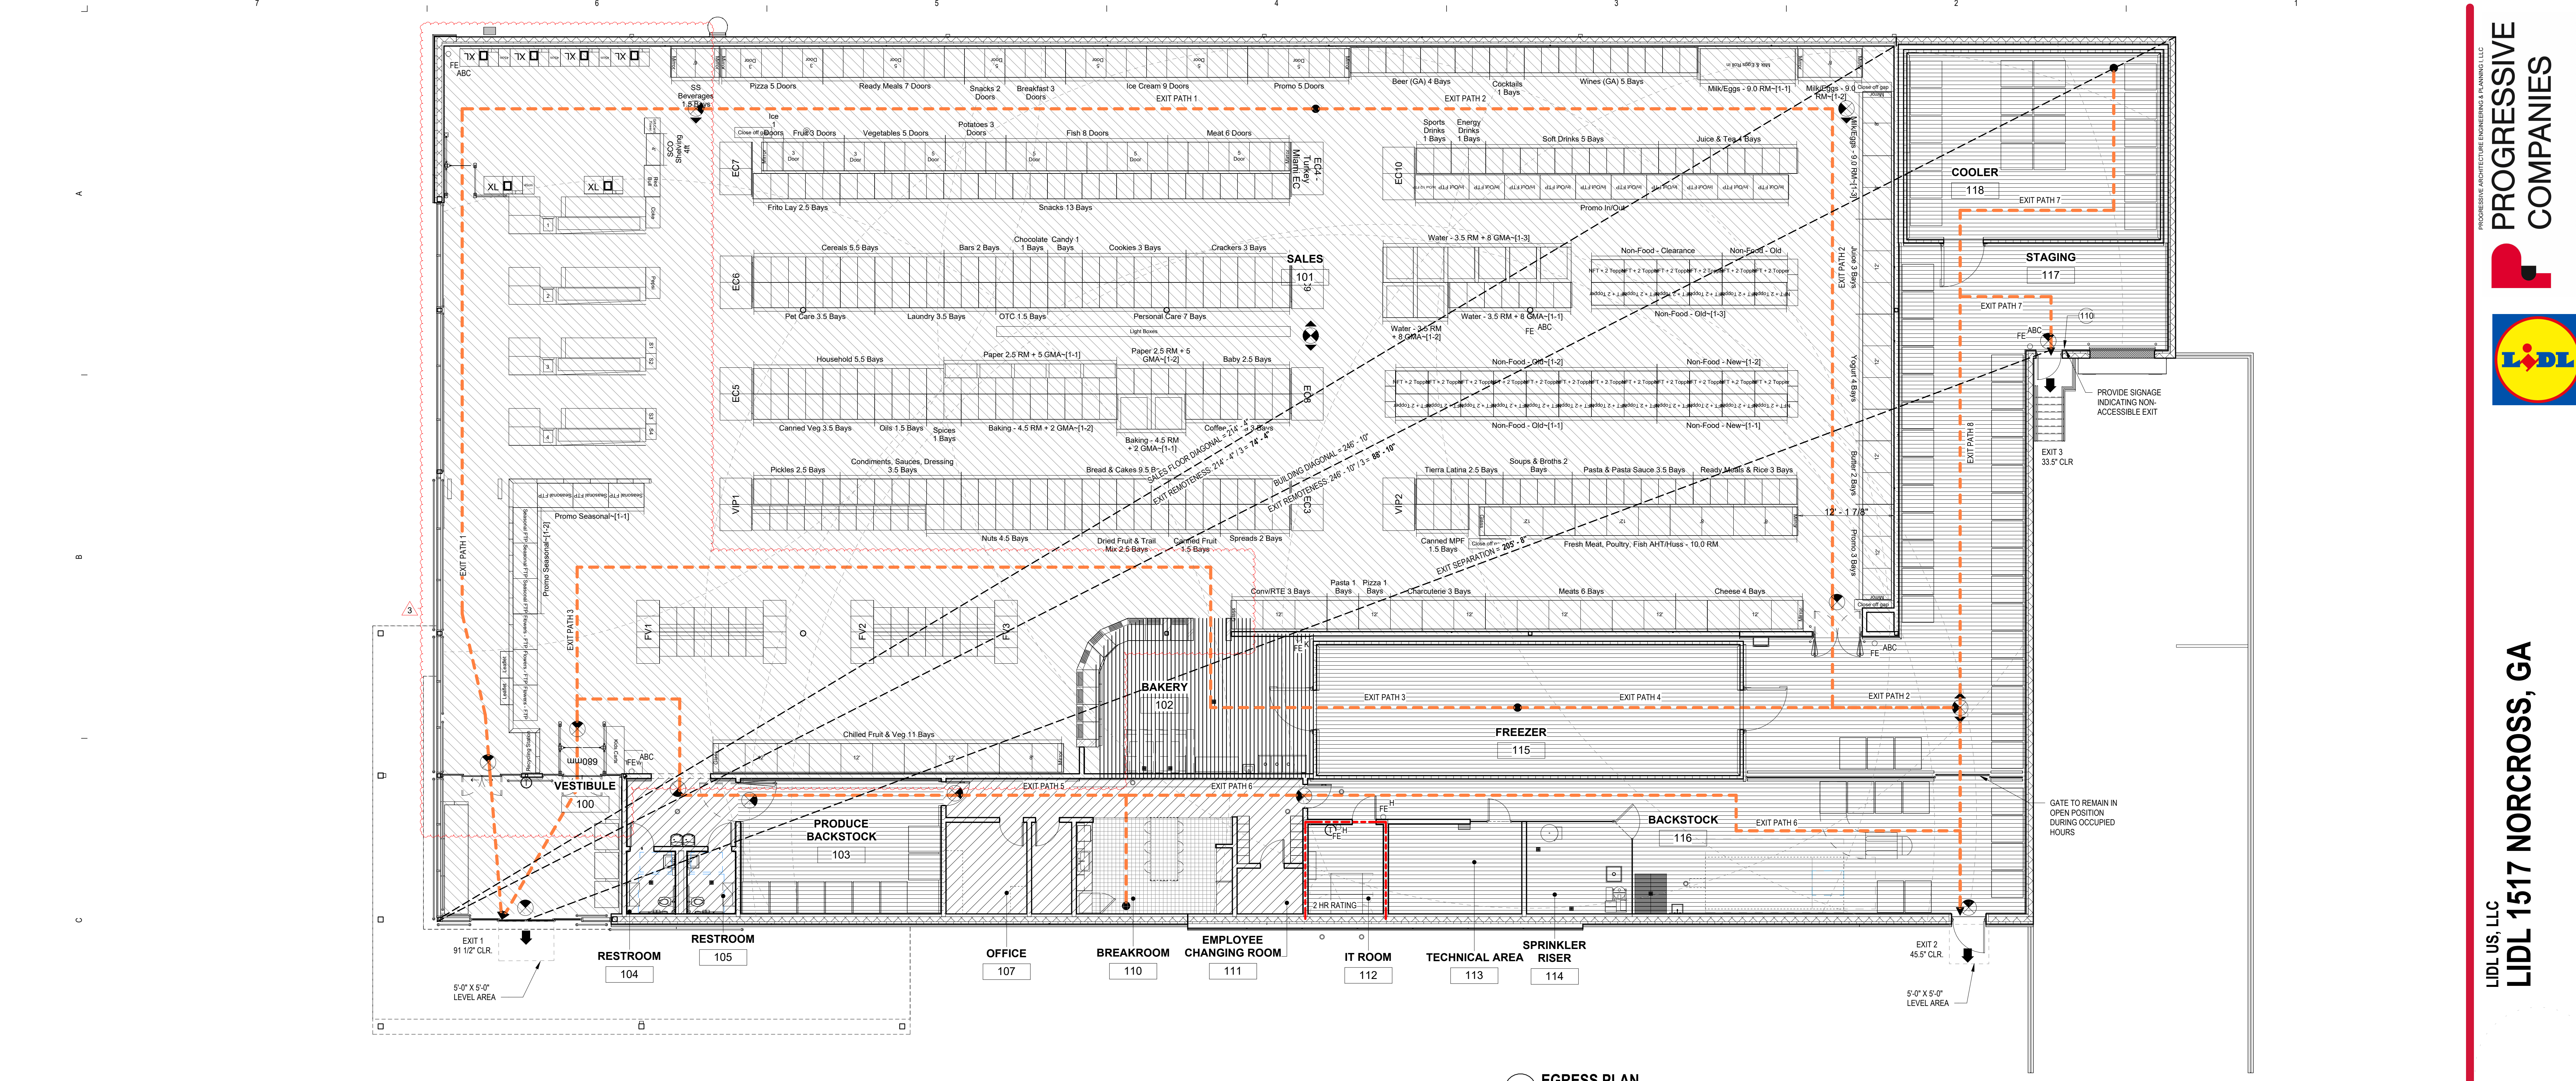

EGRESS PLAN  
1/8" = 1'-0"

## BUILDING CODE SUMMARY

AHJ: GWINNETT COUNTY, GA

### PREVAILING CODES

|               |                                                                            |
|---------------|----------------------------------------------------------------------------|
| BUILDING      | 2018 INTERNATIONAL BUILDING CODE (IBC) WITH GEORGIA AMENDMENTS             |
| FIRE          | 2018 INTERNATIONAL FIRE CODE (IFC) WITH GEORGIA AMENDMENTS                 |
| ENERGY        | 2015 INTERNATIONAL ENERGY CONSERVATION CODE (IECC) WITH GEORGIA AMENDMENTS |
| MECHANICAL    | 2018 INTERNATIONAL MECHANICAL CODE (IMC) WITH GEORGIA AMENDMENTS           |
| PLUMBING      | 2018 INTERNATIONAL PLUMBING CODE (IPC) WITH GEORGIA AMENDMENTS             |
| ELECTRICAL    | 2023 NATIONAL ELECTRICAL CODE (NFPA 70)                                    |
| ACCESSIBILITY | ICC/ANSI A117.1-2009 AND 2010 ADA                                          |

### BUILDING CODE ANALYSIS

|                  |                                                                                                          |
|------------------|----------------------------------------------------------------------------------------------------------|
| IBC 508          | MIXED USE AND OCCUPANCY                                                                                  |
| TABLE 508.4      | NO SEPARATION REQUIREMENT BETWEEN MERCANTILE AND STORAGE                                                 |
| IBC 302          | NON-SEPARATED MIXED USE (M (MERCANTILE) AND S-1 (STORAGE) WITH ACCESSORY F-1 (FACTORY) AND B (BUSINESS)) |
| IBC 509          | INCIDENTAL USES                                                                                          |
|                  | BUILDING SQUARE FOOTAGE                                                                                  |
|                  | 23,392 SF (GROSS)                                                                                        |
| CHAPTER 6        | CONSTRUCTION TYPE                                                                                        |
|                  | V-B (FULLY SPRINKLERED)                                                                                  |
| IBC 507          | UNLIMITED AREA BUILDINGS                                                                                 |
|                  | FULLY SPRINKLERED ONE-STORY                                                                              |
|                  | 80 FOOT OR GREATER SEPARATION GROUPS B, F, M AND/OR S ONLY                                               |
|                  | YES                                                                                                      |
|                  | YES                                                                                                      |
|                  | YES                                                                                                      |
|                  | YES                                                                                                      |
| IBC TABLE 1004.5 | BUILDING OCCUPANT LOAD CALCULATION                                                                       |
|                  | MERCANTILE GRADE FLOOR AREAS                                                                             |
|                  | 15,340 SF (GROSS) / 60 = 255 OCCUPANTS                                                                   |
|                  | WAREHOUSE/STAGING                                                                                        |
|                  | 5,578 SF (GROSS) / 300 = 18 OCCUPANTS                                                                    |
|                  | ACCESSORY BUSINESS AREAS                                                                                 |
|                  | 842 SF (GROSS) / 150 = 5 OCCUPANTS                                                                       |
|                  | ACCESSORY FACTORY AREAS (BAKERY)                                                                         |
|                  | 532 SF (GROSS) / 200 = 2 OCCUPANTS                                                                       |
|                  | ACCESSORY ASSEMBLY AREA (BREAK ROOM)                                                                     |
|                  | 198 SF (NET) / 15 = 13 OCCUPANTS                                                                         |
|                  | TOTAL                                                                                                    |
|                  | 301 OCCUPANTS                                                                                            |

|                                                                   | REQUIRED? | PROVIDED? |
|-------------------------------------------------------------------|-----------|-----------|
| IBC TABLE 601                                                     |           |           |
| FIRE RESISTANCE RATING REQUIREMENTS FOR BUILDING ELEMENTS (HOURS) |           |           |
| PRIMARY STRUCTURAL FRAME                                          | 0         | 0         |
| EXTERIOR BEARING WALLS                                            | 0         | 0         |
| INTERIOR BEARING WALLS                                            | 0         | 0         |
| EXTERIOR NONBEARING WALLS (X-30)                                  | 0         | 0         |
| INTERIOR NONBEARING PARTITIONS                                    | 0         | 0         |
| FLOOR CONSTRUCTION                                                | 0         | 0         |
| ROOF CONSTRUCTION                                                 | 0         | 0         |

|                                                                   | FIRE SEPARATION ASSEMBLIES                                             | REQUIRED?                                                      | PROVIDED?                        |
|-------------------------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------|----------------------------------|
| IBC TABLE 706.4                                                   | FIRE WALLS                                                             | N/A                                                            | NONE                             |
| IBC TABLE 707.3.10                                                | FIRE BARRIERS/HORIZONTAL ASSEMBLIES                                    | NONE                                                           | NONE                             |
| IBC 713                                                           | SHAFT ENCLOSURES                                                       | N/A                                                            | NONE                             |
| IBC 708                                                           | FIRE PARTITIONS                                                        | N/A                                                            | 2 HR AT IT ROOM (OWNER REQUIRED) |
| IBC 709                                                           | SMOKE BARRIERS                                                         | N/A                                                            | NONE                             |
| IBC 710                                                           | SMOKE PARTITIONS                                                       | N/A                                                            | NONE                             |
| IBC TABLE 1020                                                    | EXIT ACCESS CORRIDOR                                                   | N/A                                                            | NONE                             |
|                                                                   |                                                                        | REQUIRED?                                                      | PROVIDED?                        |
| IBC TABLE 705.8                                                   | EXTERIOR WALL OPENING PROTECTION                                       | NOT REQUIRED                                                   | N/A                              |
| IBC 903                                                           | AUTOMATIC SPRINKLER SYSTEM                                             | REQUIRED                                                       | PROVIDED                         |
| IBC 905                                                           | STANDPIPE SYSTEM                                                       | NOT REQUIRED                                                   | N/A                              |
| IFC 906.1                                                         | PORTABLE FIRE EXTINGUISHERS                                            | A-B-C                                                          | PROVIDED                         |
| IN ACCORDANCE WITH NFPA 10 - REQUIRED AT THE FOLLOWING LOCATIONS: |                                                                        |                                                                |                                  |
| - COMMERCIAL KITCHEN EXHAUST HOOD                                 |                                                                        |                                                                |                                  |
| - AREAS WHERE FUEL IS DISPENSED                                   |                                                                        |                                                                |                                  |
| - WHERE FLAMMABLE OR COMBUSTIBLE LIQUID IS USED                   |                                                                        |                                                                |                                  |
| - EACH COMPLETED FLOOR OF BUILDING UNDER CONSTRUCTION             |                                                                        |                                                                |                                  |
| - LABORATORIES, SHOP OR OTHER SIMILAR PURPOSE                     |                                                                        |                                                                |                                  |
| - WHERE REQUIRED BY CHAPTER 35                                    |                                                                        |                                                                |                                  |
| IFC 907.2                                                         | FIRE ALARM AND DETECTION SYSTEM                                        |                                                                |                                  |
|                                                                   | AUTOMATIC SMOKE DETECTION                                              | NOT REQUIRED                                                   | N/A                              |
|                                                                   | MANUAL FIRE ALARM                                                      | REQUIRED                                                       | PROVIDED                         |
| IFC 910.2                                                         | SMOKE AND HEAT VENTS                                                   | NOT REQUIRED                                                   | N/A                              |
| IBC 1008                                                          | MEANS OF EGRESS ILLUMINATION                                           | REQUIRED                                                       | PROVIDED                         |
| IBC 1013                                                          | ILLUMINATED EXIT SIGNS                                                 | REQUIRED                                                       | PROVIDED                         |
| IBC TABLE 1006.2.1                                                | COMMON PATH OF TRAVEL                                                  | M, A-2: 75 FEET; S-1, B, F-1: 100 FEET                         |                                  |
|                                                                   | FLOOR ACTUAL PROVIDED                                                  | NOT TO EXCEED 75 FEET - SEE EGRESS PLAN                        |                                  |
| IBC TABLE 1006.2.1                                                | SPACES WITH ONE MEANS OF EGRESS                                        |                                                                |                                  |
|                                                                   | OCCUPANCY A, B, E, F, M, U                                             | MAX 49 OCCUPANTS                                               | 2 EXITS PROVIDED                 |
|                                                                   | OCCUPANCY S                                                            | MAX 29 OCCUPANTS                                               | 3 EXITS PROVIDED                 |
| IBC 1006.2.1.1                                                    | THREE OR MORE EXITS                                                    | REQ'D FOR SPACE WITH 501-1000 OCCUPANTS                        |                                  |
| IBC TABLE 1017.2                                                  | EXIT ACCESS TRAVEL DISTANCE                                            | M, S-1, F-1, A-2: 250 FEET; B: 300 FT                          |                                  |
| IBC 1007.1                                                        | EXIT CONFIGURATION                                                     |                                                                |                                  |
|                                                                   | MIN EXIT SEPARATION (SPRINKLERED)                                      | 1/3 LENGTH OF MAX DIAG BUILDING DISTANCE                       |                                  |
|                                                                   | REQUIRED: 85 FT                                                        | PROVIDED: 241 FT                                               |                                  |
| IBC 1005                                                          | EGRESS WIDTHS                                                          |                                                                |                                  |
|                                                                   | GROUND FLOOR                                                           | OTHER EGRESS COMPONENTS: 348 OCCUPANTS x 0.2' = 69.6' REQUIRED |                                  |
|                                                                   | EXIT 1 = 66.7'; EXIT 2 = 33'; EXIT 3 = 33'; EXIT 4 = 45'; EXIT 5 = 33' | TOTAL = 210.75' PROVIDED                                       |                                  |

| IBC 1009.6        | AREA OF REFUGE                       | NOT REQUIRED                                                                                                                                              |
|-------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| IBC 1020.4        | MAX DEAD END                         | 50 FT                                                                                                                                                     |
| IBC 718           | DRAFT STOPPING                       | N/A                                                                                                                                                       |
| IBC TABLE 803.11  | INTERIOR WALL AND CEILING FINISHES   |                                                                                                                                                           |
|                   | VERTICAL EXITS AND EXIT PASSAGEWAYS  | B                                                                                                                                                         |
|                   | EXIT ACCESS CORR & OTHER EXIT WAYS   | C                                                                                                                                                         |
|                   | ROOMS AND ENCLOSED SPACES            | C                                                                                                                                                         |
| IFC TABLE 803.1.1 | FLAME AND SMOKE INDEX                |                                                                                                                                                           |
|                   | CLASS A                              | CLASS B                                                                                                                                                   |
|                   | CLASS C                              | CLASS C                                                                                                                                                   |
|                   | FLAME SPREAD INDEX                   | 0-25                                                                                                                                                      |
|                   | SMOKE DEVELOPED INDEX                | 0-450                                                                                                                                                     |
| IFC 804           | INTERIOR FLOOR FINISHES              |                                                                                                                                                           |
|                   | M, B, S-2, A-2                       | CARPET AND CARPET LIKE FINISHES SHALL COMPLY WITH ASTM D 2895. FLOOR COVERINGS OTHER THAN CARPET SHALL HAVE A MINIMUM CRITICAL RADIANT FLUX OF 0.22 W/GM² |
|                   | F-1                                  | NOT REQUIRED PER IFC 804                                                                                                                                  |
| IFC 804           | INTERIOR FLOOR FINISH CLASSIFICATION |                                                                                                                                                           |
|                   | CLASS 1                              | NOT LESS THAN 0.45 W/m²                                                                                                                                   |
|                   | CLASS 2                              | NOT LESS THAN 0.22 W/m²                                                                                                                                   |
| IPC TABLE 403.1   | PLUMBING FIXTURE REQUIREMENTS        | SEE PLUMBING CODE SUMMARY TABLE                                                                                                                           |
| IBC 906.1         | PORTABLE FIRE EXTINGUISHERS          | IN ACCORDANCE WITH NFPA 10                                                                                                                                |
|                   | MAX FLOOR AREA FOR EXTINGUISHER      | 11,250 SF                                                                                                                                                 |
|                   | MAX TRAVEL DISTANCE TO EXTINGUISHER  | 75 FEET                                                                                                                                                   |
| IBC 1111          | SIGNAGE                              | SEE CODE REQUIRED SIGNAGE TABLE                                                                                                                           |

### Egress Travel Distances

| Mark        | Path of Egress | Primary/Secondary |
|-------------|----------------|-------------------|
| EXIT PATH 1 | 211' - 0"      | Primary           |
| EXIT PATH 2 | 183' - 8"      | Secondary         |
| EXIT PATH 3 | 183' - 11"     | Secondary         |
| EXIT PATH 4 | 82' - 4"       | Primary           |
| EXIT PATH 5 | 126' - 1"      | Primary           |
| EXIT PATH 6 | 134' - 9"      | Secondary         |
| EXIT PATH 7 | 67' - 4"       | Primary           |
| EXIT PATH 8 | 128' - 8"      | Secondary         |

| KEY NOTES |                                         |
|-----------|-----------------------------------------|
| NUMBER    | NOTE                                    |
| 110       | ACCESSIBLE SIGNAGE, REFER TO SHEET G105 |

| OCCUPANT LOAD ANALYSIS               |                        |          |                      |                                      |
|--------------------------------------|------------------------|----------|----------------------|--------------------------------------|
| ROOM NUMBER                          | ROOM NAME              | AREA     | OCCUPANT LOAD FACTOR | OCCUPANCY TYPE                       |
| 110                                  | BREAKROOM              | 237 SF   | 15                   | ASSEMBLY                             |
| ASSEMBLY                             |                        | 237 SF   | 16 OCCUPANTS         |                                      |
| 107                                  | OFFICE                 | 118 SF   | 150                  | BUSINESS                             |
| 108                                  | MEETING ROOM           | 58 SF    | 150                  | BUSINESS                             |
| 109                                  | BREAKROOM HALL         | 265 SF   | 150                  | BUSINESS                             |
| 111                                  | EMPLOYEE CHANGING ROOM | 48 SF    | 150                  | BUSINESS                             |
| BUSINESS                             |                        | 480 SF   | 4 OCCUPANTS          |                                      |
| 102                                  | BAKERY                 | 517 SF   | 200                  | FACTORY (COMMERCIAL KITCHEN, BAKERY) |
| FACTORY (COMMERCIAL KITCHEN, BAKERY) |                        | 517 SF   | 3 OCCUPANTS          |                                      |
| 100                                  | VESTIBULE              | 417 SF   | 60                   | MERCANTILE                           |
| 101                                  | SALES                  | 1509 SF  | 60                   | MERCANTILE                           |
| 104                                  | RESTROOM               | 48 SF    | 60                   | MERCANTILE                           |
| 105                                  | RESTROOM               | 48 SF    | 60                   | MERCANTILE                           |
| 106                                  | HALLWAY                | 118 SF   | 60                   | MERCANTILE                           |
| MERCANTILE                           |                        | 15725 SF | 263 OCCUPANTS        |                                      |
| 103                                  | PRODUCE BACKSTOCK      | 435 SF   | 300                  | WAREHOUSE / STAGING                  |
| 112                                  | IT ROOM                | 107 SF   | 300                  | WAREHOUSE / STAGING                  |
| 113                                  | TECHNICAL AREA         | 193 SF   | 300                  | WAREHOUSE / STAGING                  |
| 114                                  | SPRINKLER RISER        | 154 SF   | 300                  | WAREHOUSE / STAGING                  |
| 115                                  | FREEZER                | 899 SF   | 300                  | WAREHOUSE / STAGING                  |
| 116                                  | BACKSTOCK              | 1076 SF  | 300                  | WAREHOUSE / STAGING                  |
| 117                                  | STAGING                | 1683 SF  | 300                  | WAREHOUSE / STAGING                  |
| 118                                  | COOLER                 | 759 SF   | 300                  | WAREHOUSE / STAGING                  |
| WAREHOUSE / STAGING                  |                        | 5296 SF  | 18 OCCUPANTS         |                                      |
| TOTAL                                |                        |          | 304 OCCUPANTS        |                                      |

| 2018 IPC, TABLE 403.1.1 - MINIMUM PLUMBING FIXTURES |               |               |               |               |               |               |               |               |               |
|-----------------------------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| OCCUPANCY                                           | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS | WATER CLOSETS |
| REQUIREMENT                                         | MALE          | FEMALE        | MALE          | FEMALE        | MALE          | FEMALE        | MALE          | FEMALE        | MALE          |
| "S-1"                                               | 1 per 500     | 1 per 500     | 1 per 750     | 1 per 750     | 1 per 1,000   | 1 per 1,000   | 1 per 1,000   | 1 per 1,000   | 1 per 1,000   |
| REQUIREMENT                                         | MALE          | FEMALE        | MALE          | FEMALE        | MALE          | FEMALE        | MALE          | FEMALE        | MALE          |
| "S-1"                                               | 1 per 100     | 1 per 100     | 1 per 100     | 1 per 100     | 1 per 100     | 1 per 100     | 1 per 100     | 1 per 100     | 1 per 100     |
| TOTAL OCCUPANT LOAD = 301                           | 2             | 2             | 3             | 3             | 4             | 4             | 4             | 4             | 4             |

| OCC.           | OCC. LOAD | W.C.   | W.C.  | W.C.  | W.C.  | W.C.  | W.C.  | W.C.  | W.C.  |
|----------------|-----------|--------|-------|-------|-------|-------|-------|-------|-------|
| "M"            | 282       | 17,112 | 0.282 | 0.282 | 0.188 | 0.188 | 0.282 | 0.282 | 0.282 |
| "S-1"          | 19        | 5,578  | 0.10  | 0.10  | 0.10  | 0.10  | 0.019 | 0.019 | 0.019 |
| TOTAL REQUIRED | 1         | 1      | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| PROVIDED       | 1         | 1      | 1     | 1     | 1     | 1     | 2     | 1     | 1     |


### LEGEND


- SALES FLOOR (M)
- BAKERY (F-1)
- OFFICE (B)
- STORAGE (S-1)
- ASSEMBLY (A-3)

- EXIT SIGN WITH LIGHTS AND CHEVRONS
- EGRESS PATH
- EXIT DOOR LOAD
- 10LB A, B, C, FIRE EXTINGUISHER
- 11 LB HALOTRON FIRE EXTINGUISHER
- 6L CLASS K FIRE EXTINGUISHER
- FIRE EXTINGUISHER 75' RADIUS
- 2 HR FIRE SEPARATION

### BUILDING AREAS

|                                                |           |
|------------------------------------------------|-----------|
| FOOTPRINT / IMPERVIOUS SF<br>• INCLUDES CANOPY | 24,731 SF |
| GROSS SF / CONDITIONED SF<br>• EXCLUDES CANOPY | 23,492 SF |
| NET SF<br>• EXCLUDES CANOPY AND EXTERIOR WALLS | 22,741 SF |




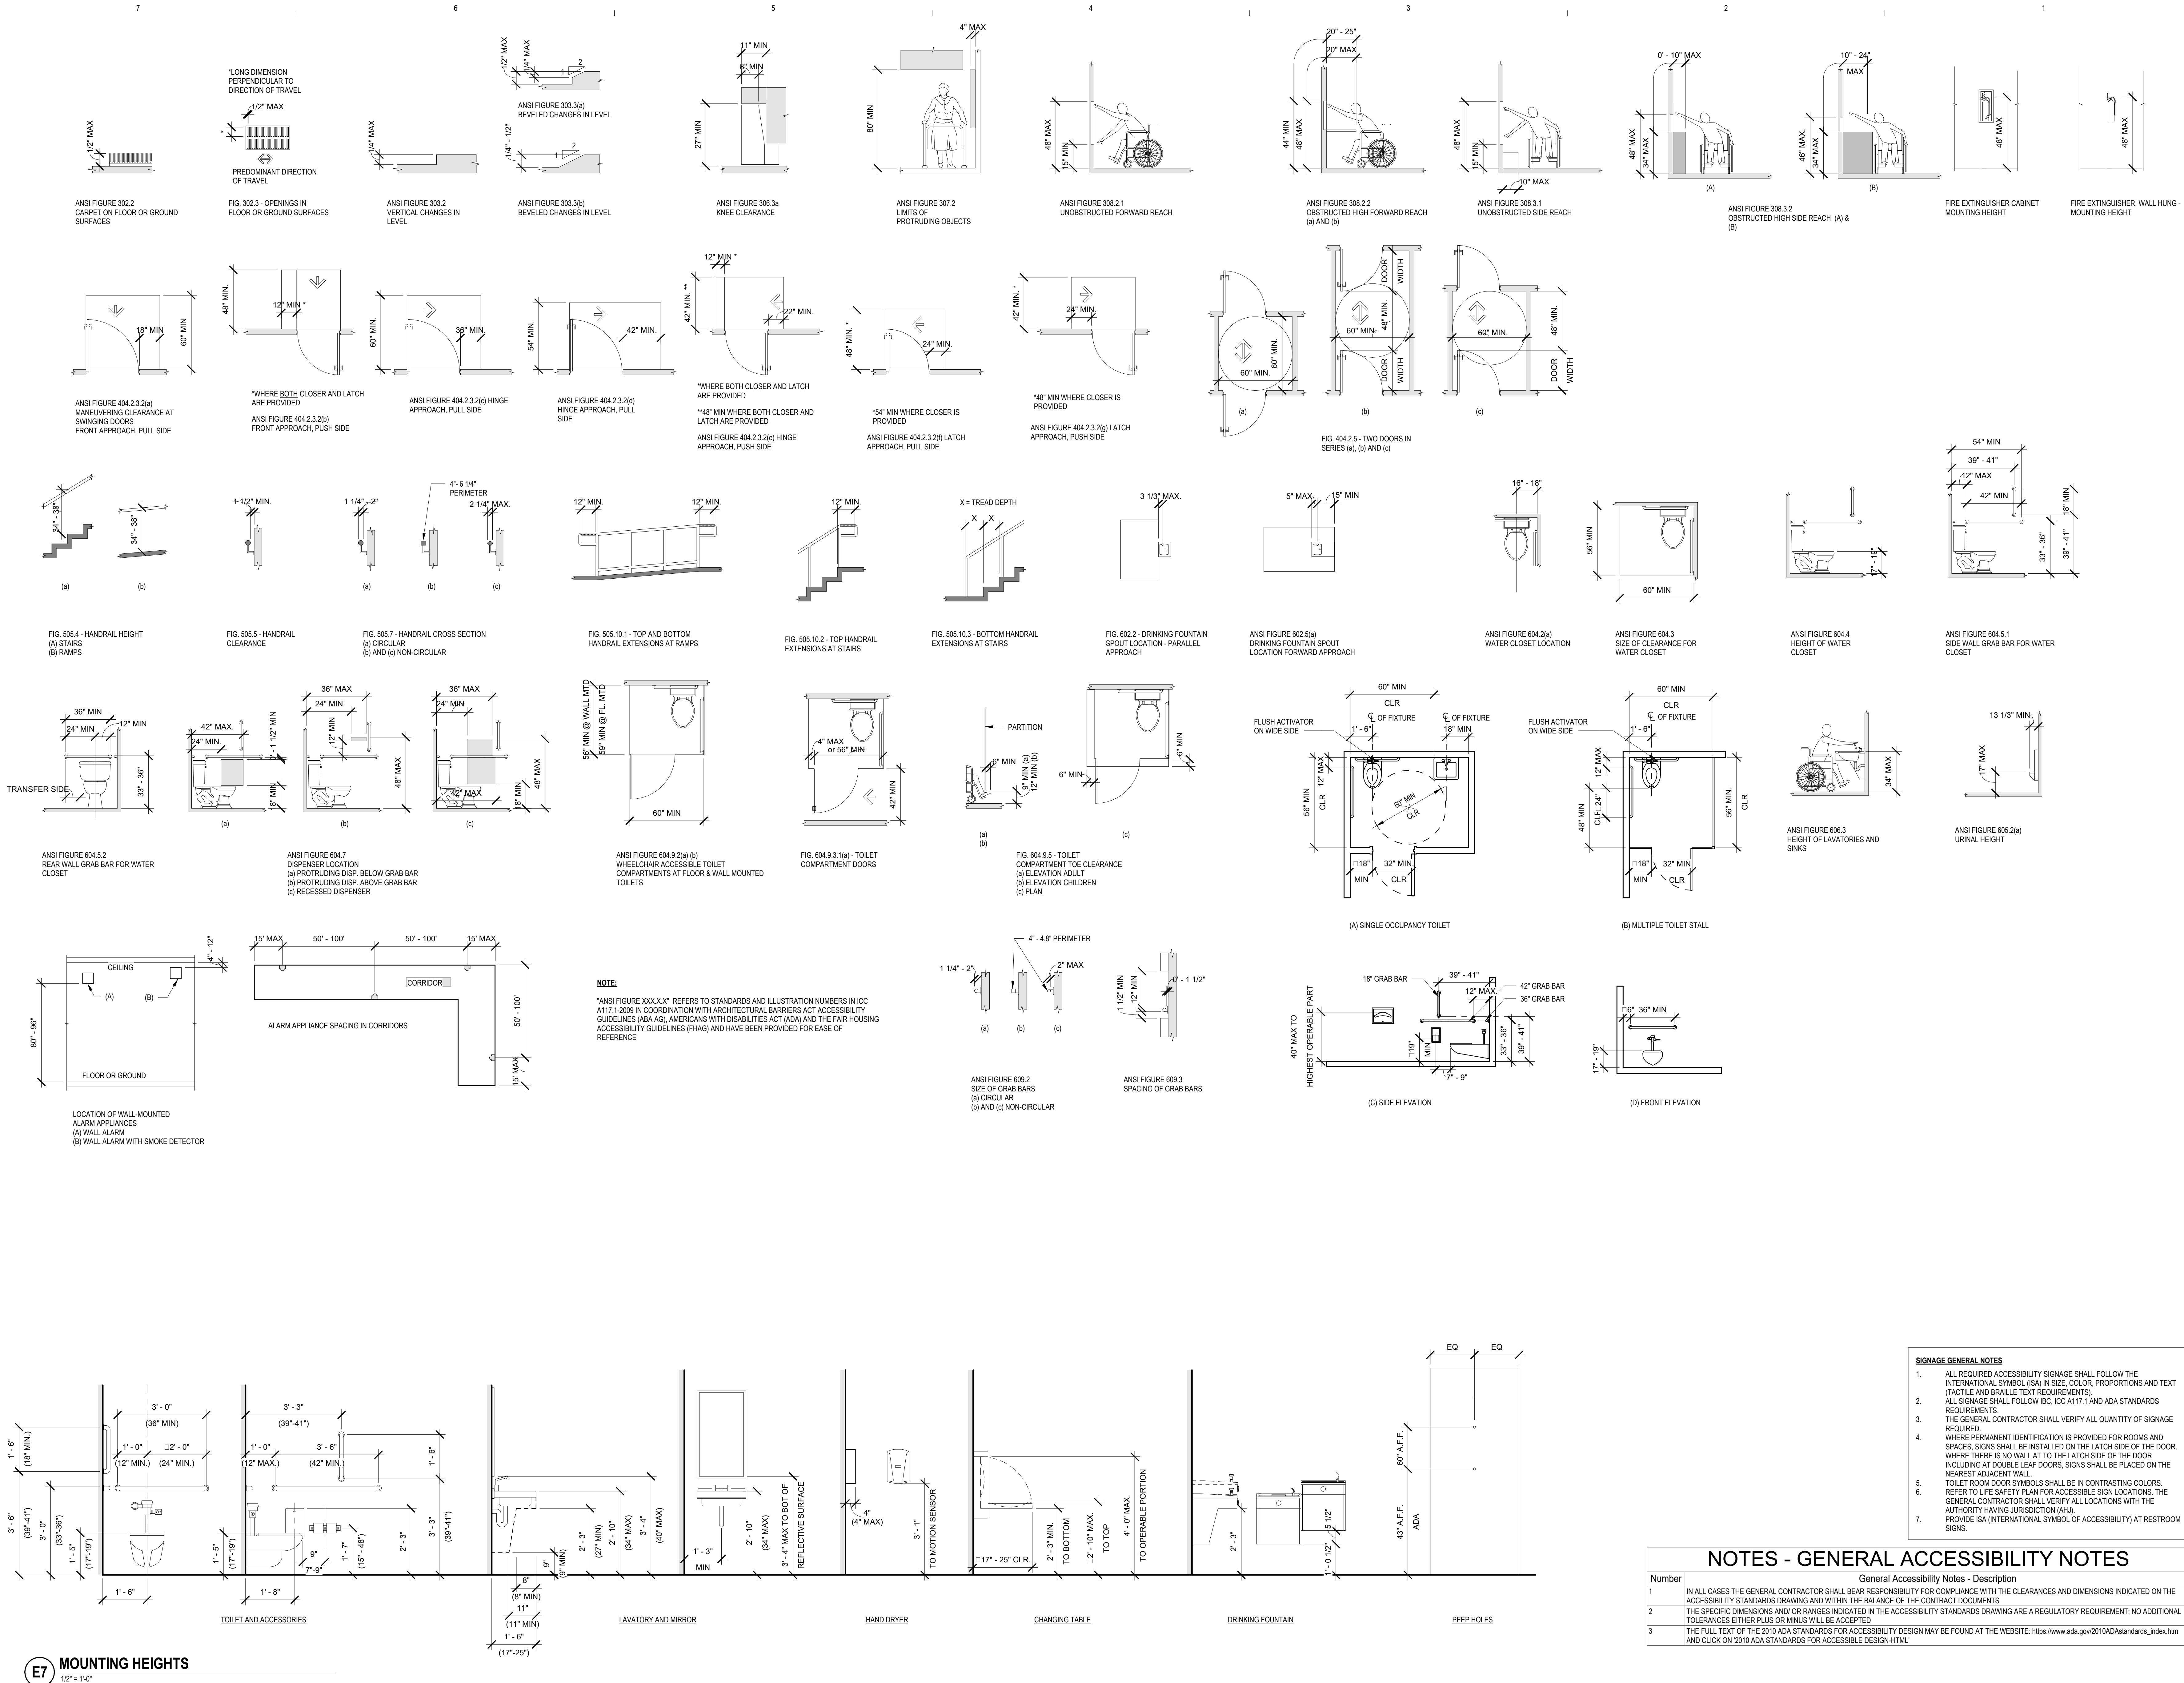




2-HR\* CEILING ASSEMBLY FOR IT ROOM  
(OWNER-REQUIRED, NOT CODE-REQUIRED)


2-Hr Rated Assembly - Horizontal Members or Metal Duct Enclosure

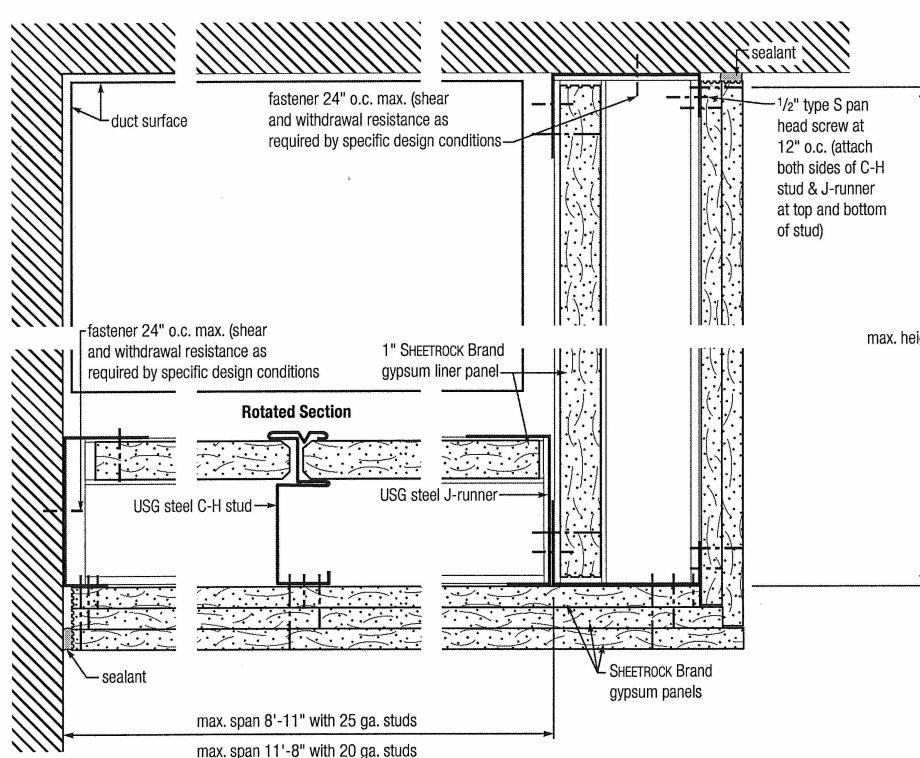

1-Hr Fire Rated Assembly (see NF-286) - Corridor Ceiling and Stair Soffits

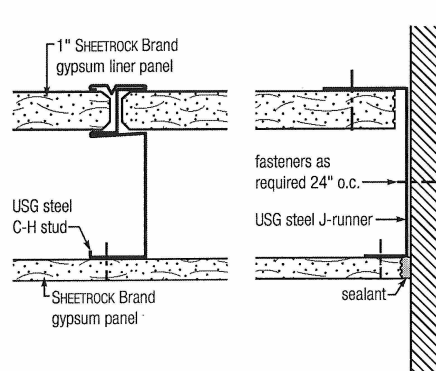

2-Hr Fire Rated Assembly (see NF-286) - Corridor Ceiling and Stair Soffits

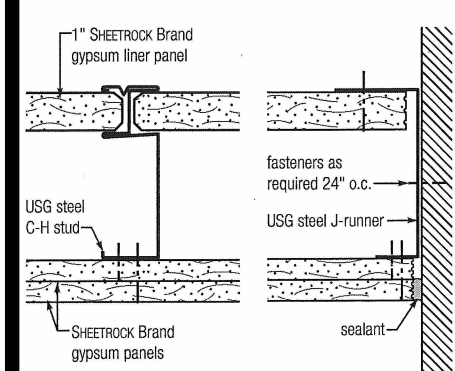

21 USG Shaft Wall Systems

Ceiling System - Limiting Spans

Horizontal Assemblies

Sheetrock Brand Shaft Wall Systems installed horizontally provide economical construction for fire-resistive duct enclosures, corridor ceilings and stairway soffits.

Triple Layer

With 1" liner panels inserted in USG C-H Studs 24" o.c. and triple-layer 1/2" Sheetrock Brand Firecode C Core Gypsum Panels screw-attached to studs, the system provides 2-hour protection from fire.

Double Layer


With double-layer 1/2" Sheetrock Brand Firecode C Core Gypsum Panels screw-attached to studs, the assembly provides 2-hour fire-resistive ceiling construction for corridors and stair soffits (see Design Details).

Single Layer

With single-layer 5/8" Sheetrock Brand Firecode C Core Gypsum Panels screw-attached to studs, the assembly provides one-hour fire-resistive ceiling construction for corridors and stair soffits.

Limitations

- USG C-H Studs are not designed to carry live loads or mechanical equipment or provide material storage area.
- Maximum stud spacing is 24" o.c.; maximum spans are shown in table below.

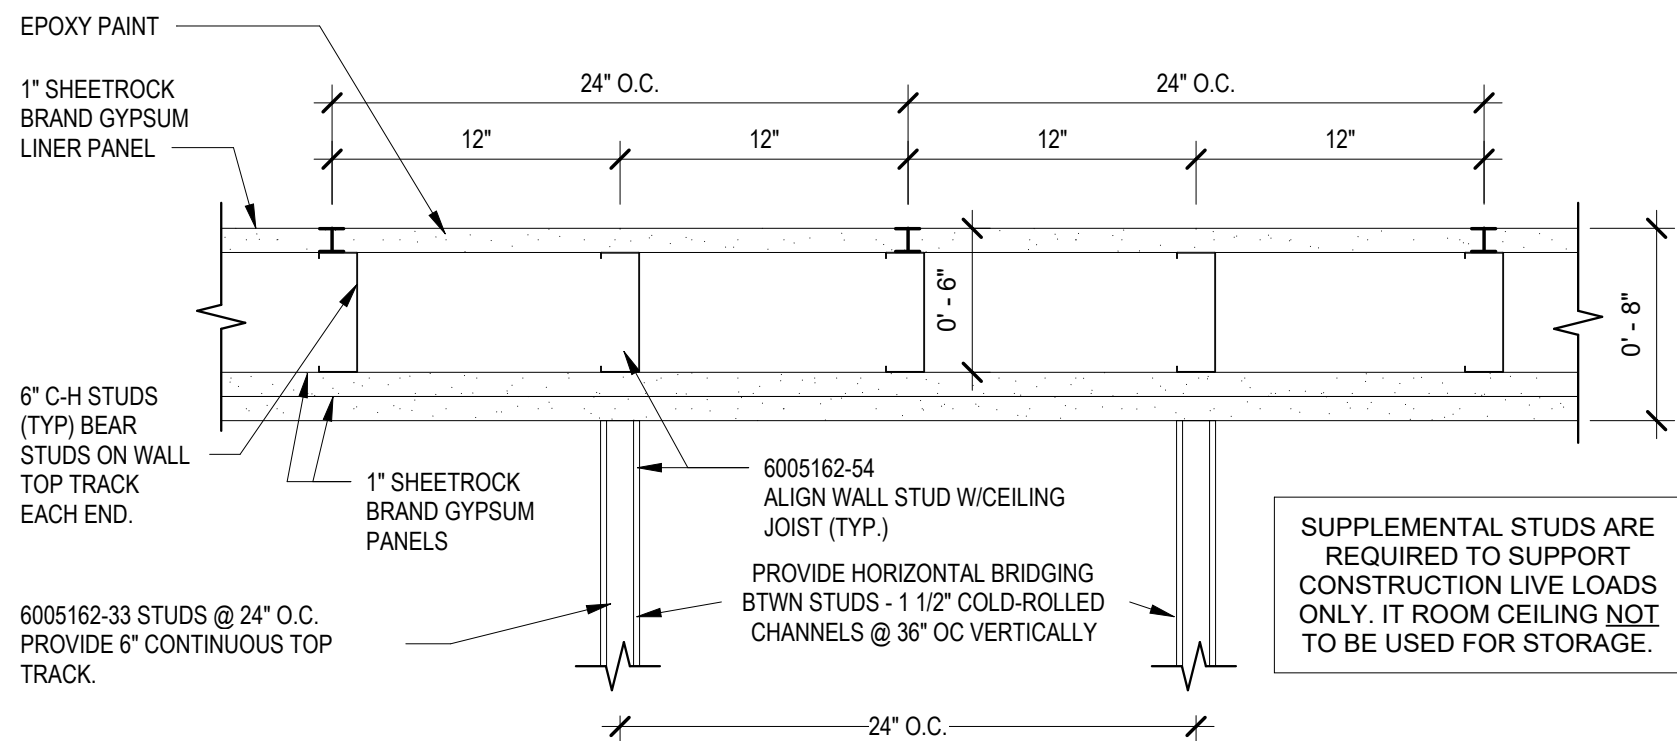


E8

SECTION THROUGH IT ROOM CEILING

SCALE: 1 1/2" = 1'-0"

2-HR WALL ASSEMBLY FOR IT ROOM  
(OWNER-REQUIRED, NOT CODE-REQUIRED)

Design No. U419  
Nonbearing Wall Ratings — 1, 2, 3 or 4 Hr (See  
Items 4 & 5 through 5K)

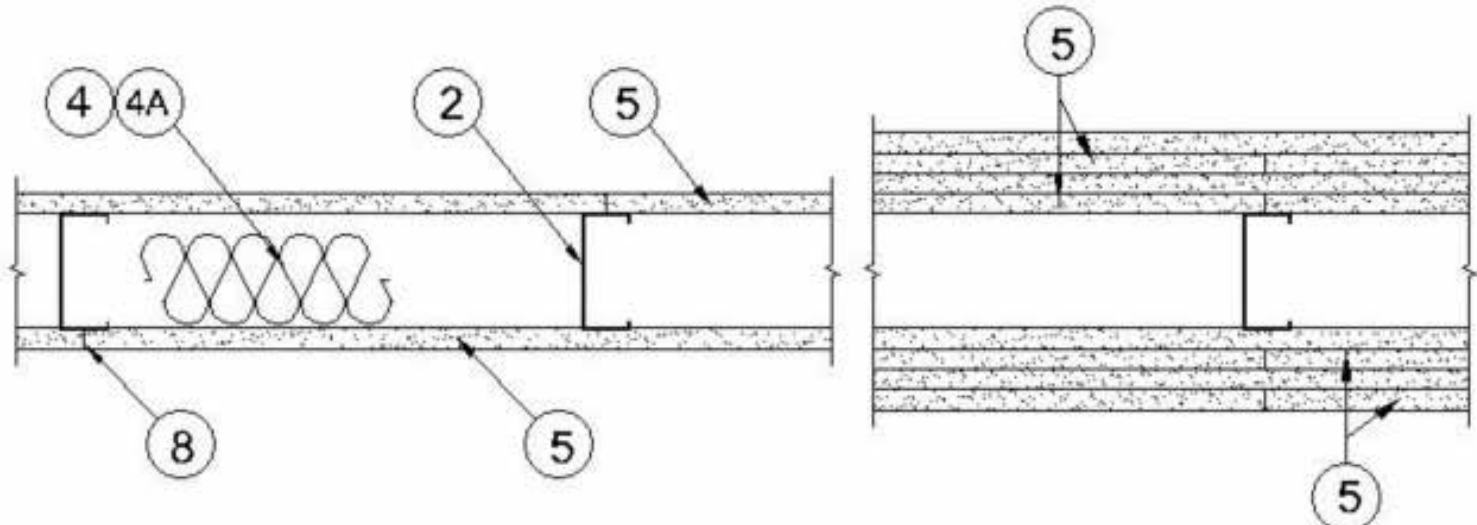

1. Floor and Ceiling Runners — (Not Shown) — For use with Item 2 — Channel shaped, fabricated from min 25 MSG corrosion-protected steel, min depth to accommodate stud size, with min 1-1/4 in. long legs, attached to floor and ceiling with fasteners 24 in. OC max.

2. Steel Studs — Channel shaped, fabricated from min 25 MSG corrosion-protected steel, min depth as indicated under Item 5, spaced a max of 24 in. OC. Studs to be cut 3/8 to 3/4 in. less than assembly height.

5. Gypsum Board\* — Gypsum panels with beveled, square or tapered edges, applied vertically or horizontally. Vertical joints centered over studs and staggered one stud cavity on opposite sides of studs. Vertical joints in adjacent layers (multilayer systems) staggered one stud cavity. Horizontal joints need not be backed by steel framing. Horizontal edge joints and horizontal butt joints on opposite sides of studs need not be staggered. Horizontal edge joints and horizontal butt joints in adjacent layers (multilayer systems) staggered a min of 12 in. The thickness and number of layers for the 1 hr, 2 hr, 3 hr and 4 hr ratings are as follows:

Gypsum Board Protection on Each Side of Wall

| Rating, Hr | Min Stud Depth, in. Item 2 | No. of Layers & Thins of Panel |
|------------|----------------------------|--------------------------------|
| 2          | 1-5/8                      | 2 layers, 1/2 in. thick        |

CGC INC — 1/2 in. thick Type C, IP-X2 or IPC-AR; WRC, 5/8 in. thick Type AR, C, IP-AR, IP-X1, IP-X2, IPC-AR, SCX, SHX, WRX or WRC; 3/4 in. thick Types IP-X3 or ULTRACODE  
UNITED STATES GYPSUM CO — 1/2 in. thick Type C, IP-X2, IPC-AR or WRC; 5/8 in. thick Type SCX, SGX, SHX, WRX, IP-X1, AR, C, WRC, FRX-G, IP-AR, IP-X2, IPC-AR, 3/4 in. thick Types IP-X3 or ULTRACODE

6. Fasteners — (Not Shown) — For use with Items 2 and 2F - Type S or S-12 steel screws used to attach panels to studs (Item 2) or running channels (Item 7). Single layer systems: 1 in. long for 1/2 and 5/8 in. thick panels or 1-1/4 in. long for 3/4 in. thick panels, spaced 8 in. OC when panels are applied horizontally, or 8 in. OC along vertical and bottom edges and 12 in. OC in the field when panels are applied vertically. Two layer systems: First layer: 1 in. long for 1/2 and 5/8 in. thick panels or 1-1/4 in. long for 3/4 in. thick panels, spaced 16 in. OC. Second layer: 1-5/8 in. long for 1/2 in., 5/8 in. thick panels or 2-1/4 in. long for 3/4 in. thick panels, spaced 16 in. OC with screws offset 8 in. from first layer. Three layer systems: First layer: 1 in. long for 1/2 in., 5/8 in. thick panels, spaced 24 in. OC. Second layer: 1-5/8 in. long for 1/2 in., 5/8 in. thick panels, spaced 24 in. OC. Third layer: 2-1/4 in. long for 1/2 in., 5/8 in. thick panels or 2-5/8 in. long for 5/8 in. thick panels, spaced 12 in. OC. Screws offset min 6 in. from layer below. Four layer systems: First layer: 1 in. long for 1/2 in., 5/8 in. thick panels, spaced 24 in. OC. Second layer: 1-5/8 in. long for 1/2 in., 5/8 in. thick panels, spaced 24 in. OC. Third layer: 2-1/4 in. long for 1/2 in. thick panels or 2-5/8 in. long for 5/8 in. thick panels, spaced 24 in. OC. Fourth layer: 2-5/8 in. long for 1/2 in. thick panels or 3 in. long for 5/8 in. thick panels, spaced 12 in. OC. Screws offset min 6 in. from layer below.

8. Joint Tape and Compound — Vinyl or cascin, dry or premixed joint compound applied in two coats to joints and screw heads of outer layers. Paper tape, non 2 in. wide, embedded in first layer of compound over all joints of outer layer panels. Paper tape and joint compound may be omitted when gypsum panels are supplied with a square edge.



LIDL US, LLC  
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD, NORCROSS, GA 30093

Charlotte, NC | Detroit, MI | Grand Rapids, MI  
weareprogressive.com

## COMcheck Software Version COMcheckWeb Envelope Compliance Certificate

### Project Information

Energy Code: 2015 IECC  
Project Title: Lidl Norcross GA  
Location: Atlanta, Georgia  
Climate Zone: 3a  
Project Type: New Construction  
Vertical Glazing / Wall Area: 0%

Construction Site: 4900 JIMMY CARTER BLVD, NORCROSS, GEORGIA 30093  
Owner/Agent: Lidl US Operations LLC, 3500 S. Clark St., Arlington, Virginia 22202  
Designer/Contractor: Progressive Architecture Engineering & Planning, L.L.C., 1801 N. Graham Street, Charlotte, North Carolina 28206, 704-771-8000

### Additional Efficiency Package(s)

Credits: 1.0 Required 1.0 Proposed  
Reduced Lighting Power: 1.0 credit

| Building Area            | Floor Area |
|--------------------------|------------|
| 1-Retail: Nonresidential | 23352      |

### Envelope Assemblies

| Assembly                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Gross Area of Perimeter | Cavity R-Value | Cont. R-Value | Proposed U-Factor | Budget U-Factor |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------|---------------|-------------------|-----------------|
| Roof: Insulation Entirely Above Deck, 3-Year-Aged Solar Reflectance Index = 75.00, Thermal Emittance = 0.90 (a), [Bldg. Use 1 - Retail]<br>Floor: Unheated Slab-On-Grade, Horizontal with vertical 2 R., [Bldg. Use 1 - Retail] (d)                                                                                                                                                                                                                                                                                                                                                                                                                                      | 23006                   | —              | 30.0          | 0.032             | 0.039           |
| NORTH<br>Ext. Wall: Concrete Block, 8in., Partially Grouted, Cells Empty, Normal Density, Furring Metal, [Bldg. Use 1 - Retail]<br>Door: Other U-Factor option, Garage door 14% glazing [Bldg. Use 1 - Retail]<br>Door: Insulated Metal, Swinging, [Bldg. Use 1 - Retail]<br>Ext. Wall: Concrete Block, 8in., Partially Grouted, Cells Empty, Normal Density, Furring Metal, [Bldg. Use 1 - Retail]<br>Door: Insulated Metal, Swinging, [Bldg. Use 1 - Retail]<br>Ext. Wall: Steel-Framed, 16in. o.c., [Bldg. Use 1 - Retail]<br>Door: Glass (over 50% glazing): Metal Frame, Entrance Door, Perf. Specs., Product ID NA, SHGC 0.27, PF 0.67, [Bldg. Use 1 - Retail] (c) | 449                     | 0.0            | 15.0          | 0.055             | 0.123           |
| EAST<br>Ext. Wall: Steel-Framed, 16in. o.c., [Bldg. Use 1 - Retail]<br>Window: Metal Frame with Thermal Break: Fixed, Perf. Specs., Product ID THIRAIL 6013, SHGC 0.27, PF 1.16, [Bldg. Use 1 - Retail] (c)<br>Ext. Wall: Concrete Block, 8in., Partially Grouted, Cells Ins., Normal Density, Furring Metal, [Bldg. Use 1 - Retail]                                                                                                                                                                                                                                                                                                                                     | 2024                    | 19.0           | 15.0          | 0.041             | 0.064           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1092                    | —              | —             | 0.240             | 0.460           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 396                     | 0.0            | 15.0          | 0.054             | 0.123           |

Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 1 of 8

| Section # & Req. ID       | Mechanical Rough-In Inspection                                                            | Complies?                                                                                                                                                    | Comments/Assumptions |
|---------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| C402.3.1 [R131]<br>[R131] | Stair and elevator shaft vents have C402.3.1, insulated dampers that automatically close. | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                      |

### Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)  
Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 6 of 8

| Assembly                                                                                                                                                                                                                                                          | Gross Area or Perimeter | Cavity R-Value | Cont. R-Value | Proposed U-Factor | Budget U-Factor |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------|---------------|-------------------|-----------------|
| SOUTH<br>Ext. Wall: Concrete Block, 8in., Partially Grouted, Cells Empty, Normal Density, Furring Metal, [Bldg. Use 1 - Retail]<br>WEST<br>Ext. Wall: Concrete Block, 8in., Partially Grouted, Cells Empty, Normal Density, Furring Metal, [Bldg. Use 1 - Retail] | 3860                    | 0.0            | 15.0          | 0.055             | 0.123           |
|                                                                                                                                                                                                                                                                   | 2652                    | 0.0            | 15.0          | 0.055             | 0.123           |

(a) Budget U-Factors are used for software baseline calculations ONLY, and are not code requirements.  
(b) Other components require supporting documentation for proposed U-factors.  
(c) Fenestration product performance must be certified in accordance with NFRC and requires supporting documentation.  
(d) Slab-On-Grade proposed and budget U-factors shown in table are F-factors.  
(e) High-albedo roof requirement options: 1) 3-year aged solar reflectance  $\geq 0.55$  thermal emittance  $\geq 0.75$ , 2) 3-year aged solar reflectance index  $\geq 64.0$ , 3) initial year aged solar reflectance  $\geq 0.70$  thermal emittance  $\geq 0.75$ , 4) initial year aged solar reflectance index  $\geq 62.0$ .

### Envelope PASS55: Design 37% better than code

### Envelope Compliance Statement

Compliance Statement: The proposed envelope design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed envelope systems have been designed to meet the 2015 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Gabriela Camarillo  
Name - Title Signature Date 12/12/2025

Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 2 of 8

| Section # & Req. ID       | Insulation Inspection                                                                                                                                                                                             | Complies?                                                                                                                                                    | Comments/Assumptions                          |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| C303.1 [IN5]<br>[IN5]     | Roof insulation installed per manufacturer's instructions. Blown or poured loose-fill insulation is installed only where the roof slope is $\leq 1:12$ .                                                          | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C303.1 [IN10]<br>[IN10]   | Building envelope insulation is labeled with R-value or insulation certificate providing R-value and other relevant data.                                                                                         | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C402.2 [IN7]<br>[IN7]     | Above-grade wall insulation installed per manufacturer's instructions.                                                                                                                                            | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C303.2 [IN14]<br>[IN14]   | Exterior insulation is protected from damage with a protective material. Verification for exposed foundation insulation may need to occur during Foundation Inspection.                                           | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C402.3.1 [IN17]<br>[IN17] | Insulation intended to meet the roof insulation requirements cannot be installed on top of a suspended ceiling. Mark this requirement compliant if insulation is installed accordingly.                           | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C104 [IN6]<br>[IN6]       | Installed above-grade wall insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.                                                                          | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C104 [IN8]<br>[IN8]       | Installed floor insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.                                                                                     | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C402.2.6 [IN18]<br>[IN18] | Radiant panels and associated components, designed for heat transfer from the panel surfaces to the occupants or indoor space are insulated with a minimum of R-3.5.                                              | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C402.3 [IN5]<br>[IN5]     | High-albedo roofs satisfy one of the following: 3-year-aged solar reflectance $\geq 0.55$ and thermal emittance $\geq 0.75$ or 3-year-aged solar reflectance index $\geq 64.0$ .                                  | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C104 [IN2]<br>[IN2]       | Installed roof insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports. For some existing systems, verification may need to occur during Framing Inspection. | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C402.5.1 [IN1]<br>[IN1]   | All sources of air leakage in the building thermal envelope are sealed, caulked, gasketed, weather stripped or wrapped with moisture vapor-permeable wrapping material to minimize air leakage.                   | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |

### Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)  
Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 7 of 8

## COMcheck Software Version COMcheckWeb Inspection Checklist

### Energy Code: 2015 IECC

Requirements: 11.0% were addressed directly in the COMcheck software  
Text in the "Comments/Assumptions" column is provided by the user in the COMcheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is itemized in a separate table, a reference to that table is provided.

| Section # & Req. ID       | Plan Review                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Complies?                                                                                                                                                    | Comments/Assumptions     |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| C103.2 [PR1]<br>[PR1]     | Plans and/or specifications provide all information with which compliance can be determined for the building envelope and document where exceptions to the standard are claimed.                                                                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | Requirement will be met. |
| C402.4.1 [PR10]<br>[PR10] | The vertical fenestration area $\leq 30$ percent of the gross above-grade wall area.                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                          |
| C402.4.1 [PR11]<br>[PR11] | The skylight area $\leq 3$ percent of the gross roof area.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                          |
| C402.4.2 [PR14]<br>[PR14] | In enclosed spaces $> 2,500$ sq ft directly under a roof with ceiling height $> 15$ ft and used as an office, convention center, automotive service, manufacturing, non-refrigerated warehouse, retail store, distribution center, air transportation, or workshop, the following requirements apply: (a) the skylight zone under skylights is $\geq$ half the floor area; (b) the skylight area to daylight zone is $\geq 3$ percent with a skylight $> 6$ ft by 6 ft or a minimum skylight effective aperture $\geq 1$ percent. | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                          |
| C406 [PR8]<br>[PR8]       | Plans, specifications, and/or calculations provide all information with which compliance can be determined for the additional energy efficiency package options.                                                                                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                          |

### Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)  
Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 3 of 8

| Section # & Req. ID       | Final Inspection                                                                                                                                                                                                        | Complies?                                                                                                                                                    | Comments/Assumptions |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| C402.3.3 [R131]<br>[R131] | Where open combustion air ducts or combustion air intake ducts are located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope, such rooms are sealed and insulated. | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                      |
| C402.5.6 [R137]<br>[R137] | Weatherstrips installed on all loading dock cargo doors.                                                                                                                                                                | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                      |
| C402.5.8 [R140]<br>[R140] | Accessed luminaires in thermal envelope to limit infiltration and be IC rated and labeled. Seal between interior finish and luminaire housing.                                                                          | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                      |

### Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)  
Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 8 of 8

| Section # & Req. ID       | Footing / Foundation Inspection                                                                                                       | Complies?                                                                                                                                                    | Comments/Assumptions                          |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| C303.2 [FO4]<br>[FO4]     | Slab edge insulation installed per manufacturer's instructions.                                                                       | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C303.2.1 [FO6]<br>[FO6]   | Exterior insulation protected against damage, sunlight, moisture, wind, landscaping and equipment maintenance activities.             | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C104 [FO3]<br>[FO3]       | Installed slab-on-grade insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports. | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C402.2.6 [FO12]<br>[FO12] | Radiant heating systems panels insulated to $\geq R-3.5$ on face opposite space being heated.                                         | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |

### Additional Comments/Assumptions:

| Section # & Req. ID       | Framing / Rough-In Inspection                                                                                                                                                                                 | Complies?                                                                                                                                                    | Comments/Assumptions                          |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| C303.1.3 [FR12]<br>[FR12] | Fenestration products rated in accordance with NFRC.                                                                                                                                                          | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C303.1.3 [FR13]<br>[FR13] | Fenestration products are certified as to performance labels or certificates provided.                                                                                                                        | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C402.4.3 [FR10]<br>[FR10] | Vertical fenestration SHGC value.                                                                                                                                                                             | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C402.4.3 [FR8]<br>[FR8]   | Vertical fenestration U-Factor.                                                                                                                                                                               | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C402.4.4 [FR14]<br>[FR14] | U-factor of opaque doors associated with the building thermal envelope meets requirements.                                                                                                                    | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable | See the Envelope Assemblies table for values. |
| C402.5.1 [FR16]<br>[FR16] | The building envelope contains a continuous air barrier that is sealed in an approved manner and either constructed or tested in an approved manner. Air barrier operations are sealed in an approved manner. | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C402.5.2 [FR16]<br>[FR16] | Factory-built fenestration and doors are sealed at meeting air leakage requirements.                                                                                                                          | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |
| C402.5.7 [FR17]<br>[FR17] | Weatherstrips are installed on all building entrances. Doors have self-closing devices.                                                                                                                       | <input type="checkbox"/> Complies<br><input type="checkbox"/> Does Not<br><input type="checkbox"/> Not Observable<br><input type="checkbox"/> Not Applicable |                                               |

### Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)  
Project Title: Lidl Norcross GA  
Data filename: Report date: 12/12/25  
Page 5 of 8

