



















ABBREVIATIONS - HVAC

Φ	FLAT OVAL DUCT	DDTU	DUAL DUCT TERMINAL UNIT	KVAR	KILOVOLT-AMPERES REACTIVE	SA	SUPPLY AIR
AC	ARCHITECTURAL CONTRACTOR	DDT	DIFFUSER	L	REFRIGERATION LIQUID	SAF	SUPPLY AIR FAN
ACL	ACOUSTICALLY LINED	DISC	DISCONNECT	LAB	LABORATORY	SAT	SATURATED
ACU	AIR CONDITIONING UNIT	DR	DAMPER	LAT	LEAVING AIR TEMPERATURE	SC	STEAM COIL
ACV	AIR CONTROL VALVE	DT	DOUBLE THROW	LVR	LOUVER	SD	SUPPLY AIR DIFFUSER
AD	ACCESS DOOR	EA	EXHAUST AIR	LWT	LEAVING WATER TEMPERATURE	SG	SUPPLY AIR REGISTER
ADA	AMERICANS WITH DISABILITIES ACT	EDB	ENTERING DRY BULB	MA	MIXED AIR	SK	SINK
AFS	AIR FLOW SWITCH	EF	EXHAUST FAN	MAV	MANUAL AIR VENT	SM	SURFACE MOUNTED
AFT	AIR FLOW TRANSMITTER	EG	EXHAUST AIR GRILLE	MAX	MAXIMUM	SMM	SNOW MELT MANIFOLD
AHU	AIR HANDLING UNIT	EHC	ELECTRIC HEATING COIL	MB	MOP BASIN	SMR	SNOW MELT RETURN
AP	ACCESS PANEL	EIH	ELECTRIC INFARED HEATER	MBH	THOUSAND BRITISH THERMAL UNIT	SMS	SNOW MELT SUPPLY
APD	AIR PRESSURE DROP	EM	EMERGENCY	MCA	MINIMUM CIRCUIT AMPS	SR	SUPPLY AIR GRILLE
APPROX	APPROXIMATE	ENT	ENTERING	MD	MOTORIZED DAMPER, MOTION DETECTOR	STL	STEEL
AQ-STAT	AQUA STAT	ERC	ENERGY RECOVERY COIL	MOP	MAXIMUM OVERCURRENT PROTECTION	STM	STEAM
AS	AMP SWITCH	ESP	EXTERNAL STATIC PRESSURE	NC	NORMALLY CLOSED	STOR	STORAGE
ATS	AUTOMATIC TRANSFER SWITCH	ET	EXPANSION TANK	NF	NONFUSED	TERM	TERMINAL
ATT	SOUND ATTENUATOR	EWB	ENTERING WET BULB	NFDS	NONFUSED DISCONNECT SWITCH	TF	TRANSFER FAN
		EWT	ENTERING WATER TEMPERATURE	NG	NATURAL GAS	TG	TRANSFER AIR GRILLE
BAS	BUILDING AUTOMATION SYSTEM	EXH	EXHAUST	NO	NORMALLY OPEN	THERM	THERM
BBD	BOOSTER COIL	EXP	EXPLOSION PROOF	OA	OUTSIDE AIR	TR	TAMPER RESISTANT
BC	BOOSTER COIL	F&T	FLOAT & THERMOSTATIC STEAM TRAP	CHD	OVERHEAD DOOR	TSE	TOP OF STEEL ELEVATION
BDD	BACKDRAFT DAMPER	FC	FLEXIBLE CONNECTION	ORD	OVERFLOW ROOF DRAIN	TU	TERMINAL UNIT
BFP	BREAKER HORSEPOWER PUMP	FCU	FAN COIL UNIT	OV	OUTLET VELOCITY	UV	UNIT VENTILATOR
BHP	BREAK HORSEPOWER	FDO	FIRE DAMPER	P	PUMP	V	VOLTS
BMS	BUILDING MANAGEMENT SYSTEM	FDS	FUSED DISCONNECT SWITCH	PH	PHASE	VAV	VARIABLE AIR VOLUME
BP	BACKFLOW PREVENTER	FM	FORCEMAIN	OPG	OPENING	VCD	VOLUME CONTROL DAMPER
		FOS	FUEL OIL SUPPLY	PR	PERIMETER RADIATION	VFD	VARIABLE FREQUENCY DRIVE
C	CONVECTOR	FOR	FUEL OIL RETURN	PRV	PRESSURE REDUCING VALVE	VI	VIBRATION ISOLATOR
CAB	CABINET	FOS	FUEL OIL SUPPLY	PSIG	POUNDS PER SQUARE INCH GAUGE	WB	WET BULB
CAP	CAPACITY	FPM	FEET PER MINUTE	R	RISER	WHTR	WATER HEATER
CC	COOLING COIL	FT	FIN TUBE	RA	RETURN AIR	XFER	TRANSFER
CD	COLD DECK	G	GAS	RAF	RETURN AIR FAN		
CD	CONDENSATE DRAIN	GEN	GENERATOR	RC	RE-HEAT COIL		
CF	CEILING FAN	GPH	GALLONS PER HOUR	RCP	RADIANT CEILING PANEL		
CF	CUBIC FOOT	GPM	GALLONS PER MINUTE	RG	RETURN AIR GRILLE		
CFH	CUBIC FEET PER HOUR	GV	GATE VALVE	RP	RADIANT PANEL		
CFM	CUBIC FEET PER MINUTE	HC	HEATING COIL	RBP	REDUCED PRESSURE BACKFLOW PREVENTER		
CH	CABINET HEATER	HG	REFRIGERATION HOT GAS	RPM	REVOLUTIONS PER MINUTE		
CLR	CLEAR, CLEARANCE	HP	HORSEPOWER	RR	RETURN AIR REGISTER		
CMP	CORRUGATED METAL PIPE	HP-STM	HIGH PRESSURE STEAM	RR	REST ROOM		
CMPR	COMPRESSOR	HPS	HEAT PUMP WATER RETURN	RTU	ROOFTOP UNIT		
CNR	CONDENSER WATER RETURN	HR	HEATING WATER RETURN, HOUR	RV	RELIEF VENT		
CNS	CONDENSER WATER SUPPLY	HS	HEATING WATER SUPPLY				
COMP	COMPARTMENT	HSPK	HOUSEKEEPING PAD				
COND	CONDENSATE	HTG	HEATING				
CONV	CONNECTOR	HTR	HEATER				
COORD	COORDINATE	HUM	HUMIDIFIER				
CP	CIRCULATING PUMP	HWP	HYDRONIC WATER PUMP				
CT	COOLING TOWER	HX	HEAT EXCHANGER				
CTR	COOLING TOWER RETURN	HZ	HERTZ				
CTS	COOLING TOWER SUPPLY	INS	INSULATE, INSULATION				
CU	COPPER	IR	INFRARED				
CV	CONTROL VALVE						
CWR	CHILLED WATER RETURN						
CWS	CHILLED WATER SUPPLY						
DB	DRY BULB						
DDC	DIRECT DIGITAL CONTROLS						



MECHANICAL SYMBOLS

	SUPPLY DIFFUSER, SD#, ### CFM
	RETURN OR EXHAUST REGISTER TYPE RG# ### CFM
	EXHAUST REGISTER TYPE EG# ### CFM
	SIDEWALL SUPPLY, RETURN, OR EXHAUST REGISTER TYPE ###, ### CFM
	SUPPLY DUCT UP
	SUPPLY DUCT DOWN
	RETURN DUCT UP
	RETURN DUCT DOWN
	EXHAUST DUCT UP
	EXHAUST DUCT DOWN
	SUPPLY AIR BRANCH CONNECTION WITH VOLUME DAMPER
	RETURN AIR/EXHAUST AIR BRANCH CONNECTION WITH VOLUME DAMPER
	HORIZONTAL FIRE DAMPER
	VERTICAL FIRE DAMPER
	SMOKE HORIZONTAL FIRE DAMPER
	SMOKE VERTICAL FIRE DAMPER
	COMBINATION FIRE/SMOKE HORIZONTAL FIRE DAMPER
	COMBINATION FIRE/SMOKE VERTICAL FIRE DAMPER
	SOUND ATTENUATOR
	PUMP (SCHEMATIC)
	MECHANICAL EQUIPMENT (EXAMPLE ACV-#) SEE SCHEDULE FOR ADDITIONAL
	FINNED TUBE RADIATION (SEE DETAIL AND SCHEDULE)
	CABINET UNIT HEATER, TYPE CUH-#
	CONVECTOR, TYPE C-#
	VOLUME DAMPER
	MOTORIZED CONTROL DAMPER

SHEETMETAL SYMBOLOGY

	SUPPLY AIR
	OUTSIDE AIR
	TRANSFER AIR
	RETURN AIR
	EXHAUST AIR

PHASING

	EXISTING - TO REMAIN
	EXISTING - FOR DEMOLITION
	POINT OF DISCONNECTION BETWEEN EXISTING AND DEMOLITION
	POINT OF CONNECTION BETWEEN PROPOSED AND EXISTING

MECHANICAL GENERAL NOTES

- COMPLY WITH ALL APPLICABLE LOCAL, STATE AND/OR REGULATORY AGENCIES, CODES AND REGULATIONS FOR NEW WORK.
- ALL WORK AND MATERIALS SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS AND DRAWINGS.
- IN THE EVENT OF A DISCREPANCY BETWEEN CONTRACT DRAWINGS AND SPECIFICATIONS, THE MOST STRINGENT SHALL GOVERN. ALL WORK TO BE IN ACCORDANCE WITH REQUIREMENTS OF GOVERNING STATE AND LOCAL FIRE AND BUILDING CODES, NFPA, AND OSHA.
- DO NOT INSTALL EQUIPMENT, PIPING OR DUCTWORK OVER ANY ELECTRICAL EQUIPMENT OR COMMUNICATION ROOMS.
- DO NOT RUN ANY PIPING OR DUCTWORK INTO THE ELECTRICAL ROOM UNLESS DEDICATED TO SERVE THAT ROOM.
- INSTALL MECHANICAL EQUIPMENT TO FACILITATE SERVICING, MAINTENANCE, AND REPAIR OR REPLACEMENT OF EQUIPMENT COMPONENTS AS MUCH AS PRACTICAL. CONNECT EQUIPMENT FOR EASE OF DISCONNECTING, WITH A MINIMUM OF INTERFERENCE WITH OTHER INSTALLATIONS.
- LOCATE THERMOSTAT/TEMPERATURE SENSORS 48" ABOVE FINISHED FLOOR OR AS NOTED ON THE PLANS. THERMOSTAT APPEARANCE SHALL BE COORDINATED WITH THE ARCHITECT/OWNER.
- WORK IDENTIFIED WITH MECHANICAL AND ELECTRICAL NOTES AND KEY NOTES SHALL BE PERFORMED BY QUALIFIED MECHANICAL AND ELECTRICAL CONTRACTORS RESPECTIVELY UNDER DIRECTION OF THE CONSTRUCTION MANAGER. COORDINATE WITH OWNERS REPRESENTATIVE OR CONSTRUCTION MANAGER. ALL MATERIALS AND WORKMANSHIP ARE SUBJECT TO REVIEW AND APPROVAL BY THE ARCHITECT. ANY PORTION OF THE WORK FOUND TO BE DEFECTIVE SHALL BE REPLACED BY THE CONTRACTOR AS PART OF THIS CONTRACT AT NO ADDITIONAL COST TO THE OWNER.
- INSTALL SMOKE DETECTOR IN DUCTWORK AS SHOWN ON THE DRAWINGS AND IN ACCORDANCE WITH THE MANUFACTURER'S PRINTED INSTRUCTIONS.
- DRAWINGS ARE DIAGRAMMATIC IN NATURE AND ALL CONDITIONS SHALL BE CONTRACTOR COORDINATED AND VERIFIED FOR EXACT LOCATION AND SIZES. THE DRAWINGS SHALL NOT BE SCALED TO DETERMINE EXACT LOCATIONS OF PIPING OR DUCTWORK. VERIFY ALL CONDITIONS IN FIELD BEFORE START OF CONSTRUCTION. NOTIFY ARCHITECT/ENGINEER OF DISCREPANCIES BETWEEN DRAWINGS AND ACTUAL FIELD CONDITIONS.
- COORDINATE WORK WITH OTHER TRADES AND WITH THE CONSTRUCTION MANAGER. INSTALL ALL PIPING AND DUCTWORK TO AVOID OBSTRUCTIONS. INSTALL ALL PIPING AND DUCTWORK TO BEST SUIT FIELD CONDITIONS.
- COORDINATE ANY REQUIRED SHUTDOWN OF SERVICES OR EQUIPMENT WITH OWNERS REPRESENTATIVE. MINIMIZE INTERRUPTION OF EXISTING SERVICES.
- PROVIDE ALL MISCELLANEOUS STEEL, SUPPORTS, ANCHORING, AND ITEMS REQUIRED FOR THE PROPER INSTALLATION OF ALL PIPE, SHEET METAL AND EQUIPMENT.
- COORDINATE FLOOR, WALL & ROOF PENETRATIONS ETC. WITH ARCHITECTURAL TRADES.
- FIRESTOP SHALL BE PROVIDED IN HOLES AND PENETRATIONS IN RATED ASSEMBLIES.
- PROVIDE OPERATING HANDLES FOR ALL VALVES AND COCKS WITHOUT INTEGRAL OPERATORS.
- DUCTS STORED ON THE CONSTRUCTION SITE SHALL BE PROTECTED AND ISOLATED FROM DUST CONTAMINATION.
- AT CONTRACTOR DISCRETION SUBSTITUTION OF RECTANGULAR DUCTWORK TO ROUND DUCTWORK WHERE PHYSICAL OBSTRUCTIONS DO NOT INTERFERE IS ACCEPTABLE. THE SUBSTITUTION WILL REQUIRE THE CONTRACTOR TO COORDINATE WITH ALL OTHER TRADES.
- SEE ARCHITECTURAL DOCUMENTS FOR PAINTING OF ALL EXPOSED DUCTWORK, PIPING, AIR OUTLETS, FUTURE TRIM, AND MECHANICAL EQUIPMENT.
- UNLESS SPECIFICALLY SPECIFIED OR SHOWN OTHERWISE ALL CONSTRUCTION IS TO CONFORM TO SMACNA HVAC CONSTRUCTION STANDARDS AS A MINIMUM REQUIREMENT.
- ALL PIPING TO BE LOCATED INSIDE WALL CAVITIES OR INACCESSIBLE SPACES SHALL BE LEAK TESTED AND INSULATED WITH VAPOR BARRIER SEAL BEFORE INSTALLATION (TYPICAL).
- CORE DRILL CONCRETE WALL FOR PIPE PENETRATIONS. DIAMETER OF WALL OPENING SHALL BE 2 INCHES LARGER THEN THE DIAMETER OF PIPE WITH INSULATION. SEAL ALL PENETRATIONS WITH UL APPROVED SEALANT. (REFER TO ARCHITECTURAL RECOMMENDATIONS).
- FIRE AND/OR SMOKE DAMPERS (FSD) SHALL BE FURNISHED BY DIV. 23. INSTALLED BY DIV. 23. POWER, AND WIRING BY DIV. 26. CONTROL, AND FACP WIRING BY DIV. 26. CONTROLS CONTRACTOR SHALL PROVIDE FSD STATUS FROM FSD END SWITCH AT OPERATOR WORK STATION.
- ZONE TEMPERATURE SENSOR SHALL PROVIDE A TEMPERATURE DEADBAND OF NO MORE THAN +/- 2 DEGREES F WITHIN WHICH THE SUPPLY OF HEATING AND COOLING TO THE ZONE IS CAPABLE OF BEING REDUCED TO A MINIMUM.
- CONTRACTOR SHALL ENSURE BUILDING PRESSURE IS BALANCED TO .02 IN WC WITH KITCHEN EXHAUST FAN TURNED ON.

SHEETMETAL NOTES

- THE INSTALLATION OF ALL DUCTWORK SHALL BE CLOSELY COORDINATED WITH NEW PLUMBING, ELECTRICAL, AND STRUCTURAL CONDITIONS. NOT ALL REQUIRED OFFSETS AND FITTINGS ARE INDICATED ON DRAWINGS, BUT SHALL BE PROVIDED. REFER TO ARCHITECTURAL AND STRUCTURAL PLANS FOR CLEARANCES. ALTERNATE DUCT ROUTING SHALL BE APPROVED BY ARCHITECT/ENGINEER BEFORE PROCEEDING IN ORDER TO ENSURE THAT THE AVAILABLE STATIC PRESSURE REMAINS ADEQUATE. DUCTWORK LOCATION SHALL TAKE PRECEDENCE OVER HVAC AND FIRE PROTECTION PIPING AND ELECTRICAL CONDUIT AND CABLE TRAY.
- REFER TO DUCT TAKEOFF DETAILS. SPIN-IN TYPE WITH SCOOPS SHALL NOT BE ACCEPTED. A MINIMUM OF 2 FEET SHALL BE PROVIDED BETWEEN RUNOUT TAKEOFFS FROM TRUNK DUCTS.
- THERMOSTAT AND SENSORS LOCATIONS WITHIN DUCTWORK SHALL BE VERIFIED WITH ARCHITECT/ENGINEER BEFORE ROUGH-IN.
- RUNOUT BALANCING DAMPERS SHALL BE MOUNTED AS CLOSE TO MAIN DUCT AS POSSIBLE.
- DUCTWORK LAYOUT HAS BEEN DESIGNED TO ABSORB NOISE. ALL FITTINGS SHALL BE PROVIDED AS INDICATED.
- TERMINAL UNITS SHALL BE MOUNTED TO NOT IMPAIR ACCESS TO FILTERS, COILS AND CONTROLS.
- WATERTIGHT CONCRETE CURBS SHALL BE PROVIDED AROUND ELEVATED FLOOR SLAB PENETRATIONS.
- DUCTWORK AND ASSOCIATED COMPONENTS SHALL CLEAR DOORS AND WINDOWS.
- UNLESS OTHERWISE NOTED, ALL DUCTWORK ABOVE CEILING OR EXPOSED IS OVERHEAD AND AS HIGH AS POSSIBLE TO THE UNDERSIDE OF THE STRUCTURE, WITH SPACE FOR INSULATION WHERE REQUIRED.
- LOCATE MECHANICAL EQUIPMENT SUCH THAT THERE IS UNOBSTRUCTED ACCESS TO UNIT ACCESS PANELS, CONTROLS AND VALVING.
- PROVIDE FLEXIBLE CONNECTIONS IN ALL DUCTWORK SYSTEMS CONNECTED TO MECHANICAL EQUIPMENT THAT REQUIRE VIBRATION ISOLATION. FLEXIBLE CONNECTIONS SHALL BE PROVIDED AT THE POINT OF CONNECTION TO THE EQUIPMENT UNLESS OTHERWISE NOTED.
- DUCTWORK SIZES ARE INSIDE CLEAR DIMENSIONS.
- ALL ELBOWS IN DUCTWORK SHALL BE RADIUS ELBOWS UNLESS OTHERWISE NOTED. RADIUS ELBOWS SHALL HAVE CENTERLINE RADIUS OF CURVATURE 1.5 TIMES THE DUCT DIAMETER OR WIDTH IN THE PLANE OF TURN. WHERE SQUARE ELBOWS ARE SHOWN, INSTALL TURNING VANES.
- DUCTS CONNECTED TO EQUIPMENT SHALL EQUAL EQUIPMENT CONNECTION SIZE UNLESS NOTED OTHERWISE.
- MAXIMUM LENGTH ON FLEXIBLE DUCT SHALL BE 5'-0", UNLESS OTHERWISE NOTED ON DETAILS OR SPECIFICATION.
- REFER TO ARCH REFLECTED CEILING PLANS FOR EXACT DIFFUSER LOCATIONS IN AREAS WITH A CEILING.

MECHANICAL DEMOLITION NOTES

- THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE LOCAL, STATE AND/OR REGULATORY AGENCIES, CODES AND REGULATIONS FOR NEW WORK. CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF THEIR WORK WITH OTHER TRADES AND WITH THE CONSTRUCTION MANAGER.
- WORK IDENTIFIED WITH MECHANICAL AND ELECTRICAL NOTES AND KEY NOTES SHALL BE PERFORMED BY QUALIFIED MECHANICAL AND ELECTRICAL CONTRACTORS RESPECTIVELY UNDER DIRECTION OF THE CONSTRUCTION MANAGER. COORDINATE WITH OWNERS REPRESENTATIVE.
- VERIFY ALL CONDITIONS IN FIELD BEFORE START OF CONSTRUCTION. NOTIFY ARCHITECT/ENGINEER OF DISCREPANCIES BETWEEN DRAWINGS AND ACTUAL FIELD CONDITIONS.
- COORDINATE ALL WORK WITH APPROPRIATE TRADES.
- COORDINATE ANY REQUIRED SHUTDOWN OF SERVICES OR EQUIPMENT WITH OWNERS REPRESENTATIVE. MINIMIZE INTERRUPTION OF EXISTING SERVICES.
- COORDINATE FLOOR, WALL, AND ROOF PENETRATIONS ETC. WITH ARCHITECT/UTLURAL TRADES. PROVIDE TEMPORARY WATER TIGHT SEAL FOR ALL EXTERIOR WALL AND ROOF PENETRATION. AS NECESSARY.
- HOLES AND PENETRATIONS IN RATED WALLS SHALL BE PATCHED WITH APPROPRIATE FIRESTOP MATERIALS FOR RATING REQUIRED.

MECHANICAL SHEET INDEX

NUMBER	DESCRIPTION
M000	SYMBOL LIST AND GENERAL NOTES - MECHANICAL
M101	MECHANICAL PLAN
M102	ENLARGED MECHANICAL PLAN
M103	ROOF MECHANICAL PLAN
M500	MECHANICAL SCHEDULES
M600	MECHANICAL DETAILS
M601	MECHANICAL DETAILS
M602	MECHANICAL - BAKERY HOOD DETAILS
M901	MECHANICAL COMCHECK
M902	MECHANICAL COMCHECK

PROJECT NUMBER
7965019
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
J. MARTINEZ
CHECKED BY
B. KOOMAN

SYMBOL LIST AND GENERAL NOTES - MECHANICAL
M000


LIDL US, LLC

LIDL 1517 NORCROSS, GA

ISSUANCE
11/07/2025 PERMIT CYCLE 1

PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, INC.
PROGRESSIVE
COMPANIES
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com



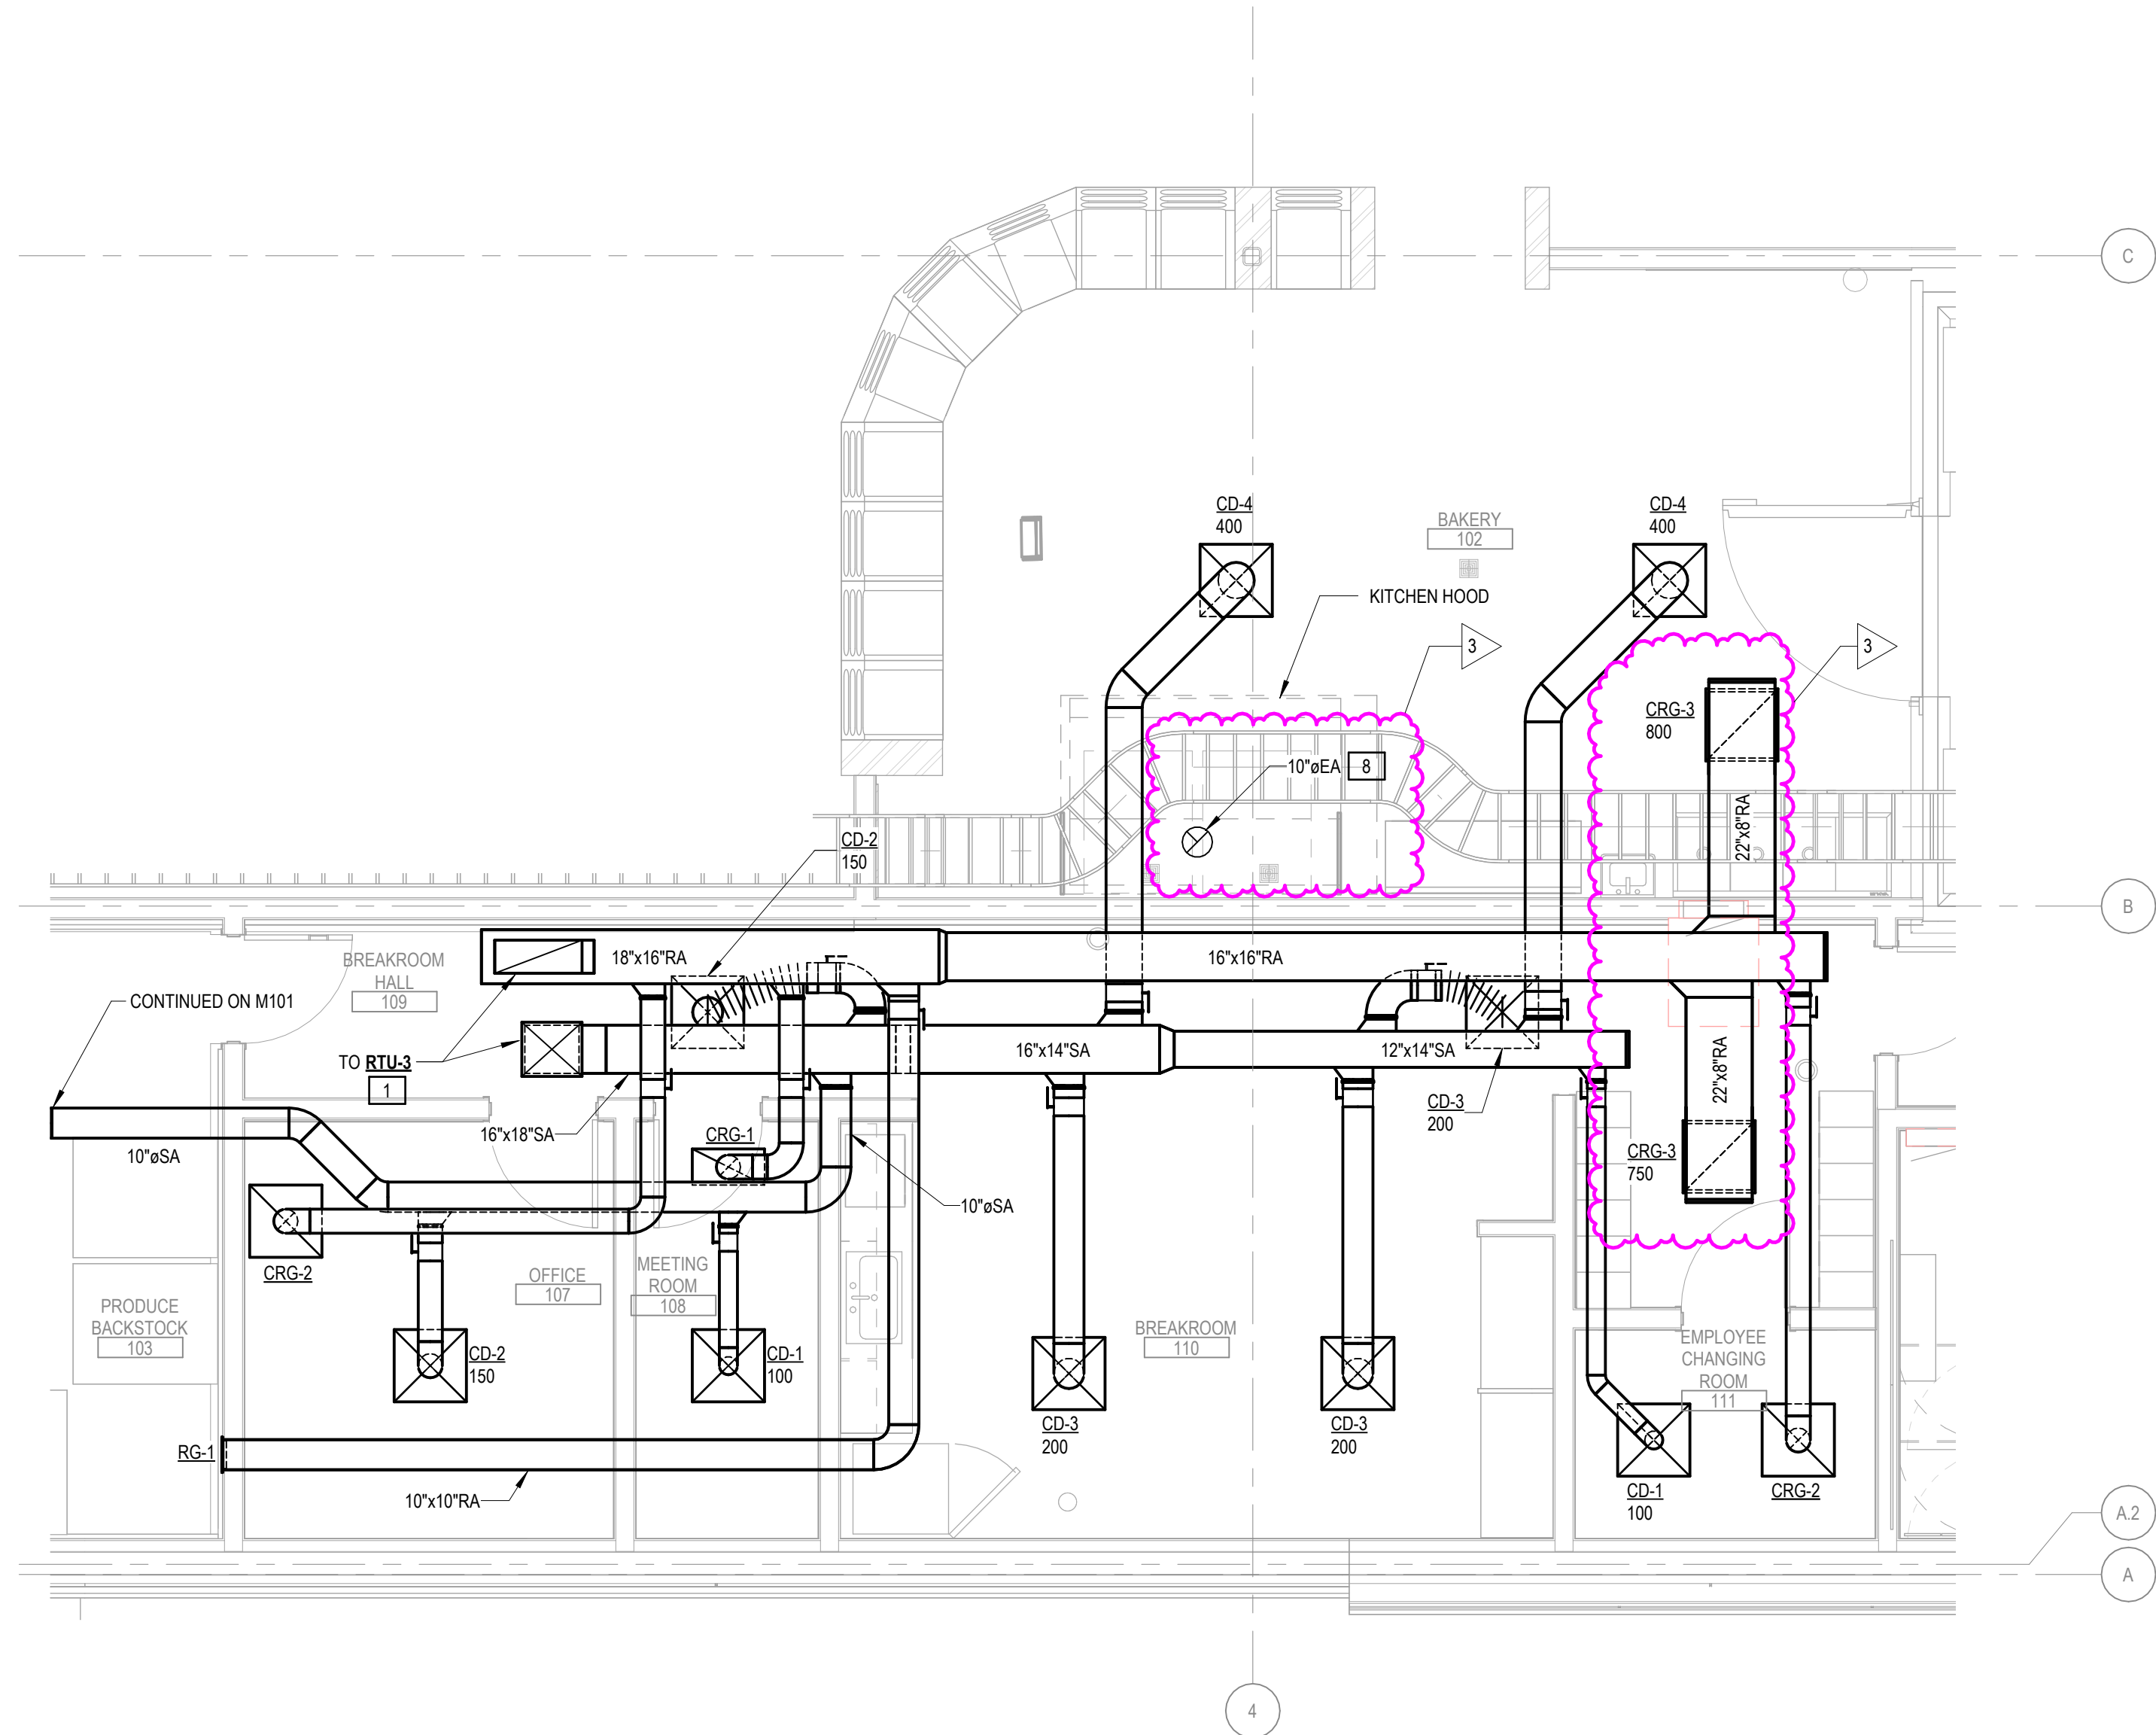

1 MECHANICAL ENLARGED PLAN
1/4" = 1'-0"

HVAC KEYNOTES

1. DUCT DROPS TO MATCH RTU CONNECTION SIZE. TRANSITION TO SIZE AS SHOWN ON PLANS. DUCT DROPS TO BE LINED WITH 1" LINING. TAPE END OF DUCTWRAP TO SHEET METAL. EXPOSED OUT END OF INSULATION IS NOT ACCEPTABLE.
2. PROVIDE WELDED WIRE MESH SCREEN AT OPEN END OF DUCTWORK. SEE MECHANICAL DETAILS FOR MORE INFORMATION.
3. ROUTE DUCTS AS HIGH AS POSSIBLE, THROUGH STRUCTURAL JOISTS WHERE POSSIBLE. COORDINATE WITH STRUCTURAL TRADES. COORDINATE DUCT ROUTING WITH CABLE TRAY LOCATION. DUCT ROUTING TO BE BELOW CABLE TRAY TO AVOID CONFLICT WITH DUCT ROUTING ON AIRFLOW.
4. ADJUST DIFFUSER BLADES IN DRUM DIFFUSER TO BE 20 ° FROM HORIZONTAL.
5. 2"x12" SLOT OPENING COVERED WITH WIRE MESH SCREEN, LOCATED 1'-6" AFF. REFER TO MECHANICAL DETAILS.
6. DESTRATIFICATION FAN TO BE MOUNTED AT 16'-0" AFF.
7. ROUTE CONDENSATE DOWN WITHIN WALL. EXIT WALL AND DRAIN TO GRADE. PENETRATION THROUGH EXTERIOR WALL TO BE AT APPROXIMATELY 1'-0" AFF.
8. EXHAUST DUCT FROM EXHAUST FAN ON ROOF. EXHAUST DUCT TO CONNECT TO KITCHEN HOOD. REFER TO BAKERY HOOD DETAILS M602.
9. EXTEND DISCHARGE OF EXHAUST DUCT TO TOP OF PARAPET AND PROVIDE WITH GOOSENECK.
10. NEW SPLIT SYSTEM. ROUTE REFRIGERANT PIPING TO CONDENSING UNIT ON THE ROOF. SIZE AND MATERIAL OF PIPING TO BE BY MANUFACTURER RECOMMENDATION.
11. GAS METER. SEE NATURAL GAS LOAD SCHEDULE FOR CAPACITY AND PRESSURE INFORMATION. COORDINATE EXACT LOCATION WITH INCOMING GAS SERVICE FROM CIVIL.
12. PROVIDE AND INSTALL PRESSURE REDUCING STATION TO REDUCE THE NATURAL GAS PRESSURE FROM 2 PSI TO 7" W.C. PROVIDE AND INSTALL GAS CONNECTION TO GAS FIRED EQUIPMENT WITH DIRT LEG AND GAS COCK. REFER TO M600 FOR EQUIPMENT SCHEDULES AND GAS LOAD. SEE GAS PIPING RTU CONNECTION WITH PRV DETAIL ON M600.
13. ROUTE DUCTS AS HIGH AS POSSIBLE, TIGHT TO THE BOTTOM OF STRUCTURAL JOISTS. COORDINATE WITH STRUCTURAL TRADES FOR DUCT ELEVATION. DUCT ROUTING TO BE ABOVE CABLE TRAY. DUCT MOUNTED DIFFUSERS TO BE ANGLED 45 ° FROM HORIZONTAL.
14. PROVIDE MANUAL VARIABLE SPEED CONTROLLER FOR DESTRATIFICATION FANS. MANUFACTURER AIRJUS MODEL TRIAC-120-5, 120V 5AMPS. INSTALLED BY ELECTRICAL CONTRACTOR. INSTALL TIGHT TO EDGE OF WALL AT 40" AFF.
15. INSTALL TRANSFER GRILLE INTO VESTIBULE AT 12" AFF TO BOTTOM OF GRILLE.
16. MOUNT VESTIBULE TRANSFER FAN AS HIGH AS POSSIBLE, BETWEEN STRUCTURAL JOISTS.


ISSUANCE
3 11/07/2025 PERMIT CYCLE 1
05/28/2026 CCD 01

PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
J. MARTINEZ
CHECKED BY
B. KOOMAN

ENLARGED
MECHANICAL
PLAN
M102

LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD NORCROSS, GA 30093




PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, LLC
**PROGRESSIVE
COMPANIES**
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com

5/26/2025 10:20 PM Autodesk Docs/79550191 - Lidl 1517 Norcross GA/MECH-14

ROOF MECHANICAL PLAN

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF PROGRESSIVE ARCHITECTURE & PLANNING, LLC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PROGRESSIVE ARCHITECTURE & PLANNING, LLC. ALL RIGHTS ARE RESERVED, INCLUDING THE COPYRIGHT THEREIN.

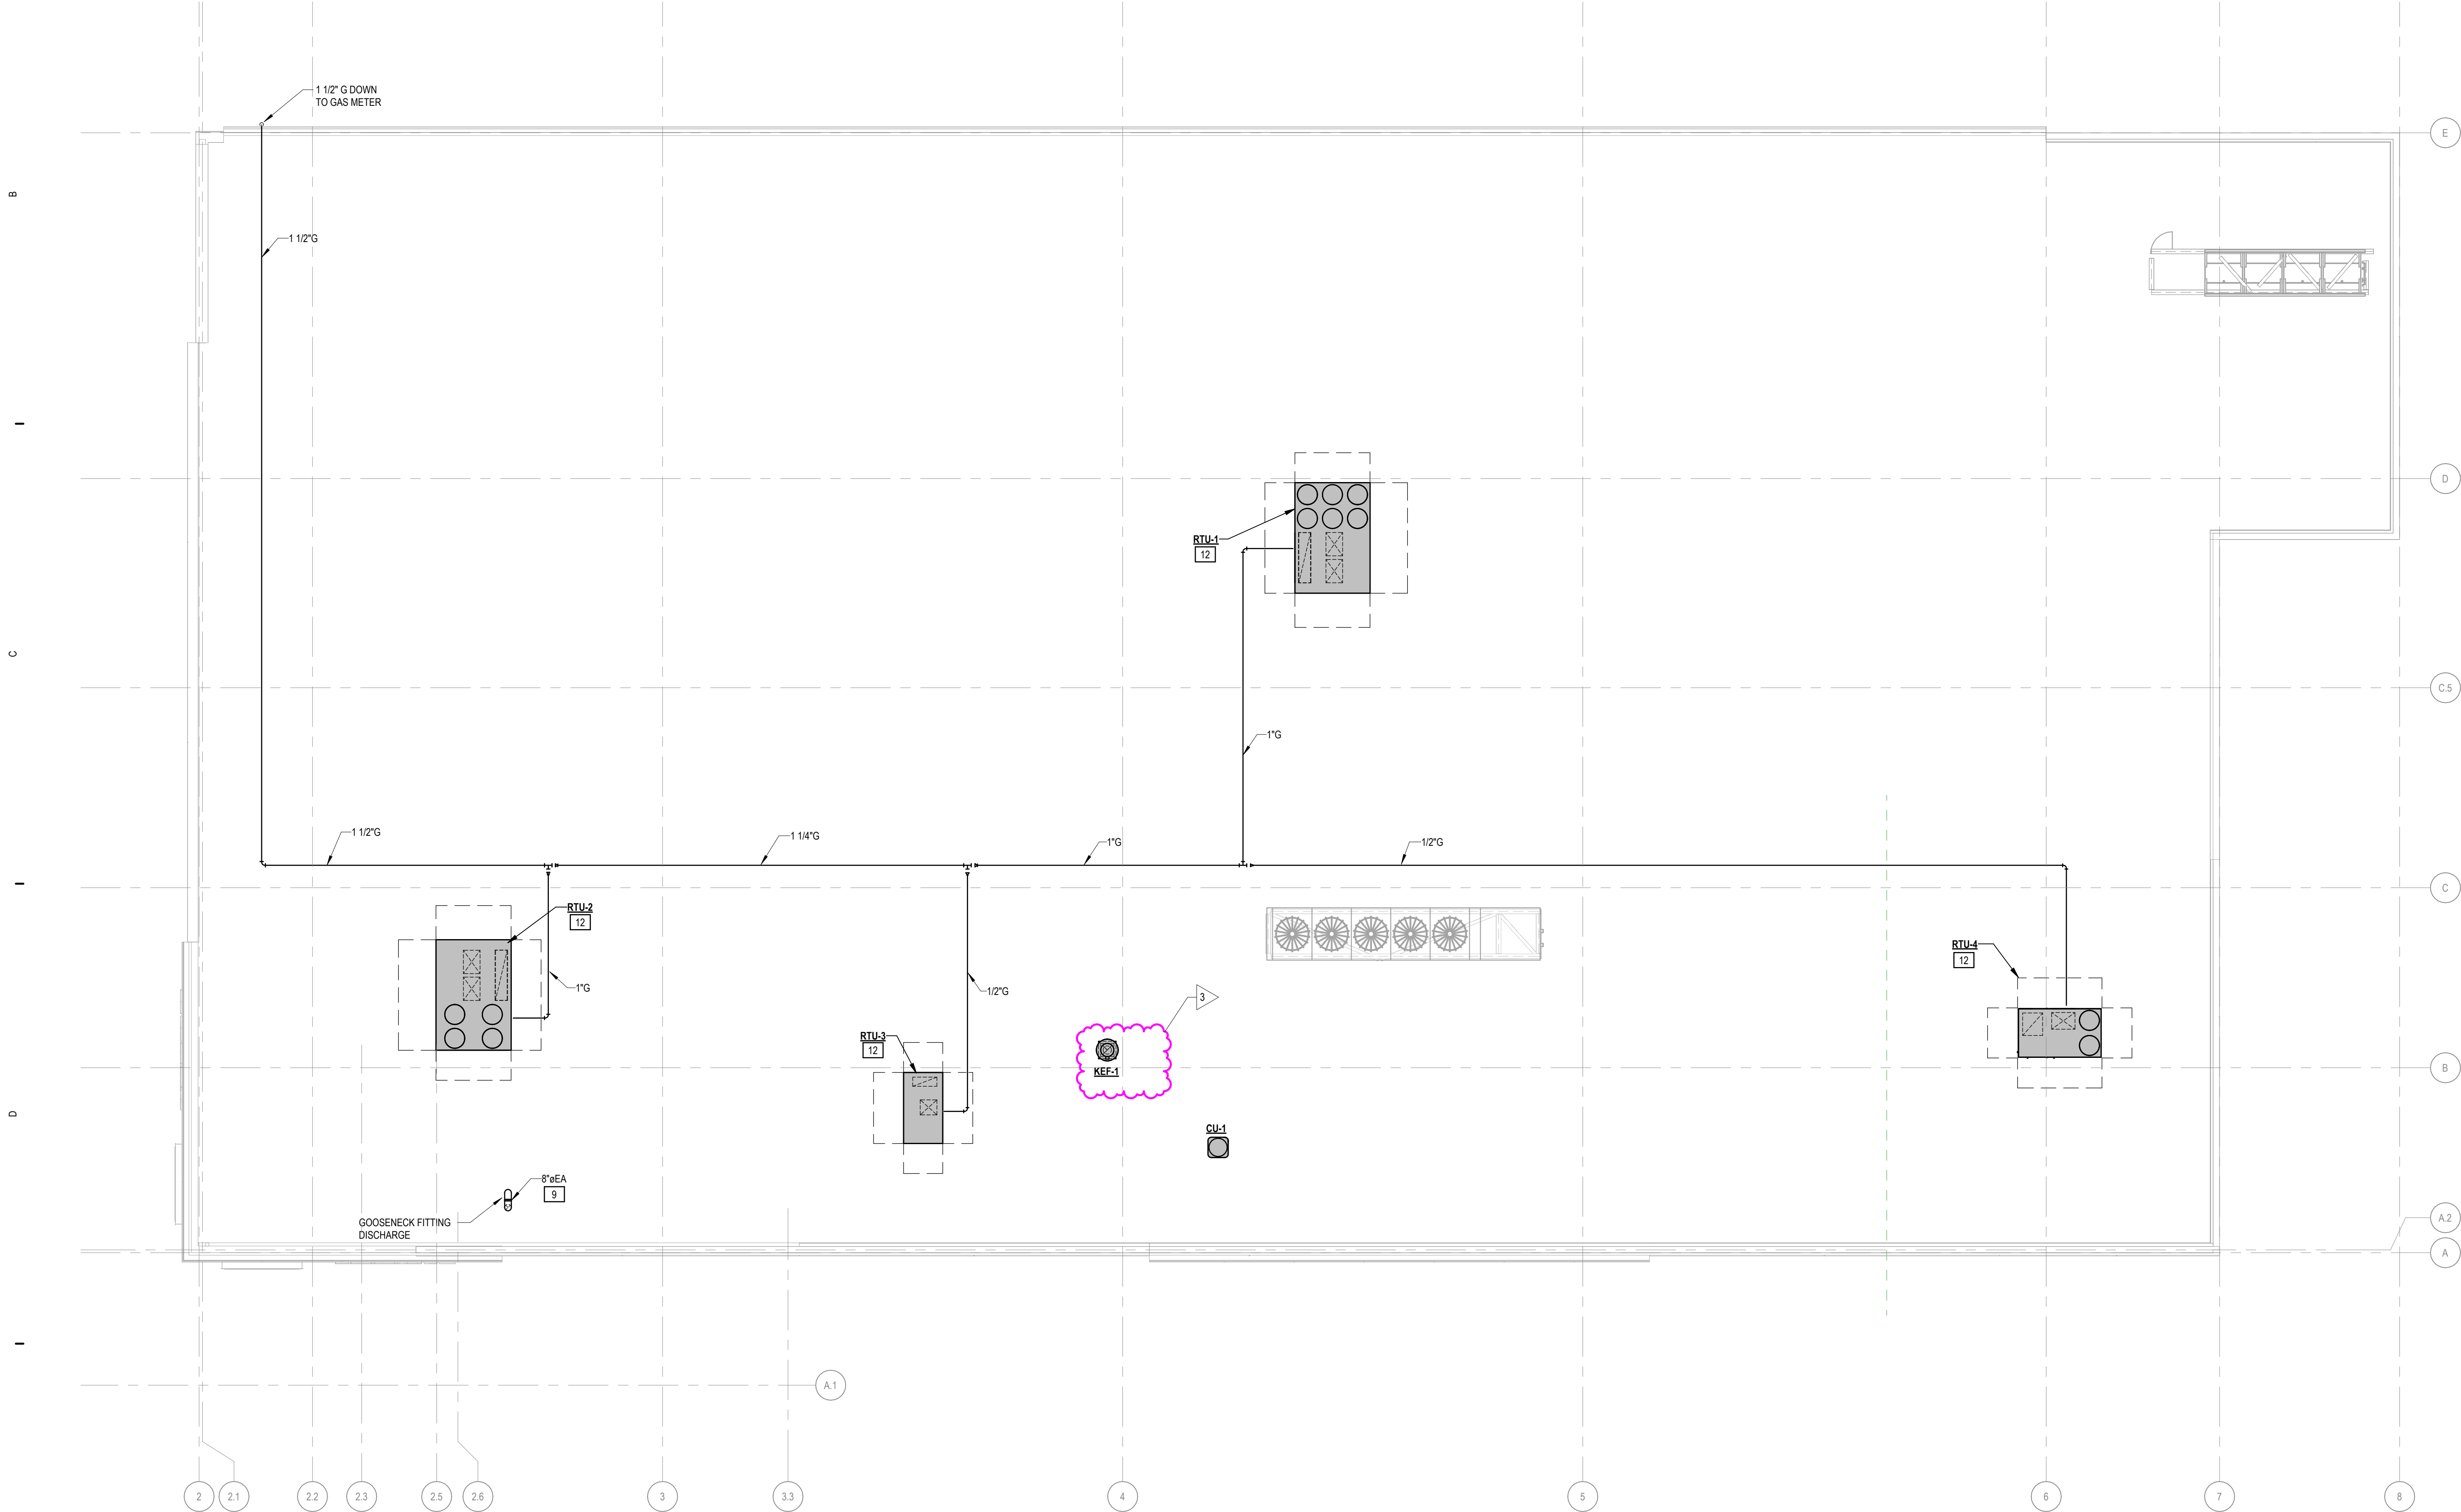

ROOF HVAC PLAN
1/8" = 1'-0"

HVAC KEYNOTES

1. DUCT DROPS TO MATCH RTU CONNECTION SIZE. TRANSITION TO SIZE AS SHOWN ON PLANS. DUCT DROPS TO BE LINED WITH 1" LINING. TAPE END OF DUCTWRAP TO SHEET METAL. EXPOSED CUT END OF INSULATION IS NOT ACCEPTABLE.
2. PROVIDE WELDED WIRE MESH SCREEN AT OPEN END OF DUCTWORK. SEE MECHANICAL DETAILS FOR MORE INFORMATION.
3. ROUTE DUCTS AS HIGH AS POSSIBLE, THROUGH STRUCTURAL JOISTS WHERE POSSIBLE. COORDINATE WITH STRUCTURAL TRADES. COORDINATE DUCT ROUTING WITH CABLE TRAY LOCATION. DUCT ROUTING TO BE BELOW CABLE TRAY TO AVOID CONFLICT WITH DUCT ROUTING OR AIRFLOW.
4. ADJUST DIFFUSER BLADES IN DRUM DIFFUSER TO BE 20 ° FROM HORIZONTAL.
5. 2"x12" SLOT OPENING COVERED WITH WIRE MESH SCREEN, LOCATED 1'-6" AFF. REFER TO MECHANICAL DETAILS.
6. DESTRATIFICATION FAN TO BE MOUNTED AT 16'-0" AFF.
7. ROUTE CONDENSATE DOWN WITHIN WALL. EXIT WALL AND DRAIN TO GRADE. PENETRATION THROUGH EXTERIOR WALL TO BE AT APPROXIMATELY 1'-0" AFF.
8. EXHAUST DUCT FROM EXHAUST FAN ON ROOF. EXHAUST DUCT TO CONNECT TO KITCHEN HOOD. REFER TO BAKERY HOOD DETAILS M602.
9. EXTEND DISCHARGE OF EXHAUST DUCT TO TOP OF PARAPET AND PROVIDE WITH GOOSENECK.
10. NEW SPLIT SYSTEM. ROUTE REFRIGERANT PIPING TO CONDENSING UNIT ON THE ROOF. SIZE AND MATERIAL OF PIPING TO BE BY MANUFACTURER RECOMMENDATION.
11. GAS METER. SEE NATURAL GAS LOAD SCHEDULE FOR CAPACITY AND PRESSURE INFORMATION. COORDINATE EXACT LOCATION WITH INCOMING GAS SERVICE FROM CIVIL.
12. PROVIDE AND INSTALL PRESSURE REDUCING STATION TO REDUCE THE NATURAL GAS PRESSURE FROM 2 PSI TO 7" W.C. PROVIDE AND INSTALL GAS CONNECTION TO GAS FIRED EQUIPMENT WITH DIRT LEG AND GAS COCK. REFER TO M600 FOR EQUIPMENT SCHEDULES AND GAS LOAD. SEE GAS PIPING RTU CONNECTION WITH PRV DETAIL ON M600.
13. ROUTE DUCTS AS HIGH AS POSSIBLE. TIGHT TO THE BOTTOM OF STRUCTURAL JOISTS. COORDINATE WITH STRUCTURAL TRADES FOR DUCT ELEVATION. DUCT ROUTING TO BE ABOVE CABLE TRAY. DUCT MOUNTED DIFFUSERS TO BE ANGLED 45 ° FROM HORIZONTAL.
14. PROVIDE MANUAL VARIABLE SPEED CONTROLLER FOR DESTRATIFICATION FANS. MANUFACTURER AIRJUS MODEL TRIAC-120-5. 120V 5AMPS. INSTALLED BY ELECTRICAL CONTRACTOR. INSTALL TIGHT TO EDGE OF WALL AT 40" AFF.
15. INSTALL TRANSFER GRILLE INTO VESTIBULE AT 12" AFF TO BOTTOM OF GRILLE.
16. MOUNT VESTIBULE TRANSFER FAN AS HIGH AS POSSIBLE, BETWEEN STRUCTURAL JOISTS.


ISSUANCE		
1	11/07/2025	PERMIT CYCLE 1
2	12/18/2025	PERMIT CYCLE 2
3	05/28/2026	CCD 01

PROJECT NUMBER
79550191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
J. MARTINEZ
CHECKED BY
B. KOOMAN

ROOF
MECHANICAL
PLAN
M103

LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD. NORCROSS, GA 30093



PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, LLC
**PROGRESSIVE
COMPANIES**
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com

FAN SCHEDULE																
MARK	LOCATION	BASED ON	MODEL	TYPE	CFM	ESP	SONE	FAN RPM	BACKDRAFT DAMPER REQUIRED	TYPE	HP	V	PH	HZ	FLA	REMARKS
CVF-1	BACKSTOCK FREEZER	FANTECH	FG-10 EC	INLINE BOOSTER	400	0.30		2138	No		0.11	120	1	60	1.27	14,89.10
CVF-2	BAKERY FREEZER/COOLER	FANTECH	FG-8 EC	INLINE BOOSTER	300	0.30		2131	No		0.06	120	1	60	1.27	14,89.10
CVF-3	BAKERY FREEZER/COOLER	FANTECH	FG-10 EC	INLINE BOOSTER	400	0.30		2138	No		0.11	120	1	60	1.27	14,89.10
EF-1	VESTIBULE	GREENHECK	SEI-16-428-VG	INLINE	600	0.10	2.6	1725	No		0.75	115	1	60	8.8	13,8.11
KEF-1	KITCHEN HOOD	CAPTIVARE	DUO-100-FA	CENTRIFUGAL UPBLAST	874	0.50	10.3	1231	No		0.5	120	1	60	6.3	12,3.4.5.7
TEF-1	RESTROOM	GREENHECK	SP-A190	CEILING EXHAUST	100	0.40	1.5	887	Yes	GRAVITY	0.16	115	1	60	0.45	12,4.6
TEF-2	RESTROOM	GREENHECK	SP-A190	CEILING EXHAUST	100	0.40	1.5	887	Yes	GRAVITY	0.16	115	1	60	0.45	12,4.6

1. PROVIDE WITH STANDARD DISCONNECT.
2. PROVIDE WITH GRAVITY BACKDRAFT DAMPER.
3. PROVIDE WITH VFD FOR BALANCING AND SOFT START.
4. PROVIDE WITH VIBRATION ISOLATION.
5. PROVIDE WITH ROOF CURB.
6. FAN OPERATION CONTROLLED VIA BMS BASED ON OCCUPIED/UNOCCUPIED SPACE.
7. FAN TO BE CONTROLLED BY THE KITCHEN HOOD CONTROL PANEL AND BMS.
8. FAN TO BE HORIZONTALLY MOUNTED.
9. PROVIDE WITH MOTOR GUARD ENCLOSURE.
10. FAN OPERATION CONTROLLED VIA BMS AND TO RUN CONTINUOUSLY.
11. FAN OPERATION CONTROLLED BY THERMOSTAT.

SPLIT SYSTEM AIR CONDITIONING UNIT SCHEDULE															
MARK	LOCATIONS	MANUFACTURER	MODEL	COOLING CAPACITY (MBH)	HEATING CAPACITY (MBH)	AIRFLOW (CFM)	DIMENSIONS			UNIT WEIGHT (LBS)	ELECTRICAL				REMARKS
							L	W	H		V	PH	HZ	AMPS	
AC-1	IT ROOM 109	LENNOX	MVM0012S6-1P	16	24	340	35	8	11"	23	208 V	1	60 HZ	0.1 A	1,2,3,4

1. PROVIDE WITH WIRED PROGRAMMABLE THERMOSTAT.
2. PROVIDE WITH BACNET-IP GATEWAY.
3. SINGLE POINT POWER CONNECTION. INDOOR UNIT IS POWERED FROM OUTDOOR UNIT.
4. PROVIDE WITH DRIP TRAY. DRIP TRAY TO BE INSTALLED SO BOTTOM OF TRAY IS 7" 0" AFF.

CONDENSING UNIT SCHEDULE													
MARK	MANUFACTURER	MODEL	LOCATION	UNIT SERVED	CAPACITY (TONS)	EER	SEER	ELECTRICAL					REMARKS
								V	PH	HZ	MCA	MOP	
CU-1	LENNOX	MMLD012S6S-1P	ROOF	AC-1	1	14	24	208 V	1	60 Hz	12 A	20 A	1,2

1. MOUNT ON EQUIPMENT RAILS.
2. PROVIDE WITH LOW AMBIENT HEAT PUMP.

ELECTRIC UNIT HEATER SCHEDULE									
MARK	BASED ON	MODEL	HEATING LOAD (KW)	ELECTRICAL				WEIGHT (LB)	REMARKS
				FLA	V	PH	HZ		
EUH-1	QMARK	EF080048	8	17 A	480 V	1	60 Hz	50	1,2,3

1. PROVIDE WITH INTEGRAL DISCONNECT.
2. COORDINATE GRILLE COLOR WITH ARCHITECT.
3. PROVIDE WITH INTEGRAL TAMPER PROOF THERMOSTAT SET TO 55 °F.

AIR BALANCE SCHEDULE						
TAG	SUPPLY AIR CFM	RETURN AIR CFM	OUTSIDE AIR CFM	EXHAUST AIR CFM	UNIT PRESSURE	SEQUENCE OF OPERATIONS
RTU-1	8000	5600	2400	0	2400	CONTINUOUS
RTU-2	7000	4900	2100	0	2100	CONTINUOUS
RTU-3	2300	1700	600	0	600	CONTINUOUS
RTU-4	4000	3600	400	0	400	CONTINUOUS
KEF-1	0	0	0	814	-814	CONTINUOUS
TEF-1	0	0	0	100	-100	INTERMITTENT
TEF-2	0	0	0	100	-100	INTERMITTENT
TOTAL	21300	15800	5500	1014	4486	POSITIVE

INTERNATIONAL MECHANICAL CODE 2018 VENTILATION FOR ACCEPTABLE INDOOR AIR QUALITY													
ZONE			403.3.1.1 ZONE OUTDOOR AIRFLOW CALCULATION										
ROOM NUMBER	ROOM NAME	OCCUPANCY CATEGORY (TABLE 403.3.1.1)	OCCUPANT DENSITY (PEOPLE/1000 SF)	PEOPLE OUTDOOR AIRFLOW RATE (CFM/PERSON)	ZONE POPULATION (PEOPLE)	ZONE OUTDOOR AIRFLOW RATE (CFM/PERSON)	FLOOR AREA (SF)	BREATHING ZONE OUTDOOR AIRFLOW (Vbz=Rp*P+Ra*Az (CFM))	ZONE AIR DISTRIBUTION EFFECTIVENESS (Ez)	MINIMUM OUTDOOR AIRFLOW (Vbz = Vbz/Ez (CFM))	EXHAUST AIRFLOW RATE (CFM/ST)	ZONE SUPPLY AIRFLOW (CFM)	ZONE PRIMARY AIRFLOW (CFM)
101	SALES	SALES	15	7.5	224	0.12	1680	3475.52	0.8	4344.15	0	15000	15000
					TOTALS	224	-	1680	3475.52	-	4344.15	15000	15000
102	BAKERY	KITCHEN*	0	0	0	0	515	0	0.8	0.00	800	800	200
106	PRODUCE BACKSTOCK	WAREHOUSES	0	10	0	0.08	432	25.92	0.8	32.40	0	300	300
108	RESTROOM	TOILET ROOMS- PUBLIC	0	0	0	0	48	0	0.8	0.00	500*	0	0
109	RESTROOM	TOILET ROOMS- PUBLIC	0	0	0	0	48	0	0.8	0.00	500*	0	0
103	HALLWAY	OFFICE SPACES	5	5	1	0.08	117	12.02	0.8	15.03	0	100	100
107	OFFICE	OFFICE SPACES	5	5	1	0.08	118	12.08	0.8	15.10	0	100	100
108	MEETING ROOM	OFFICE SPACES	5	5	1	0.08	98	9.48	0.8	10.62	0	100	100
109	BREAKROOM/HALLWAY	OFFICE SPACES	5	5	1	0.08	266	25.98	0.8	26.20	0	150	150
110	BREAKROOM	CONFERENCE/MEETING	5	5	11	0.08	237	19.22	0.8	18.53	0	800	800
111	EMPLOYEE CHANGING ROOM	OFFICE SPACES	5	5	1	0.08	48	7.88	0.8	9.85	0	100	100
					TOTALS	16	-	1887	156.56	-	116.7	2300	2300
113	TECHNICAL AREA	WAREHOUSES	0	10	0	0.08	493	29.58	0.8	36.98	0	300	300
116	BACKSTOCK	WAREHOUSES	0	10	0	0.08	1076	64.56	0.8	80.70	0	1600	1600
117	STAGING	WAREHOUSES	0	10	0	0.08	1663	101.98	0.8	128.23	0	2100	2100
					TOTALS	0	0	2759	195.54	-	226.925	4000	4000

NATURAL GAS LOAD		
APPLIANCE	TAG	MBH
ROOFTOP UNIT	RTU-1	480
ROOFTOP UNIT	RTU-2	480
ROOFTOP UNIT	RTU-3	150
ROOFTOP UNIT	RTU-4	180
total		1290

- NOTES:
1. REFER TO THE 2018 GEORGIA FUEL GAS CODE, TABLE 402.4(5) FOR SIZING INFORMATION.
 2. NATURAL GAS SERVICE PRESSURE TO BE 2 PSI.
 3. GAS SYSTEM FULLY DEVELOPED LENGTH IS 450 FEET.
 4. BLACK STEEL PIPE TO BE USED FOR NATURAL GAS SYSTEM.

ROOF TOP UNIT SCHEDULE																										
MARK	MANUFACTURER	MODEL	LOCATION	MIN OA CFM	SUPPLY AIR BLOWER				DX COOLING COIL				HEATING MODULE				ELECTRICAL									
					CFM	ESP (IN. WC)	MOTOR HP	EDB	EWB	LDB	LWB	TOTAL MBH	SENS. MBH	INPUT (MBH)	OUTPUT (MBH)	EDB	LAT	# OF STAGES	EER	WEIGHT	VOLTS	PHASE	HZ	MCA	MOP	REMARKS
RTU-1	LENNOX	LGT240HSM	ROOF	2,400	8,000	0.5	7.50	84 °F	66 °F	60 °F	56 °F	240	212	480	389	51 °F	96 °F	2	12	3234 lb	460 V	60	60 Hz	17A	20A	1-223
RTU-2	LENNOX	LGT210HSM	ROOF	2,100	7,000	1	5.00	84 °F	66 °F	60 °F	56 °F	217	186	480	389	51 °F	103 °F	2	12	3170 lb	460 V	3	60 Hz	21A	25A	1-224
RTU-3	LENNOX	LGT0720HSE	ROOF	600	2,300	1	1.50	87 °F	69 °F	60 °F	59 °F	77	68	160	121	63 °F	101 °F	2	12.2	899 lb	460 V	3	60 Hz	16 A	20 A	1-22
RTU-4	LENNOX	LGT120HSE	ROOF	400	4,000	1	3.75	80 °F	64 °F	56 °F	54 °F	122	105	180	144	60 °F	93 °F	2	12.1	1395 lb	460 V	3	60 Hz	23 A	30 A	1-22

1. PROVIDE SINGLE POINT POWER CONNECTION.
2. COORDINATE INLET GAS PRESSURE REGULATOR W/ BUILDING GAS PRESSURE.
3. PROVIDE 14" HEIGHT INSULATED SLOPED ROOF CURB.
4. FACTORY INSTALLED WEATHER PROOF MAIN DISCONNECT.
5. FACTORY INSTALLED PRESSURE SWITCH FOR DIRTY FILTER STATUS.
6. MERV 8 2" PLEATED FILTERS.
7. CERTIFIED IN ACCORDANCE WITH ANSI/AHRI STANDARD 340/360.
8. PROVIDE WITH FACTORY INSTALLED SUPPLY AND RETURN SMOKE DETECTORS.
9. STAINLESS STEEL HEAT EXCHANGER.
10. CONDENSATE DRAIN TRAP.
11. PROVIDED WITH PHASE AND BROWNOUT PROTECTION.
12. PROVIDED TEMPERATURE SENSOR, COORDINATE WITH BMS.
13. PROVIDE DUCT MOUNTED CO2 SENSOR.
14. ENTHALPY CONTROLLED ECONOMIZER.
15. FACTORY INSTALLED 115V GFI OUTLET W/ WEATHERPROOF COVER.
16. PROVIDE WITH AIR INTAKE HOOD.
17. PROVIDED SPACE MOUNTED ON WALL HUMIDITY SENSOR AND HUMIDITY CONTROL.
18. VFD CONTROLLED SUPPLY FAN.
19. HOT GAS REHEAT.
20. HAIL GUARDS PROVIDED BY MFR.
21. INDOOR AND OUTDOOR CORROSION PROTECTION COATING.
22. PROVIDE WITH BAROMETRIC RELIEF.
23. PROVIDE WITH MODULATING POWER EXHAUST.

DESTRATIFICATION FAN SCHEDULE									
ELECTRICAL									
MARK	MANUFACTURER	MODEL	CFM	V	PH	HZ	FLA	W	REMARKS
DSF-1	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-2	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-3	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-4	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-5	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-6	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-7	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-8	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-9	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5
DSF-10	AIRIUS	PEARL-S1-SP	545	120 V	1	60 Hz	0.32 A	45 W	1,2,3,4,5

1. PROVIDE WITH STANDARD DISCONNECT.
2. PROVIDE WITH SPEED CONTROLLER.
3. DESTRATIFICATION FAN TO BE TIED TO BMS. FAN TO RUN CONTINUOUSLY WHEN OCCUPIED AND TURN OFF WHEN UNOCCUPIED.
4. PROVIDE WITH FAN HANGING KIT.
5. FAN COLOR AND HOUSING TO BE COORDINATED WITH ARCHITECTURAL WHITE UNLESS OTHERWISE NOTED.

DIFFUSER, REGISTER, & GRILLE SCHEDULE													
MARK	MANUFACTURER	MODEL	CFM RANGE		NECK SIZE		FACE SIZE		MOUNTING	PATTERN	COLOR	REMARKS	
			MIN FLOW	MAX FLOW	Ø"	L"	W"	L"					W"
CD-1	TITUS	OMNI	0	100	6"			24"	LAY-IN	4-WAY	WHITE	1,2,3,4,5	
CD-2	TITUS	OMNI	101	200	8"			24"	LAY-IN	4-WAY	WHITE	1,2,3,4,5	
CD-3	TITUS	OMNI	201	300	10"			24"	LAY-IN	4-WAY	WHITE	1,2,3,4,5	
CD-4	TITUS	OMNI	301	400	12"			24"	LAY-IN	4-WAY	WHITE	1,2,3,4,5	
SD-1	RUSKIN	01-578-25	0	8000		36"	36"		DUCT MOUNT	6-WAY	CLEAR ANODIZED	1,2,3,4,5	
SR-1	TITUS	S301FL	0	250	6"	12"	8"	14"	SIDEWALL	DOUBLE DEFLECTION	CLEAR ANODIZED	1,2,3,4,5,6	
SR-2	TITUS	S301FL	251	400	8"	18"	10"	20"	SIDEWALL	DOUBLE DEFLECTION	CLEAR ANODIZED	1,2,3,4,5,6	
CRS-1	TITUS	PAR	0	150	8"			24"	LAY-IN	PERFORATED	WHITE	1,2,3,4,5	
CRG-3	TITUS	PAR	0	125	22"	22"	24"	24"	LAY-IN	PERFORATED	WHITE	1,2,3,4,5	
RF-1	TITUS	350RL	0	300	12"	10"	12"	12"	SIDEWALL	SINGLE DEFLECTION	WHITE	1,2,3,4,5	
TG-1	TITUS	350RL	0	600	10"	24"	12"	26"	SIDEWALL	SINGLE DEFLECTION	WHITE	1,2,3,4	

1. PROVIDE WITH MAXIMUM TOTAL PRESSURE DROP OF 0.1" W.G.
2. PROVIDE WITH MAXIMUM SOUND POWER LEVEL OF NC 30.

7

I

6

I

5

I

4

I


3

I


2

I

1

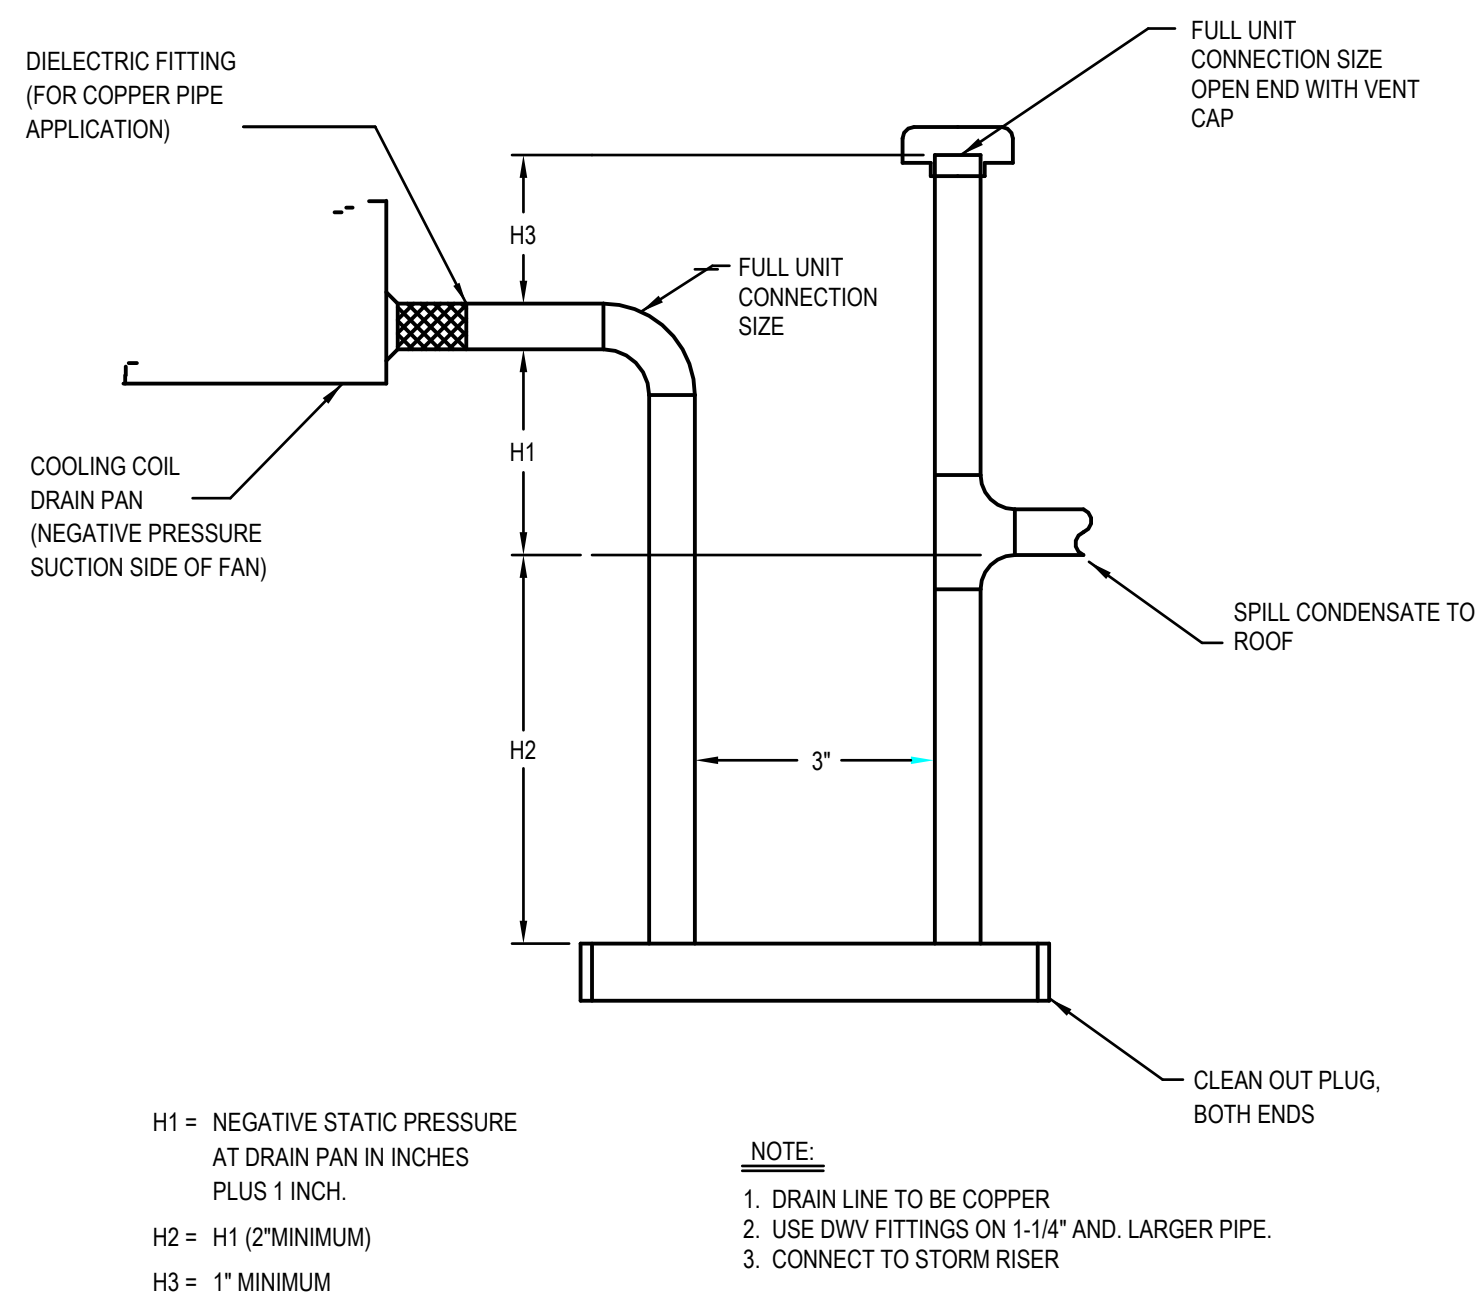


B6 RTU CONDENSATE DRAIN DETAIL
NOT TO SCALE

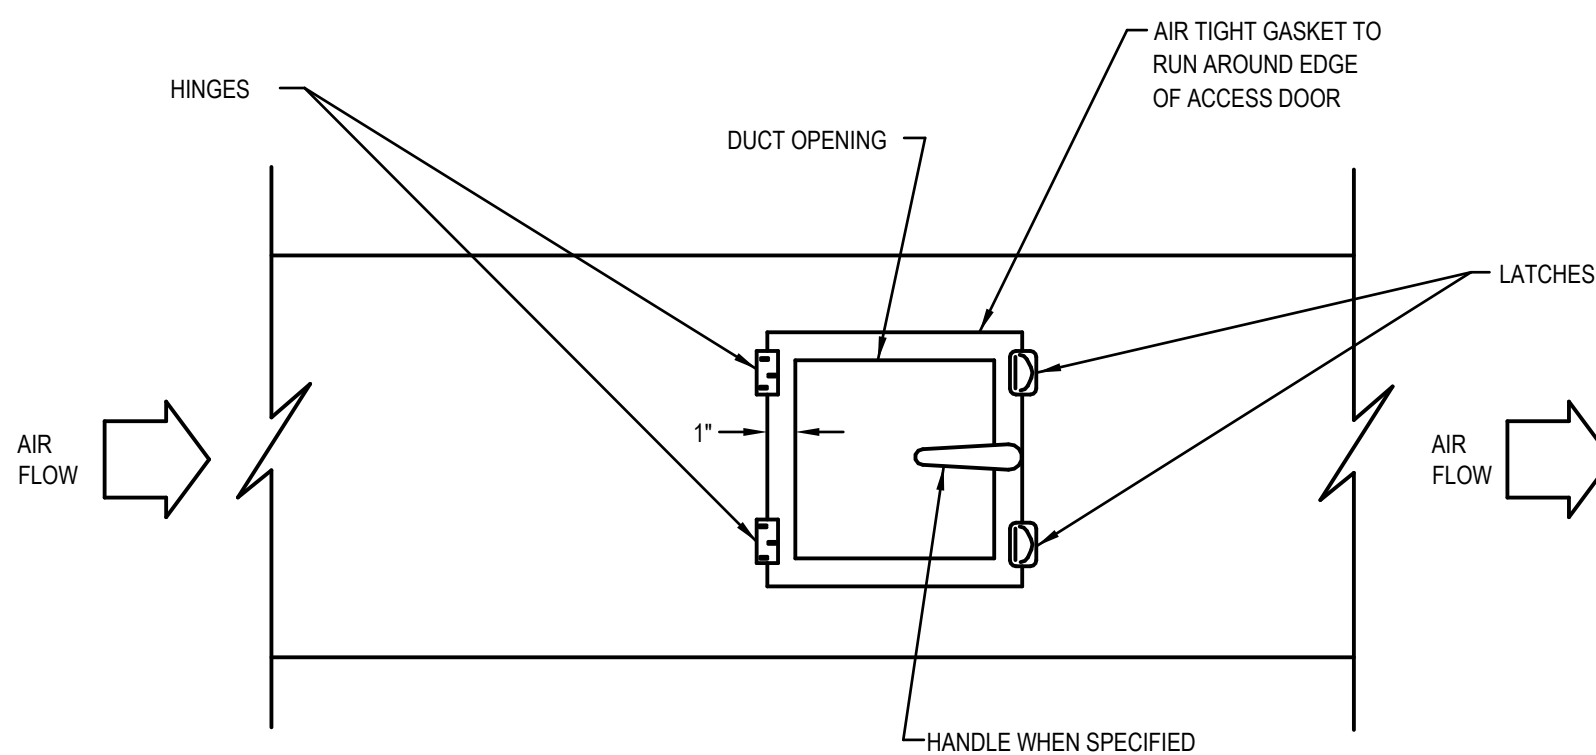

ACCESS PANEL SIZE SCHEDULE	
DUCT SIZE	ACCESS PANEL SIZE
6" TO 14"	10" W X (DUCT DEPTH-2") D
15" TO 21"	12" W X (DUCT DEPTH-2") D
22" AND ABOVE	18" W X (DUCT DEPTH-2") D

- NOTES:
1. PROVIDE FOUR CAM LATCHES ON PANELS LARGER THAN 18"x18" SIZE. REQUIRED AT ALL SMOKE DETECTORS, FIRE DAMPERS, SMOKE DAMPERS, COMBINATION FIRE/SMOKE DAMPERS, CONTROL DAMPERS AND HUMIDIFIERS ETC.
 2. ACCESS DOOR FOR FIRE DAMPERS, AND FIRE SMOKE DAMPERS SHALL BE LABELED.
 3. COORDINATE CEILING ACCESS PANEL REQUIREMENTS WITH ARCHITECT.

D6 DUCT ACCESS DOOR DETAIL
NOT TO SCALE

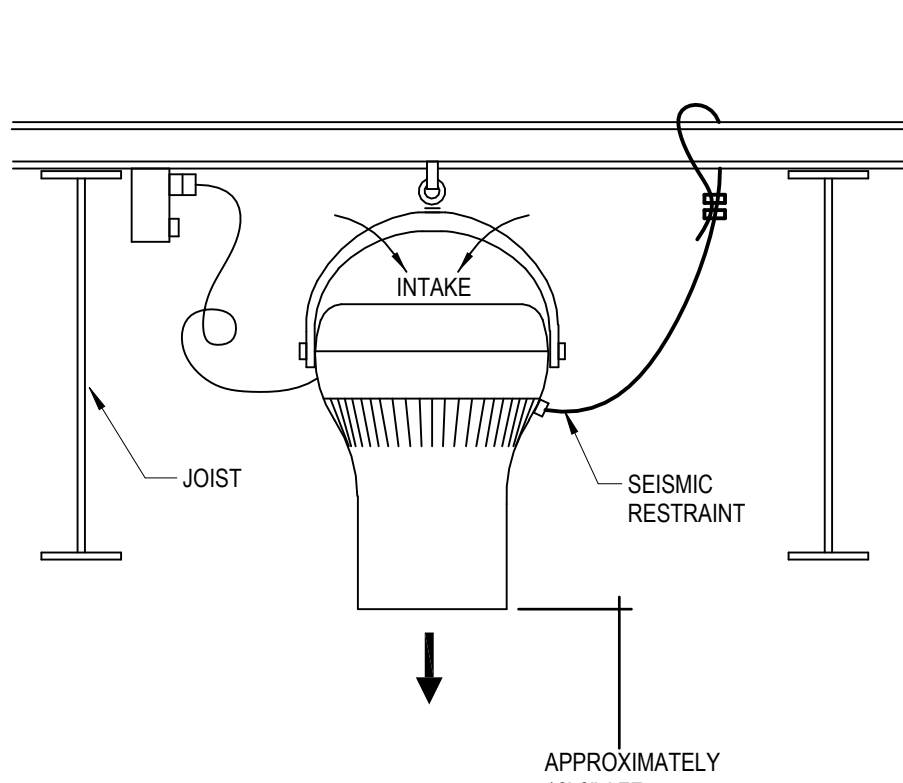


- NOTES:
1. FAN SHALL BE SUSPENDED FROM SECONDARY SUPPORT MEMBER SECURED ON TOP OF JOIST. (DO NOT SUSPEND FROM THE BOTTOM.)
 2. SEISMIC RESTRAINT SHALL BE USED TO SECURE FAN TO BUILDING STRUCTURE.
 3. FANS TO HAVE 10" OFFSET FROM VERTICAL.
 4. FAN SHALL BE MOUNTED 5' FROM REFRIGERATED AND FROZEN CASES


E6 DESTRATIFICATION FAN DETAIL
NOT TO SCALE

THESE TWO HANGERS ARE TO BE USED ON DUCTS 25" & LARGER (MAY BE USED ON SMALLER DUCTS).

THIS HANGER IS FOR DUCTS 24" DIA. & SMALLER

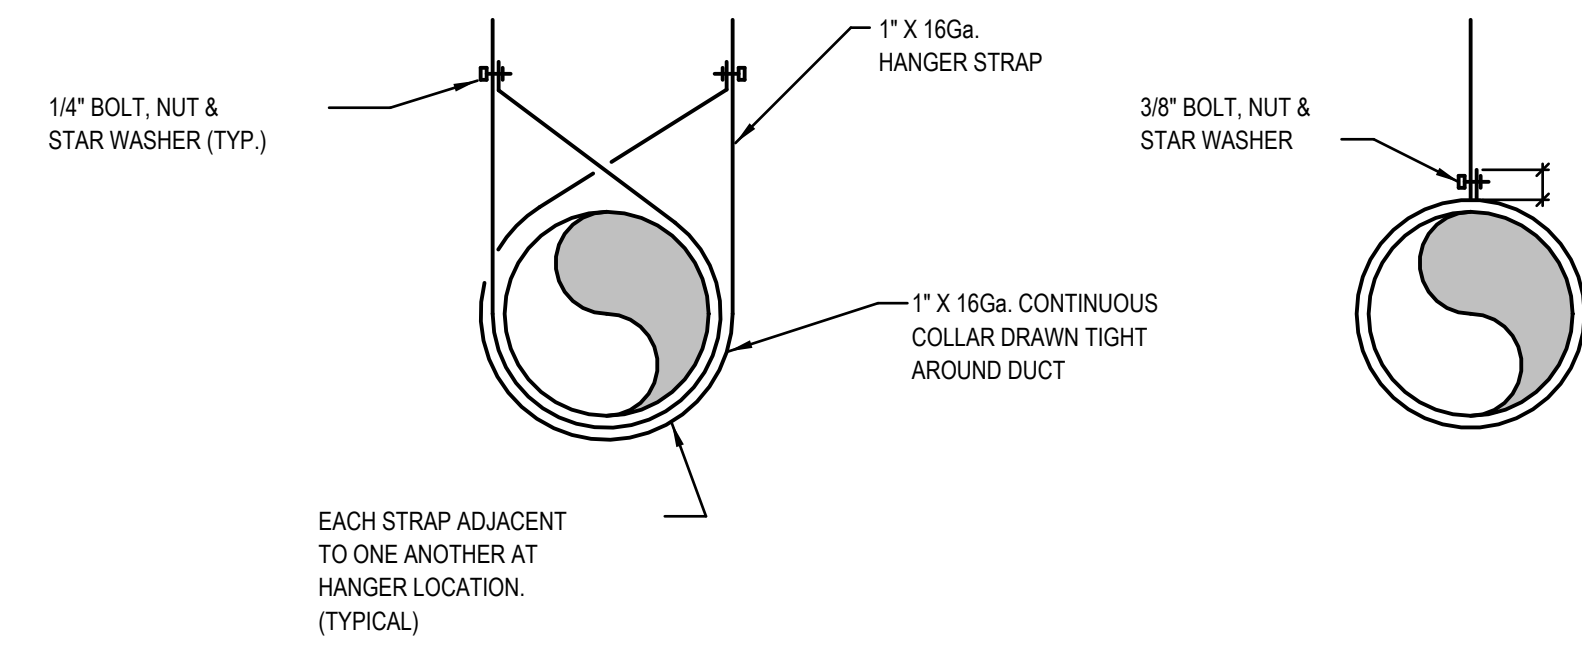


ROUND DUCT HANGER

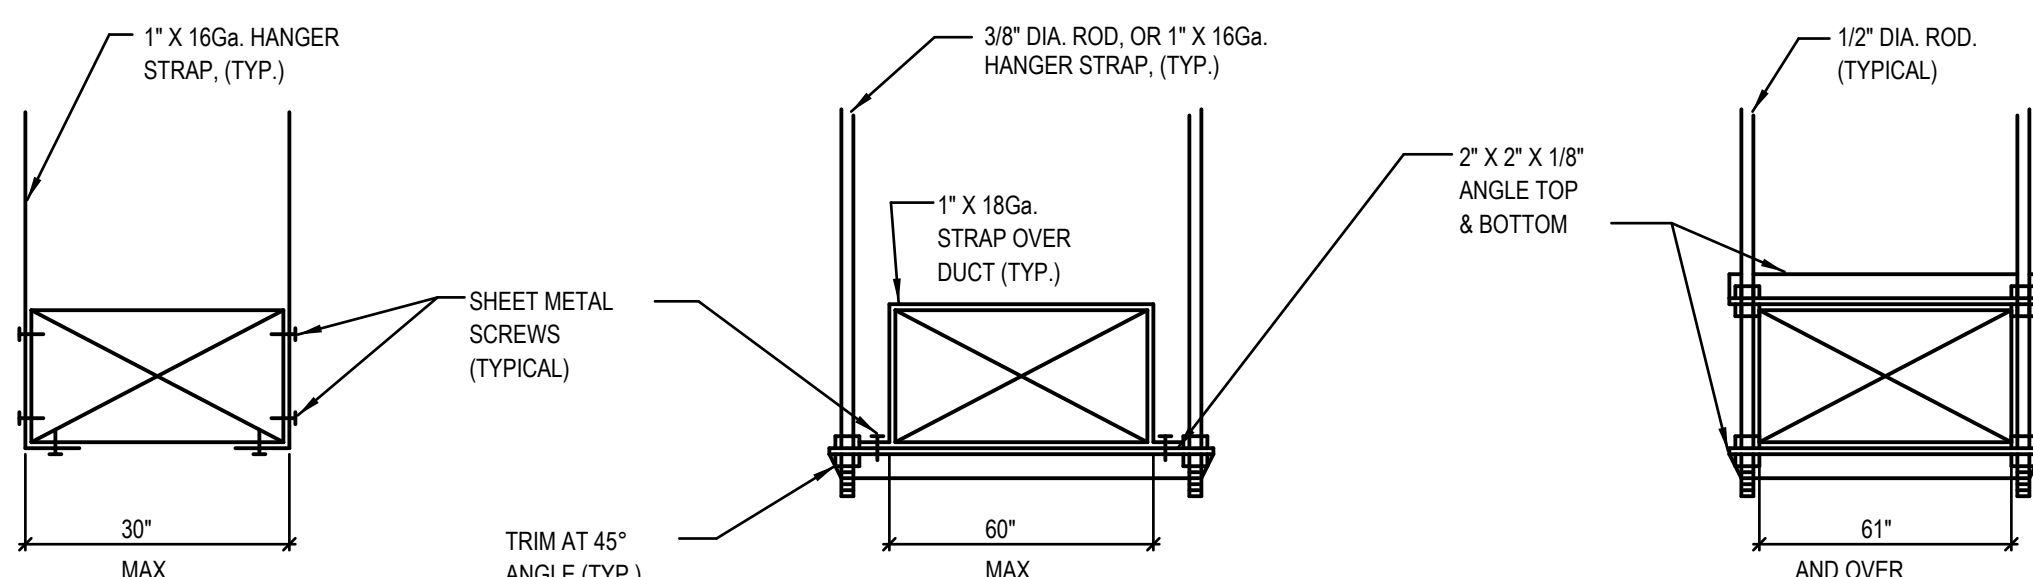


RECTANGULAR DUCT HANGER

- NOTES:
1. REFER TO SPECIFICATIONS FOR HANGER SPACING.
 2. ATTACHMENTS TO OVERHEAD STRUCTURE SHALL BE MADE IN ACCORDANCE WITH STRUCTURAL ENGINEERS REQUIREMENTS AND WEIGHT LIMITATIONS. ALL ATTACHMENT METHODS TO STRUCTURE SHALL BE SUBMITTED TO ARCHITECT AND STRUCTURAL ENGINEER FOR REVIEW.
 3. HANGER MATERIAL SUPPORTING FLEXIBLE DUCT SHALL IN NO CASE BE LESS THAN 1 1/2 INCHES WIDE. FLEXIBLE DUCT SHALL BE SUPPORTED PER MANUFACTURERS RECOMMENDED MATERIALS, BUT AT NO GREATER DISTANCE THAN 4 FEET MAX. PERMISSIBLE SAG IS MAX. 1/2 INCHES PER FOOT OF SPACING BETWEEN SUPPORTS.
 4. HANGER SUPPORTS AND SPACING TO BE INSTALLED PER CODE AND SMACNA DUCT STANDARDS.


B3 DUCT SUPPORT
NOT TO SCALE

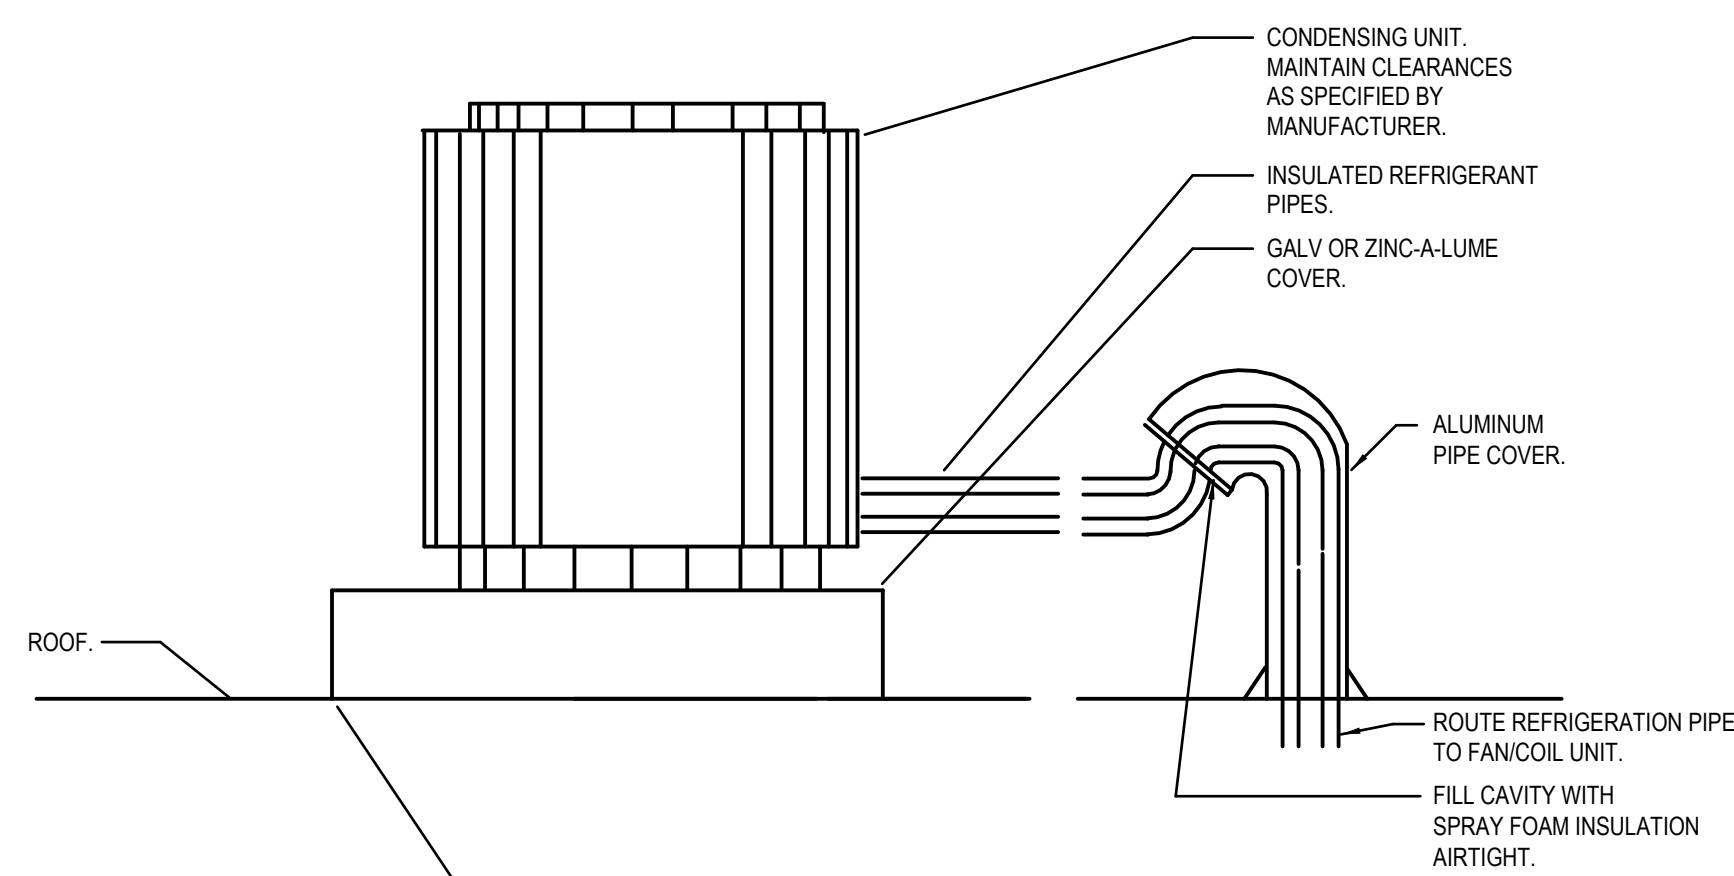


D3 ROOF MOUNTED CONDENSING UNIT DETAIL
NOT TO SCALE

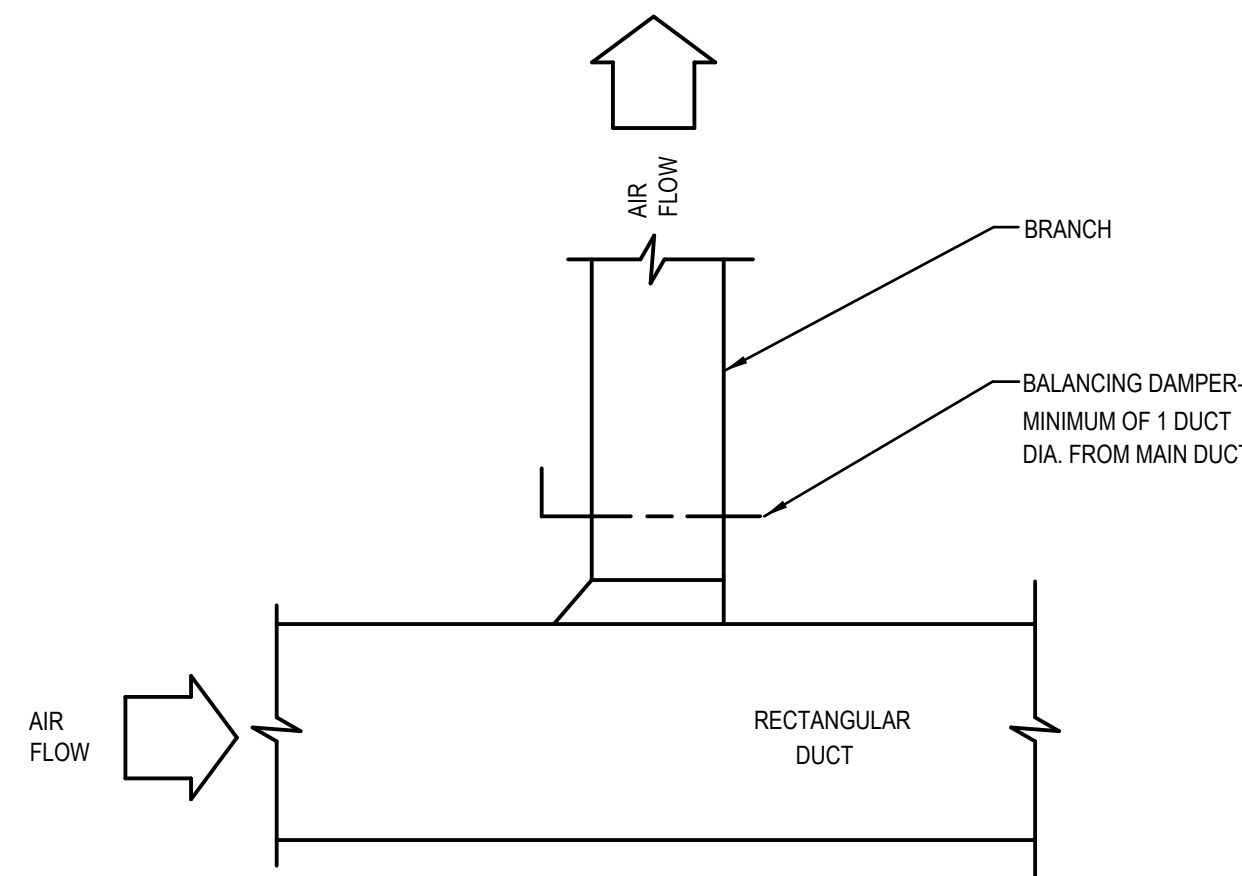


B1 RECTANGULAR SUPPLY LOW PRESSURE BRANCH
NOT TO SCALE

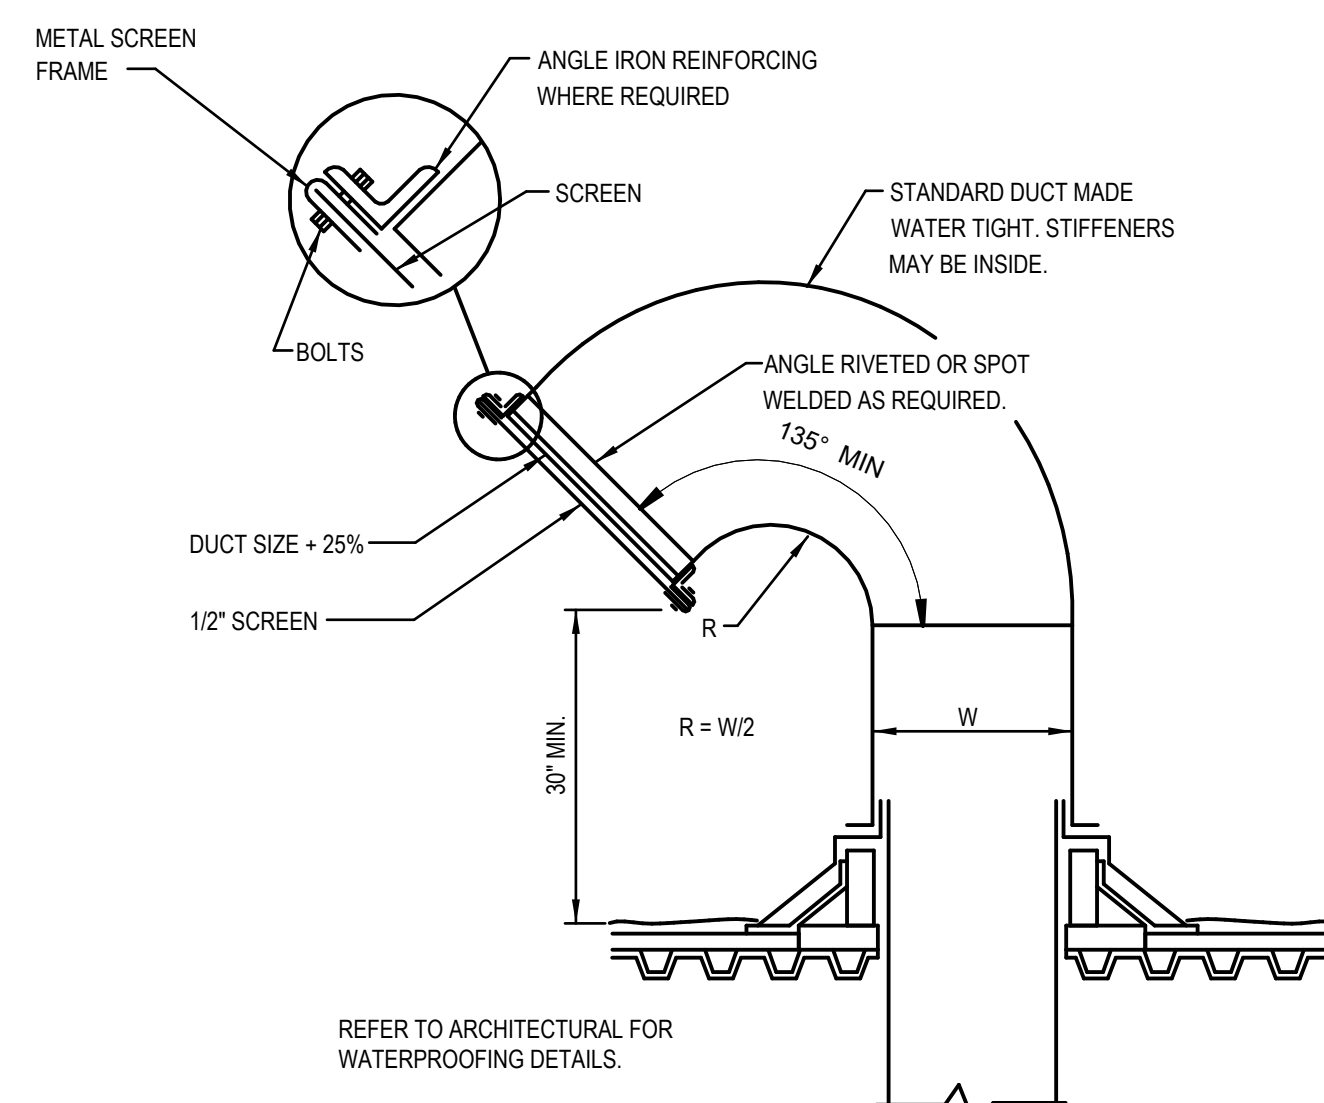

D1 TYPICAL GOOSENECK DETAIL
NOT TO SCALE

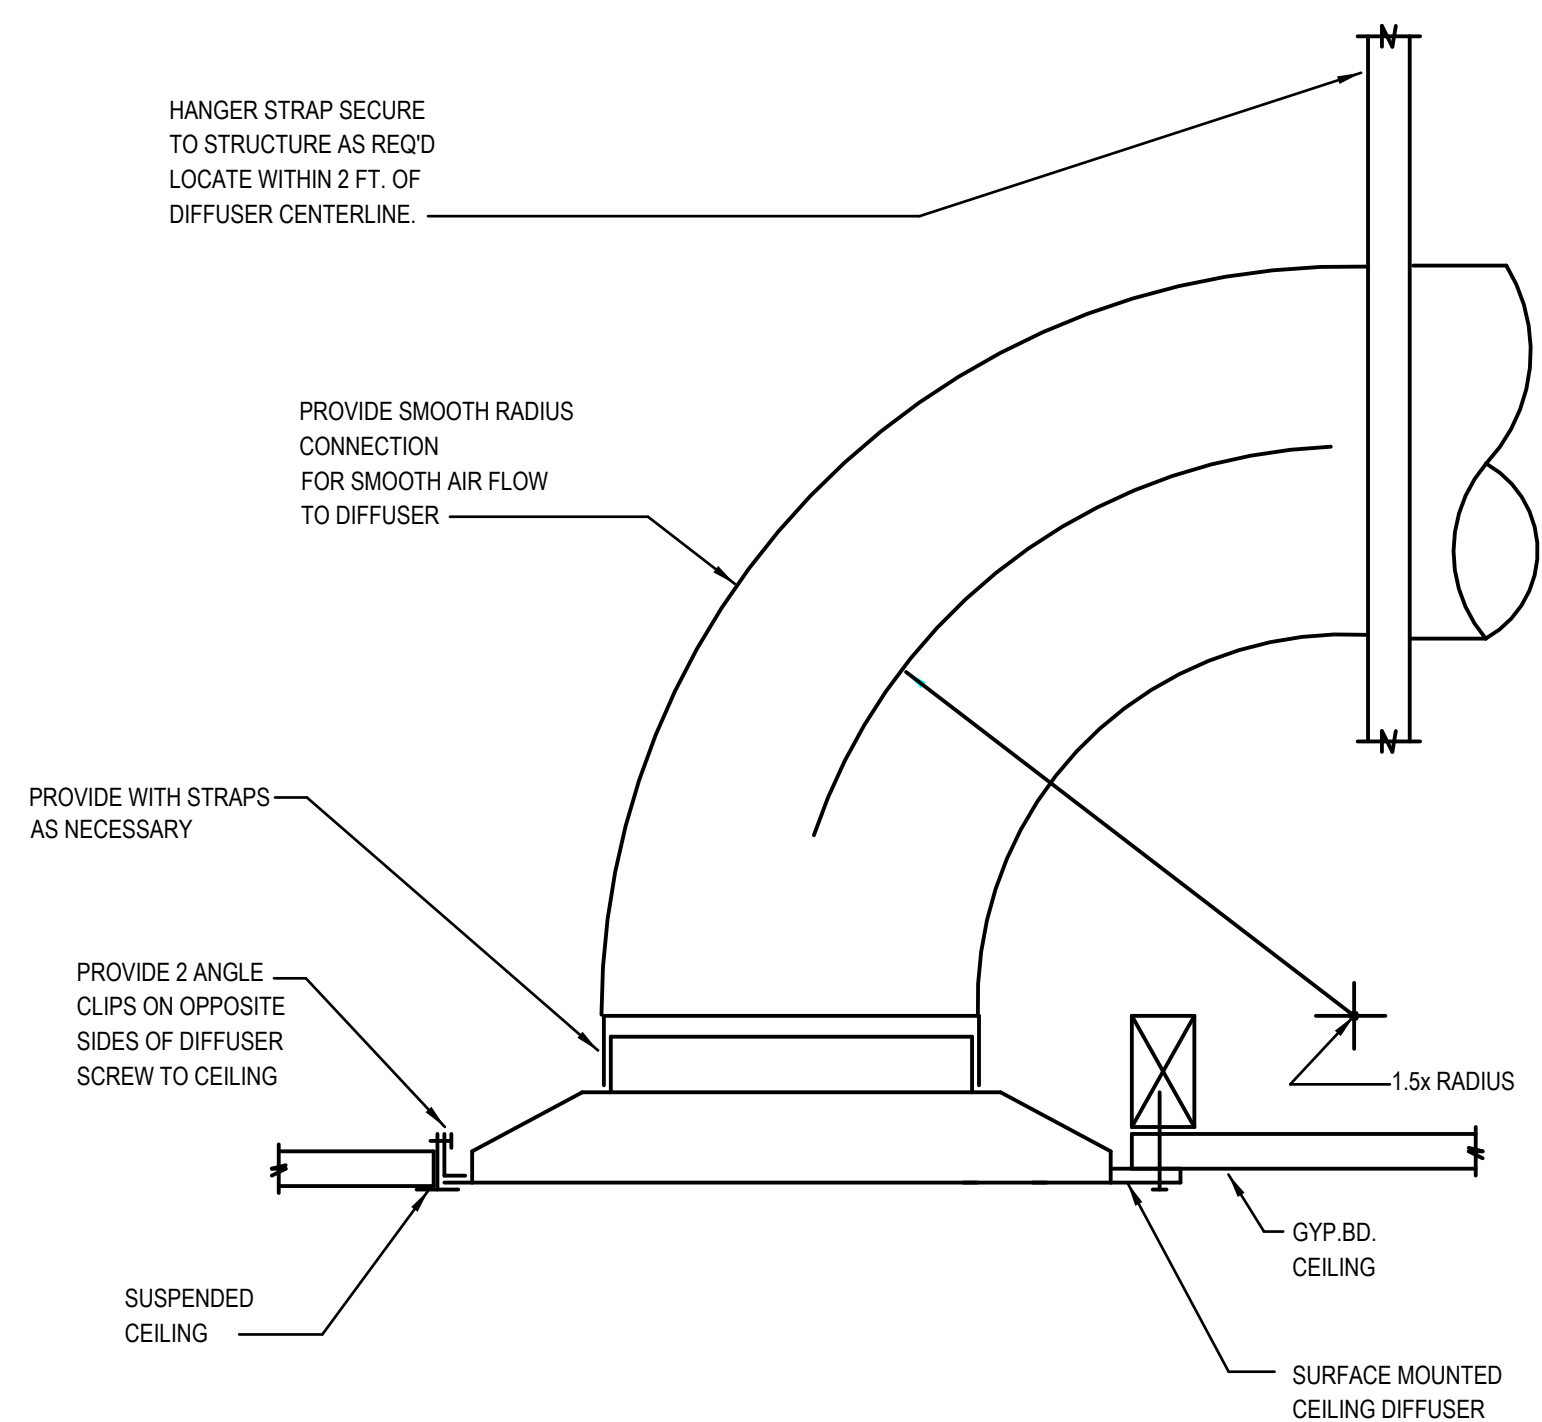


E1 CEILING DIFFUSER CONNECTION
NOT TO SCALE

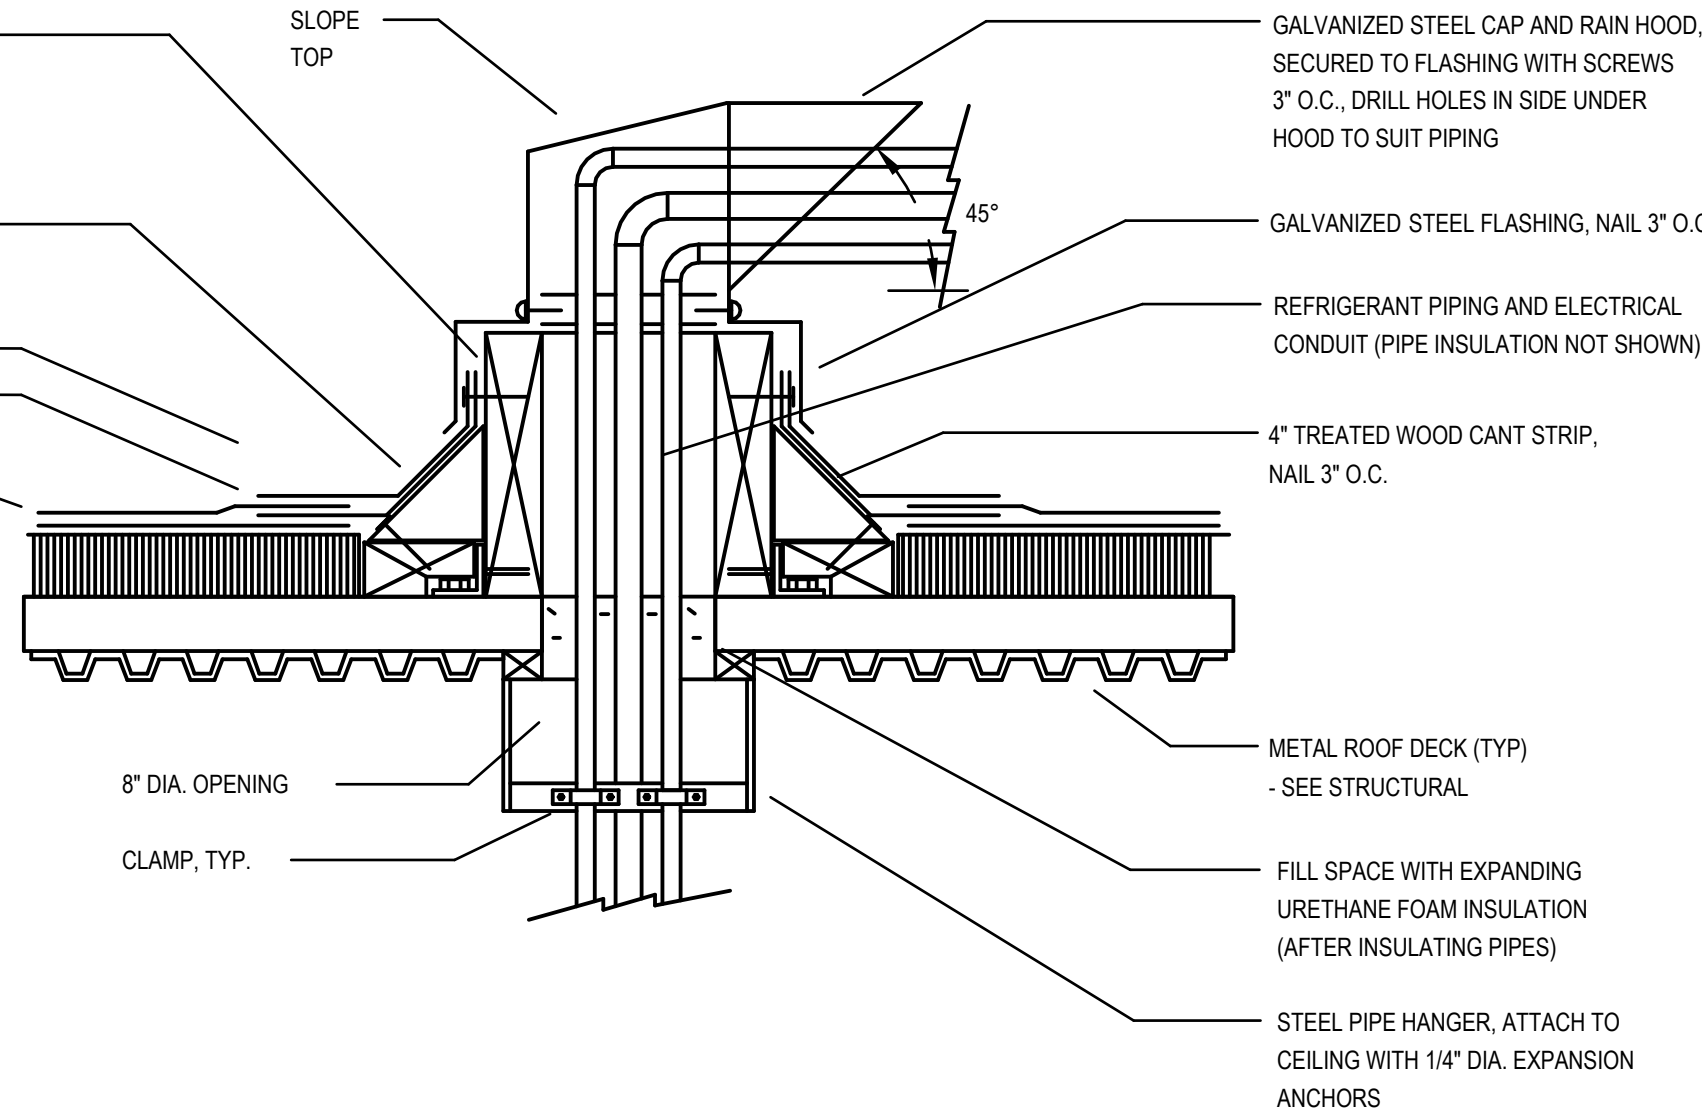

E3 PIPING AND CONDUIT ROOF PENETRATION
NOT TO SCALE

INSTALLATION SEQUENCE

1. INSTALL THE BLOCKING, CANT, ROOFING, AND FLASHING AS INDICATED.
2. INSTALL THE PIPE HANGER SUPPORT.
3. INSTALL THE VERTICAL SECTIONS OF THE NEW PIPES AND PROVIDE AN ELBOW AND A SHORT LENGTH OF HORIZONTAL PIPING ON EACH PIPE.
4. INSULATE THE INSTALLED SUCTION LINE REFRIGERANT PIPE.
5. INSTALL THE PORTION OF ELECTRICAL CONDUIT THAT WILL PASS THROUGH THE NEW ROOF OPENING AND HOODED FLASHING CAP.
6. DRILL THREE SEPARATE HOLES IN THE HOODED FLASHING CAP FOR THE TWO PIPES AND ONE ELECTRICAL CONDUIT.
7. INSTALL THE HOODED FLASHING CAP.
8. CAULK AROUND THE PIPE AND CONDUIT HOLES IN THE CAP AND ALSO ALL FLASHING SEAMS.
9. SPRAY URETHANE FOAM INSULATION IN THE VOID SPACE AROUND THE PIPES IN THE HOLE THROUGH THE ROOF.
10. INSTALL REMAINING PIPING AND CONDUIT.



HOOD OPTIONS							
HOOD NO	TAG	OPTION					
1		FIELD WRAPPER 10.56" HIGH FRONT, LEFT, RIGHT.					
		BACKPLASH 327.55" HIGH X 203.00" LONG 430 SS VERTICAL.					
		RIGHT VERTICAL END PANEL 27" TOP WIDTH, 21" BOTTOM WIDTH, 84" HIGH INSULATED 430 SS.					
		LEFT VERTICAL END PANEL 27" TOP WIDTH, 21" BOTTOM WIDTH, 84" HIGH INSULATED 430 SS.					

[illegible]

		JOB/LDL-PROTOTYPE (RIGHT WALL)	
		LOCATION	
		DATE 10/26/2022	JOB # VARIES
		DWG # 2	DRAWN BY BT-32
		REV	SCALE

Technical drawing showing the Plan View of the 'Hood II' lighting fixture. The drawing includes dimensions and labels for components.

Dimensions:

- Overall width: 66"
- Overall height: 36"
- Internal width (excluding control panel): 45 1/2"
- Internal height (excluding control panel): 45 1/2"
- Control panel width: 7"
- Control panel height: 7"
- Control panel depth: 7"
- Control panel width (including mounting): 7 3/8"
- Control panel height (including mounting): 7 3/8"
- Control panel depth (including mounting): 7 3/8"

Labels and Components:

- UL LISTED RECESSED ROUND LED
- CONTROL AND LED LIGHT
- CONTROL PANEL
- CONTROL SCREEN
- FANS
- LIGHTS

EXHAUST RISER.

HANGING ANGLE.

SEE HOOD TABLE.

66"

LSS SERIES EGG CANDY LIGHT FIXTURE
HIGH TEMP ASSEMBLY, INCLUDES GLASS THERMAL
AND SHOCK RESISTANT GLOBE (LSS FIXTURE).

FIELD WRAPPER 10.50" HIGH
(SEE HOOD OPTING TABLE).

PROTOTYPE DROP
CEILING HEIGHT IS 9'6"
VERIFY MEASUREMENT IN FIELD.

24" NDM.

IT IS THE RESPONSIBILITY
OF THE ARCHITECT/OWNER TO
ENSURE THAT THE HOOD CLEARANCE
FROM LIMITED-COMBUSTIBLE
AND COMBUSTIBLE MATERIALS
IS IN COMPLIANCE WITH
LOCAL CODE REQUIREMENTS.

DRAIN FILL PERIMETER GUTTER.

BACKSPLASH 187.50" HIGH
X 189.00" LONG.

84"

85 1/2"

4"

20"

4 1/8"

21"

27"

GAS CHASE CUTOUT
(FOR GAS AND POWER LINES).

LEFT AND RIGHT VERTICAL END PANELS
WITH ADJUSTABLE LEGS.

HOOD MD
VERIFY

  		JOB LIDL-PROTOTYPE [RIGHT WALL]	
		LOCATION	
		DATE 10/26/2022	JOB # VARIES
		DWG # 3	DRAWN BY BT-32
		REV	SCALE


NO	DN FAN	TAG	WEIGHT	ITEM	SIZE
1	# 1	KEF-1	34 LBS	CURB	19.500"W X 19.500"L X 26.000"H VENTED

FEATURES:

- DIRECT DRIVE CONSTRUCTION (NO BELTS/PULLEYS)
- ROOF MOUNTED FANS.
- UL785.
- VARIABLE SPEED CONTROL.
- INTERNAL WIRING.
- THERMAL OVERLOAD PROTECTION (SINGLE PHASE).
- NEMA 3R SAFETY DISCONNECT SWITCH.


OPTIONS

- 1 1/2"-800 DAMPER.
- ECM WIRING PACKAGE - PWM SIGNAL FROM CPMS2 PREWIRE (TELE MOTOR), 0-5V ROTATION.
- 3 YEAR PARTS WARRANTY.

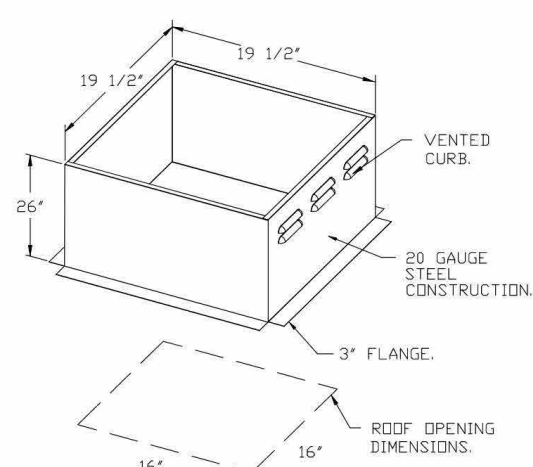

  		JOB LIDL-PROTOTYPE (RIGHT WALL)	
		LOCATION	
		DATE 10/26/2022	JOB # VARIES
		DWG # 5	DRAWN BY BT-32
		REV	SCALE

PROTOTYPE SHOP DRAWINGS

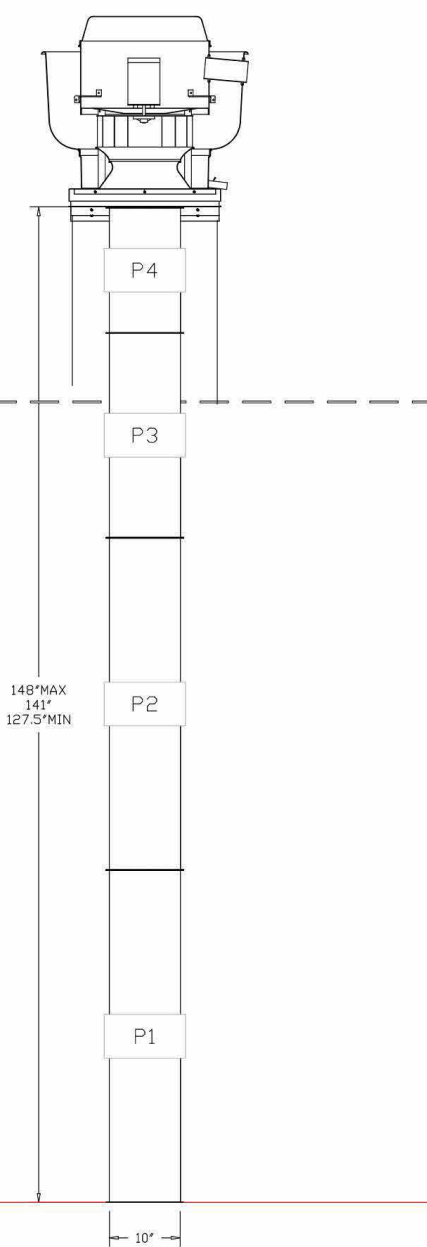

Purified Waste Grease Duct Specification

Purified waste metal, heavy duty grease duct for use with Type I listhood hoods, which conforms to the requirements of NFPA-96. Products shall be ETL listed, listed in UL E-1478 and UL-2221 for venting air and grease vapors from commercial cooking equipment. Model DWNR-18 is used for grease duct applications for 18 inch diameter hood openings. The duct is constructed of 16 gauge galvanized steel with a 10 mil thick polyethylene liner for protection of Commercial Equipment. Grease ducts shall be tested for a continuous thermal insulation of 500 degrees F and intermittent temperatures of 2000 degrees F.

The duct sections shall be constructed of an inner duct and an outer wall with insulation in between. The inner duct wall shall be constructed of 208 aluminum with a 10 mil thick polyethylene liner. The outer wall shall be constructed of stainless steel at a minimum of 208 knifeline. OUTER MEMBER (E-1478). The duct, based on model number, shall include layers of Super Drier 700 Plus Insulation between the inner and outer wall. Grease ducts shall be tested for resistance of formed Vapors and gases and sealed with 3/4" Pipe Fitter 2000. The duct wall assembly shall be tested and listed as "X" descriptors, according to classification.

UL 2221: Standard for Fire Retardant Grease Duct Enclosure Assemblies. Chapter 7 of this standard references a test labeled Internal Fire Test, Section 7.1.1, requires two installation conditions, Condition A and Condition B. Condition A represents all installation condition except for installation within non-ventilated combustible enclosures. Condition B represents installation within a non-ventilated combustible enclosure.

Model DW-2R is classified under UL2221 (Test of Fire Resistant Duct Enclosure Assemblies) as an alternate to 2-hr. fire resistant shaft enclosures with a reduced clearance to combustibles (sizes 6" to 16" diameter). Model 2R is listed in accordance with the requirements for duct enclosure Condition II.

CONTACT CAPTIVEAIRE REGION 32
FOR PURCHASING AND QUESTIONS:

		JOB/LDL-PRDTYPE [RIGHT WALL]	
		LOCATION	
		DATE 10/26/2022	JOB # VARIES
		DWG # 6	DRAWN BY BT-32
		REV	SCALE

BAKERY HOOD SYSTEM DESIGN BY EQUIPMENT MANUFACTURER. THESE SHEETS ARE PROVIDED FOR REFERENCE ONLY.



Energy Code:	2015 IECC
Project Title:	Lidl Norcross GA
Location:	Atlanta, Georgia
Climate Zone:	3a
Project Type:	New Construction

Designer/Contractor:
Progressive Architecture
Engineering & Planning I, LLC
1801 N. Graham Street
Charlotte, North Carolina 28206
704-731-8080

Credits: 1.0 Required 1.0 Proposed
Reduced Lighting Power, 1.0 credit

Quantity	System Type & Description
1	Water Treatment System (Aeration Tank)
1	Sewage Disposal System (Septic Tank)
1	Water Filtration Unit (Reverse Osmosis)
1	Water Softener System
1	Water Heating System (Tankless Water Heater)
1	Water Distribution System (Pipes & Fittings)
1	Water Storage Tank (Underground Cistern)
1	Water Pumping System (Submersible Pump)
1	Water Monitoring System (Leak Detector)
1	Water Recycling System (Greywater Reuse)
1	Water Purification System (UV Sterilization)
1	Water Conservation System (Low-Flow Fixtures)
1	Water Quality Testing Kit
1	Water Management Software License
1	Water Safety Valve (Backflow Preventer)
1	Water Pressure Regulator
1	Water Meter (Smart Meter)
1	Water Leak Alert System
1	Water Hardness Test Strips
1	Water Chlorination System
1	Water Filtration Cartridge
1	Water Softening Resin
1	Water Heating Element
1	Water Distribution Pipes (Copper)
1	Water Storage Tank (Above Ground)
1	Water Pumping Station
1	Water Monitoring Station
1	Water Recycling Unit
1	Water Purification Unit
1	Water Conservation Device
1	Water Quality Sensor
1	Water Safety Valve
1	Water Pressure Gauge
1	Water Meter
1	Water Leak Detector
1	Water Hardness Tester
1	Water Chlorinator
1	Water Filtration Media
1	Water Softening Media
1	Water Heating Coil
1	Water Distribution Fittings
1	Water Storage Tank (Polyethylene)
1	Water Pumping Motor
1	Water Monitoring Controller
1	Water Recycling Filter
1	Water Purification Membrane
1	Water Conservation Faucet
1	Water Quality Analyzer
1	Water Safety Valve Assembly
1	Water Pressure Reducing Valve
1	Water Meter Installation
1	Water Leak Alert App
1	Water Hardness Test Kit
1	Water Chlorination Tablets
1	Water Filtration Housing
1	Water Softening Control Valve
1	Water Heating Vent Pipe
1	Water Distribution Manifold
1	Water Storage Tank (Steel)
1	Water Pumping System Components
1	Water Monitoring System Hardware
1	Water Recycling System Components
1	Water Purification System Components
1	Water Conservation System Components
1	Water Quality Testing Equipment
1	Water Management Software
1	Water Safety Valve Components
1	Water Pressure Regulator Components
1	Water Meter Components
1	Water Leak Alert System Components
1	Water Hardness Test Strips Components
1	Water Chlorination System Components
1	Water Filtration Cartridge Components
1	Water Softening Resin Components
1	Water Heating Element Components
1	Water Distribution Pipes Components
1	Water Storage Tank Components
1	Water Pumping Station Components
1	Water Monitoring Station Components
1	Water Recycling Unit Components
1	Water Purification Unit Components
1	Water Conservation Device Components
1	Water Quality Sensor Components
1	Water Safety Valve Components
1	Water Pressure Gauge Components
1	Water Meter Components
1	Water Leak Detector Components
1	Water Hardness Tester Components
1	Water Chlorinator Components
1	Water Filtration Media Components
1	Water Softening Media Components
1	Water Heating Coil Components
1	Water Distribution Fittings Components
1	Water Storage Tank Components
1	Water Pumping Motor Components
1	Water Monitoring Controller Components
1	Water Recycling Filter Components
1	Water Purification Membrane Components
1	Water Conservation Faucet Components
1	Water Quality Analyzer Components
1	Water Safety Valve Assembly Components
1	Water Pressure Reducing Valve Components
1	Water Meter Installation Components
1	Water Leak Alert App Components
1	Water Hardness Test Kit Components
1	Water Chlorination Tablets Components
1	Water Filtration Housing Components
1	Water Softening Control Valve Components
1	Water Heating Vent Pipe Components
1	Water Distribution Manifold Components
1	Water Storage Tank Components
1	Water Pumping System Components
1	Water Monitoring System Hardware Components
1	Water Recycling System Components
1	Water Purification System Components
1	Water Conservation System Components
1	Water Quality Testing Equipment Components
1	Water Management Software Components
1	Water Safety Valve Components
1	Water Pressure Regulator Components
1	Water Meter Components
1	Water Leak Alert System Components
1	Water Hardness Test Strips Components
1	Water Chlorination System Components
1	Water Filtration Cartridge Components
1	Water Softening Resin Components
1	Water Heating Element Components
1	Water Distribution Pipes Components
1	Water Storage Tank Components
1	Water Pumping Station Components
1	Water Monitoring Station Components
1	Water Recycling Unit Components
1	Water Purification Unit Components
1	Water Conservation Device Components
1	Water Quality Sensor Components
1	Water Safety Valve Components
1	Water Pressure Gauge Components
1	Water Meter Components
1	Water Leak Detector Components
1	Water Hardness Tester Components
1	Water Chlorinator Components
1	Water Filtration Media Components
1	Water Softening Media Components
1	Water Heating Coil Components
1	Water Distribution Fittings Components
1	Water Storage Tank Components
1	Water Pumping Motor Components
1	Water Monitoring Controller Components
1	Water Recycling Filter Components
1	Water Purification Membrane Components
1	Water Conservation Faucet Components
1	Water Quality Analyzer Components
1	Water Safety Valve Assembly Components
1	Water Pressure Reducing Valve Components
1	Water Meter Installation Components
1	Water Leak Alert App Components
1	Water Hardness Test Kit Components
1	Water Chlorination Tablets Components
1	Water Filtration Housing Components
1	Water Softening Control Valve Components
1	Water Heating Vent Pipe Components
1	Water Distribution Manifold Components
1	Water Storage Tank Components
1	

- 1 RTU-1 (Single Zone):
Heating: 1 each - Central Furnace, Gas, Capacity = 480 kBTU/h
Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00% Et
Cooling: 1 each - Single Package DX Unit, Capacity = 243 kBTU/h, Air-Cooled Condenser, Air Economizer
Proposed Efficiency = 12.00 EER, Required Efficiency = 9.80 EER
Proposed Part Load Efficiency = 15.40 IEER, Required Part Load Efficiency = 11.40 IEER
- 1 RTU-2 (Single Zone):
Heating: 1 each - Central Furnace, Gas, Capacity = 480 kBTU/h
Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00% Et
Cooling: 1 each - Single Package DX Unit, Capacity = 221 kBTU/h, Air-Cooled Condenser, Air Economizer
Proposed Efficiency = 12.00 EER, Required Efficiency = 10.60 EER
Proposed Part Load Efficiency = 16.00 IEER, Required Part Load Efficiency = 12.20 IEER
- 1 RTU-3 (Single Zone):
Heating: 1 each - Central Furnace, Gas, Capacity = 150 kBTU/h
Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00% Et or 78% AFUE
Cooling: 1 each - Single Package DX Unit, Capacity = 75 kBTU/h, Air-Cooled Condenser, Air Economizer
Proposed Efficiency = 12.20 EER, Required Efficiency = 11.00 EER
Proposed Part Load Efficiency = 17.30 IEER, Required Part Load Efficiency = 12.60 IEER
- 1 RTU-4 (Single Zone):
Heating: 1 each - Central Furnace, Gas, Capacity = 180 kBTU/h
Proposed Efficiency = 81.00% Et, Required Efficiency: 80.00% Et or 78% AFUE
Cooling: 1 each - Single Package DX Unit, Capacity = 126 kBTU/h, Air-Cooled Condenser, Air Economizer
Proposed Efficiency = 12.10 EER, Required Efficiency = 11.00 EER
Proposed Part Load Efficiency = 16.10 IEER, Required Part Load Efficiency = 12.60 IEER
- 1 AC/CU-1 (Single Zone):
Split System Heat Pump
Heating Mode: Capacity = 24 kBTU/h,
Proposed Efficiency = 10.50 HSPF, Required Efficiency = 8.20 HSPF
Cooling Mode: Capacity = 16 kBTU/h,
Proposed Efficiency = 24.00 SEER, Required Efficiency = 14.00 SEER
Proposed Part Load Efficiency = 0.00, Required Part Load Efficiency = 0.00
- 1 EUH-1 (Unknown w/ Perimeter System):
Heating: 1 each - Unit Heater, Electric, Capacity = 27 kBTU/h
No minimum efficiency requirement applies

Quantity	System Type & Description
1	Water Heater: Electric Storage Water Heater, Capacity: 50 gallons w/ Circulation Pump No minimum efficiency requirement applies

Compliance Statement: The proposed mechanical design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed mechanical systems have been designed to meet the 2015 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

12/15/2025
Date

COMcheck Software Version COMcheckWeb

Inspection Checklist

Requirements: 60.0% were addressed directly in the COMcheck software

Text in the "Comments/Assumptions" column is provided by the user in the COMcheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is itemized in a separate table, a reference to that table is provided.

Additional Comments/Assumptions:

Project Title: Lidl Norcross GA Report date: 12/15/25
Data filename: Page 3 of 9

Additional Comments/Assumptions:

Additional Comments/Assumptions:

Project Title: Lidl Norcross GA Report date: 12/15/25
 Data filename: Page 5 of 9

Project Title: Lidl Norcross GA Report date: 12/15/25
Data filename: Page 6 of 9

Section # & Req.ID	Mechanical Rough-In Inspection	Complies?	Comments/Assumptions
C403.3 [ME62] ¹	Air economizers provided where required, meet the requirements for design capacity, control signal, ventilation controls, high-limit shut-off, integrated economizer control, and provide a means to relieve excess outside air during operation.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.3.2 [ME16] ¹	Economizer operation will not increase heating energy use during normal operation.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.4.2.3.2.1 [ME121] ³	Closed-circuit cooling tower within heat pump loop have either automatic bypass valve or lower leakage positive closure dampers. Open-circuit tower within heat pump loop have automatic valve to bypass all heat pump water flow around the tower. Open- or closed-circuit cooling towers used in conjunction with a separate heat exchanger have heat loss by shutting down the circulation pump on the cooling tower loop.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Exception: Requirement does not apply.
C403.4.4.6 [ME110] ³	Multiple zone VAV systems with DDC of individual zone boxes have static pressure setpoint reset controls.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Exception: Requirement does not apply. <i>See the Mechanical Systems list for values.</i>
C408.2.2.1 [ME53] ³	Air outlets and zone terminal devices have means for air balancing.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.5, C403.5.1, C403.5.2 [ME123] ³	Refrigerated display cases, walk-in coolers or walk-in freezers served by remote compressors and remote condensers not located in a condensing unit, have fan-powered condensers that comply with Sections C403.5.1 and refrigeration compressor systems that comply with C403.5.2...	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Lidl Norcross GA Report date: 12/15/25
Data filename: Page 7 of 9

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
C303.3, C408.2.5.3 [F18] ³	Furnished O&M manuals for HVAC systems within 90 days of system acceptance.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.2.2 [F127] ³	HVAC systems and equipment capacity does not exceed calculated loads.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.2.4.1 [F147] ³	Heating and cooling to each zone is controlled by a thermostat control. Minimum one humidity control device per installed humidification/dehumidification system.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.2.4.1.1 [F142] ³	Heat pump controls prevent supplemental electric resistance heat from coming on when not needed.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Exception: Requirement does not apply.
C403.2.4.1.2 [F138] ³	Thermostatic controls have a 5 °F deadband.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.2.4.1.3 [F120] ³	Temperature controls have setpoint overlap restrictions.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.2.4.2 [F139] ³	Each zone equipped with setback controls using automatic time clock or programmable control system.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C403.2.4.2.1, C403.2.4.2.2 [F140] ³	Automatic Controls: Setback to 55°F (heat) and 85°F (cool); 7-day clock, 2-hour occupant override, 10-hour backup	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C404.3 [F111] ³	Heat traps installed on supply and discharge piping of non-circulating systems.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Exception: Requirement does not apply.
C404.4 [F125] ²	All piping insulated in accordance with section details and Table C403.2.10.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C404.6.1 [F112] ³	Controls are installed that limit the operation of a recirculation pump installed to maintain temperature of a storage tank. System return pipe is a dedicated return pipe or a cold water supply pipe.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.1 [F128] ³	Commissioning plan developed by registered design professional or approved agency.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Lidl Norcross GA Report date: 12/15/25
Data filename: Page 8 of 9

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
C408.2.3.1 [F131] ¹	HVAC equipment has been tested to ensure proper operation.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.3.2 [F110] ¹	HVAC control systems have been tested to ensure proper operation, calibration and adjustment of controls.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.3.3 [F132] ¹	Economizers have been tested to ensure proper operation.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.4 [F129] ¹	Preliminary commissioning report completed and certified by registered design professional or approved agency.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.5.1 [F17] ³	Furnished HVAC as-built drawings submitted within 90 days of system acceptance.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.5.3 [F143] ¹	An air and/or hydronic system balancing report is provided for HVAC systems.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C408.2.5.4 [F130] ¹	Final commissioning report due to building owner within 90 days of receipt of certificate of occupancy.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Lidl Norcross GA Report date: 12/15/25
Data filename: Page 9 of 9

