

ABBREVIATIONS - PLUMBING

AC	ARCHITECTURAL CONTRACTOR	NG	NATURAL GAS
ADA	AMERICANS WITH DISABILITIES ACT	ORD	OVERHEAD DOOR
BV	BALL VALVE	ORD	OVERFLOW ROOF DRAIN
CB	CATCH BASIN	PP	PUMP - PLUMBING
CBS	COMBINATION BALANCE & SHUTOFF VALVE	PSI	POUNDS PER SQUARE INCH
CIP	CAST IRON PIPE	PSIG	POUNDS PER SQUARE INCH GAUGE
CO	CLEANOUT	RD	ROOF DRAIN, ROAD
COMP	COMPARTMENT	RIO	ROUGH-IN ONLY
CV	CHECK VALVE	RPP	REDUCED PRESSURE BACKFLOW PREVENTER
CW	COLD WATER	RPM	REVOLUTIONS PER MINUTE
DN	DISCHARGE NOZZLE	RR	REST ROOM
DSN	DOWNSPOUT NOZZLE	RV	RELIEF VENT
DW	DISHWASHER	S	SINK
DWH	DOMESTIC WATER HEATER	SAN	SANITARY
EWT	ENTER WATER TEMPERATURE	SD	STORM DRAIN
FC	FLEXIBLE CONNECTION	SG	SPECIFIC GRAVITY
FCO	FLOOR CLEAN OUT	SK	SINK
FD	FLOOR DRAIN	SNS	SANITARY SEWER
FS	FLOOR SINK	SPKR	SPRINKLER HEAD
G	GAS	SS	SPRINKLER
HB	HOSE BIBB	SSK	SERVICE SINK
HO	HUB OUTLET	ST	STORM
HW	HOT WATER	TD	TRENCH DRAIN
HWR	HOT WATER RETURN (DOMESTIC)	THERM	100 CUBIC FEET OF NATURAL GAS
HYD	HYDRANT	TOW	TOP OF WALL
IE	INVERT ELEVATION	V	VENT
IW	INDIRECT WASTE	VTR	VENT THROUGH ROOF
KVAR	KILOVOLT-AMPERES REACTIVE	W	WASTE
L	LAVATORY	WCO	WALL CLEANOUT
LAV	LAVATORY	WH	WALL HYDRANT
LWT	LEAVING WATER TEMPERATURE	WTHR	WATER HEATER
MB	MOP BASIN		
MCA	MINIMUM CIRCUIT AMPS		
MH	MANHOLE		
MOP	MAXIMUM OVERCURRENT PROTECTION		

PLUMBING GENERAL NOTES

- COORDINATE ROUTING OF PIPING WITH ALL OTHER TRADES PRIOR TO INSTALLATION TO AVOID CONFLICTS.
- COMPLY WITH ALL APPLICABLE LOCAL AND STATE CODES.
- PROVIDE ROUGH-INS AND FINAL CONNECTIONS TO FIXTURES AND EQUIPMENT FURNISHED BY LAB EQUIPMENT CONTRACTOR. USE ONLY APPROVED EQUIPMENT AND FIXTURE SHOP DRAWINGS, FROM FSEC, FOR ROUGH-IN SIZES AND LOCATIONS.
- PROVIDE TRAP SEAL PROTECTION ON ALL FLOOR DRAINS, FLOOR SINKS AND HUB DRAINS SUBJECT TO EVAPORATION. INSTALL PER MANUFACTURERS RECOMMENDATIONS.
- PROVIDE ASSE 1070 MIXING VALVE AT ALL BARRIER FREE SINKS AND ALL HAND WASHING SINKS TO PROVIDE TEMPERED WATER TO HOT WATER SIDE OF FAUCET.
- PIPING INSTALLED IN THE WAY OF ACCESS OR MAINTENANCE TO EQUIPMENT SHALL BE RELOCATED AT THE EXPENSE OF THE INSTALLING CONTRACTOR.
- PROVIDE SHUTOFF VALVES AT ALL FIXTURES AND EQUIPMENT.
- COORDINATE LOCATIONS OF FLOOR DRAINS AND FLOOR SINKS WITH LOCATIONS OF EQUIPMENT AND EQUIPMENT HOUSEKEEPING PADS. COORDINATE WITH SLOPING OF FLOOR SO THAT RIM OF DRAIN IS FLUSH WITH FINISH FLOOR.
- COORDINATE HANGING AND SUPPORT OF PIPING WITH STRUCTURAL.
- PROVIDE PIPE SLEEVES WHERE PIPES PENETRATE WALLS.
- PROVIDE PIPE SLEEVES WHERE PIPES RUN BELOW FOOTING.
- INSTALL EXTERIOR CLEAN OUTS FLUSH WITH SURFACE.
- INSTALL PIPING IN AN ORGANIZED MANNER. DO NOT ROUTE IN FRONT OF WINDOWS.
- THE INSTALLATION OF ALL PIPING SHALL BE CLOSELY COORDINATED WITH NEW SHEET METAL. HVAC PIPING, ELECTRICAL, AND STRUCTURAL CONDITIONS. NOT ALL REQUIRED OFFSETS AND FITTINGS ARE INDICATED, BUT SHALL BE PROVIDED. REFER TO ARCHITECTURAL AND STRUCTURAL PLANS FOR CLEARANCES. THE LOCATION OF SANITARY, STORM AND VENT LINES SHALL TAKE PRECEDENCE OVER HVAC AND FIRE PROTECTION PIPING AND ELECTRICAL CONDUIT AND CABLE TRAY.
- PROVIDE WATER HAMMER ARRESTORS PER PDV WH-201 AND UP STREAM OF ALL AUTOMATIC AND FAST CLOSING VALVES INCLUDING BUT NOT LIMITED TO SOLENOID VALVES.
- ALL EMERGENCY EYEWASH UNITS AND EMERGENCY SHOWERS SHALL BE PROVIDED WITH TEMPERED WATER AND SHALL BE IN COMPLIANCE WITH ANSI Z358.1.

PLUMBING SYMBOLS

	ANGLE RELIEF VALVE
	ANGLED STOP CHECK VALVE
	BALANCING VALVE
	BUTTERFLY VALVE
	BALL VALVE
	CHECK VALVE W/ARROW INDICATING FLOW
	GATE VALVE
	GLOBE VALVE
	LINEAR STOP CHECK VALVE
	GAS VALVE
	PLUG VALVE
	PRESSURE REDUCING VALVE
	PRESSURE RELIEF VALVE
	SOLENOID VALVE
	PRESSURE REGULATING VALVE - TWO WAY
	PRESSURE REGULATING VALVE - THREE WAY
	FLOW MEASURING DEVICE
	HOSE BIBB
	MANUAL AIR VENT
	PRESSURE INDICATOR
	TEMPERATURE INDICATOR
	THERMOMETER
	ANCHOR
	CAP
	END OF LINE, CLEANOUT
	FLOOR, CLEANOUT
	WALL, CLEANOUT
	EXPANSION COMPENSATOR OR EXPANSION JOINT
	FLEXIBLE PIPE CONNECTOR
	FLOOR DRAINS
	PIPE GUIDE
	MANHOLE
	PRESSURE REDUCING STATION
	REDUCED PRESSURE BACKFLOW PREVENTER
	STRAINER
	UNION

PLUMBING SYMBOLOGY

	POTABLE DOMESTIC COLD WATER
	NON-POTABLE DOMESTIC COLD WATER
	HOT WATER
	HOT WATER RETURN
	SANITARY WASTE
	SANITARY GREASE LADEN WASTE
	STORM
	STORM (OVERFLOW DRAINAGE)
	VENT
	COIL CONDENSATE TO DRAIN
	NATURAL GAS

ISSUANCE
11/07/2025 PERMIT CYCLE 1

PROJECT NUMBER
76520101
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN

GENERAL
PLUMBING
INFORMATION
P000

LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD NORCROSS, GA 30093




PROGRESSIVE
COMPANIES
Charlottesville, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com

PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, INC.

5/20/2025 12:56:47 PM Autodesk Docs/17855191 - Lbl 1517 Norcross GA/1517 NORCROSS GA - MECH-14
DWG: 1517 NORCROSS GA - MECH-14
SUB: 1517 NORCROSS GA - MECH-14

THIS DOCUMENT AND ANY INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF PROGRESSIVE ARCHITECTURE & PLANNING, LLC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PROGRESSIVE ARCHITECTURE & PLANNING, LLC. ALL RIGHTS ARE RESERVED, INCLUDING THE COPYRIGHT THEREIN.

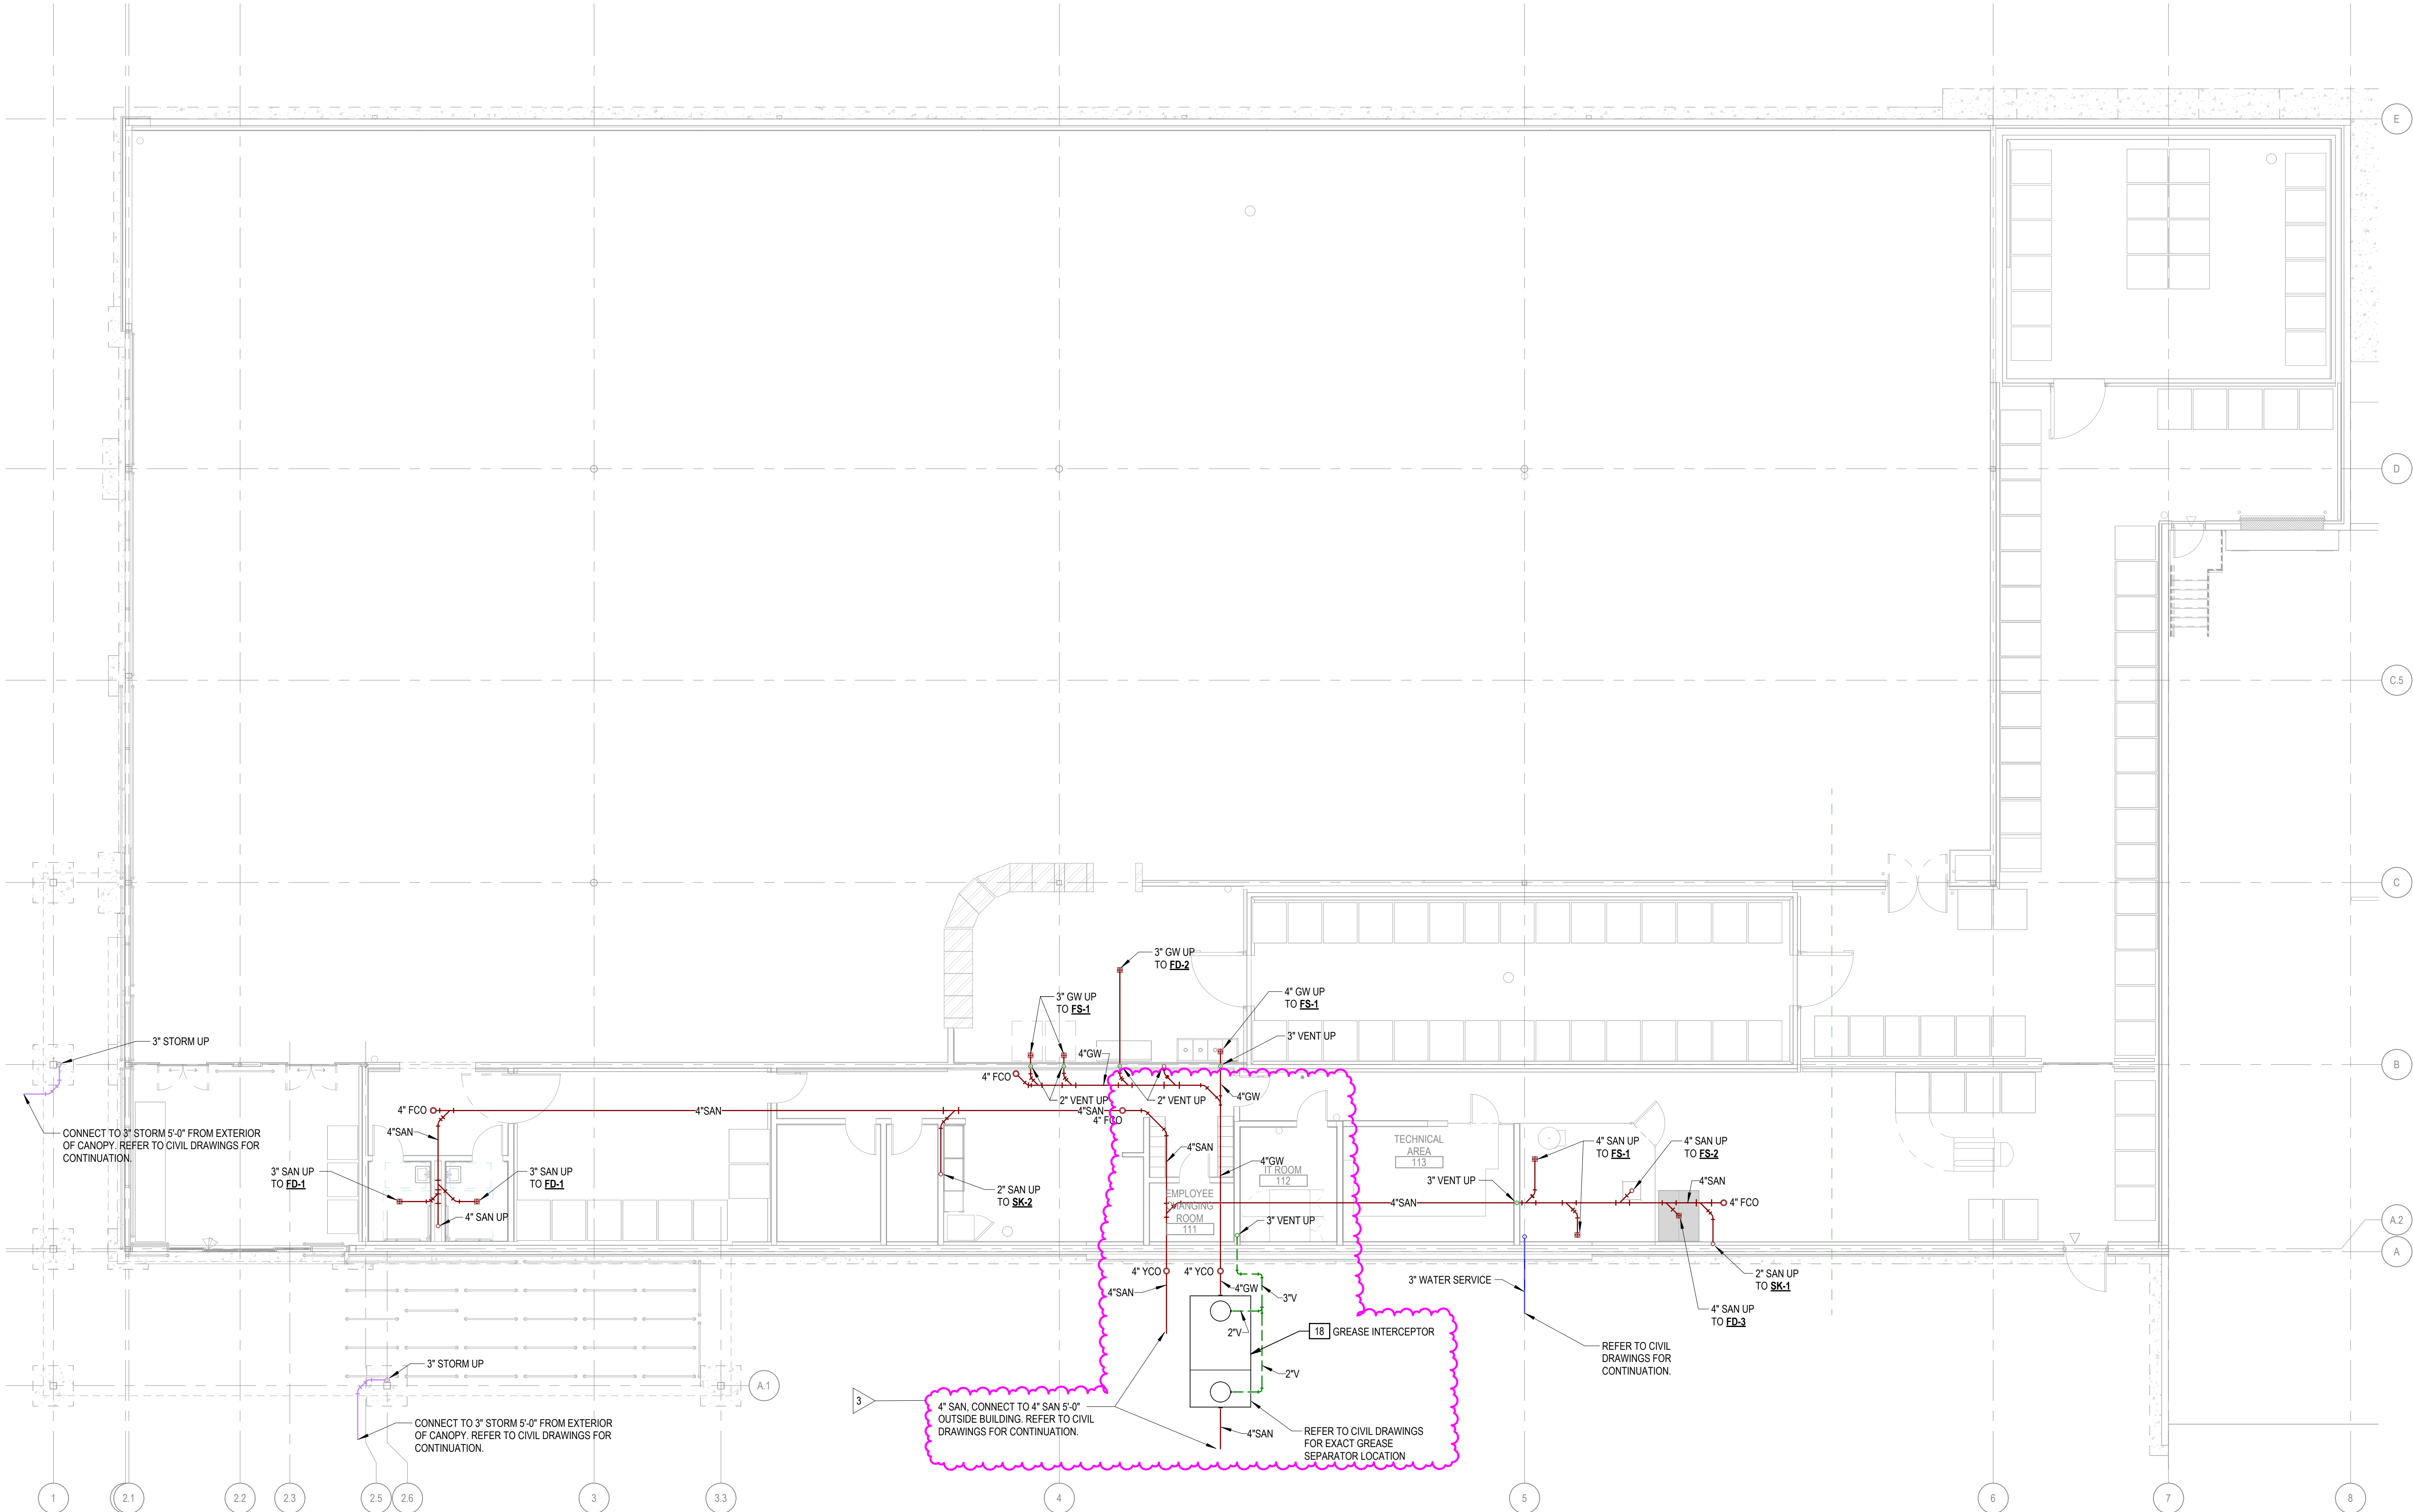

UNDERGROUND PLUMBING PLAN
1/8" = 1'-0"

GWINNET WSR-02 GREASE TRAP REQUIREMENTS CALCULATION

CALCULATION TEMPLATE USED:
HOSPITALS, NURSING HOMES, OTHER TYPE COMMERCIAL KITCHENS WITH VARIED SEATING CAPACITY:
(M) X (GM) X (LF) X (SC) = GREASE INTERCEPTOR CAPACITY IN GALLONS, WHERE:
M = MEALS PER DAY
GM = GALLONS OF WASTEWATER PER MEAL (USE 5 GALLONS PER MEAL)
LF = LOADING FACTOR - 1.0 WITH DISHWASHING
0.5 WITHOUT DISHWASHING
SC = STORAGE CAPACITY FACTOR - 1.0 FOR PUBLIC SEWER
2.5 FOR ON-SITE DISPOSAL

SITE SPECIFIC CALCULATION:
(0) X (5) X (0.5) X (1.0) = 0 - A SINGLE 1,500 GALLON INTERCEPTOR WILL BE USED FOR THE BAKERY.

- NOTES:**
1. THIS BAKERY'S PRODUCTION WILL BE LIMITED TO IN-STORE SALES ONLY. NO BAKERY PRODUCTS WILL BE SENT TO ANY OTHER STORES, WAREHOUSES, OR OTHER VENUES
 2. THE 1,500 GALLON GREASE TRAP SHALL ONLY SERVE THE BAKERY. NO OTHER ROOMS, SPACES, OR AREAS ARE TO BE CONNECTED TO THE TRAP.

PLUMBING KEYNOTES

1. WATER SERVICE ENTRANCE LOCATION. REFER TO P600 FOR DETAIL. THE BUILDING DOMESTIC WATER DEMAND IS 47 GPM. THE DOMESTIC WATER METER AND BACKFLOW PREVENTION ASSEMBLY ARE LOCATED ON SITE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE AND INSTALL 4" SANITARY WASTE AND 2" VENT CONNECTION TO EACH WALL-MOUNT WATER CLOSET WALL CARRIER. PROVIDE 1" CW TO EACH FLUSH VALVE. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
3. PROVIDE AND INSTALL 1-1/4" WASTE PIPE WITH P-TRAP TO DRAIN OF LAVATORY. CONNECT TO 2" WASTE PIPE IN WALL. CONTINUE UP IN WALL WITH 2" VENT PIPE. PROVIDE 1/2" H&CW DOWN IN WALL TO ANGLE VALVES AT APPROXIMATELY 1'-0" AFF. ROUTE H&CW TO ASSE 1070 MIXING VALVE EQUAL TO POWERS MODEL LFE480. ROUTE OUTLET TO FAUCET CONNECTION. PROVIDE WALL CLEANOUT IN 2" H STACK. MOUNT 18" A.F.F. AND INSTALL STAINLESS STEEL COVER. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
4. EACH FLOOR DRAIN AND FLOOR SINK SHALL BE PROTECTED WITH A TRAP SEAL INSERT. AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
5. PROVIDE AND INSTALL 1-1/4" WASTE CONNECTION TO HIGH-LOW WATER COOLER. PROVIDE 1/2" CW TO CONNECTION OF UNIT. INSTALL PER MFG INSTALLATION INSTRUCTIONS.
6. FLOOR SINK MOP BASIN. PROVIDE TRAPPED 3" WASTE LINE TO FIXTURE. THIS IS A DRAIN RECEPTACLE ONLY AND DOMESTIC WATER IS NOT REQUIRED. THIS RECEPTACLE IS USED TO DRAIN THE CONDENSATE VACUUM SYSTEM. THIS FIXTURE SHALL BE PROTECTED WITH A TRAP SEAL INSERT. AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
7. PROVIDE AND INSTALL 1-1/2" WASTE TO SINK BOWL P-TRAP. CONNECT TO 2" WASTE LINES IN THE WALL. CONTINUE UP IN WALL WITH MINIMUM 2" VENT LINES. PROVIDE 1/2" H&CW DOWN TO ANGLE STOP VALVE UNDER THE SINK COUNTERS. ROUTE H&CW TO ASSE 1070 MIXING VALVE EQUAL TO POWERS MODEL LFE480. ROUTE OUTLET TO FAUCET HW CONNECTION. ROUTE CW TO FAUCET CW CONNECTION. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
8. INSTALL GARBAGE DISPOSAL BELOW SINK IN CABINET. INSTALL SANITARY AND VENT PIPING PER THE GARBAGE DISPOSAL'S WRITTEN INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
9. CONNECT 1/2" HW TO UNDER CABINET DISHWASHER. CONNECT DISHWASHER DRAIN TO SINK SANITARY PIPING. INSTALL DOMESTIC WATER AND SANITARY PIPING PER DISHWASHER INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
10. PROVIDE AND INSTALL 2" WASTE FOR EACH BOWL OF 3 COMPARTMENT SINK. ROUTE EACH WASTE DRAIN INDIVIDUALLY TO FLOOR SINK WITH INDIRECT CONNECTION. PROVIDE 1" AIR GAP AT FLOOR SINK AND CUT DRAIN PIPE TERMINATIONS AT 45° ANGLE. ROUTE 3/4" CAHW DOWN TO SINK FAUCET. REFER TO P600 FOR SINK DETAIL.
11. 1/2" CW LINE DOWN TO REFRIGERATOR UTILITY BOX. PROVIDE WATER CONNECTION PER REFRIGERATOR MANUFACTURER'S INSTRUCTIONS.
12. EXTERIOR NON FREEZE WALL HYDRANT. ROUTE 3/4" CW DOWN INTERIOR WALL FACE AND INSTALL HYDRANT AT 18" A.F.F. PROVIDE AND INSTALL SHUTOFF VALVE IN 3/4" CW DROP APPROXIMATELY 48" A.F.F. PROVIDE AND INSTALL WATER HAMMER ARRESTOR IN DROP.
13. ROUTE 3/4" CW UP TO ROOF HYDRANT. COORDINATE WITH ALL TRADES. PROVIDE AND INSTALL WATER HAMMER ARRESTOR NEAR ROOF HYDRANT BELOW ROOF.
14. 3/4" CW LINE DOWN TO STEAM OVEN UTILITY BOX. PROVIDE WATER CONNECTION PER STEAM OVEN MANUFACTURER'S INSTRUCTIONS. PROVIDE ASSE 10102 BPP. EQUAL TO WATTS 90. DISCHARGE ATMOSPHERIC VENT TO FLOOR SINK WITH CODE APPROVED AIR GAP.
15. ELECTRIC WATER HEATER. MOUNT IN SAFE DRAIN PAN. PROVIDE 1" CW, 1" HW, AND 1" HWV TO UNIT. PROVIDE HEAT TRAPS AND ISOLATION BALL VALVE. ROUTE 3/4" COPPER DRAIN LINES FROM P&T VALVE AND FROM TANK DRAIN TO NEAREST FLOOR RECEPTOR (DRAIN) AND DISCHARGE INDIRECTLY WITH AIR GAP. REFER TO P600 FOR WATER HEATER DETAIL. COORDINATE WATER HEATER LOCATION WITH REFRIGERANT VACUUM SYSTEM EQUIPMENT.
16. ROUTE 3/4" H&CW DOWN TO MIXING VALVE FOR CHEMICAL CLEANER SYSTEM. INSTALL FLOOR SINK CENTERED BELOW SCRUBBER GRATE.
17. ROUTE 3/4" CW TO VACUUM SYSTEM. PROVIDE AND INSTALL 3/4" REDUCED PRESSURE ZONE BACKFLOW PREVENTER. EQUAL TO WATTS MODEL LFD09. ROUTE BPP DISCHARGE TO FLOOR SINK FS-1. REFER TO DETAIL ON SHEET P600. COORDINATE EXACT CONNECTION LOCATION WITH THE VACUUM SYSTEM CONTRACTOR.
18. GREASE INTERCEPTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE GWINNET COUNTY DEPARTMENT OF WATER RESOURCES AND AHS. REFER TO P600 FOR GREASE INTERCEPTOR DETAILS. GREASE INTERCEPTOR SHALL BE OF CONCRETE CONSTRUCTION PER THE COUNTY REQUIREMENTS. REFER TO CIVIL DRAWINGS FOR EXACT GREASE INTERCEPTOR LOCATION ON SITE.

ISSUANCE

1	11/07/2025	PERMIT CYCLE 1
2	12/18/2025	PERMIT CYCLE 2
3	05/28/2026	CCD 01

PROJECT NUMBER
7850191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOIMAN

**UNDERGROUND -
PLUMBING PLAN
P100**

LIDL US, LLC

LIDL 1517 NORCROSS, GA


499 JIMMY CARTER BLVD NORCROSS, GA 30093

PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, LLC

**PROGRESSIVE
COMPANIES**

Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com



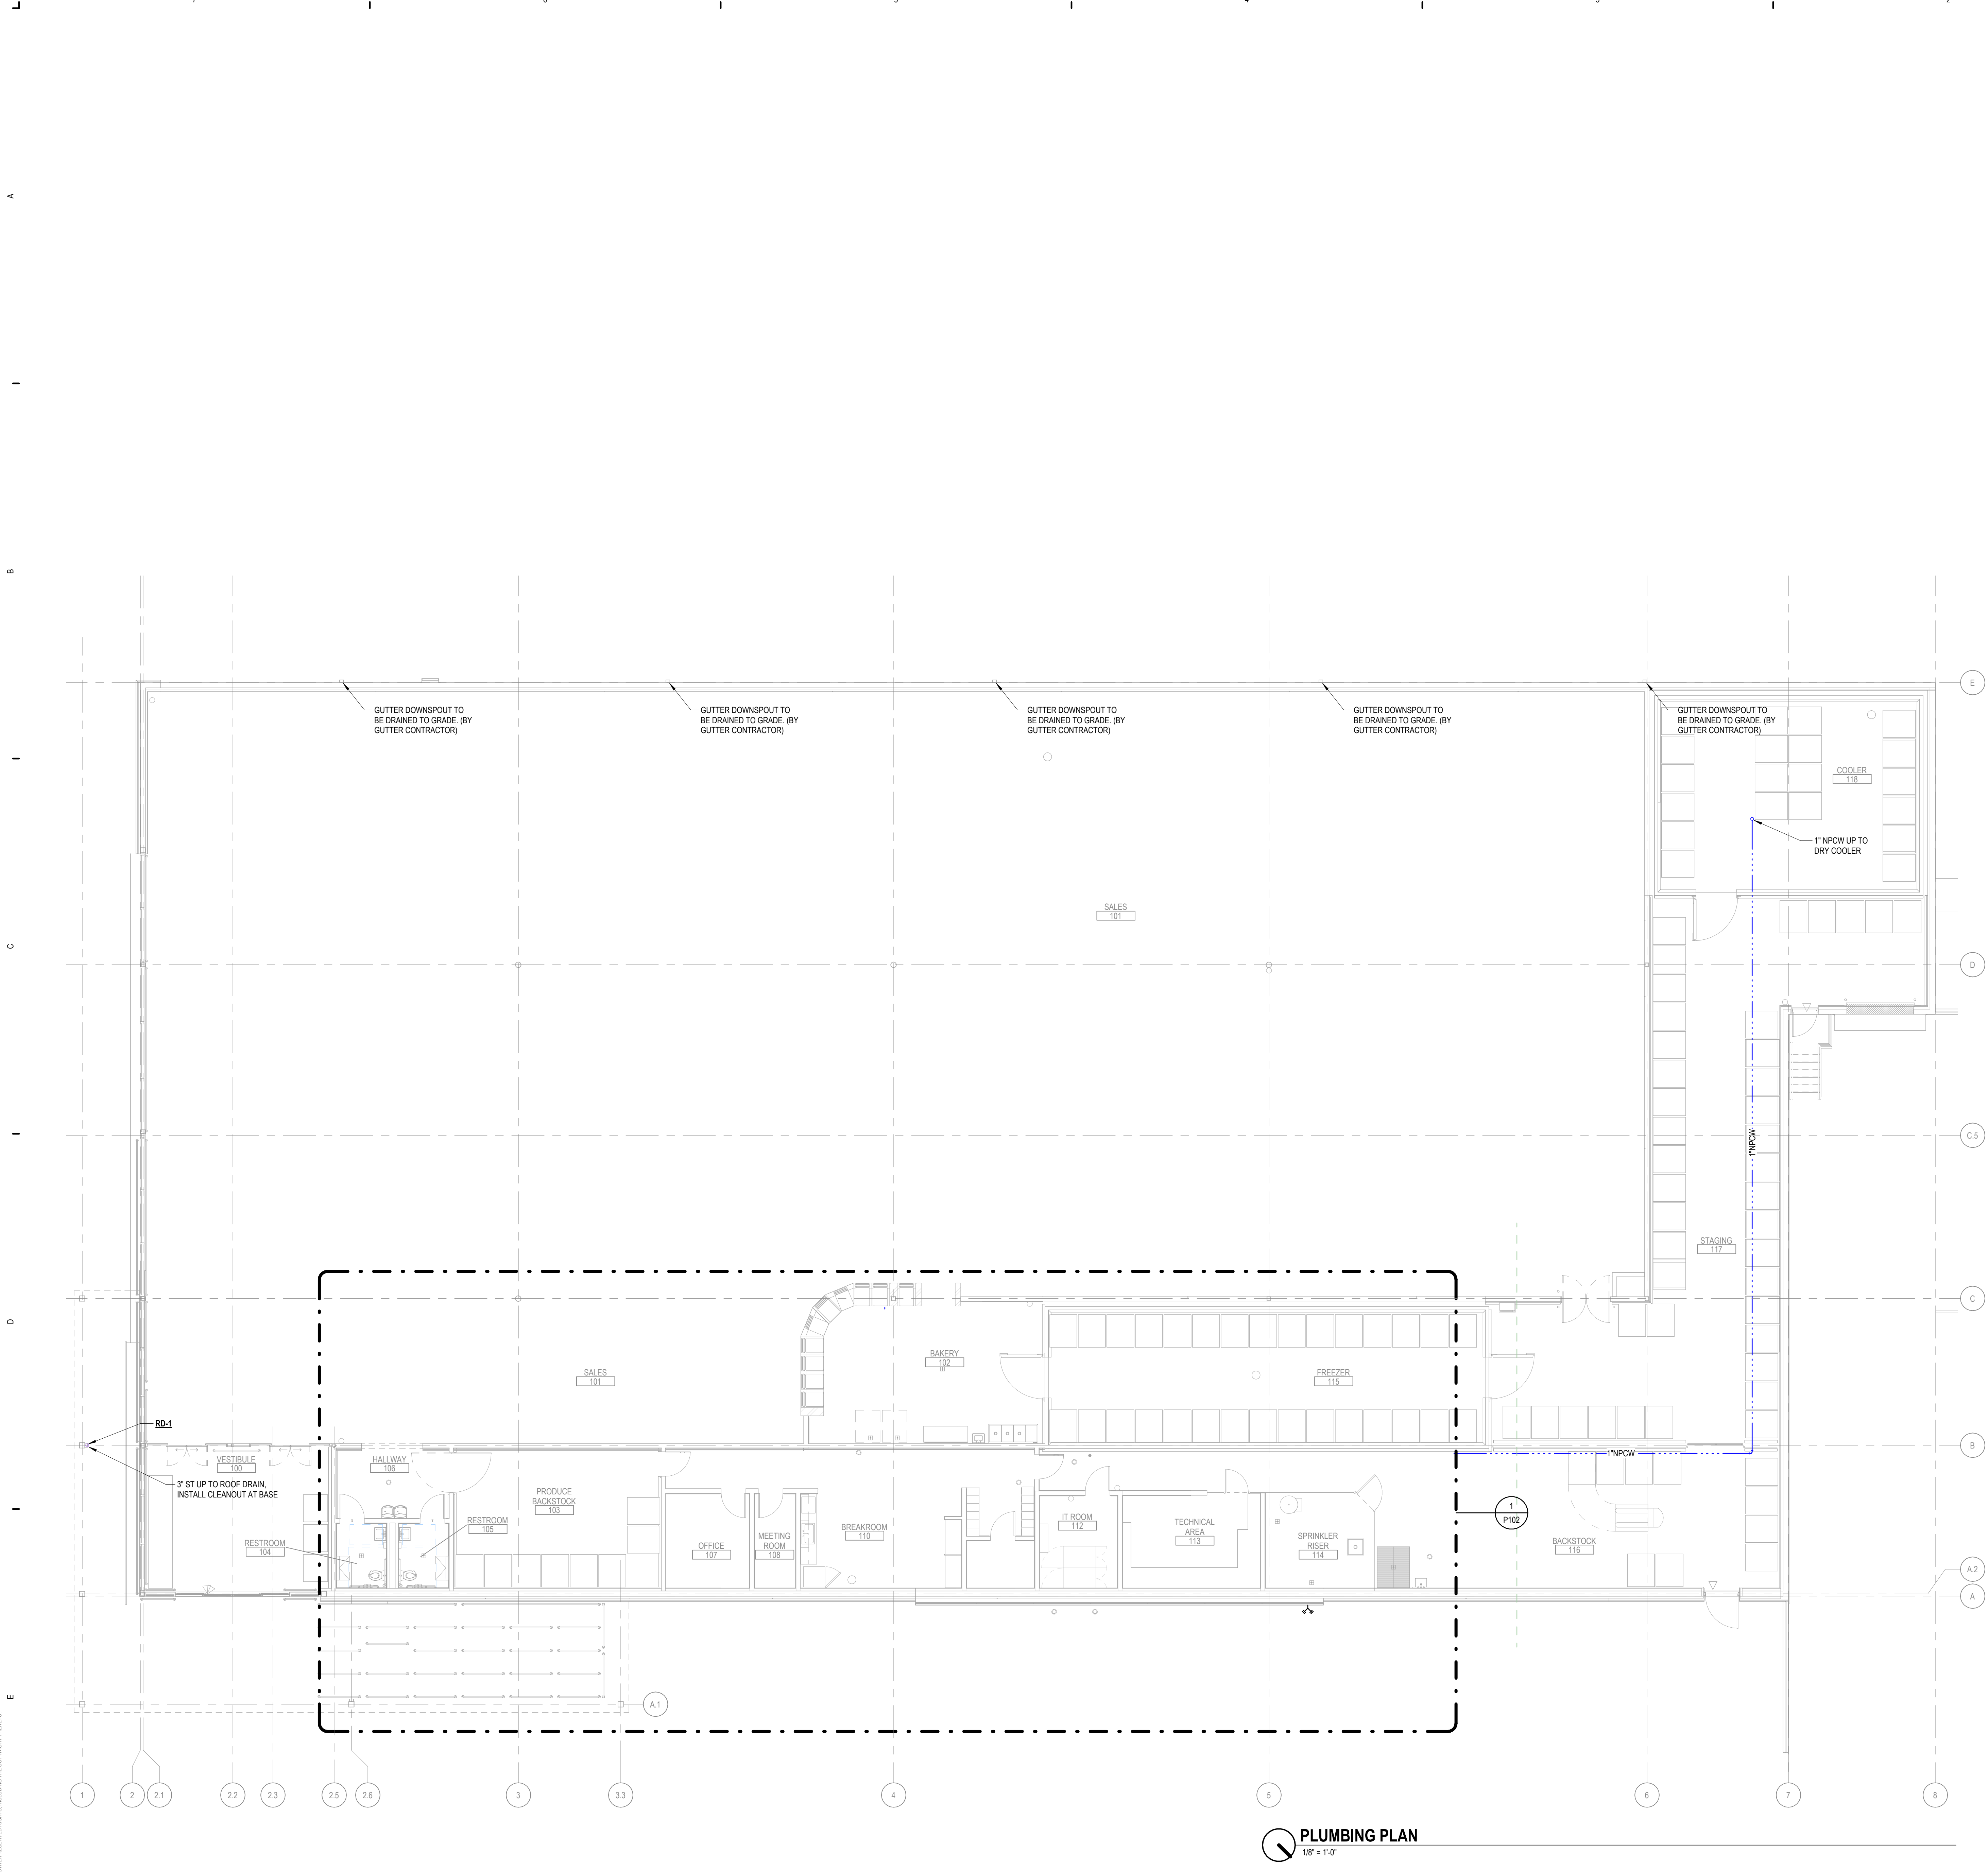

PLUMBING KEYNOTES

1. WATER SERVICE ENTRANCE LOCATION. REFER TO P600 FOR DETAIL. THE BUILDING DOMESTIC WATER DEMAND IS 47 GPM. THE DOMESTIC WATER METER AND BACKFLOW PREVENTION ASSEMBLY ARE LOCATED ON SITE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE AND INSTALL 4\"/>
3. PROVIDE AND INSTALL 1-1/4\"/>
4. EACH FLOOR DRAIN AND FLOOR SINK SHALL BE PROTECTED WITH A TRAP SEAL INSERT, AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
5. PROVIDE AND INSTALL 1-1/4\"/>
6. FLOOR SINK MOP BASIN. PROVIDE TRAPPED 3\"/>
7. PROVIDE AND INSTALL 1-1/2\"/>
8. INSTALL GARBAGE DISPOSAL BELOW SINK IN CABINET. INSTALL SANITARY AND VENT PIPING PER THE GARBAGE DISPOSAL'S WRITTEN INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
9. CONNECT 1/2\"/>
10. PROVIDE AND INSTALL 2\"/>
11. 1/2\"/>
12. EXTERIOR NON FREEZE WALL HYDRANT. ROUTE 3/4\"/>
13. ROUTE 3/4\"/>
14. 3/4\"/>
15. ELECTRIC WATER HEATER. MOUNT IN SAFE DRAIN PAN. PROVIDE 1\"/>
16. ROUTE 3/4\"/>
17. ROUTE 3/4\"/>
18. GREASE INTERCEPTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE GWINNETT COUNTY DEPARTMENT OF WATER RESOURCES AND A&J. REFER TO P600 FOR GREASE INTERCEPTOR DETAILS. GREASE INTERCEPTOR SHALL BE OF CONCRETE CONSTRUCTION PER THE COUNTY REQUIREMENTS. REFER TO CIVIL DRAWINGS FOR EXACT GREASE INTERCEPTOR LOCATION ON SITE.

LIDL US, LLC

LIDL 1517 NORCROSS, GA

ISSUANCE
11/07/2025 PERMIT CYCLE 1

PROJECT NUMBER
7650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN


PLUMBING PLAN
P101



5/20/2025 12:55:57 PM Autodesk Docs/79550191-Lid 1517 Norcross GA/79550191 Lid 1517 NORCROSS GA- MECH-104

ENL PLUMBING PLAN

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF PROGRESSIVE ARCHITECTURE & PLANNING, LLC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PROGRESSIVE ARCHITECTURE & PLANNING, LLC. ALL RIGHTS ARE RESERVED, INCLUDING THE COPYRIGHT THEREIN.

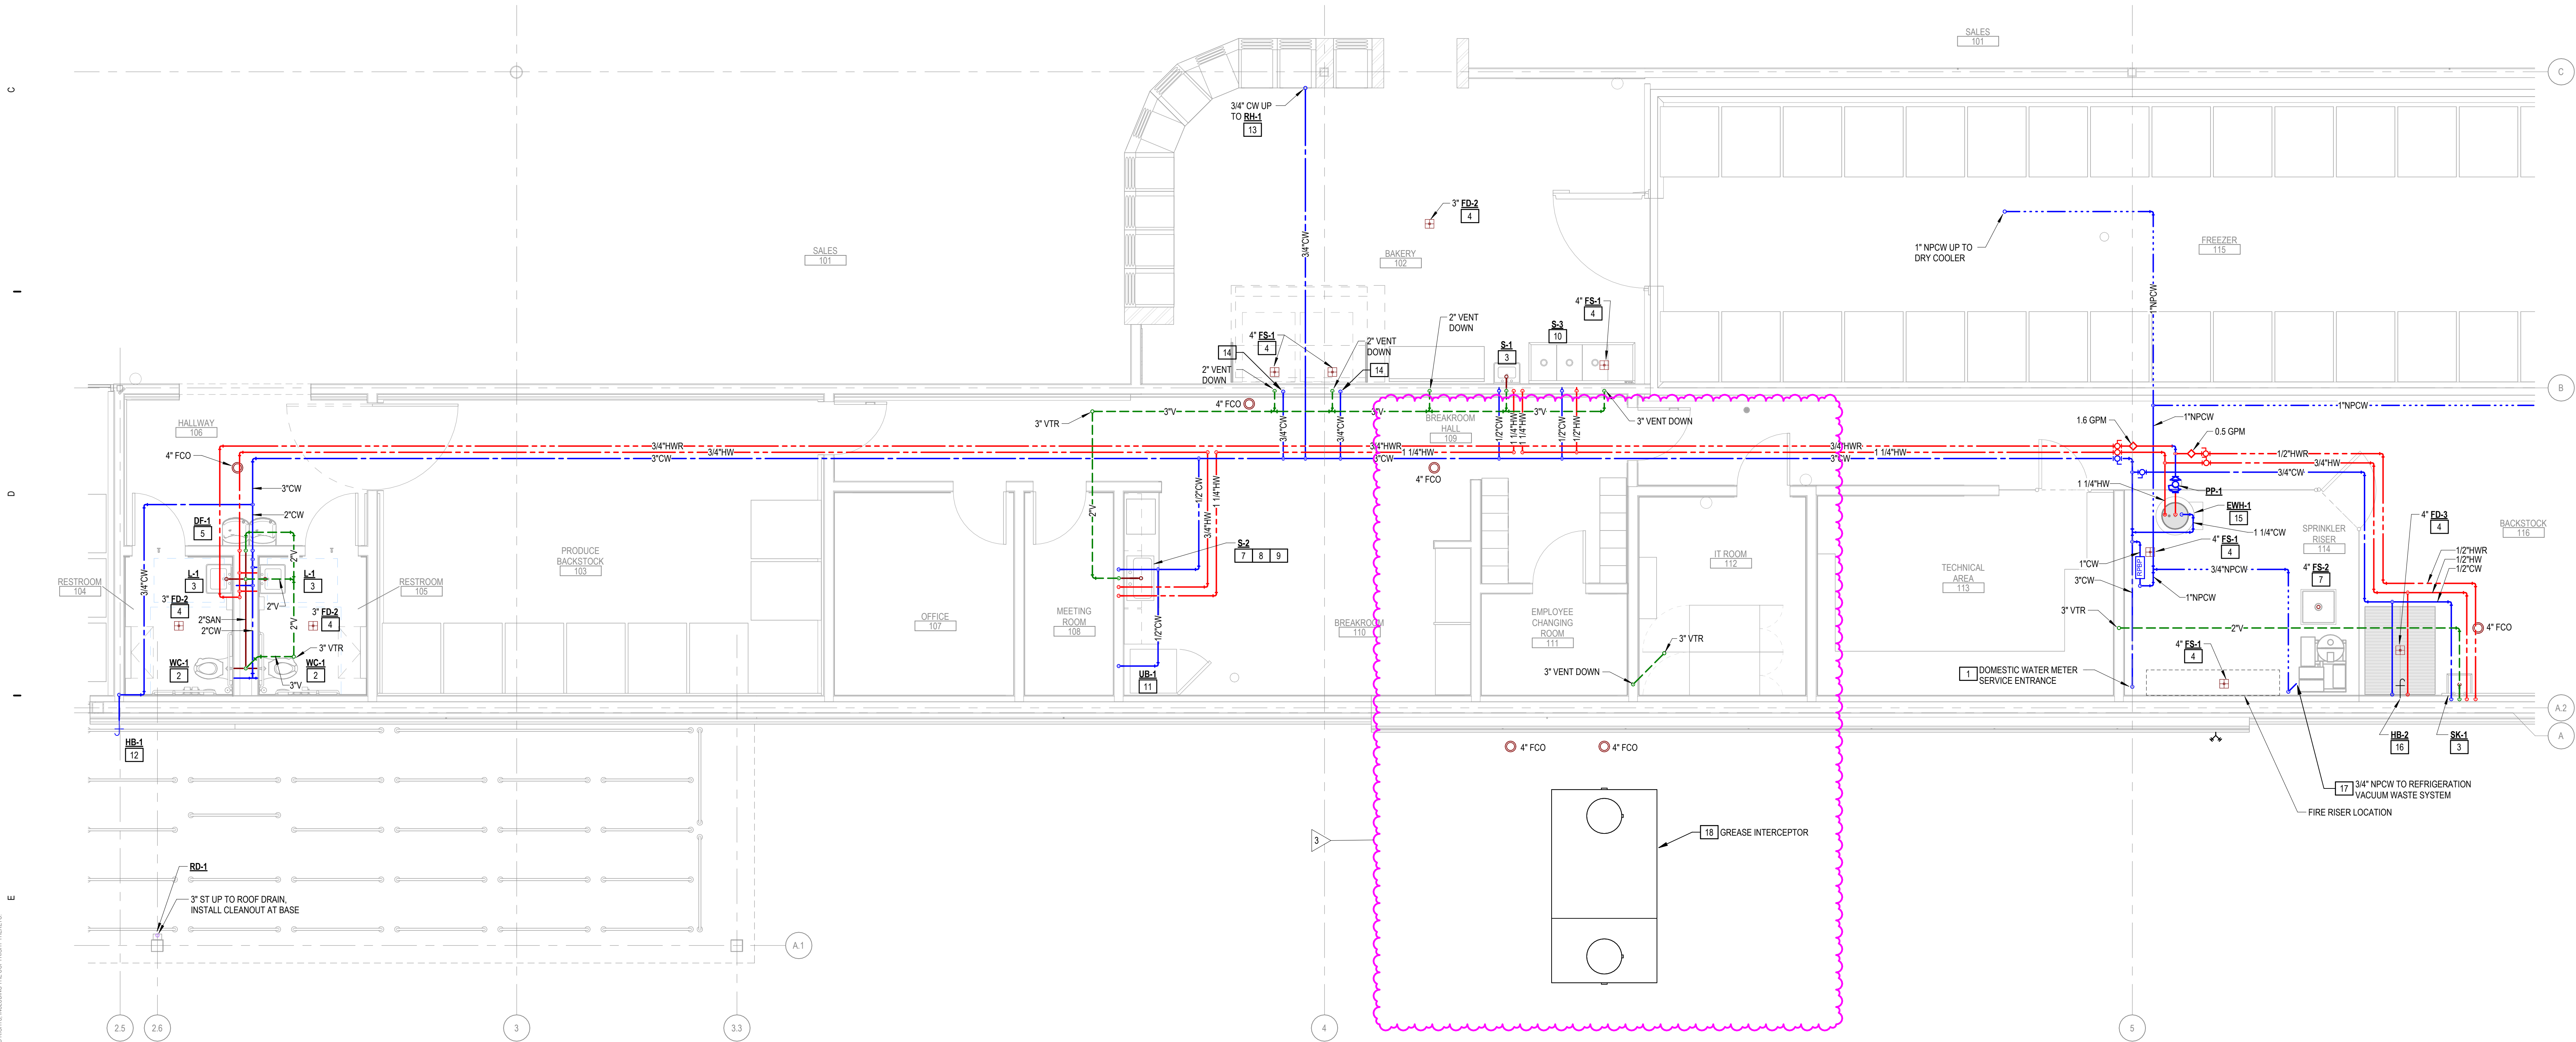

PLUMBING KEYNOTES

1. WATER SERVICE ENTRANCE LOCATION. REFER TO P600 FOR DETAIL. THE BUILDING DOMESTIC WATER DEMAND IS 47 GPM. THE DOMESTIC WATER METER AND BACKFLOW PREVENTION ASSEMBLY ARE LOCATED ON SITE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE AND INSTALL 4\"/>
3. PROVIDE AND INSTALL 1-1/4\"/>
4. EACH FLOOR DRAIN AND FLOOR SINK SHALL BE PROTECTED WITH A TRAP SEAL INSERT, AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
5. PROVIDE AND INSTALL 1-1/4\"/>
6. FLOOR SINK W/OP BASIN. PROVIDE TRAPPED 3\"/>
7. PROVIDE AND INSTALL 1-1/2\"/>
8. INSTALL GARBAGE DISPOSAL BELOW SINK IN CABINET. INSTALL SANITARY AND VENT PIPING PER THE GARBAGE DISPOSAL'S WRITTEN INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
9. CONNECT 1/2\"/>
10. PROVIDE AND INSTALL 2\"/>
11. 1/2\"/>
12. EXTERIOR NON FREEZE WALL HYDRANT. ROUTE 3/4\"/>
13. ROUTE 3/4\"/>
14. 3/4\"/>
15. ELECTRIC WATER HEATER. MOUNT IN SAFE DRAIN PAN. PROVIDE 1\"/>
16. ROUTE 3/4\"/>
17. ROUTE 3/4\"/>
18. GREASE INTERCEPTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE GWINNETT COUNTY DEPARTMENT OF WATER RESOURCES AND AWW. REFER TO P600 FOR GREASE INTERCEPTOR DETAILS. GREASE INTERCEPTOR SHALL BE OF CONCRETE CONSTRUCTION PER THE COUNTY REQUIREMENTS. REFER TO CIVIL DRAWINGS FOR EXACT GREASE INTERCEPTOR LOCATION ON SITE.

1 ENLARGED PLUMBING PLAN
1/4\"/>

LIDL US, LLC

LIDL 1517 NORCROSS, GA

ISSUANCE
1 11/07/2025 PERMIT CYCLE 1
2 12/18/2025 PERMIT CYCLE 2
3 05/28/2026 CDD 01

PROJECT NUMBER
79550191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN

ENLARGED
PLUMBING PLAN
P102



