


NOTE: This is a standard symbol list and not all items listed may be used

SECURITY SYMBOL LEGEND		
SYMBOL	DESCRIPTION	HEIGHT TO MIDDLE OF DEVICE (U.N.O.)
	DOOR CONTACT, TYPE AS NOTED	
	CREDENTIA L READER, TYPE AS NOTED	46"
	KEYPAD, TYPE AS NOTED	46"
	ELECTRIFIED INTEGRATED CREDENTIA L READER DOOR HARDWARE, TYPE AS NOTED	
	ELECTRIC LATCH RETRACTION, TYPE AS NOTED	
	ELECTRIC STRIKE, TYPE AS NOTED	
	DURESS ALARM BUTTON, TYPE AS NOTED	
	WALL MOUNTED GLASS BREAK	90"
	CEILING MOUNTED GLASS BREAK	
	ELECTRIC TRANSFER / HINGE, TYPE AS NOTED	
	MAGNETIC LOCK, TYPE AS NOTED	
	WALL MOUNTED REQUEST TO EXIT, TYPE AS NOTED	90"
	CEILING MOUNTED REQUEST TO EXIT, TYPE AS NOTED	
	WALL MOUNTED MOTION DETECTOR, TYPE AS NOTED	90"
	CEILING MOUNTED MOTION DETECTOR, TYPE AS NOTED	
	WALL MOUNTED SURVEILLANCE CAMERA, TYPE AS NOTED	90"
	WALL MOUNTED SURVEILLANCE CAMERA - PAN-TILT-ZOOM, TYPE AS NOTED	90"
	EXTERIOR, CORNER MOUNTED SURVEILLANCE CAMERA - PAN-TILT-ZOOM, TYPE AS NOTED	144"
	EXTERIOR, CORNER MOUNTED SURVEILLANCE CAMERA, TYPE AS NOTED	144"
	CEILING MOUNTED SURVEILLANCE CAMERA, TYPE AS NOTED	
	CEILING MOUNTED SURVEILLANCE CAMERA - PAN-TILT-ZOOM, TYPE AS NOTED	
	EMERGENCY CALL STATION, MOUNTING AND TYPE AS NOTED	46"
	SURVEILLANCE PREVIEW MONITOR	

AV	BLACK
SECURITY	YELLOW
IT	BLUE
FIRE ALARM	RED

[illegible]

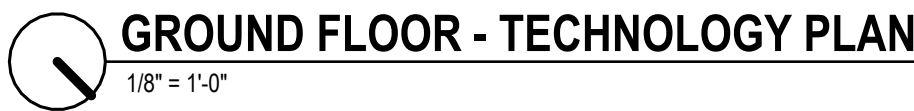

16. SERIAL DATA CABLEING DEDICATED TO ROOFTOP DRY COOLER. PROVIDE CATEGORY 6 CABLE (PANDUIT P/N: PFF5504IG-UV) FOR CONNECTION TO XWEB CENTRALIZED REFRIGERATION MONITORING SYSTEM. LEAVE 36" SERVICE LOOP AT JUNCTION BOX FOR DEVICE TO BE TERMINATED BY REFRIGERATION CONSULTANT. LABEL AT EACH END OF THE CABLE WITH THE TAG IDENTIFIED FOR EACH DEVICE.
17. PROVIDE A CATEGORY 6 CABLE (PANDUIT P/N: PFF5504IG-UV) ROUTED BETWEEN REFRIGERATOR/FREEZER/COOLER CONTROL POINTS LEAVING A 36" SERVICE LOOP FOR TERMINATION BY REFRIGERATION CONSULTANT.
18. ROUTE REFRIGERATION CABLEING THROUGH ACCESSIBLE WIRE CABLE BASKET TRAY. DO NOT ROUTE COOLER TO SALES FLOOR.
19. REFER TO SHEET E603, DETAIL #2 FOR CONDUIT TRENCH DETAIL.
20. DATA OUTLET DEDICATED TO SELF-CHECKOUT LANE. OUTLET RECESSED INTO WALL - PROVIDE MINIMUM 1" DIA EMPTY CONDUIT WITH PLUG STRING FROM OUTLET TO CABLE TRAY ABOVE.
21. DATA OUTLET BEHIND MILL WORK FOR SIGNAL BOOSTER. RSC CONDUIT TO FINISH INSIDE OF BAKERY MILLWORK.
22. ZONE 1 - CHECKOUTS. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
23. ZONE 2 - SALES. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
24. ZONE 3 - BOH. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
25. ZONE 4 - BREAK ROOM. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
26. PROVIDE JUNCTION BOX FOR VOCOVO ACCESS POINT RECEIVER WITH 18-2 CABLE TO RACK 1B VIA CABLE TRAY.
27. HAND HOLE.
28. DATA DROP FOR SECURITY DEVICE.
29. ABOVE CEILING DATA DROP FOR SECURITY DEVICE.

PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. ELYA
DRAWN BY
M. GONZALEZ
CHECKED BY
D. ELYA








1. WHERE LOW VOLTAGE AND LINE VOLTAGE POWER INTERSECT, ELECTRICAL CONTRACTOR TO PROVIDE BARRIER BRIDGE IN A MANNER THAT LOW AND HIGH VOLTAGE ARE KEPT SEPARATED. REFER TO DETAIL 3, SHEET E604.
2. ADD CABLE TRAY LINERS FOR CUSTOMER FACING SPACES.
3. EZ PATH THROUGH CEILING.
4. CABLE WIREWAY VERTICAL TRANSITION. REFER TO DETAIL 4, SHEET E604 FOR CABLE WIREWAY VERTICAL TRANSITION DETAIL.
5. CONDUIT WITH PULL STRING RUN BELOW FLOOR BETWEEN ELECTRONIC ALARM SYSTEM (EAS) PEDESTALS TO STUB UP LOCATIONS PRIOR TO SLAB POUR.
6. CONDUIT WITH PULL STRING RUN BETWEEN ELECTRONIC ALARM SYSTEM (EAS) PEDESTAL AND POWER SUPPLY FROM STUB UP LOCATION PRIOR TO SLAB POUR.
7. GENERAL LOCATION OF STUB UP IN FLOOR. EXACT LOCATION DETERMINED BY GC, HUBBELL "SystemOne" FLUSH FLOOR BOX WITH COVER TO BE INSTALLED IN CONCRETE AS PROVISION FOR FUTURE EAS PEDESTAL LOCATIONS.
8. CABLE TRAY TO BE INSTALLED CLEAR OF AGGREGATES REQUIRED FOR COLDROOMS.
9. ADD RELAY FOR DOORBELL, ROUTE TO RACK 1B.

A. REFER TO SHEET T000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.



B. EC TO LABEL OR SPRAY INSIDE JUNCTION BOXES TO IDENTIFY PURPOSE OF THE JUNCTION BOX.

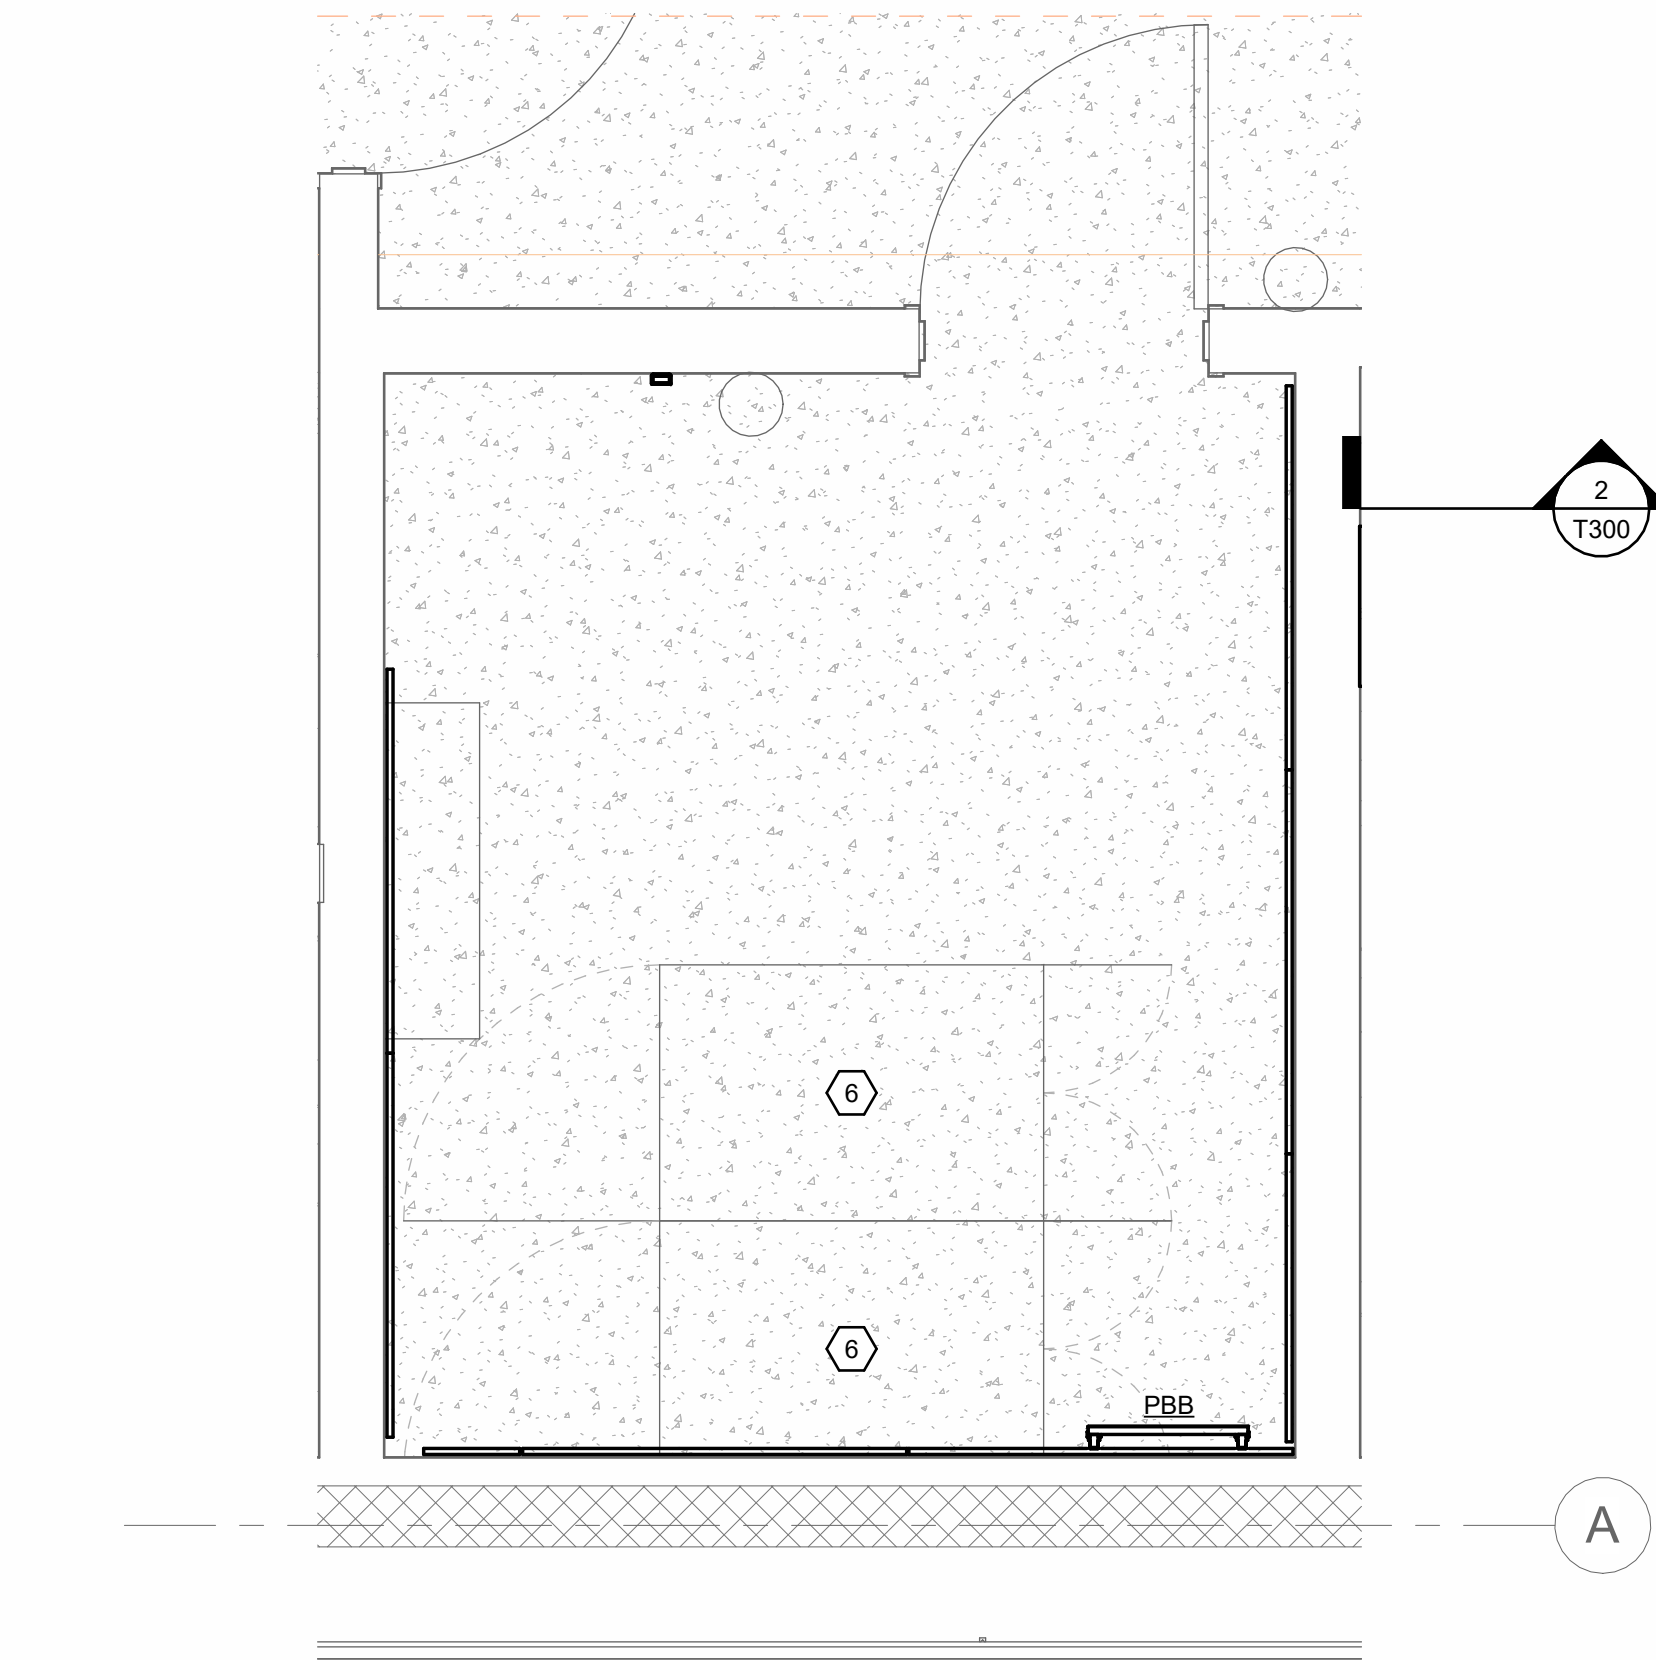


3 IT ROOM - ENLARGED TECHNOLOGY PLAN

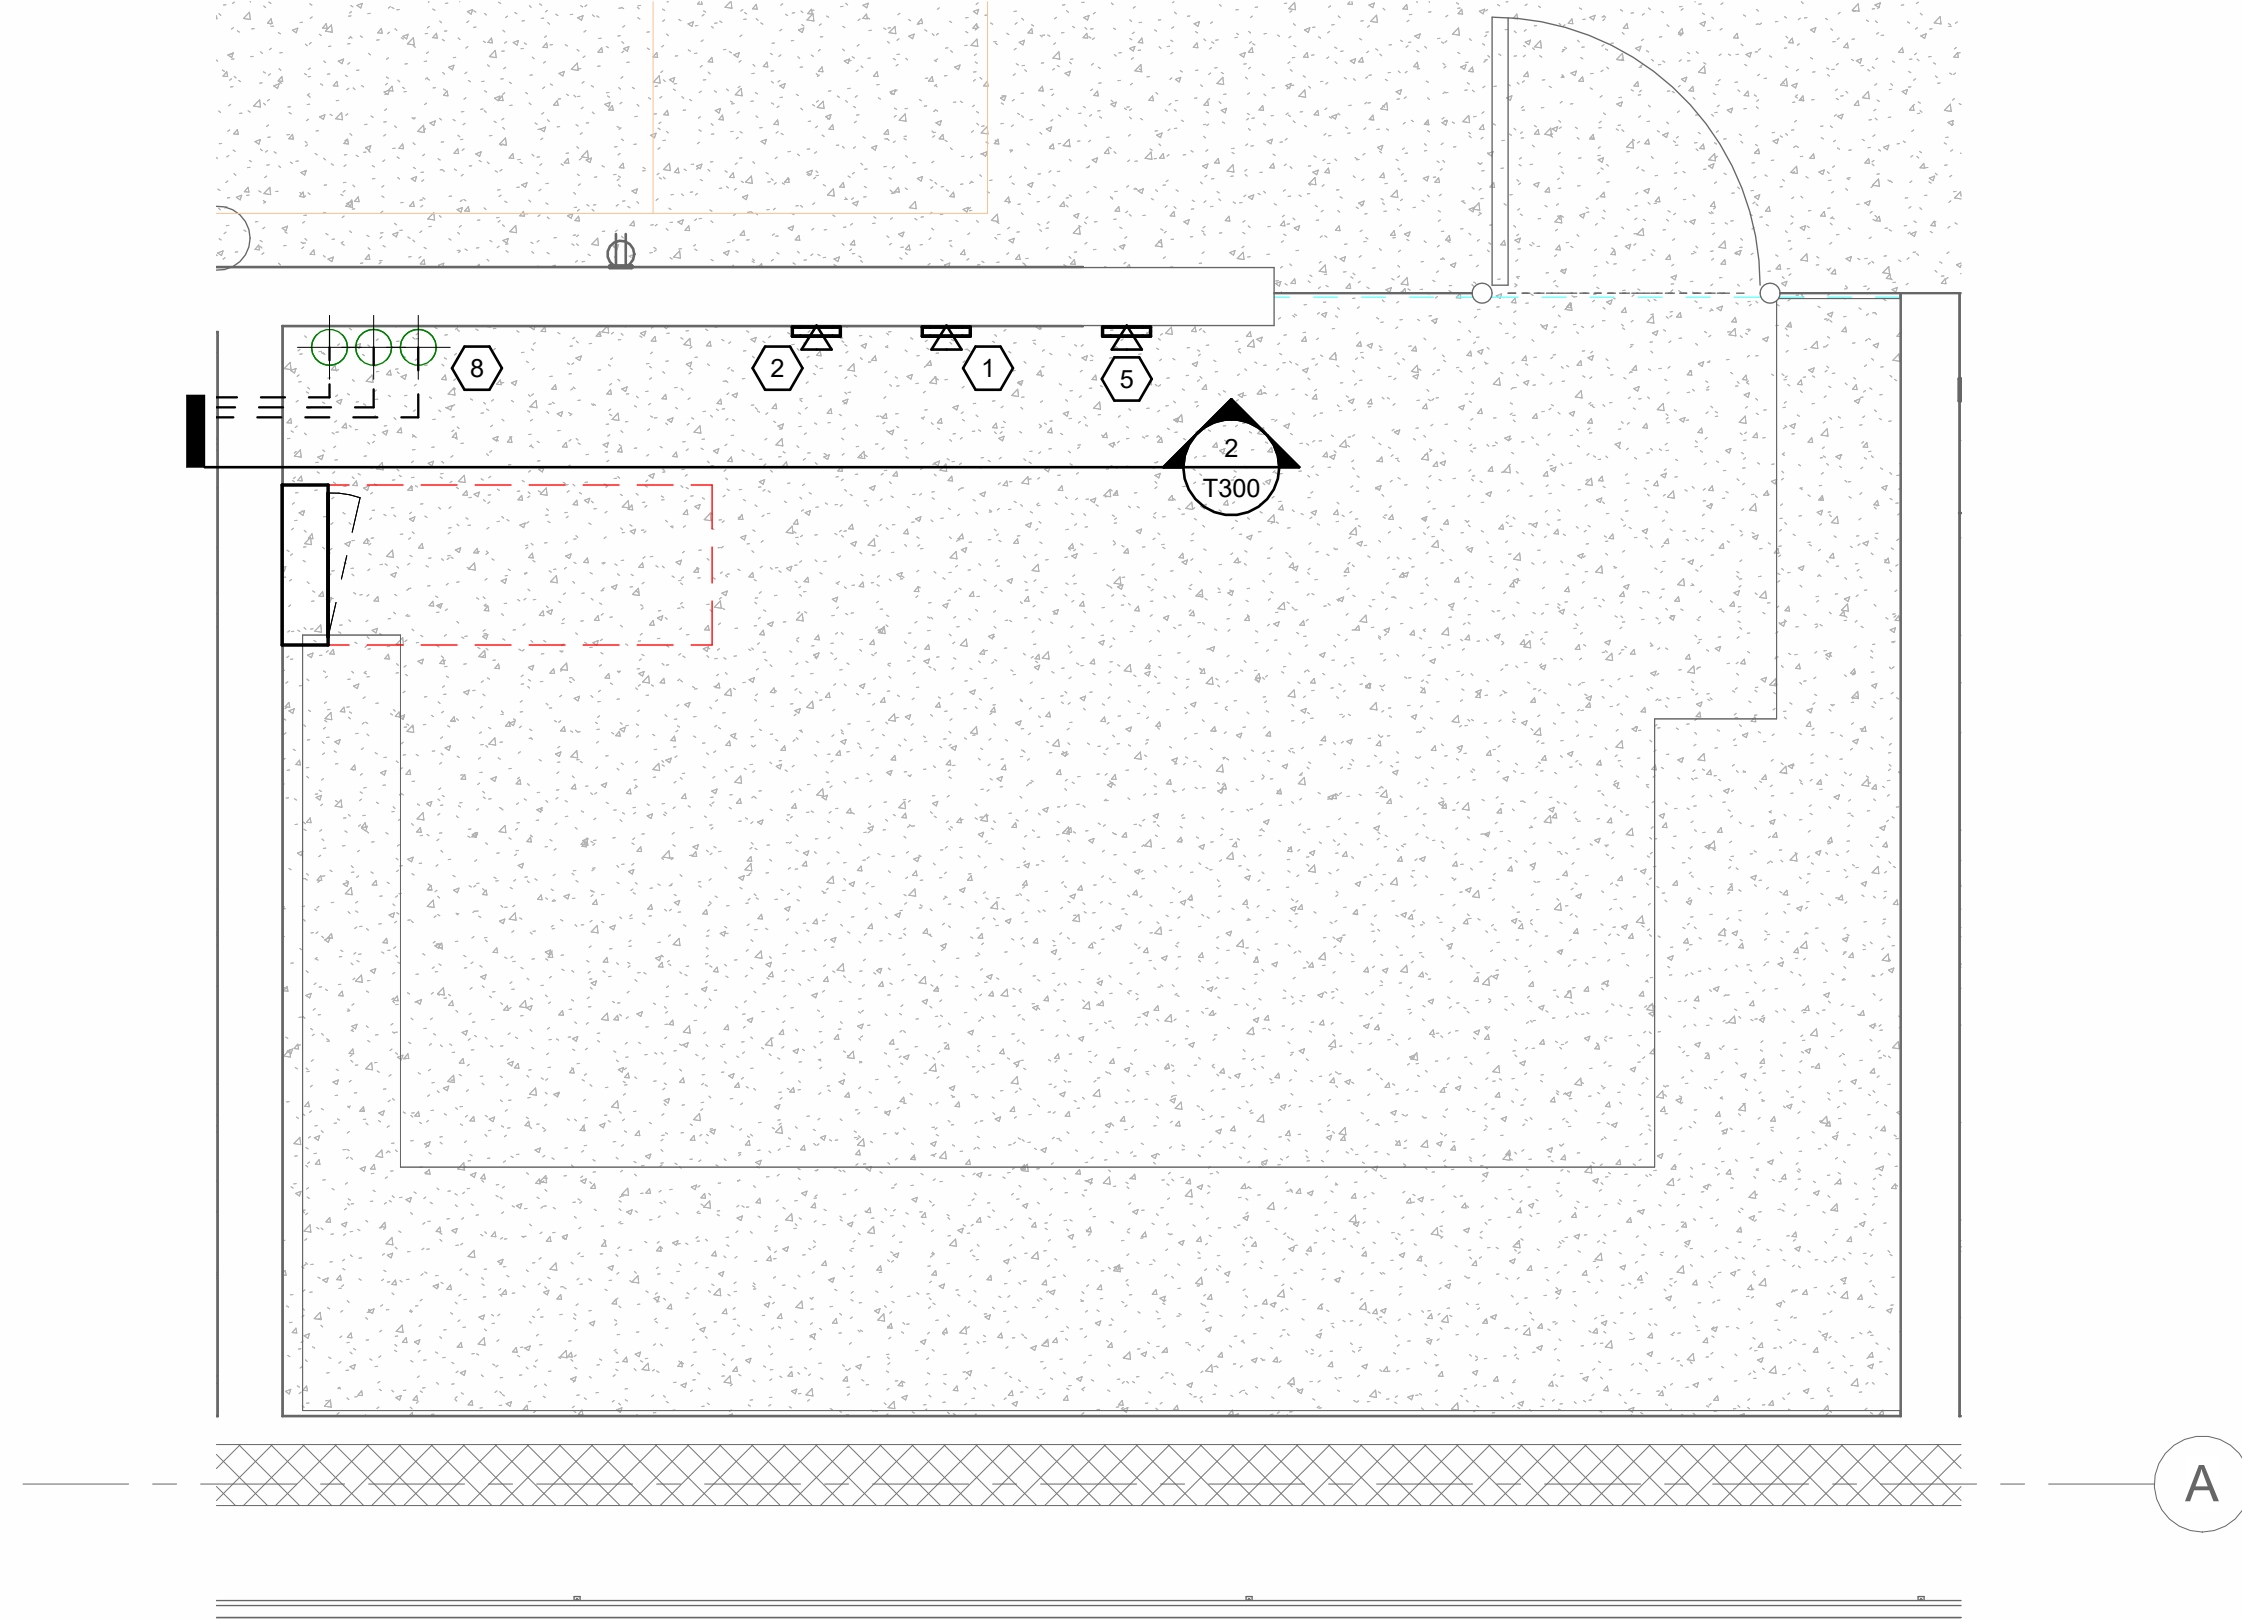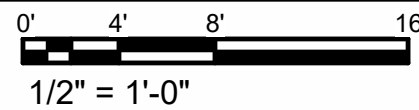

1 TECHNICAL ROOM - ENLARGED TECHNOLOGY PLAN

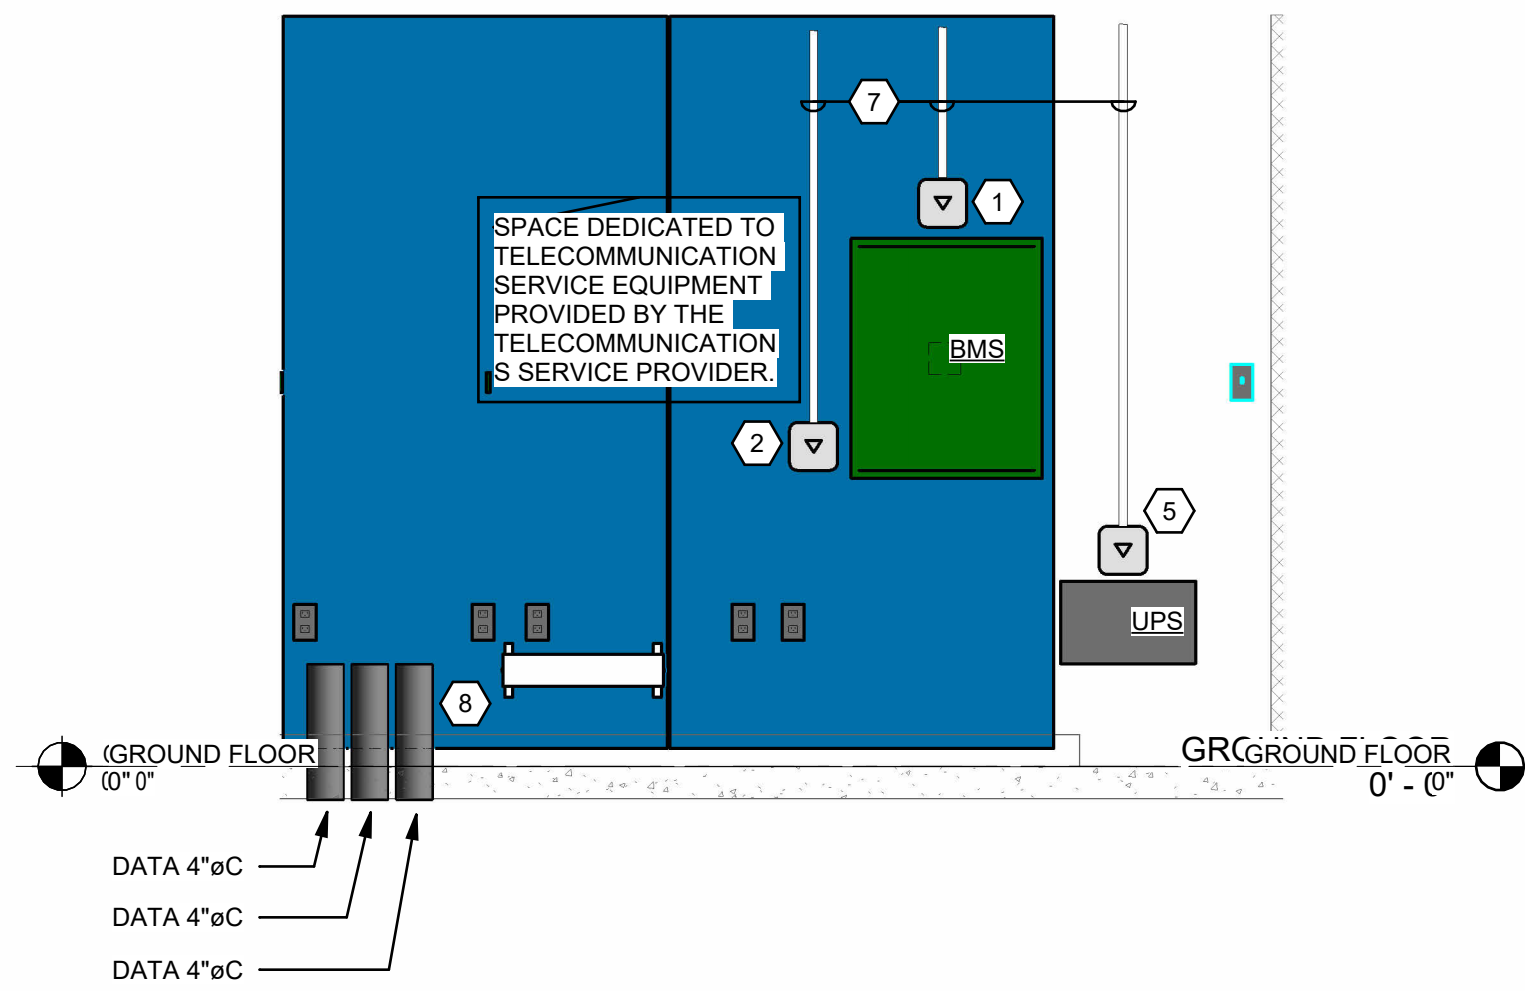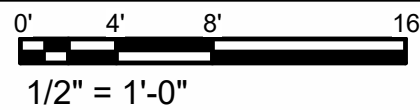

2 TECHNICAL ROOM - PLAN EAST WALL ELEVATION

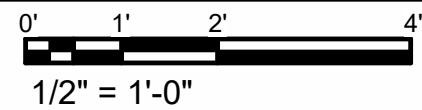


GENERAL SHEET NOTES

- A. REFER TO SHEET T000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.

SHEET KEYNOTES

- 4-PORT DATA OUTLET MOUNTED ABOVE DEDICATED BMS CONTROL PANEL.
- DATA DEDICATED TO INTRUSION DETECTION CONTROL PANEL.
- NOT USED.
- NOT USED.
- DATA OUTLET DEDICATED TO IT UPS.
- IT RACKS PROVIDED BY OWNER.
- 1" CONDUIT TO TECHNICAL ROOM WIRE MESH CABLE TRAY.
- 4" DATA CONDUIT ROUTED FROM BELOW THE SLAB, ROUTE FROM TELEDATA ENTRANCE TO TECHNICAL ROOM.

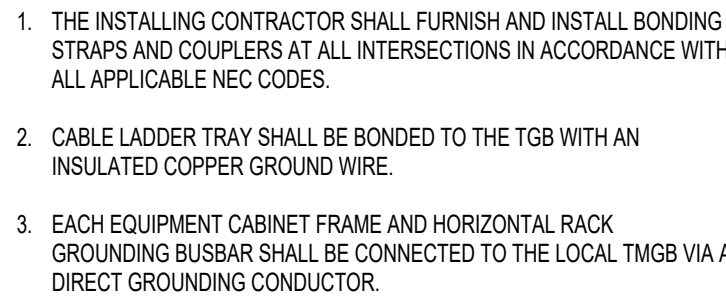

NTS

- NOTES:**
1. COORDINATE THE EXACT LOCATION OF THE DATA OUTLET AND ELECTRICAL RECEPTACLE WITH THE BMS CONTRACTOR PRIOR TO ROUGH-IN.
 2. REFER TO BMS PLANS AND DETAILS FOR THE EXACT PANEL AND EQUIPMENT CONFIGURATION AND DIMENSIONS.
 3. DATA CABLING SHALL CONNECT TO LIDL DATA NETWORK.

NTS



FRONT ELEVATION

- NOTES:**
1. COORDINATE THE EXACT LOCATION OF THE DATA OUTLET AND ELECTRICAL RECEPTACLE WITH THE FIRE ALARM CONTRACTOR PRIOR TO ROUGH-IN.
 2. REFER TO FIRE ALARM PLANS AND DETAILS FOR THE EXACT PANEL AND EQUIPMENT CONFIGURATION AND DIMENSIONS.
 3. DATA CABLING SHALL BE PROVIDED BY A LIDL PROVIDED CONTRACTOR.

NTS

NTS

PROGRESSIVE
COMPANIES

PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING I, LLC

Charlotte, NC | Detroit, MI | Grand Rapids, MI
wearprogressive.com



LIDL US, LLC
LIDL 1517 NORCROSS, GA

4990 JIMMY CARTER BLVD. NORCROSS, GA 30093

ISSUANCE
1 12/18/2025 PERMIT CYCLE 2

PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. ELYA
DRAWN BY
M. GONZALEZ
CHECKED BY
D. ELYA

TECHNOLOGY DETAILS

T600