




SHEET KEYNOTES


3. PROVIDE NEMA L21-20R RECEPTACLES FOR RL-3W FREEZER UNITS, ID6SU-8 MEDIUM TEMP CASES & ID6SU-12 REFRIGERATION UNITS. ELECTRICAL CONTRACTOR TO COORDINATE HEIGHT AND FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
2. PROVIDE NEMA L21-30R RECEPTACLES FOR RL-5W UNITS. ELECTRICAL CONTRACTOR TO COORDINATE HEIGHT AND FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
3. PROVIDE NEMA 5-15R 120V RECEPTACLES FOR PALLET JACKS. ALL RECEPTACLE BACKBOXES SHALL BE RECESSED MOUNTED WITHIN WALL. CONDUIT SHALL BE CONCEALED WITHIN WALL.
4. BUG ZAPPER RECEPTACLE.
5. RECEPTACLE TO BE RECESSED IN BRICK.
6. PROVIDE HUBBELL CS8369N RECEPTACLE FOR BALER.
7. DUPLEX X RECEPTACLE FOR UNDER SHELF LIGHTING. MOUNT RECEPTACLE IN POWER POLE AFTER LIDL FM TEAM HAS COMPLETED INSTALLATION OF SHELVING AND MOUNT 1/2" ABOVE TOP OF SHELF. ARCHITECTURAL ELEVATIONS FOR EXACT LOCATION AND MOUNTING HEIGHTS. PROVIDE WIREMOLD WHITE POWERPOLE 250TC WITH EXTENSIONS AS REQUIRED.
8. POWER FOR LED UNDERSHELF LIGHTING, 120V 1-PHASE. PROVIDE RECEPTACLE IN JUNCTION BOX SURFACE MOUNTED TO THE FLOOR. ROUTE CIRCUIT THROUGH LIGHTING CONTRACTOR. REFER TO SHEET E-203 FOR LIGHTING CONTRACTOR DETAILS. SEE ARCHITECTURAL ELEVATIONS FOR EXACT LOCATION AND MOUNTING HEIGHTS. PROVIDE WIREMOLD WHITE POWERPOLE 250TC WITH EXTENSIONS AS REQUIRED.
9. JUNCTION BOX FOR POWER TO ELECTRIC MOTOR FOR THE SHADES CONCEALED ON TOP OF STRUCTURE. INSTALL 3/4" CONDUIT FOR POWER CONCEALED WITHIN THE MULLIONS AND STRUCTURE. REFER TO SHEET A404 FOR EXACT LOCATION AND ELEVATION.
10. POWER FOR MAIN ENTRANCE DOORS. JUNCTION BOX TO BE CONCEALED.
11. PROVIDE RECEPTACLE FOR X-WEB.
12. LOCATION OF FAAP. REFER TO ARCHITECTURAL ELEVATIONS FOR EXACT ELEVATION AND LOCATION.
13. PROVIDE HUBBLE CS836C OR EQUIVALENT 50A 125V UL/CSA RECEPTACLE FOR DDX53FRW REFRIGERATION UNIT. ELECTRICAL CONTRACTOR TO COORDINATE HEIGHT AND FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
14. POWER FOR HAND DRYER. MOUNT AT 3'-0" AFF.
15. CONTRACTOR TO PROVIDE AND INSTALL L15-30R RECEPTACLE IN BACK BOX AND MATCHING L15-30P CORD CAP. AFFIX BACK BOX TO METAL STUDS. REFER TO ELECTRICAL ELEVATIONS FOR FINAL LOCATION AND ELEVATIONS PRIOR TO ROUGH IN. CONTRACTOR TO CONFIRM CLOCKWISE PHASE ROTATION PRIOR TO WIRING/INSTALLATION AND MAKE FINAL CONNECTION BETWEEN RECEPTACLES AND AGGREGATE UNITS.

- ISSUANCE**
- | | | |
|---|------------|----------------|
| 1 | 12/18/2025 | PERMIT CYCLE 2 |
| 2 | 01/14/2026 | PERMIT CYCLE 3 |
| 3 | 05/28/2026 | CCD 01 |
| 4 | 07/30/2026 | CCD 02 |
- PROJECT NUMBER**
79650191
- PROJECT MANAGER**
A. HENGSTEBECK
- PROFESSIONAL**
D. HERSCHER
- DRAWN BY**
M. GONZALEZ
- CHECKED BY**
D. HERSCHER

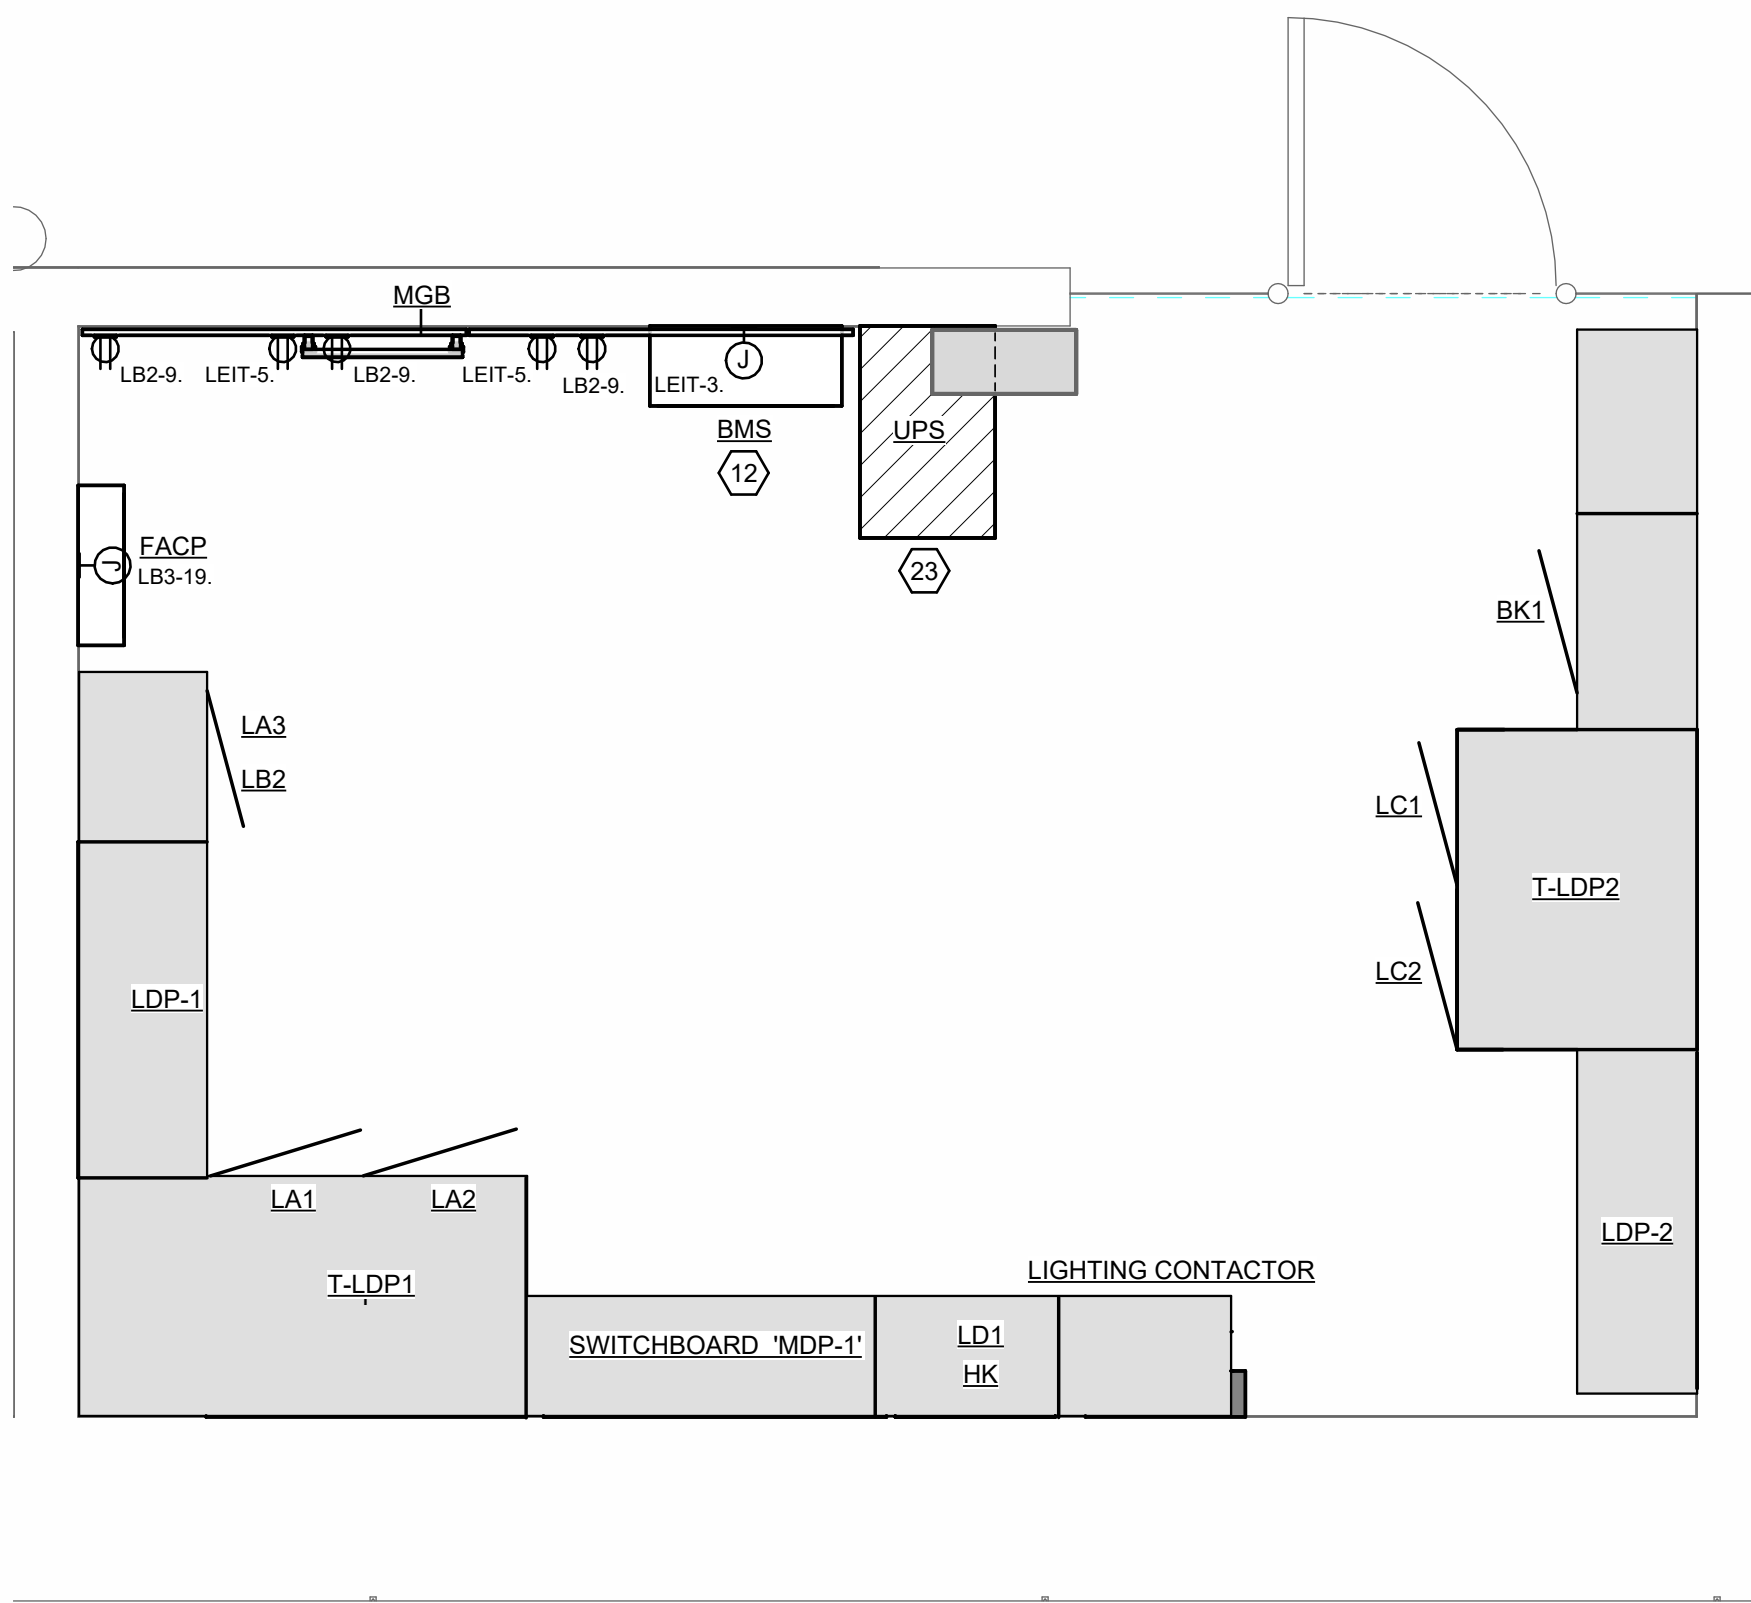


1 TECHNICAL ROOM

0' 4' 8' 16'
1/2" = 1'-0"

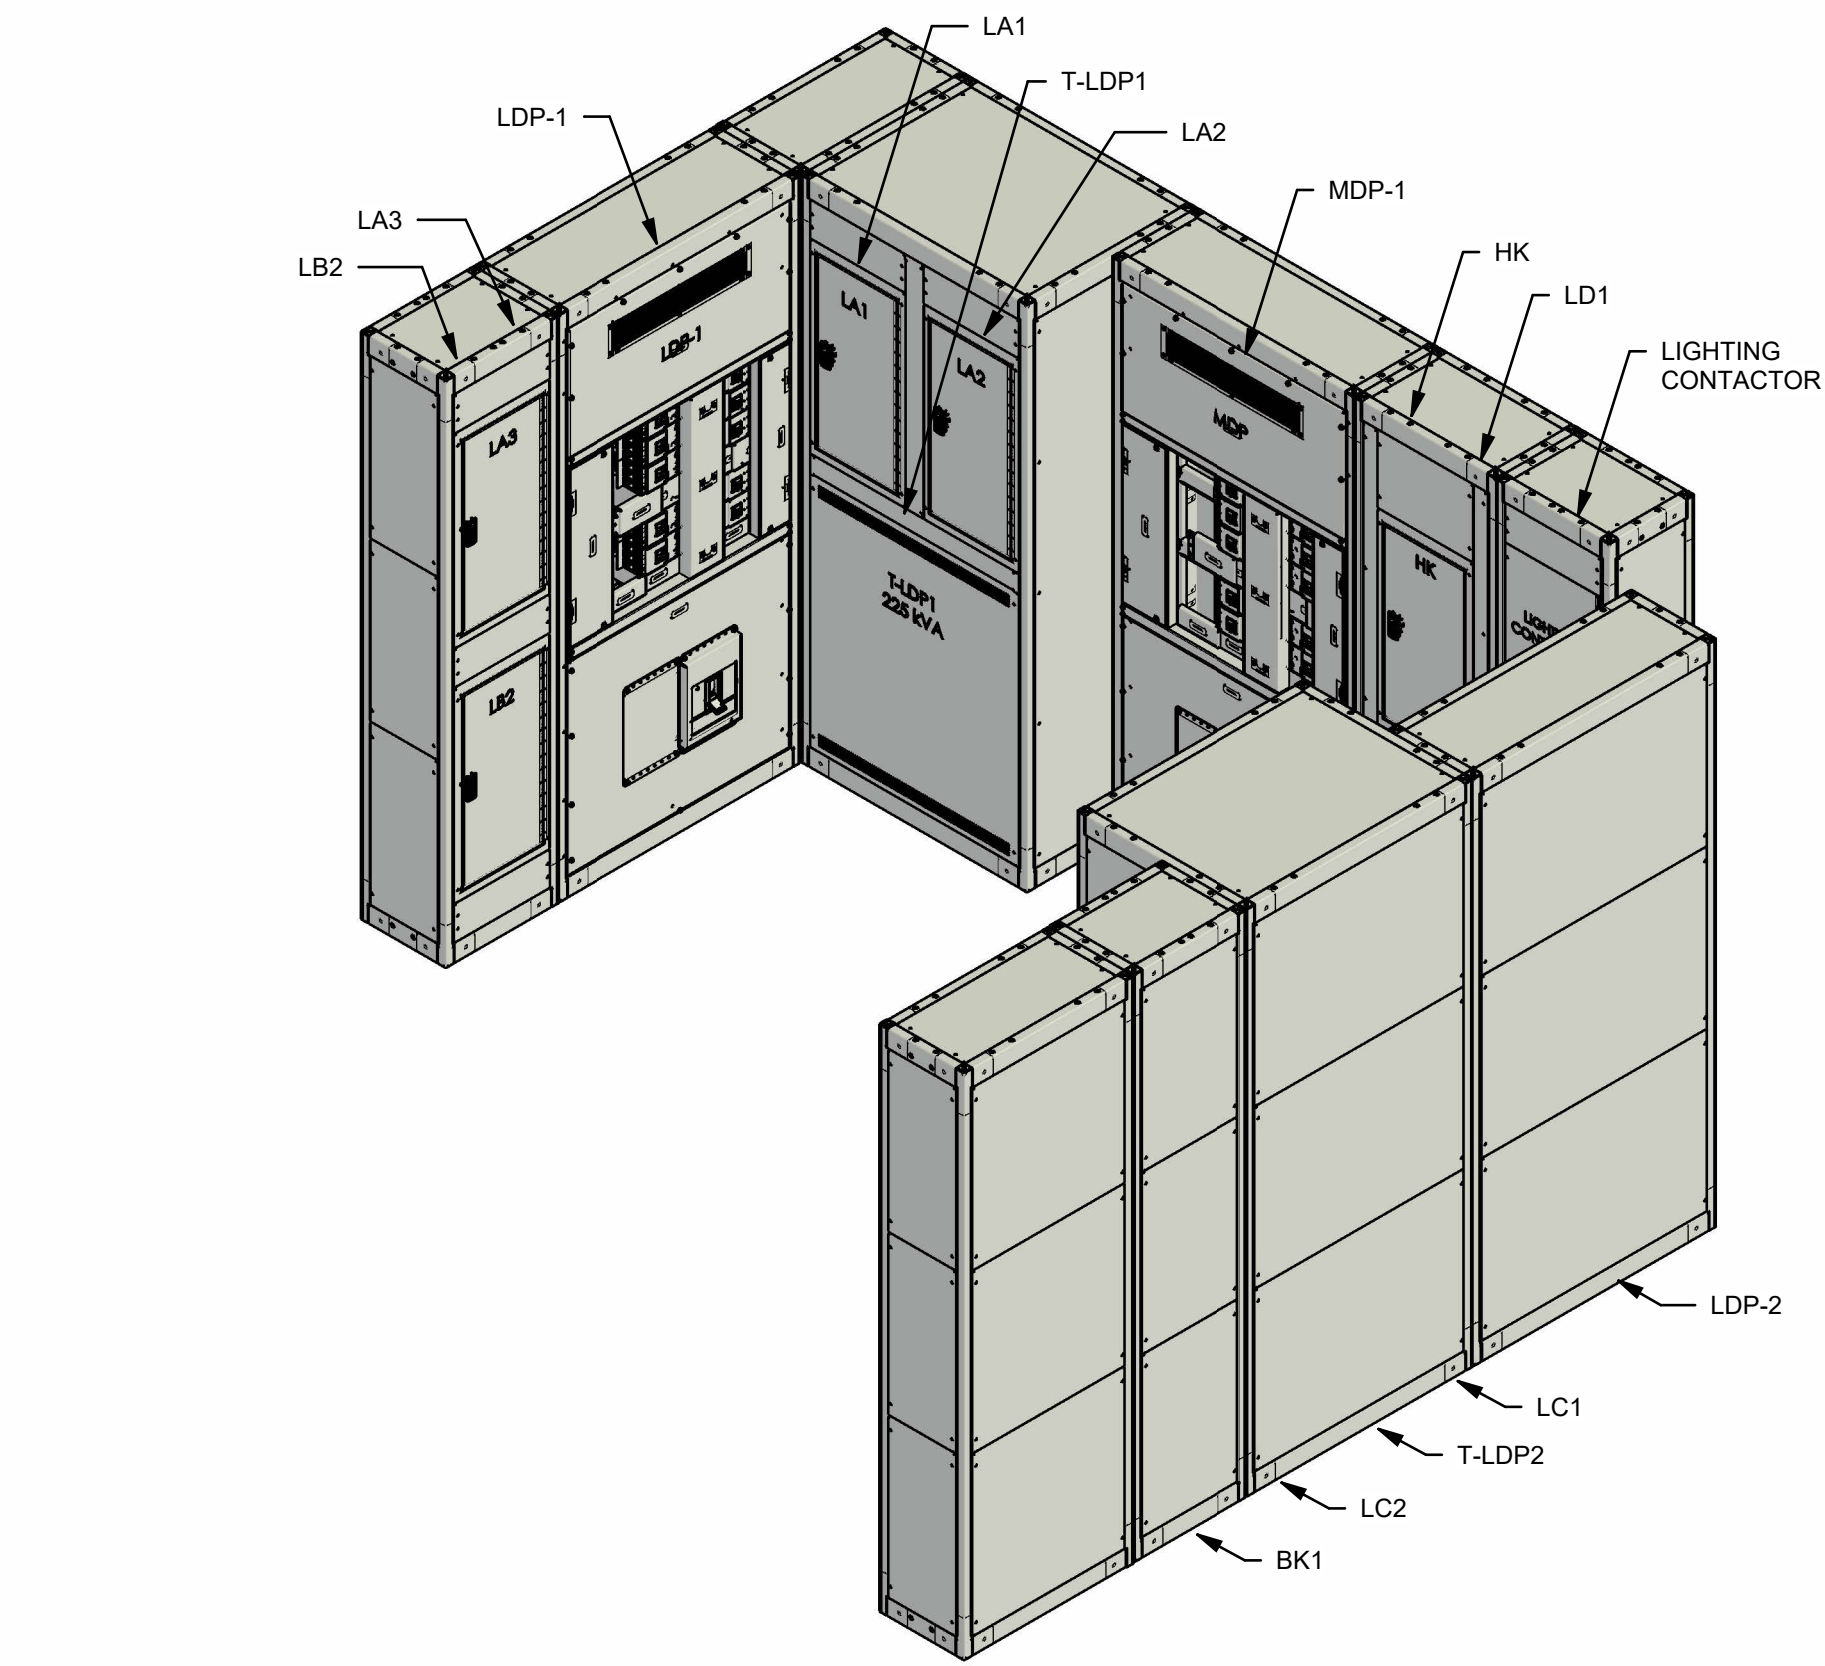


3 3D TECHNICAL ROOM

0' 4' 8' 16'
1/4" = 1'-0"

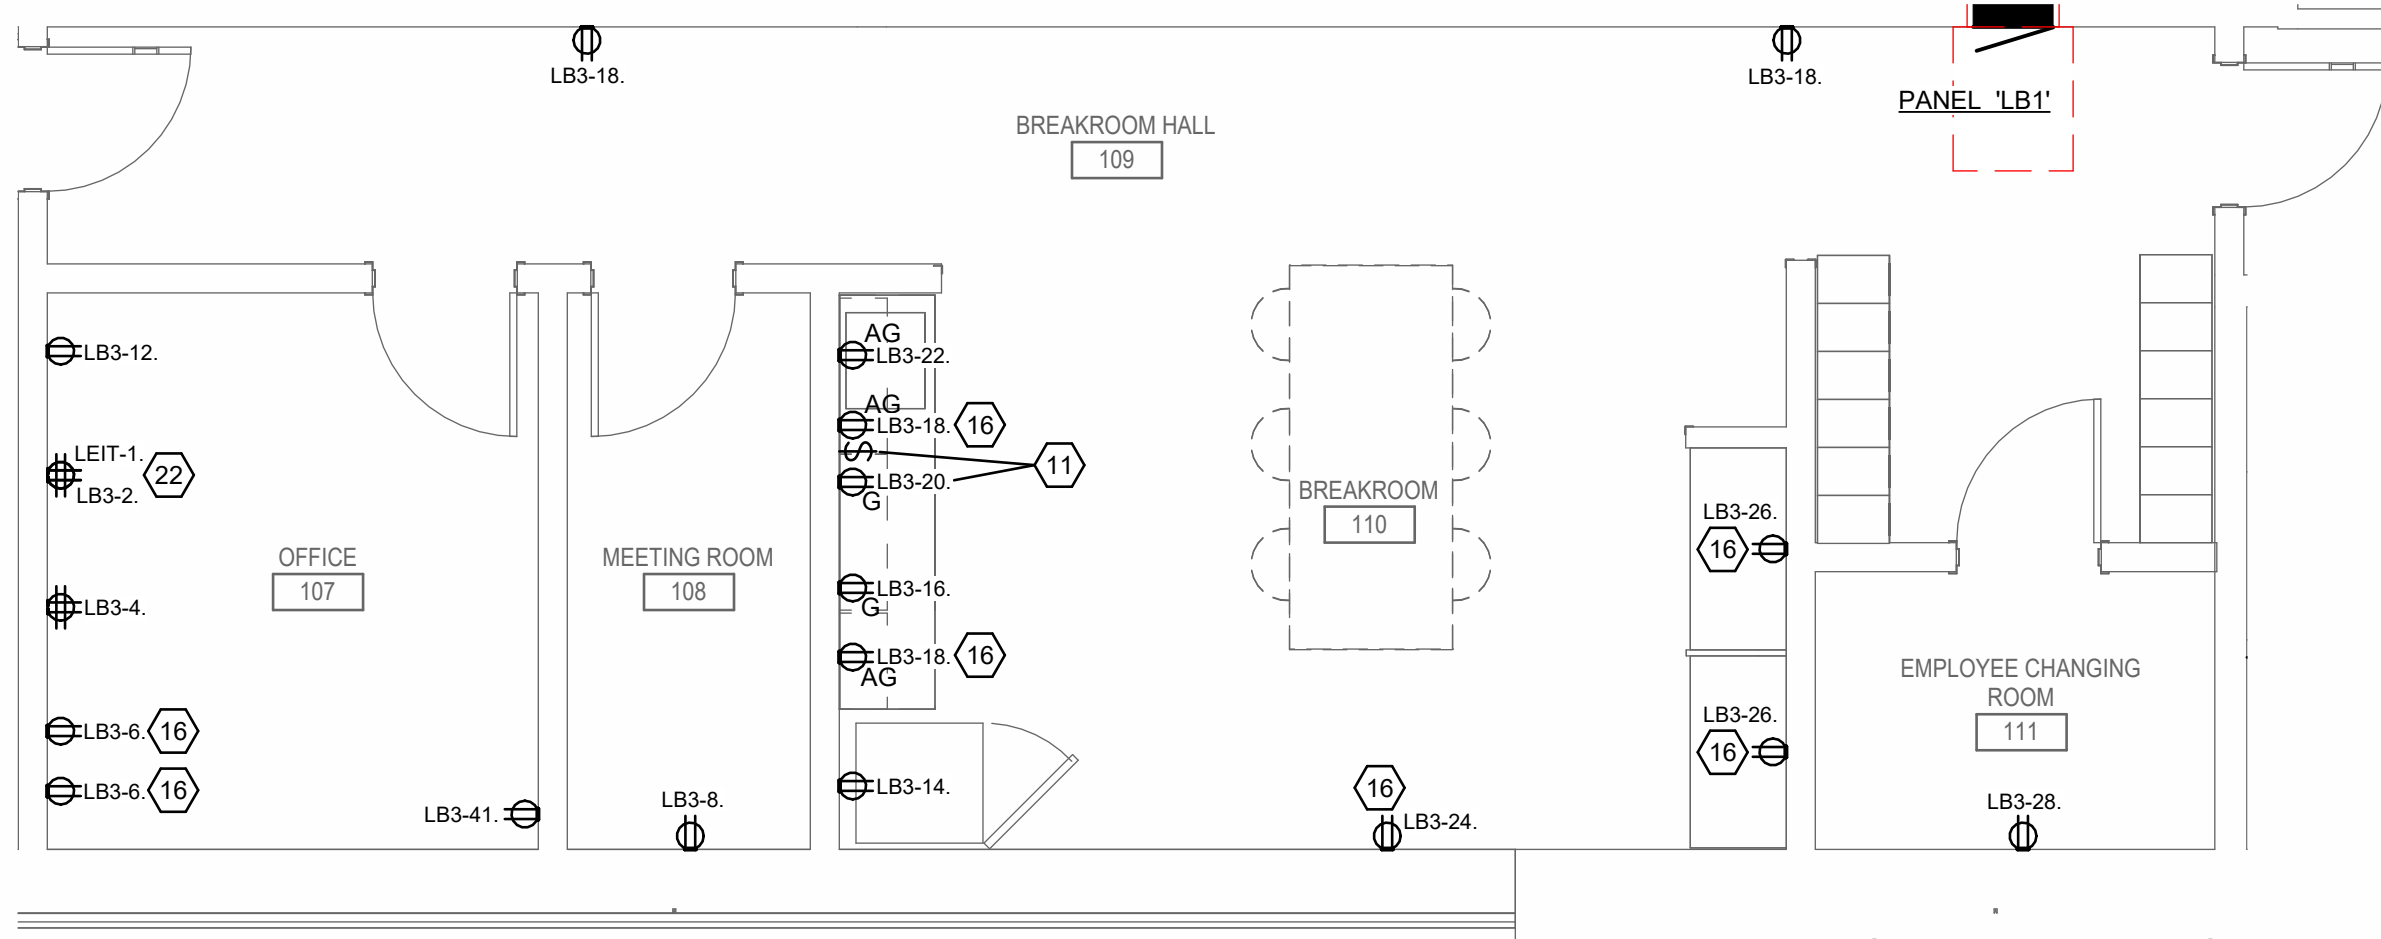


5 GROUND FLOOR - OFFICE/BREAKROOM POWER PLAN

0' 2' 4' 8'
1/4" = 1'-0"

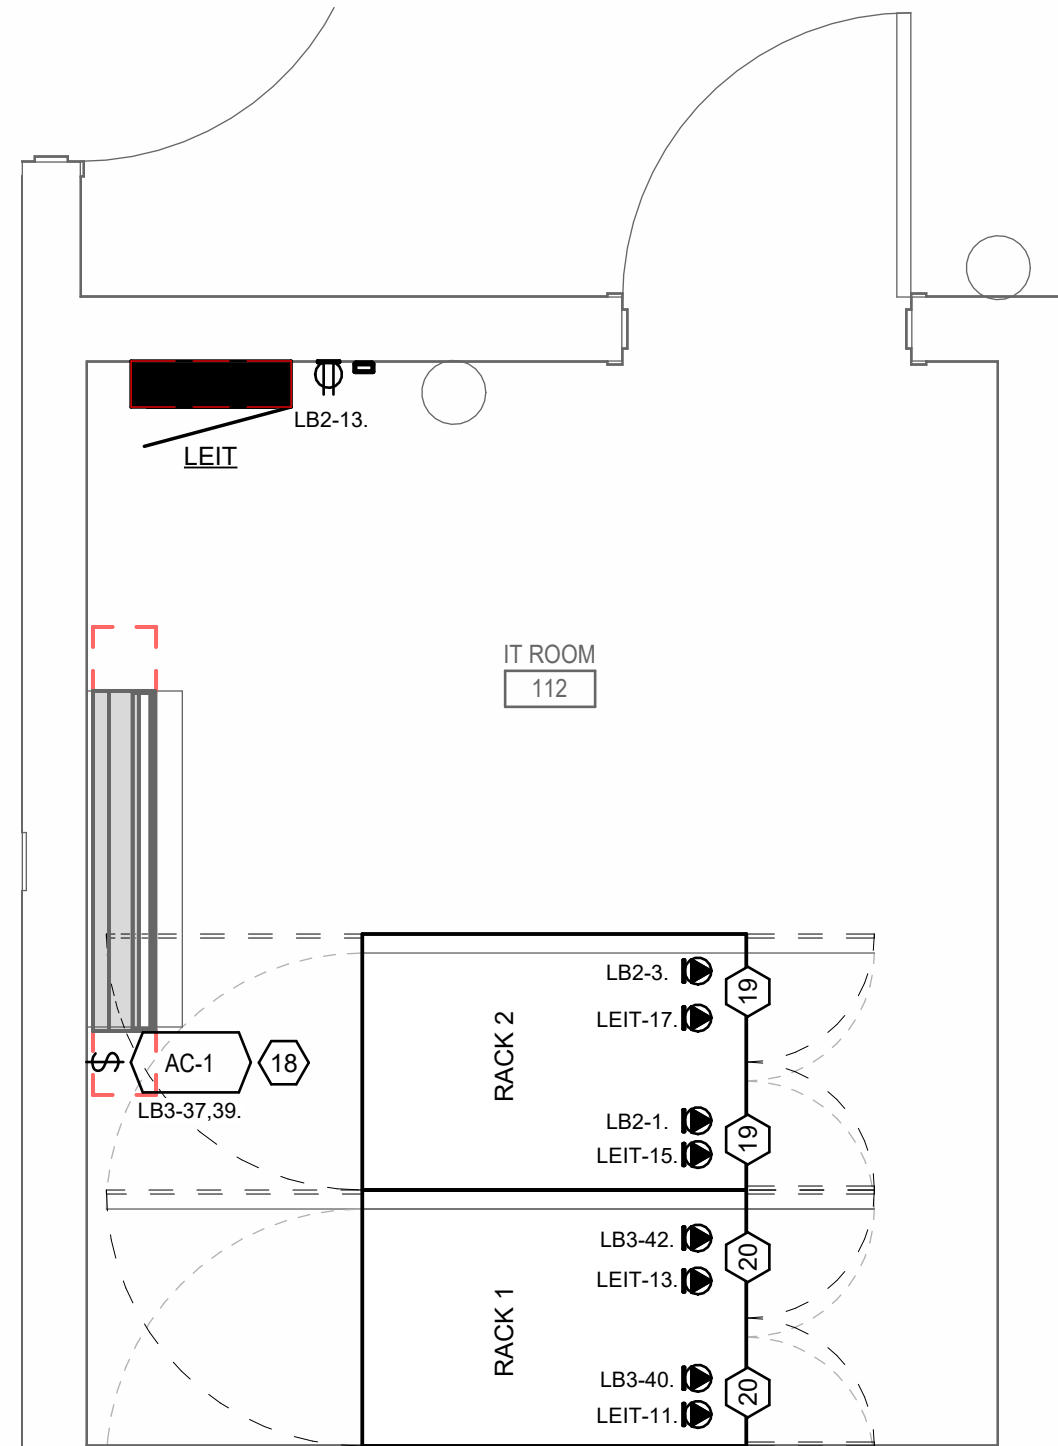


7 IT ROOM

0' 4' 8' 16'
1/2" = 1'-0"

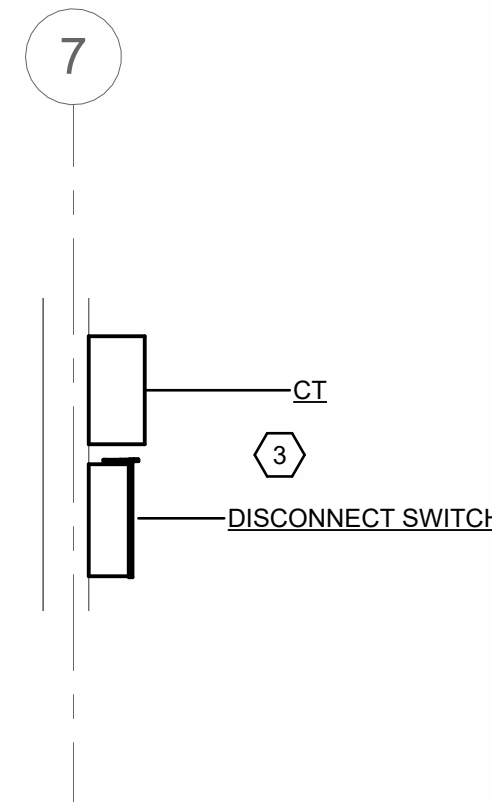

2 SERVICE DISCONNECT AREA

0' 4' 8' 16'
1/4" = 1'-0"

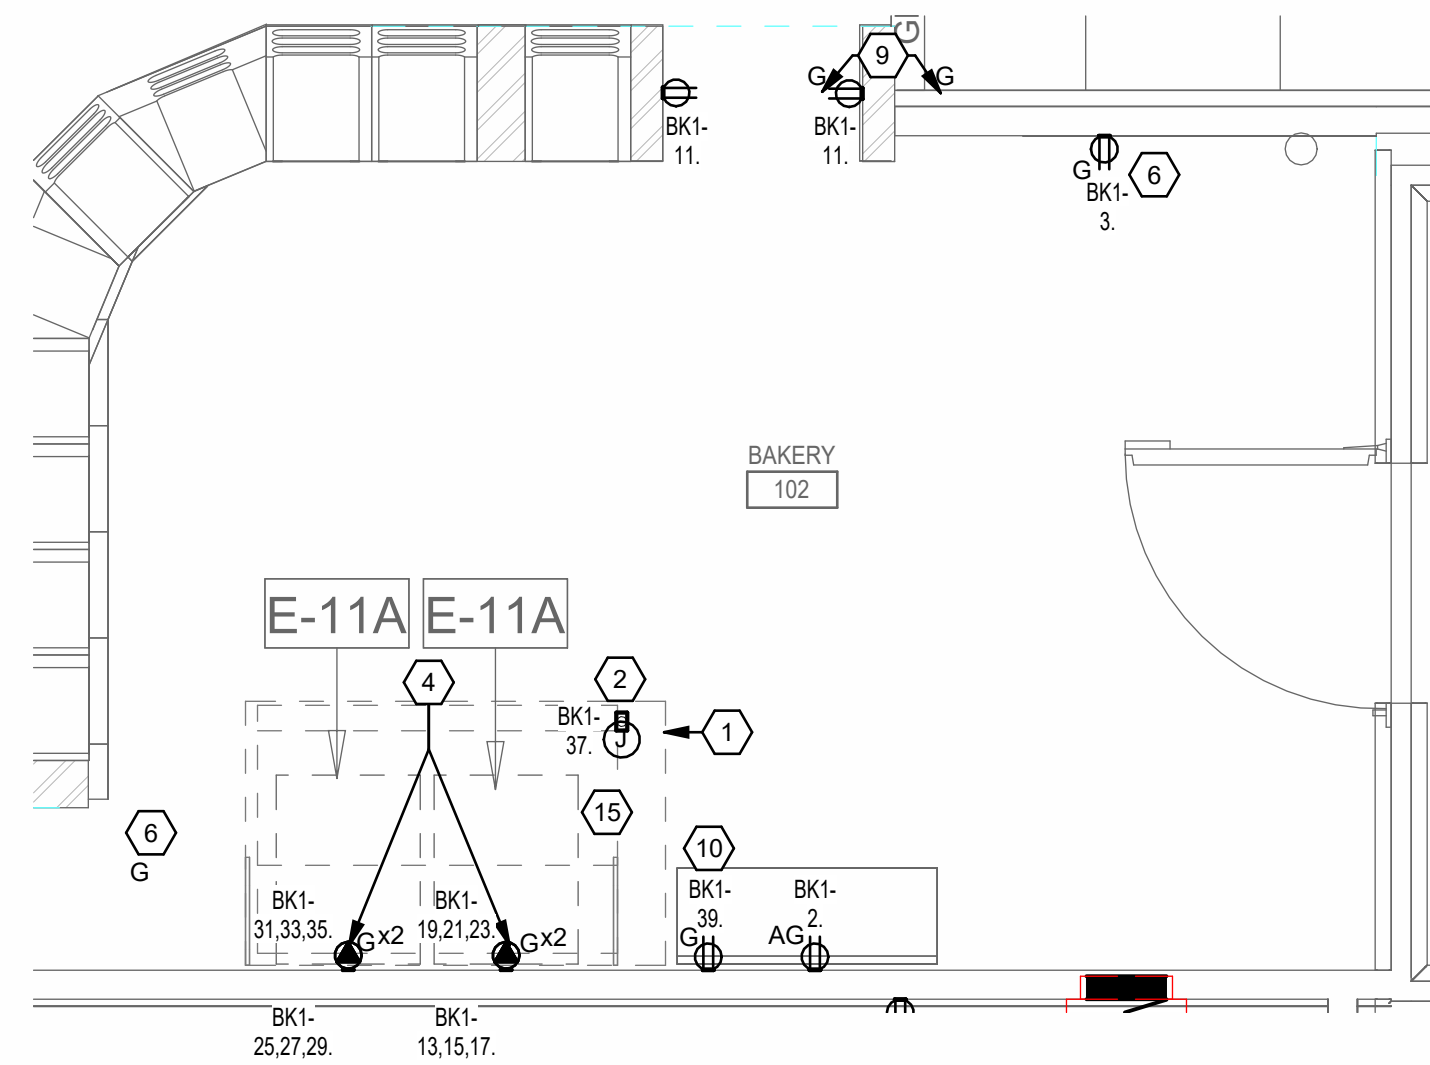

4 BAKERY - ENLARGED POWER PLAN

0' 2' 4' 8'
1/4" = 1'-0"

GENERAL SHEET NOTES

- REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- CONTRACTOR SHALL PROVIDE FACTORY BLUE FINISH WIRING DEVICES FOR ALL UPS OUTLETS FED FROM PANEL "LEIT" IN STORES FOR IDENTIFICATION PURPOSES. COORDINATE WITH ARCHITECTS FOR EXACT DEVICE FINISH PRIOR TO PURCHASE.
- CONTRACTOR SHALL PROVIDE AND INSTALL STAINLESS STEEL COVER PLATES FOR ALL BAKERY OUTLETS. COORDINATE WITH ARCHITECTS FOR COVERPLATE FINISH.
- PROVIDE HOUSEKEEPING PADS FOR ALL FLOOR MOUNTED AND GRADE MOUNTED ELECTRICAL EQUIPMENT.
- SEE SHEET E606 FOR HOOD DETAILS.
- PROVIDE JUNCTION BOX FOR HOOD LIGHTING AND CONTROLS.
- PROVIDE NEMA 3R ENCLOSURES FOR THE CT CABINET AND THE SERVICE DISCONNECT.
- PROVIDE TWO (2) NEMA 15-60R 250V RECEPTACLES FOR LOWER OVEN POWER AND TWO (2) NEMA 15-50R 250V RECEPTACLES FOR UPPER OVEN POWER. ALL RECEPTACLES SHOULD BE CLEARLY LABELED WITH PANEL AND CIRCUIT ID AND AMPERAGE.
- NOT USED.
- PROVIDE RECEPTACLE FOR BUG ZAPPER.
- NOT USED.
- NOT USED.
- CONTROLLED RECEPTACLES IDENTIFIED IN BAKERY SHALL BE POWERED FROM PANEL "BK" VIA RELAY COIL/CONTACTOR -B DEDICATED FOR 2/3 LIGHTING CIRCUITRY.
- POWER FOR BAKERY PRINTER.
- PROVIDE POWER DUPLEX AND ABOVE COUNTER SWITCH FOR GARBAGE DISPOSAL SYSTEM.
- PROVIDE JUNCTION BOX TO POWER BMS PANEL.
- PROVIDE QUADRECEPT FOR HEADSET CHARGING STATION.
- NOT USED.
- PROVIDE A SHUNT TRIP DEVICE FOR ALL RECEPTACLES AND EQUIPMENT LOCATED UNDER THE HOOD.
- PROVIDE QUAD RECEPTACLE IN PLACE OF DUPLEX. ONE HALF OF QUAD TO BE CONTROLLED BY OCCUPANCY SENSOR. PROVIDE DARK GREY DUPLEX RECEPTACLES TO DIFFERENTIATE FROM NON-SWITCHED RECEPTACLES OF CONTROLLED QUADRAPLEX RECEPTACLES.
- NOT USED.
- FLUSHMOUNT TOGGLE SWITCH FOR AC UNIT ON DRYWALL.
- MOUNT FOUR NEMA L5-20 TWISTLOCK RECEPTACLES FOR IT RACK-1 ON UNISTRUT SUPPORTS 0'-8" FROM CABLE TRAY AT MATCHED ELEVATION OF CABLE TRAY ABOVE RACKS. CIRCUIT (2) RECEPTACLES ON UPS POWER, AND (2) RECEPTACLES ON NORMAL POWER AS INDICATED ON PLAN.
- MOUNT FOUR NEMA L5-30 TWISTLOCK RECEPTACLES FOR IT RACK-2 ON UNISTRUT SUPPORTS 0'-8" FROM CABLE TRAY AT MATCHED ELEVATION OF CABLE TRAY ABOVE RACKS. CIRCUIT (2) RECEPTACLES ON UPS POWER, AND (2) RECEPTACLES ON NORMAL POWER AS INDICATED ON PLAN.
- NOT USED.
- MOUNT (1) UPS POWER QUADRAPLEX ABOVE COUNTER AT 3'-6" AND (1) UTILITY POWER DUPLEX BELOW COUNTER AT 1'-6".
- SO CORD TO BE USED IN LIEU OF METAL CONDUIT.

ISSUANCE
1 12/18/2025 PERMIT CYCLE 2
4 07/30/2026 CDD 02

PROJECT NUMBER
79551011
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER



ENLARGED
ELECTRICAL
DRAWINGS
E300

LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD. NORCROSS, GA 30093

PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, INC.
PROGRESSIVE
COMPANIES
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com



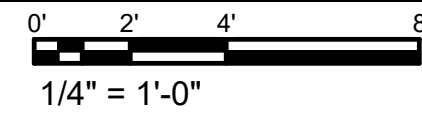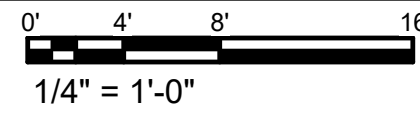

10. CONTRACTOR TO PROVIDE WIREMOLD WHITE POWERPOLE 250TC AND RECEPTACLE FOR DRINK CHILLER.
11. PROVIDE NEMA L21-20R RECEPTABLES FOR RL-3W FREEZER UNITS. PROVIDE NEMA L21-20P PLUG CORDS FOR FIELD WIRING OF FREEZER UNITS. ELECTRICAL CONTRACTOR TO COORDINATE FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
12. PROVIDE NEMA L21-30R RECEPTABLES FOR RL-5W FREEZER UNITS. PROVIDE NEMA L21-30P PLUG CORDS FOR FIELD WIRING OF FREEZER UNITS. ELECTRICAL CONTRACTOR TO COORDINATE FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
13. PROVIDE WALL MOUNTED DUPLEX RECEPTACLE FOR ELECTRIC SECURITY GATES. MOUNT AT 12" AFF.
14. JOIST MOUNTED RECEPTACLE FOR PVM.
15. FLOOR RECEPTABLES FOR STORE EQUIPMENT LED LIGHTS.
16. PROVIDE (1) DUPLEX RECEPTACLE ON UPS POWER AND (1) RECEPTACLE ON UTILITY POWER FOR 2/3 LIGHTING WHEN SHOWN. ALL RECEPTABLES SHALL BE RECESSED INTO WALL AND MOUNTED AT 0" AFF. REFER TO ARCH DRAWINGS DETAIL FOR ADDITIONAL INFORMATION.
17. PROVIDE (1) DUPLEX RECEPTACLE ON UPS POWER FOR SELF CHECKOUT STATION ATTENDANT. RECEPTACLE SHALL BE INTEGRAL TO THE 4000 WIREMOLD AT EACH SELF CHECKOUT STATION ATTENDANT STATION. FLEXIBLE CONDUIT TO FEED CABLES FROM CABLE TRAY TO POWER POLE WHEN NEEDED.
18. WIREMOLD 4000 RACEWAY MOUNTED TO PARTITION WALL. PROVIDE WIREMOLD FITTING TO CONNECT TO POWER POLE.
19. POWER FOR DIGITAL SIGNS. CONFIRM FINAL LOCATION AND CONNECTION WITH FIT OUT MANAGER.

A. REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES

- A. REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES

PANELBOARD: LD1

MAIN LUGS ONLY										MOUNTING: SURFACE				Accessories:																			
BUS AMPACITY: 125A										ENCLOSURE: TYPE 1																							
EQUIPMENT RATING: 480/277 V, 3PH, 4 WIRE										LOCATION: TECHNICAL AREA...																							
AIC RATING:										SUPPLIED FROM: MDP-1																							
														Load (VA)																			
CKT	Description/Location	Type	C.B.	Pole	Note	A						B						C						Note	Pole	C.B.	Type	Description/Location	CKT				
						A	B	C	A	B	C	A	B	C	A	B	C	A	B	C													
1	SALES LIGHTING 2/3	LIG...	20 A	1		4,566							400								1	20 A	LIG...	BAKERY LIGHTING	2								
3	SALES LIGHTING 2/3	LIG...	20 A	1			2,808							1,066								1	20 A	LIG...	RESTROOM AND OFFICE BLOCK	4							
5	SALES LIGHTING 1/3	LIG...	20 A	1				3,957							0							1	20 A	--	SPARE BREAKER	6							
7	CHECKOUT LIGHTING 2/3	LIG...	20 A	1		2,250				0												1	20 A	--	SPARE BREAKER	8							
9	CHECKOUT LIGHTING 1/3	LIG...	20 A	1			1,001				0											1	20 A	--	SPARE BREAKER	10							
11	VESTIBULE LIGHTING	LIG...	20 A	1					288					0								1	20 A	--	SPARE BREAKER	12							
13	CANOPY LIGHTING	LIG...	20 A	1		135									0							1	20 A	--	SPARE BREAKER	14							
15	BACK OF HOUSE LIGHTING	LIG...	20 A	1			1,505						0									1	20 A	--	SPARE BREAKER	16							
17	ENDCAP LIGHTING	LIG...	20 A	1					720					0								1	20 A	--	SPARE BREAKER	18							
19	EXIT SIGNS	LIG...	20 A	1		75					0											1	20 A	--	SPARE BREAKER	20							
21	PARKING LOT	LIG...	20 A	1				1,768						--								1	--	--	BUSSED SPACE	22							
23	EXTERIOR WALL PACKS	LIG...	20 A	1					111													1	--	--	BUSSED SPACE	24							
25	LOADING WALL PACKS	LIG...	20 A	1		185								--								1	--	--	BUSSED SPACE	26							
27	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	28							
29	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	30							
31	BUSSED SPACE	--	--	1		--			--				--									1	--	--	BUSSED SPACE	32							
33	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	34							
35	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	36							
37	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	38							
39	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	40							
41	BUSSED SPACE	--	--	1					--				--									1	--	--	BUSSED SPACE	42							
Total Connected load Ph. A						29 A						Panel Connected Load: 20.8 kVA						25.1 A															
Total Connected load Ph. B						31 A						Total Demand Load: 25.7 kVA						30.9 A															
Total Connected load Ph. C						18 A																											
Notes:																																	
Load Type Definitions:																																	
Motor (125% largest Motor + 100% remaining motors) K = Kitchen (Demand as per NEC Table 220.56) C = Continuous Load (125%) X = X-Rays (Demand per NEC 660.6)																																	
R = Receptacles (to 10kVA 100%, over 10kVA... G = General Load (Non-continuous) (100%) L = Lighting (125%) H = Heating (100%)																																	
E = Existing Load 30-day metered (125%) EL = Elevator (Demand as per NEC Table 620.14) W = Water Heater (125%)																																	
Load Type Connected Load NEC Demand Factor NEC Demand Load Panel Totals																																	
LIGHTING 19356.0 125.00% 24195.0																																	
GENERAL 935.0 100.00% 935.0 Total Connected Load: 20835.0 VA																																	
Lighting 2 544.0 100.00% 544.0 Total NEC Demand: 25674.0 VA																																	
Total Connected Current: 25.1 A																																	
Total NEC Demand Current: 30.9 A																																	

PANELBOARD: BK1

MAIN LUGS ONLY						MOUNTING: SURFACE						Accessories:											
BUS AMPACITY: 225A						ENCLOSURE: TYPE 1																	
EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE						LOCATION: TECHNICAL AREA...																	
AIC RATING:						SUPPLIED FROM: LDP-2																	
						Load (VA)																	
						A	B	C	A	B	C												
CKT	Description/Location	Type	C.B.	Pole	Note							Note	Pole	C.B.	Type	Description/Location	CKT						
1	SPARE BREAKER	--	20 A	1	0				180			1	20 A	REC...		WORKTOP RECEPTACLE	2						
3	BUG ZAPPER	REC...	20 A	1		900						1	20 A	--		SPARE BREAKER	4						
5	KEF-1	Motor	20 A	1			756		0	0		1	20 A	--		SPARE BREAKER	6						
7	SHUNT TRIP	--	--	--	--	--	--	--	--	--	--	1	20 A	--		SPARE BREAKER	8						
9	BUG ZAPPER	REC...	20 A	1		900			0	0		1	20 A	--		SPARE BREAKER	10						
11	BAKERY CASE LIGHTING	REC...	20 A	1			860		0			1	20 A	--		SPARE BREAKER	12						
13	UPPER BAKERY OVEN	KIT...	50 A	3		3,667			0			1	20 A	--		SPARE BREAKER	14						
15	--	--	--	--	--	--	3,667		0	0		1	20 A	--		SPARE BREAKER	16						
17	--	--	--	--	--	--	3,667		0	0		1	20 A	--		SPARE BREAKER	18						
19	LOWER BAKERY OVEN	KIT...	60 A	3		5,367			0			1	20 A	--		SPARE BREAKER	20						
21	--	--	--	--	--	--	5,367		0	0		1	20 A	--		SPARE BREAKER	22						
23	--	--	--	--	--	--	5,367		--	--	--	1	20 A	--		BUSSED SPACE	24						
25	UPPER BAKERY OVEN	KIT...	50 A	3		3,667			--	--	--	1	--	--		BUSSED SPACE	26						
27	--	--	--	--	--	--	3,667		--	--	--	1	--	--		BUSSED SPACE	28						
29	--	--	--	--	--	--	3,667		--	--	--	1	--	--		BUSSED SPACE	30						
31	LOWER BAKERY OVEN	KIT...	60 A	3		5,367			1	--	--	1	--	--		BUSSED SPACE	32						
33	--	--	--	--	--	--	5,367		--	--	--	1	--	--		BUSSED SPACE	34						
35	--	--	--	--	--	--	5,367		--	--	--	1	--	--		BUSSED SPACE	36						
37	OVEN HOOD LYS AND CONT. (G)	KIT...	20 A	1		180			--	--	--	1	--	--		BUSSED SPACE	38						
39	BAKERY PRINTER	GE...	20 A	1		300			--	--	--	1	--	--		BUSSED SPACE	40						
41	SPARE BREAKER	--	20 A	1			0		--	--	--	1	--	--		BUSSED SPACE	42						
Total Connected Load Ph. A						154 A	Panel Connected Load: 57.8 kVA						160.4 A										
Total Connected load Ph. B						169 A	Total Demand Load: 41.7 kVA						115.6 A										
Total Connected load Ph. C						161 A																	
Notes:																							
Load Type Definitions:																							
Motor (125% largest Motor + 100% remaining motors)						K = Kitchen (Demand as per NEC Table 220.56)						C = Continuous Load (125%)						X = X-Rays (Demand per NEC 660.6)					
R = Receptacles (to 10kVA 100%, over 10kVA...						G = General Load (Non-continuous) (100%)						L = Lighting (125%)						H = Heating (100%)					
E = Existing Load 30-day metered (125%)						EL = Elevator (Demand as per NEC Table 620.14)						W = Water Heater (125%)											
Load Type	Connected Load	NEC Demand Factor				NEC Demand Load				Panel Totals													
KITCHEN	54380.0	70.00%				38066.0																	
Motor	756.0	125.00%				945.0				Total Connected Load: 57776.0 VA													
GENERAL	300.0	100.00%				300.0				Total NEC Demand: 41651.0 VA													
RECEPTACLE	2340.0	100.00%				2340.0				Total Connected Current: 160.4 A													
										Total NEC Demand Current: 115.6 A													

GENERAL SHEET NOTES

REFER TO THE NOTES COLUMN IN EACH PANELBOARD SCHEDULE FOR CIRCUIT ENERGY MONITORING CATEGORY. ENERGY MONITORING CATEGORY FOR THE TOTAL PANELBOARD (REMAINING LOAD) SHALL BE AS INDICATED IN THE TOP RIGHTHAND CORNER OF EACH PANELBOARD SCHEDULE.

- CT-G = RECEPTACLES AND GENERAL LOADS
- CT-L = LIGHTING LOADS
- CT-H = HVAC LOADS
- CT-R = REFRIGERATION CASE & DRY COOLER LOADS
- CT-W = WALK-IN COOLER & FREEZER LOADS
- CT-B = BAKERY LOADS

PANELBOARD: HK

MAIN LUGS ONLY										MOUNTING: SURFACE										Accessories:																									
BUS AMPACITY: 225 A										ENCLOSURE: TYPE 1																																			
EQUIPMENT RATING: 480/277 V, 3PH, 4 WIRE										LOCATION: TECHNICAL AREA...																																			
AIC RATING:										SUPPLIED FROM: MDP-1																																			
																				Load (VA)																									
CKT	Description/Location				Type	C.B.	Pole	Note	A	B	C	A	B	C	Note	Pole	C.B.	Type	Description/Location				CKT																						
1	RTU-2				HVAC	60 A	3	15.4...						0			3	20 A	--	480V METER				2																					
3	--				--	--	--	--	15,404					0			--	--	--	--				4																					
5	--				--	--	--	--		15,404				0			--	--	--	--				6																					
7	DC-2				CO...	45 A	3	9,428					4,080				2	25 A	HEA...	EUH-1				8																					
9	--				--	--	--	--	9,428				4,080				1	--	--	BUSSSED SPACE				10																					
11	--				--	--	--	--		9,428			4,080				1	--	--	BUSSSED SPACE				12																					
13	RTU-3				HVAC	35 A	3	8,499						--			1	--	--	BUSSSED SPACE				14																					
15	--				--	--	--	--	8,499					--			1	--	--	BUSSSED SPACE				16																					
17	--				--	--	--	--		8,499				--			1	--	--	BUSSSED SPACE				18																					
19	RTU-4				HVAC	15 A	3	3,187					--				1	--	--	BUSSSED SPACE				20																					
21	--				--	--	--	--	3,187				--				1	--	--	BUSSSED SPACE				22																					
23	--				--	--	--	--		3,187			--				1	--	--	BUSSSED SPACE				24																					
25	--				--	--	--	--					--				1	--	--	BUSSSED SPACE				26																					
27	DC-1				CO...	35 A	3		7,543				--				1	--	--	BUSSSED SPACE				28																					
29	--				--	--	--	--		7,543			--				1	--	--	BUSSSED SPACE				30																					
31	--				--	--	--	--	7,543				--				1	--	--	BUSSSED SPACE				32																					
33	EVAC				Motor	20 A	3	2,125					2,125				1	--	--	BUSSSED SPACE				34																					
35	--				--	--	--	--	2,125				2,125				1	--	--	BUSSSED SPACE				36																					
37	--				--	--	--	--	2,125				--				1	--	--	BUSSSED SPACE				38																					
39	HOT WATER HEATING				HOT...	35 A	2		6,000				--				1	--	--	BUSSSED SPACE				40																					
41	--				--	--	--	--		6,000			--				1	--	--	BUSSSED SPACE				42																					
Total Connected load Ph. A									181 A			Panel Connected Load: 158.7 kVA									190.9 A																								
Total Connected load Ph. B									204 A			Total Demand Load: 160.8 kVA									193.4 A																								
Total Connected load Ph. C									189 A																																				
Notes:																																													
Load Type Definitions:																																													
Motor (125% largest Motor + 100% remaining motors)										K = Kitchen (Demand as per NEC Table 220.56)					C = Continuous Load (125%)					X = X-Rays (Demand per NEC 660.6)																									
R = Rotochips (to 10kVA, 100% over 10kVA...										G = General Load (Non-continuous) (100%)					L = Lighting (125%)					H = Heating (100%)																									
E = Existing Load 30-day metered (125%)										EL = Elevator (Demand as per NEC Table 620.14) W = Water Heater (125%)																																			
Load Type		Connected Load		NEC Demand Factor				NEC Demand Load				Panel Totals																																	
Motor		14533.9		114.04%				16573.9																																					
HVAC		81267.8		100.00%				81267.8				Total Connected Load: 158713.6 VA																																	
COOLING		50911.9		100.00%				50911.9				Total NEC Demand: 160753.6 VA																																	
HOT WATER...		12000.0		100.00%				12000.0				Total Connected Current: 190.9 A																																	
										Total NEC Demand Current: 193.4 A																																			

PANELBOARD: LA3																		
MAIN LUGS ONLY BUS AMPACITY: 225A EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE AIC RATING:										MOUNTING: SURFACE ENCLOSURE: TYPE 1 LOCATION: TECHNICAL AREA.. SUPPLIED FROM: LDP-1				Accessories:				
Load (VA)																		
CKT	Description/Location	Type	C.B.	Pole	Note	A	B	C	A	B	C	Note	Pole	C.B.	Type	Description/Location	CKT	
1	RL-SW	REF...	25 A	3		2,078			1,213				3	20 A	REF...	RL-3F	2	
3	--	--	--	--	--	2,078				1,213			--	--	--	--	4	
5	--	--	--	--	--		2,078				1,213		--	--	--	--	6	
7	RL-SW	REF...	25 A	3		2,078			2,078				3	25 A	REF...	RL-5F	8	
9	--	--	--	--	--	2,078			2,078				--	--	--	--	10	
11	--	--	--	--	--		2,078		2,078				--	--	--	--	12	
13	RL-SW	REF...	25 A	3		2,078			2,078				3	25 A	REF...	RL-5F	14	
15	--	--	--	--	--		2,078			2,078			--	--	--	--	16	
17	--	--	--	--	--	2,078				2,078			--	--	--	--	18	
19	RL-SW	REF...	25 A	3		2,078			2,078				3	25 A	REF...	RL-5F	20	
21	--	--	--	--	--		2,078		2,078				--	--	--	--	22	
23	--	--	--	--	--			2,078		2,078			--	--	--	--	24	
25	RL-SW	REF...	25 A	3		2,078			2,078				3	25 A	REF...	RL-5F	26	
27	--	--	--	--	--	2,078			2,078				--	--	--	--	28	
29	--	--	--	--	--		2,078			2,078			--	--	--	--	30	
31	RL-3W	REF...	20 A	3		1,213			1,213	1,213			3	20 A	REF...	RL-3F	32	
33	--	--	--	--	--		1,213			1,213			--	--	--	--	34	
35	--	--	--	--	--			1,213			1,213		--	--	--	--	36	
37	RL-3W	REF...	20 A	3		1,213						1	--	--	--	BUSSED SPACE	38	
39	--	--	--	--	--			1,213				1	--	--	--	BUSSED SPACE	40	
41	--	--	--	--	--			1,213					1	--	--	BUSSED SPACE	42	
Total Connected load Ph. A						196 A	Panel Connected Load: 70.6 kVA						196.1 A					
Total Connected load Ph. B						196 A	Total Demand Load: 70.6 kVA						196.1 A					
Total Connected load Ph. C						196 A												
Notes:																		
Load Type Definitions:																		
Motor (125% largest Motor + 100% remaining motors)						K = Kitchen (Demand as per NEC Table 220.56) C = Continuous Load (125%)						X = X-Rays (Demand per NEC 660.6)						
R = Receptacles (to 10kVA 100%, over 10kVA...)						G = General Load (Non-continuous) (100%) L = Lighting (125%)						H = Heating (100%)						
E = Existing Load 30-day metered (125%)						EL = Elevator (Demand as per NEC Table 620.14) W = Water Heater (125%)												
Load Type																		
REFRIGERATION		Connected Load		70648.3		100.00%		NEC Demand Factor		NEC Demand Load		70648.3		Panel Totals				
												Total Connected Load: 70648.3 VA						
												Total NEC Demand: 70648.3 VA						
												Total Connected Current: 196.1 A						
												Total NEC Demand Current: 196.1 A						

PANELBOARD: LB3																				
MAIN LUGS ONLY BUS AMPACITY: 200 A EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE AIC RATING:										MOUNTING: RECESSED ENCLOSURE: TYPE 1 LOCATION: STAGING 114 SUPPLIED FROM: LDP-2										
Accessories:																				
Load (VA)																				
CKT	Description/Location	Type	C.B.	Pole	Note	A	B	C	A	B	C	Note	Pole	C.B.	Type	Description/Location	CKT			
1	COOLER DOOR HEATER	HEA	20 A	1		1,500			180				1	20 A REC...		CASH OFFICE	2			
3	COOLER DOOR ALARM	GE	20 A	1			750			360			1	20 A REC...		HEADSET CHARGING STATION	4			
5	FREEZER DOOR HEATER	HEA	20 A	1				1,500			360		1	20 A REC...		CASH OFFICE	6			
7	FREEZER DOOR HEATER	HEA	20 A	1		1,500			180				1	20 A REC...		MEETING ROOM	8			
9	FREEZER DOOR ALARM	GE	20 A	1			750				1,440		1	20 A REC...		RECEPTACLES BACKSTOCK 116	10			
11	FREEZER DOOR ALARM	GE	20 A	1				750			180		1	20 A GE...		PRINTER	12			
13	PALLET JACK STAGING 117	GE	20 A	1		900			1,800				1	20 A GE...		BREAKROOM REFRIGERATOR	14			
15	PALLET JACK STAGING 117	GE	20 A	1			900			1,400			1	20 A GE...		DISHWASHER	16			
17	PALLET JACK STAGING 117	GE	20 A	1				900			720		1	20 A REC...		BREAKROOM	18			
19	FACP	REC	20 A	1		390			900				1	20 A GE...		GARBAGE DISPOSAL	20			
21	WRITE OFF SCALE	REC	20 A	1			480			1,650			1	20 A REC...		MICROWAVE	22			
23	BACK OF HOUSE RCPPTS	REC	20 A	1				540			180		1	20 A REC...		BREAKROOM TV	24			
25	BALER BACKSTOCK 116	Motor	70 A	3		3,567			360				1	20 A REC...		BREAKROOM WORKSTATIONS	26			
27	--	--	--	--	--		3,567				180		1	20 A REC...		CHANGING ROOM	28			
29	--	--	--	--	--			3,567			180		1	20 A REC...		RECIRCULATION PUMP	30			
31	XWEB	REC	20 A	1		1,920			1,040				3	20 A Motor		AC-1/CU-1	32			
33	COOLER VHF-1/2	Motor	20 A	1			305			1,040			--	--	--	--	34			
35	FREEZER CVF-3	Motor	20 A	1				152			1,040	--	--	--	--	--	36			
37	AC-1/CU-1	Motor	15 A	2		21			0				1	20 A --		SPARE BREAKER	38			
39	--	--	--	--	--			21			800		1	20 A REC...		NETWORK CABINET	40			
41	SAFE	REC	20 A	1				180			800		1	20 A REC...		NETWORK CABINET	42			
Total Connected Load Ph. A						122 A	Panel Connected Load: 38.9 kVA						108.1 A							
Total Connected Load Ph. B						117 A	Total Demand Load: 41.4 kVA						114.8 A							
Total Connected Load Ph. C						92 A														
Notes:																				
1. PROVIDE (3) CT'S ON THE INCOMING FEEDER OF TO THIS PANELBOARD TO MONITOR THE ENTIRE LOAD ON THIS PANELBOARD																				
Load Type Definitions:																				
Motor (125% largest Motor + 100% remaining motors) K = Kitchen (Demand as per NEC Table 220.56) C = Continuous Load (125%) X = X-Rays (Demand per NEC 660.6)																				
R = Receptacles (to 10kVA 100%, over 10kVA... G = General Load (Non-continuous) (100%) L = Lighting (125%) H = Heating (100%)																				
E = Existing Load 30-day metered (125%) EL = Elevator (Demand as per NEC Table 620.14) W = Water Heater (125%)																				
Load Type																				
HEATING		Connected Load		NEC Demand Factor		NEC Demand Load		Panel Totals												
		4500.0		100.00%		4500.0														
Motor		14318.8		118.68%		16993.8				Total Connected Load: 38948.8 VA										
GENERAL		9620.0		100.00%		9620.0				Total NEC Demand: 41368.8 VA										
										Total Connected Current: 108.1 A										
RECEPTACLE		10510.0		97.57%		10255.0				Total NEC Demand Current: 114.8 A										