


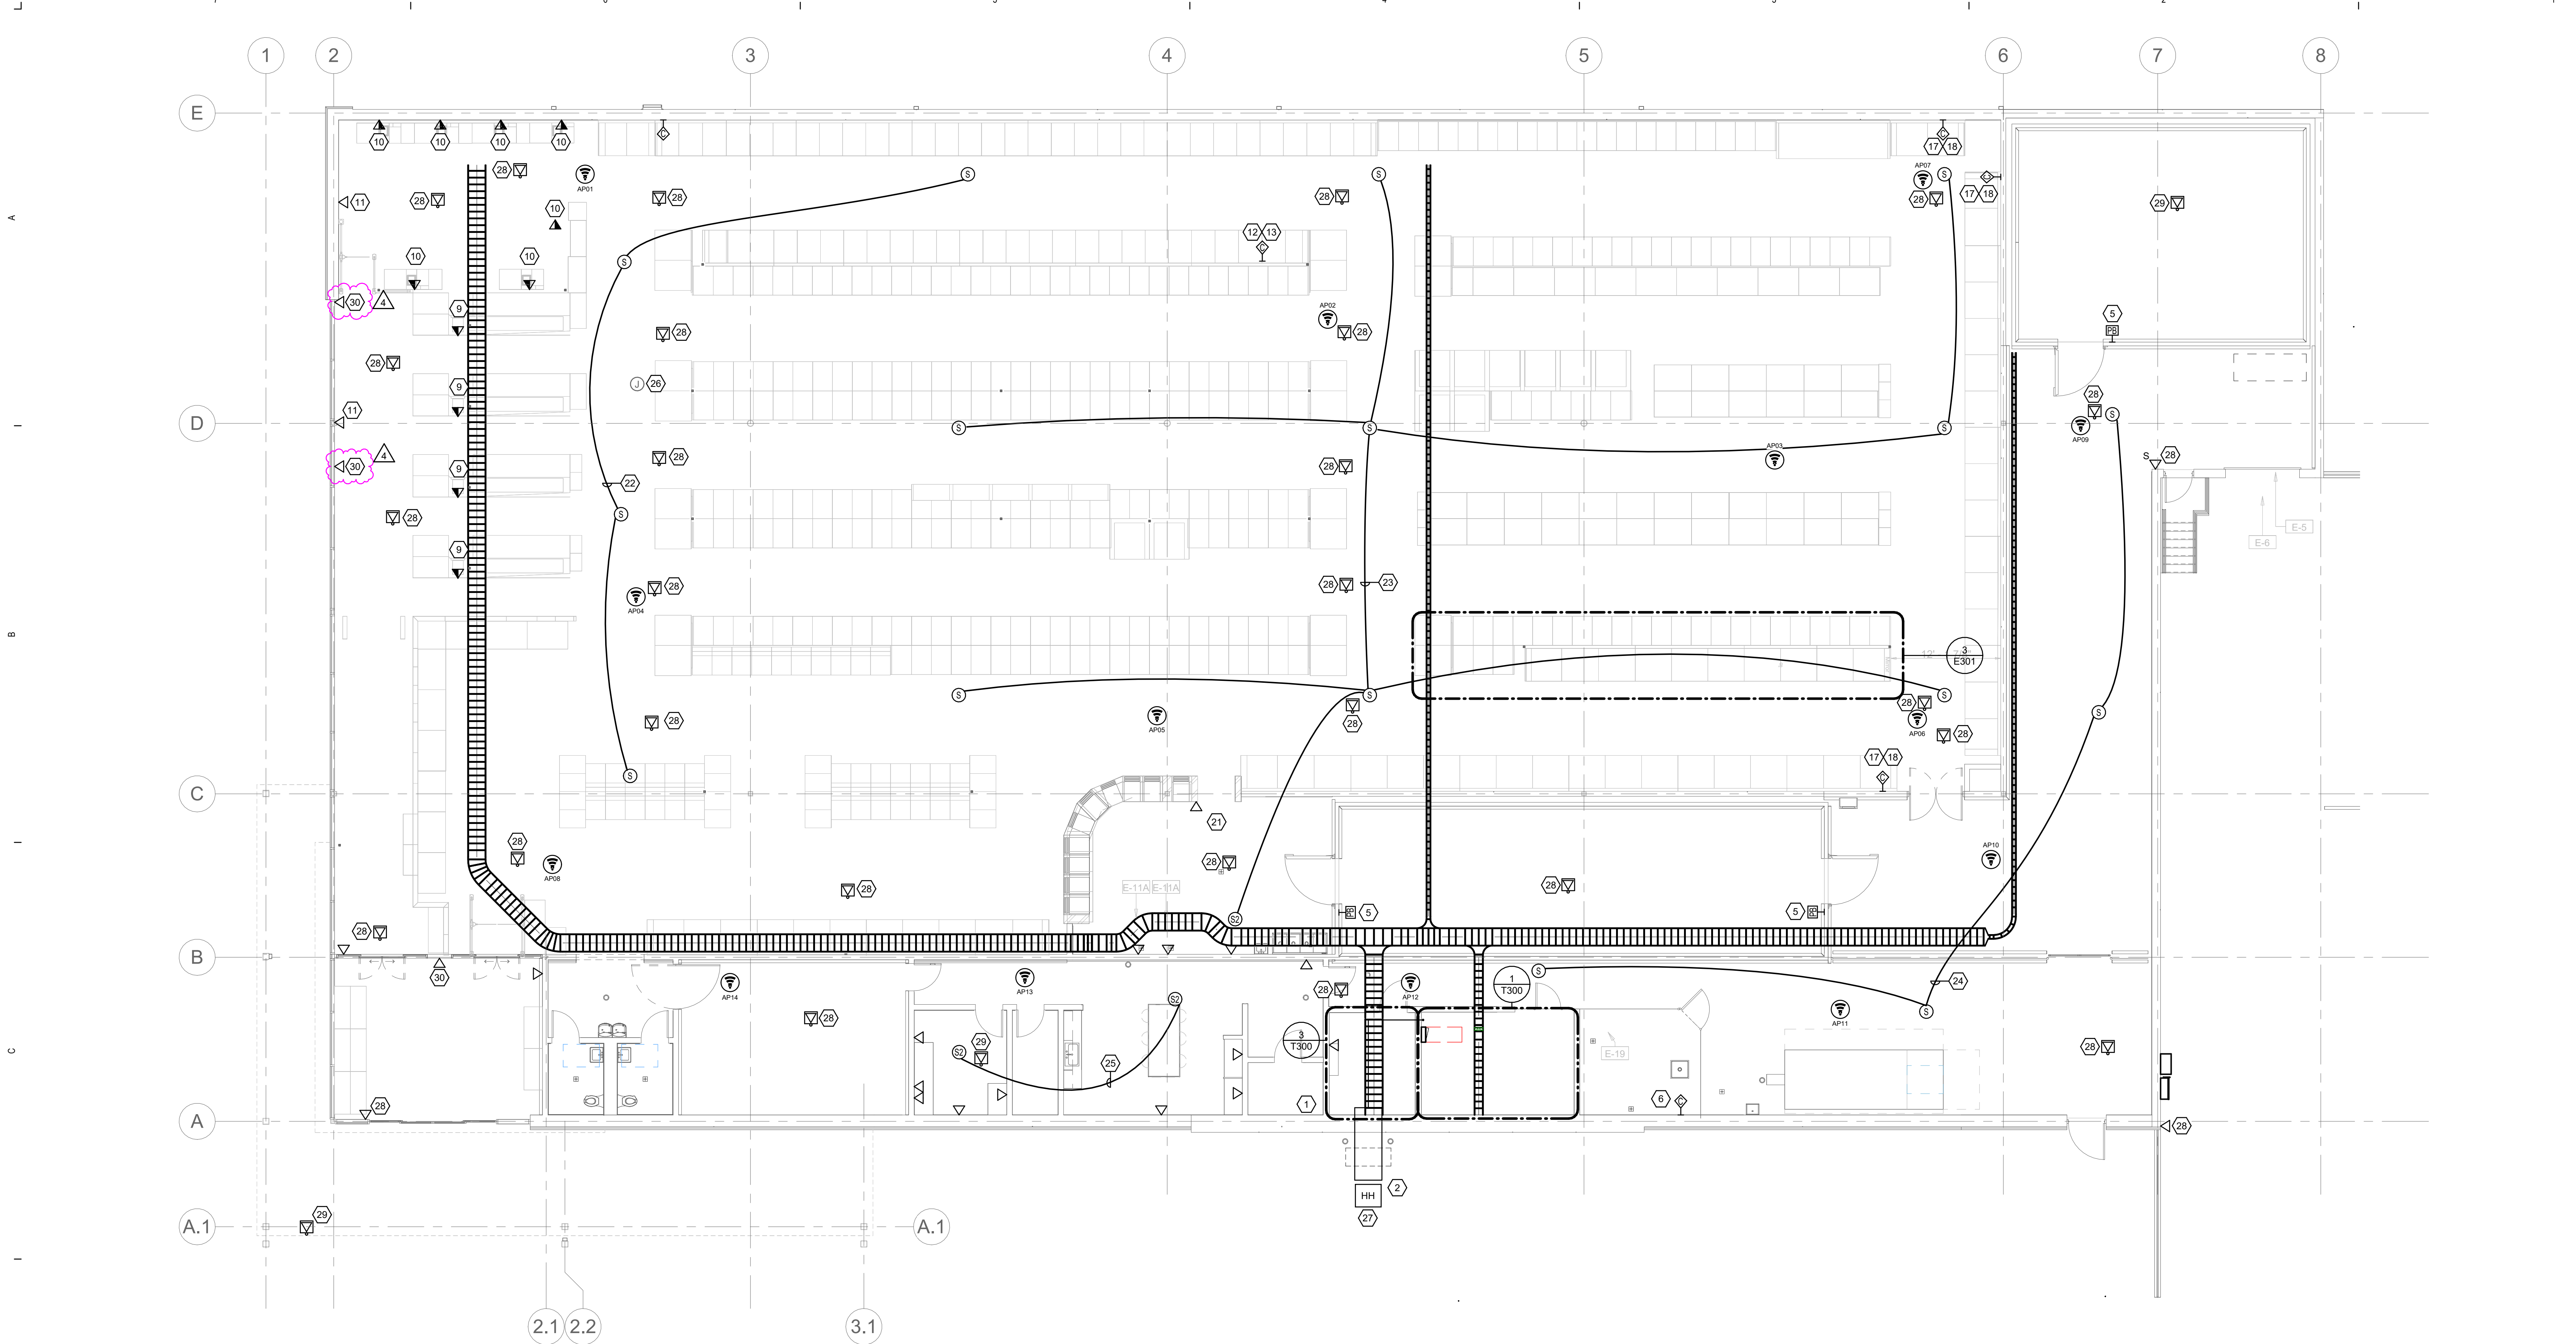

GROUND FLOOR - TECHNOLOGY PLAN
1/8" = 1'-0"

GENERAL SHEET NOTES

- REFER TO SHEET T000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- REFER TO SHEET E102 FOR CABLE WIREWAY PLAN.
- EC TO LABEL OR SPRAY INSIDE JUNCTION BOXES TO IDENTIFY PURPOSE OF THE JUNCTION BOX.
- REFER TO HUSSMANN DRAWINGS FOR EXACT TECHNOLOGY LAYOUT.
 - FOR HUSSMANN CASE CONNECTIONS:
 - AT THE FIRST AND LAST CASE IN EACH LINEUP, AN ETHERNET PATCH CABLE WILL BE CONNECTED TO THE WALL JACK, THE OPPOSITE END WILL BE CUT OFF AND STRIPPED BACK NEATLY, AND THE WIRE COLORS SPECIFIED IN E6.1 XWEB CABLE TERMINATION CONNECTION DETAIL WILL BE TERMINATED ON THE CORELINK CONTROLLER.
 - BELDEN 222 CABLE WILL THEN BE USED TO DAISY CHAIN EACH CASE WITHIN A LINEUP.
 - ALL CABLES ON THIS COMMUNICATION LOOP SHOULD BE LABELED RS485.
 - ALL WALL PLATE JACKS SHOULD BE LABELED RS485.
 - WALL JACK TO BE INSTALLED ON SALES FLOOR SIDE OF WALL AND 84" AFF.
 - ISLAND RJ45 JACKS ARE TO BE INSTALLED AT THE BOTTOM OF THE POWER POLLS.

SHEET KEYNOTES

- APPROXIMATE LOCATION OF TELECOMMUNICATION ENTRANCE FACILITY. REFER TO DETAIL 1/7300.
- CONDUITS CONTINUE TO TELECOMMUNICATIONS UTILITY SERVICE PROVIDER POINT OF PRESENCE (POP). COORDINATE THE EXACT LOCATION OF THE POP WITH EACH UTILITY SERVICE PROVIDER PRIOR TO INSTALLATION. REFER TO CIVIL UTILITY PLAN FOR CONTINUATION OF CONDUIT ROUTING.
- PROVIDE A 48"W X 48"H X 36"D HAND HOLE WITH A TRAFFIC RATED LID. REFER TO ELECTRICAL DETAILS. PROVIDE ADDITIONAL HANDHOLES IN CONDUIT ROUTE TO PROPERTY LINE WHEN CONDUIT LENGTH EXCEEDS 100'.
- DATA OUTLET DEDICATED TO TIME CLOCK. COORDINATE EXACT LOCATION WITH LIDL PROVIDED TIME CLOCK.
- SURFACE MOUNTED BOX FOR FREEZER PANIC SWITCH TO BE MOUNTED + 24" A.F.F. TO CENTER OF BOX - PROVIDE 3/4" EMPTY CONDUIT FROM BOX TO NEAREST CABLE TRAY WITH PULL STRING.
- CONTROL FOR EVAC SYSTEM.
- DATA OUTLET FOR COMPUTER WORKSTATION.
- DATA OUTLET FOR SAFE.
- SURFACE MOUNTED DATA OUTLET WITHIN CHECKOUT LANE PROVIDED BY MANUFACTURER. ROUTE CABLING THROUGH THE POWER POLE. REFER TO ELECTRICAL DRAWINGS, SHEET E301 FOR POWER POLE LOCATION.
- DATA OUTLET DEDICATED TO SELF-CHECKOUT LANE OR SELF-CHECKOUT LANE STATION ATTENDANT MOUNTED IN WIREMOLD 4000 RACEWAY. ROUTE CABLING THROUGH THE POWER POLE. REFER TO ELECTRICAL DRAWINGS, SHEET E301 FOR POWER POLE LOCATION.
- DATA OUTLET DEDICATED TO DIGITAL ADVERTISEMENT DISPLAY PROVIDED BY LIDL IT. FIELD VERIFY EXACT LOCATION.
- SERIAL DATA CABLING DEDICATED TO FREEZER/CHILLER UNIT. PROVIDE CATEGORY 6 CABLE (PANDUIT P/N: PFP5504IG-UJ) FOR CONNECTION TO XWEB CENTRALIZED REFRIGERATION MONITORING SYSTEM. LEAVE 36" SERVICE LOOP AT JUNCTION BOX FOR DEVICE TO BE TERMINATED BY REFRIGERATION CONSULTANT. LABEL AT EACH END OF THE CABLE WITH THE TAG IDENTIFIED FOR EACH DEVICE.
- ROUTE CABLING THROUGH POWER POLE. REFER TO ELECTRICAL DRAWING, SHEET E301 FOR POWER POLE LOCATIONS. PROVIDE A 1/2" FLEXIBLE METAL CONDUIT ROUTED BETWEEN THE POWER POLE AND THE FREEZER/REFRIGERATOR CONTROL PANEL. COORDINATE CONDUIT TERMINATION AT THE FREEZER/REFRIGERATOR CONTROL PANEL WITH REFRIGERATION CONSULTANT.
- SERIAL DATA CABLING DEDICATED TO AMBIENT HEAT SENSOR. PROVIDE CATEGORY 6 CABLE (PANDUIT P/N: PFP5504IG-UJ) FOR CONNECTION TO XWEB CENTRALIZED REFRIGERATION MONITORING SYSTEM. LEAVE 36" SERVICE LOOP AT JUNCTION BOX FOR DEVICE TO BE TERMINATED BY REFRIGERATION CONSULTANT. LABEL AT EACH END OF THE CABLE WITH THE TAG IDENTIFIED FOR EACH DEVICE.
- DATA OUTLET DEDICATED TO XWEB CENTRALIZED REFRIGERATION MONITORING SYSTEM. CONNECT TO LIDL DATA NETWORK IN IT 110. SURFACE MOUNT DATA OUTLET TO BLOCK WALL AND ROUTE SURFACE MOUNTED CONDUIT UP TO ABOVE CEILING AND THE NEAREST ACCESSIBLE CABLE PATHWAY.
- SERIAL DATA CABLING DEDICATED TO ROOFTOP DRY COOLER. PROVIDE CATEGORY 6 CABLE (PANDUIT P/N: PFP5504IG-UJ) FOR CONNECTION TO XWEB CENTRALIZED REFRIGERATION MONITORING SYSTEM. LEAVE 36" SERVICE LOOP AT JUNCTION BOX FOR DEVICE TO BE TERMINATED BY REFRIGERATION CONSULTANT. LABEL AT EACH END OF THE CABLE WITH THE TAG IDENTIFIED FOR EACH DEVICE.
- PROVIDE A CATEGORY 6 CABLE (PANDUIT P/N: PFP5504IG-UJ) ROUTED BETWEEN REFRIGERATOR/FREEZER/COOLER CONTROL POINTS LEAVING A 36" SERVICE LOOP FOR TERMINATION BY REFRIGERATION CONSULTANT.
- ROUTE REFRIGERATION CABLING THROUGH ACCESSIBLE WIRE CABLE BASKET TRAY. DO NOT ROUTE VISIBLE TO SALES FLOOR.
- REFER TO SHEET E603, DETAIL #2 FOR CONDUIT TRENCH DETAIL.
- DATA OUTLET DEDICATED TO SELF-CHECKOUT LANE. OUTLET RECESSED INTO WALL - PROVIDE MINIMUM 1" DIA EMPTY CONDUIT WITH PULL STRING FROM OUTLET TO CABLE TRAY ABOVE.
- DATA OUTLET BEHIND MILL WORK FOR SIGNAL BOOSTER. RSC CONDUIT TO FINISH INSIDE OF BAKERY MILLWORK.
- ZONE 1 - CHECKOUTS. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
- ZONE 2 - SALES. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
- ZONE 3 - BOH. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
- ZONE 4 - BREAK ROOM. PROVIDE 18-2 CABLE AND ROUTE TO RACK 1B IN IT ROOM VIA CABLE TRAY.
- PROVIDE JUNCTION BOX FOR VOCOVO ACCESS POINT RECEIVER WITH 18-2 CABLE TO RACK R1B VIA CABLE TRAY.
- HAND HOLE.
- DATA DROP FOR SECURITY DEVICE.
- ABOVE CEILING DATA DROP FOR SECURITY DEVICE.
- DATA FOR DIGITAL SIGNS. CONFIRM FINAL LOCATION AND CONNECTION WITH FIT OUT MANAGER.

ISSUANCE		
1	12/18/2025	PERMIT CYCLE 2
2	01/14/2026	PERMIT CYCLE 3
3	05/28/2026	CCD 01
4	09/08/2026	CCD 02

PROJECT NUMBER
7950191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. ELYA
DRAWN BY
M. GONZALEZ
CHECKED BY
D. ELYA