

NOTE: This is a standard symbol list and not all items listed may be used

Connections / Equipment

Connections / Equipment		Telephone Utility Pole	
	COMBINATION ADJUSTABLE FREQUENCY DRIVE WITH SAFETY DISCONNECT SWITCH		TELEPHONE TRANSFORMER PAD/VAULT
	COMBINATION MOTOR STARTER/FUSED DISCONNECT SWITCH	Raceways	
	CONTACTOR COIL		CABLE RUNWAY, WIRE MESH BASKET TYPE, WIDTH AS INDICATED
	HEAVY DUTY FUSED DISCONNECT SWITCH	— — — — —	EXISTING CONDUIT CONCEALED IN WALL OR CEILING SPACE
	MOTOR CONNECTION	— · — · — · —	EXISTING CONDUIT ROUTED BELOW FLOOR / GRADE
	NON-FUSED DISCONNECT SWITCH	— GP —	OVERHEAD PRIMARY SERVICE
	RELAY	— OT —	OVERHEAD TELEPHONE SERVICE
	REMOTE DRIVER FOR LED LUMINAIRES	— — — — —	SOLID BOTTOM CABLE RUNWAY (WHITE COLOR), WIDTH AS INDICATED
	TRANSFORMER	— — — — —	UNDERGROUND CABLE TELEVISION SERVICE
	FIRE SMOKE DAMPER	— — — — —	UNDERGROUND PRIMARY SERVICE
	SMOKE DAMPER	— — — — —	UNDERGROUND SECONDARY SERVICE
	CEILING MOUNTED JUNCTION BOX	— — — — —	UNDERGROUND TELEPHONE SERVICE
	FLOOR MOUNTED JUNCTION BOX	—————	CONDUIT CONCEALED IN WALL OR CEILING SPACE
	WALL-MOUNTED JUNCTION BOX	- - - - -	CONDUIT ROUTED BELOW FLOOR / GRADE
Fire Alarm		—————●	CONDUIT ELLED DOWN
	FIRE ALARM CONTROL PANEL	—————○	CONDUIT ELLED UP
	NOTIFICATION APPLIANCE CIRCUIT PANEL	—————>	CONDUIT/WIRING CONTINUATION
	FIRE ALARM ANNUNCIATOR PANEL	—————	CONDUIT/WIRING STUBBED OUT WITH END CAP OR INSULATED PLASTIC BUSHING
	PULL STATION	~~~~~	FLEXIBLE CONDUIT
	REMOTE TEST SWITCH	Switches and Receptacles	
	SMOKE DETECTOR		COMBINATION COMMUNICATIONS OUTLET AND DOUBLE DUPLEX RECEPTACLE, FLUSH FLOOR
	SMOKE DETECTOR, DUCT MOUNTED		DUPLEX RECEPTACLE, FLUSH FLOOR
	SPRINKLER FLOW SWITCH WITH INPUT MODULE		DUPLEX RECEPTACLE (MULTIPLE LETTERS INDICATE MULTIPLE OPTIONS) G = GFCI PROTECTED WP = WEATHERPROOF CONTINUOUS USE COVER, GFCI PROTECTED, WITH- A = ABOVE COUNTER
	SPRINKLER TAMPER SWITCH WITH INPUT MODULE		DUPLEX RECEPTACLE, FLUSH FLOOR
	CEILING MOUNTED HORN/STROBE COMBINATION (# INDICATES MINIMUM C/		(G) DOUBLE DUPLEX RECEPTACLE, FLUSH FLOOR
	STROBE, CEILING MOUNTED (# INDICATES MINIMUM CANDELA RATING)		DOUBLE DUPLEX RECEPTACLE. SEE LETTER CODE LIST AT DUPLEX RECEPTACLE
	WALL MOUNTED HORN/STROBE COMBINATION		SINGLE RECEPTACLE, FLUSH FLOOR
	ADDRESSABLE MONITOR MODULE		SINGLE RECEPTACLE. SEE LETTER CODE LIST AT DUPLEX RECEPTACLE FOR OPT
	ADDRESSABLE RELAY MODULE		EQUIPMENT ELECTRICAL CONNECTION
	WATER FLOW ALARM BELL FURNISHED BY DIV.13 WIRED TO FIRE ALARM S		SPECIAL PURPOSE RECEPTACLE. LETTER CODE DENOTES RECEPTACLE CONFIGU X = COORDINATE RECEPTACLE CONFIGURATION WITH EQUIPMENT BEING
General			PENDANT RECEPTACLE WITH CORD GRIPS. VERIFY PENDANT LENGTH. SEE LETT
	DETAIL NUMBER AND SHEET LOCATION		CEILING MOUNTED OCCUPANCY SENSOR V (LOWERCASE) = VACANCY CONTROL DESIGNATION
	EQUIPMENT IDENTIFICATION		WALL MOUNTED OCCUPANCY SENSOR V (LOWERCASE) = VACANCY CONTROL DESIGNATION
	FOOD SERVICE EQUIPMENT / CALCULATION TAG		WALL MOUNTED OCCUPANCY SENSOR/SWITCH V (LOWERCASE) = VACANCY CONTROL DESIGNATION
	KEYED NOTE		MULTIPLE CHANNEL SURFACE METAL RECEPTACLE RACEWAY WITH LOW VOLTAGE
	POINT OF CONNECTION		SURFACE METAL RECEPTACLE RACEWAY
	SECTION NUMBER AND SHEET LOCATION		PHOTO ELECTRIC SWITCH S = SWITCHED PHOTOCELL
	DEMOLISH		SINGLE POLE SWITCH K = KEYED SWITCH, OS = OCCUPANCY SENSOR SWITCH
	EXISTING WORK		
	NEW WORK		
Lighting			
	A TYPE LINEAR LIGHT FIXTURE		
	A TYPE SPOTLIGHT FIXTURE		
	EXIT SIGN CEILING MOUNTED, ARROW(S) INDICATES DIRECTION IF SHOWN		
	EXIT SIGN WALL MOUNTED, ARROW(S) INDICATES DIRECTION IF SHOWN		
	WALL MOUNTED LUMINAIRE		

#10 B-27,29,31	BRANCH CIRCUIT WIRING. ARROW INDICATES HOME RUN TO PANEL WITH CIRCUITS AS NOTED. WIRE SIZE IS #12 AWG MINIMUM UNLESS NOTED OTHERWISE. SHORT TICK MARKS INDICATE PHASE CONDUCTORS. LONG TICK MARKS INDICATE NEUTRAL CONDUCTORS. A SINGLE CURVED TICK MARK INDICATES INSULATED GREEN GROUND CONDUCTOR. SECOND CURVED TICK MARK INDICATES "ISOLATED GROUND" (GREEN INSULATION WITH YELLOW STRIPE) CONDUCTOR.
	BRANCH PANEL
	CIRCUIT BREAKER
	DRY TYPE TRANSFORMER
	FLUSH MOUNT EQUIPMENT ENCLOSURE AS NOTED
	FLUSH WALL MOUNTED BRANCH PANEL
	GROUND BAR
	GROUNDING POINT
	MAIN DISTRIBUTION PANEL / SUB DISTRIBUTION PANEL
	POWER POLE
	SURFACE MOUNT EQUIPMENT ENCLOSURE AS NOTED

DO NOT COMMENCE INSTALLATION OF ELECTRICAL SYSTEMS AND EQUIPMENT WITHOUT RELATED SHOP DRAWING APPROVALS.

B. "FURNISH" MEANS TO "SUPPLY" AND USUALLY REFERS TO DELIVERY OF AN ITEM OF EQUIPMENT TO THE PROJECT SITE, READY FOR INSTALLATION. EQUIPMENT TO THE PROJECT SITE DOES NOT INCLUDE DELIVERY OR INSTALLATION OF THE EQUIPMENT TO ITS PLACE IN FULL OPERATIONAL ORDER. PROVIDE" MEANS TO "FURNISH" AND "INSTALL." "FUTURE," BY OTHERS, (REFER DISCIPLINE) DIVISION" AND SIMILAR EXPRESSIONS INDICATE WORK THAT MAY BE PERFORMED UNDER THE CONTRACT DOCUMENTS BUT, NOT NECESSARILY UNDER THE DIVISION OR DISCIPLINE ON WHICH THE NOTE APPEARS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE WORK WITH SUPPLIERS, SUBCONTRACTORS, MANUFACTURERS, ETC. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE WORK BE REQUIRED, CONTACT THE ARCHITECT/ENGINEER PRIOR TO SUBMITTING BID.

C. THE WORK SHALL COMPLY WITH LATEST CODE. THIS WOULD INCLUDE, BUT IS NOT LIMITED TO THE INTERNATIONAL BUILDING CODE (IBC) AND THE NATIONAL BUILDING CODE (NEC), AMENDMENTS, NFPA, ANSI, OSHA, AND ALL OTHER LOCAL OR MUNICIPAL BUREAUS AND AGENCIES. THE CONTRACTOR SHALL VERIFY ALL CONDITIONS UNDER WHICH CONSTRUCTION DOCUMENTS NOT WITHSTANDING. THIS SHALL NOT BE CONSTRUED AS WAIVING COMPLIANCE WITH ANY REQUIREMENTS OF THE PLANS AND SPECIFICATIONS WHICH MAY BE IN EXCESS OF ANY REQUIREMENTS OF THESE CODES.

D. PROVIDE SUITABLE ANCHORAGE AND SUPPORT FOR ELECTRICAL EQUIPMENT IN RATED WALLS, CEILING, FLOORS AND CEILING. PROVIDE DEVICES AND RACEWAYS IN ACCORDANCE WITH ESTABLISHED CODES AND SPECIFICATIONS.

E. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS. DRAWINGS AND SPECIFICATIONS COMPLEMENT EACH OTHER. REQUIREMENT BY EITHER INFERS REQUIREMENT BY BOTH. CONTRACTOR SHALL CAREFULLY COMPARE THE DRAWINGS AND SPECIFICATIONS, CHECK FOR CONFLICTS AND DISCREPANCIES UNDER WHICH CONSTRUCTION IS TO BE IMPLEMENTED. FOR CLARIFICATION BETWEEN VARIOUS DRAWINGS AND/OR SPECIFICATIONS, THE DISPUTED ISSUE SHALL BE REFERRED TO THE ENGINEER BEFORE ANY WORK IS COMPLETED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY EXCEPTIONS NECESSARY TO MAKE THIS WORK A COMPLETE AND READY-TO-USE INSTALLATION. IF NOT SO-STATED IN THE CONTRACTOR'S PROPOSAL, ANY SUCH WORK WILL NOT BE CONSIDERED ADDITIONAL.

F. THE CONTRACTOR SHALL CAREFULLY EXAMINE THE CONTRACT DOCUMENTS, VISITING THE SITE, TAKEAWAY THE PREMISES AND MAKE A CONSTRUCTION SURVEY OF THE CONDITIONS UNDER WHICH CONSTRUCTION WILL BE IMPLEMENTED. THE SUBMISSION OF A PROPOSAL WILL BE CONSTRUED AS EVIDENCE THAT SUCH AN EXAMINATION HAS BEEN MADE. FAILURE TO DO SO SHALL BE CONSIDERED ACCEPTANCE OF THE CONDITIONS OF THE CONTRACT. ANY LATER CLAIMS FOR LABOR, EQUIPMENT, OR MATERIALS REQUIRED FOR DIFFICULTIES ENCOUNTERED WHICH COULD HAVE BEEN FORESEEN HAD SUCH AN EXAMINATION BEEN MADE, WILL NOT BE RECOVERED.

G. THE CONTRACTOR SHALL CURRY, OBTAIN AND PAY FOR ALL PERMITS, INSPECTIONS, AXES, LICENSE, AND FEES TO ALL GOVERNMENT AGENCIES REQUIRED FOR THE EXECUTION AND COMPLETION OF THE ELECTRICAL WORK. SCHEDULING OF ALL REQUIRED INSPECTIONS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. CONTRACTOR SHALL PREPARE AND SUBMIT ALL REQUIRED DRAWINGS AND PERMITS TO THE GOVERNMENTAL AGENCIES AND UTILITY COMPANIES FOR THEIR APPROVAL.

H. CONNECT EQUIPMENT AND DEVICES FURNISHED UNDER OTHER DIVISIONS OF THIS CONTRACT BY OWNER OR BY OTHER CONTRACTS.

I. UNLESS OTHERWISE NOTED, PROVIDE CONCEALED AND FLUSH MOUNTED INSTALLATION OF DEVICES AND EQUIPMENT IN AREAS.

J. ELECTRICAL DRAWINGS ARE DIAGRAMMATIC IN NATURE AND SHALL NOT BE SCALED. TO THIS EXTENT, DATA GIVEN ON THE DRAWINGS IS AS EXACT AS COULD BE SECURED. THE CONTRACTOR SHALL COORDINATE THE EXACT LOCATION OF ALL REQUIRED WORK AND EQUIPMENT WITH THE OTHER TRADES. WHERE THERE ARE POTENTIAL CONFLICTS, THE CONTRACTOR SHALL OBTAIN AND VERIFY EXACT LOCATIONS, MEASUREMENTS, LEVELS, SPACE REQUIREMENTS, ETC. AT THE SITE AND SHALL SATISFACTORILY ADAPT HIS WORK TO ACTUALLY EXISTING CONDITIONS. REFER TO ARCHITECTURAL, MECHANICAL, PLUMBING, FIRE PLANS, ELEVATIONS AND DETAILS INDICATING THE LOCATIONS OF CEILING ELEMENTS (E.G., LIGHTS, SPRINKLERS, DIFFUSERS, ETC.) AND WALL ELEMENTS. CEILING MOUNTED ITEMS SHALL BE INSTALLED IN ACCORDANCE WITH THE ARCHITECTURAL REFLECTED CEILING PLANS. IF A LOCATION FOR AN ITEM IS NOT SHOWN ON THE ARCHITECTURAL DRAWINGS, VERIFY THE EXACT LOCATION OF THE ITEM WITH THE ARCHITECT PRIOR TO INSTALLATION. THESE REQUIREMENTS APPLY TO ALL CEILING ELEMENTS.

K. THE CONTRACTOR SHALL PROVIDE TEMPORARY POWER AND LIGHTING FOR THIS WORK DURING CONSTRUCTION. TEMPORARY LIGHTING SHALL AT LEAST BE THE EQUAL OF (1100-WATT FIXTURE EVERY 100 SQUARE FEET, WITH A MINIMUM ONE FIXTURE PER ROOM. TEMPORARY LIGHTING SHALL BE LEFT IN PLACE UNTIL PERMANENT LIGHTING IS COMPLETELY INSTALLED. THE CONTRACTOR SHALL COORDINATE TEMPORARY LIGHTING WITH OTHER TRADES AND PROVIDE ADEQUATE PROVISIONS. THE CONTRACTOR SHALL PERFORM ALL COORDINATION WITH THE OWNER AND/OR LANDLORD AND UTILITY COMPANY.

L. PROVIDE SEPARATE EQUIPMENT GROUNDING CONDUCTOR IN 120 VOLT, MULTI-WIRE CIRCUITS.

M. RUN ELECTRICAL CONDUIT CONCEALED AND PARALLEL TO BUILDING LINES. VERIFY WITH ARCHITECT.

N. INSTALL COMPLETE SYSTEM OF CONDUCTORS IN RACEWAY SYSTEM THROUGHOUT BUILDING FOR FEEDERS, BRANCH CIRCUITS, ETC.

O. INSTALLATION OF UTILITY TRANSFORMER, UTILITY SERVICE CONDUITS, VAULTS, GROUNDING, ETC., SHALL BE VERIFIED AND COORDINATED WITH UTILITY COMPANY PRIOR TO INSTALLATION. CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS AND APPROVALS FROM THE UTILITY COMPANY. THE PROPOSED UTILITY COMPANY TRANSFORMER LOCATION, SERVICE FEEDER ROUTING, VAULT LOCATION AND SIZE ARE SUBJECT TO UTILITY COMPANY ENGINEERING. CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS AND APPROVALS FROM THE UTILITY COMPANY. UTILITY REQUIREMENTS FOR THIS PROJECT WITH UTILITY COMPANY PRIOR TO COMMENCING WORK.

P. ALL WORK ON SERVICE CONDUCTORS, FEEDERS, AND OTHER SUCH EQUIPMENT SHALL BE DONE ONLY WHEN SUCH CONDUCTORS, FEEDERS, AND EQUIPMENT ARE DE-ENERGIZED. THE CONTRACTOR SHALL FOLLOW THE OSHA SAFETY AND LOCK-OUT/TAG-OUT PROCEDURE IN PLACE PRIOR TO COMMENCEMENT OF WORK.


Q. ELECTRICAL CONTRACTOR SHALL COORDINATE ALL CONDUIT TRENCHING WITH OTHER DISCIPLINES AND THE UTILITY COMPANY TO AVOID CONFLICT.

R. MINIMUM SIZE FOR EXTERIOR BELOW GRADE CONDUIT SHALL BE 1".

S. OCCUPANCY SENSOR NOTES:

1. SENSOR SHALL BE LOCATED IN EAR "VIEW" OF OCCUPANTS, WHERE SENSOR WILL BE BLOCKED, SUBSTITUTE WITH SMALL ROOM CEILING SENSOR.
2. SEE MANUFACTURER'S SPECIFICATION REGARDING PLACING SENSORS AWAY FROM STRONG AIR-FLOW, IDENTIFY PRECISE LOCATION OF EACH CEILING SENSOR WHERE DRAWINGS INDICATE AIR SUPPLIES.
3. IN DINING ROOMS WITH CEILING SENSORS AND DUAL-LEVEL LIGHTING, ASSUME TWO TOGGLE SWITCH OVERRIDES PER SENSITIVE.

T. PROVIDE MACHINE-PRINTED, PRESSURE SENSITIVE, ABRASION RESISTANT LABEL TAPE ON BACK OF ALL SWITCH AND RECEPTACLE PLATES TO IDENTIFY THE PANELBOARD AND CIRCUIT BREAKER FOR WHICH THE EQUIPMENT IS SERVED. FOR LABELING OF UPS CIRCUITS, USE 1/2" BLACK ON WHITE TAPE 14PT FONT.

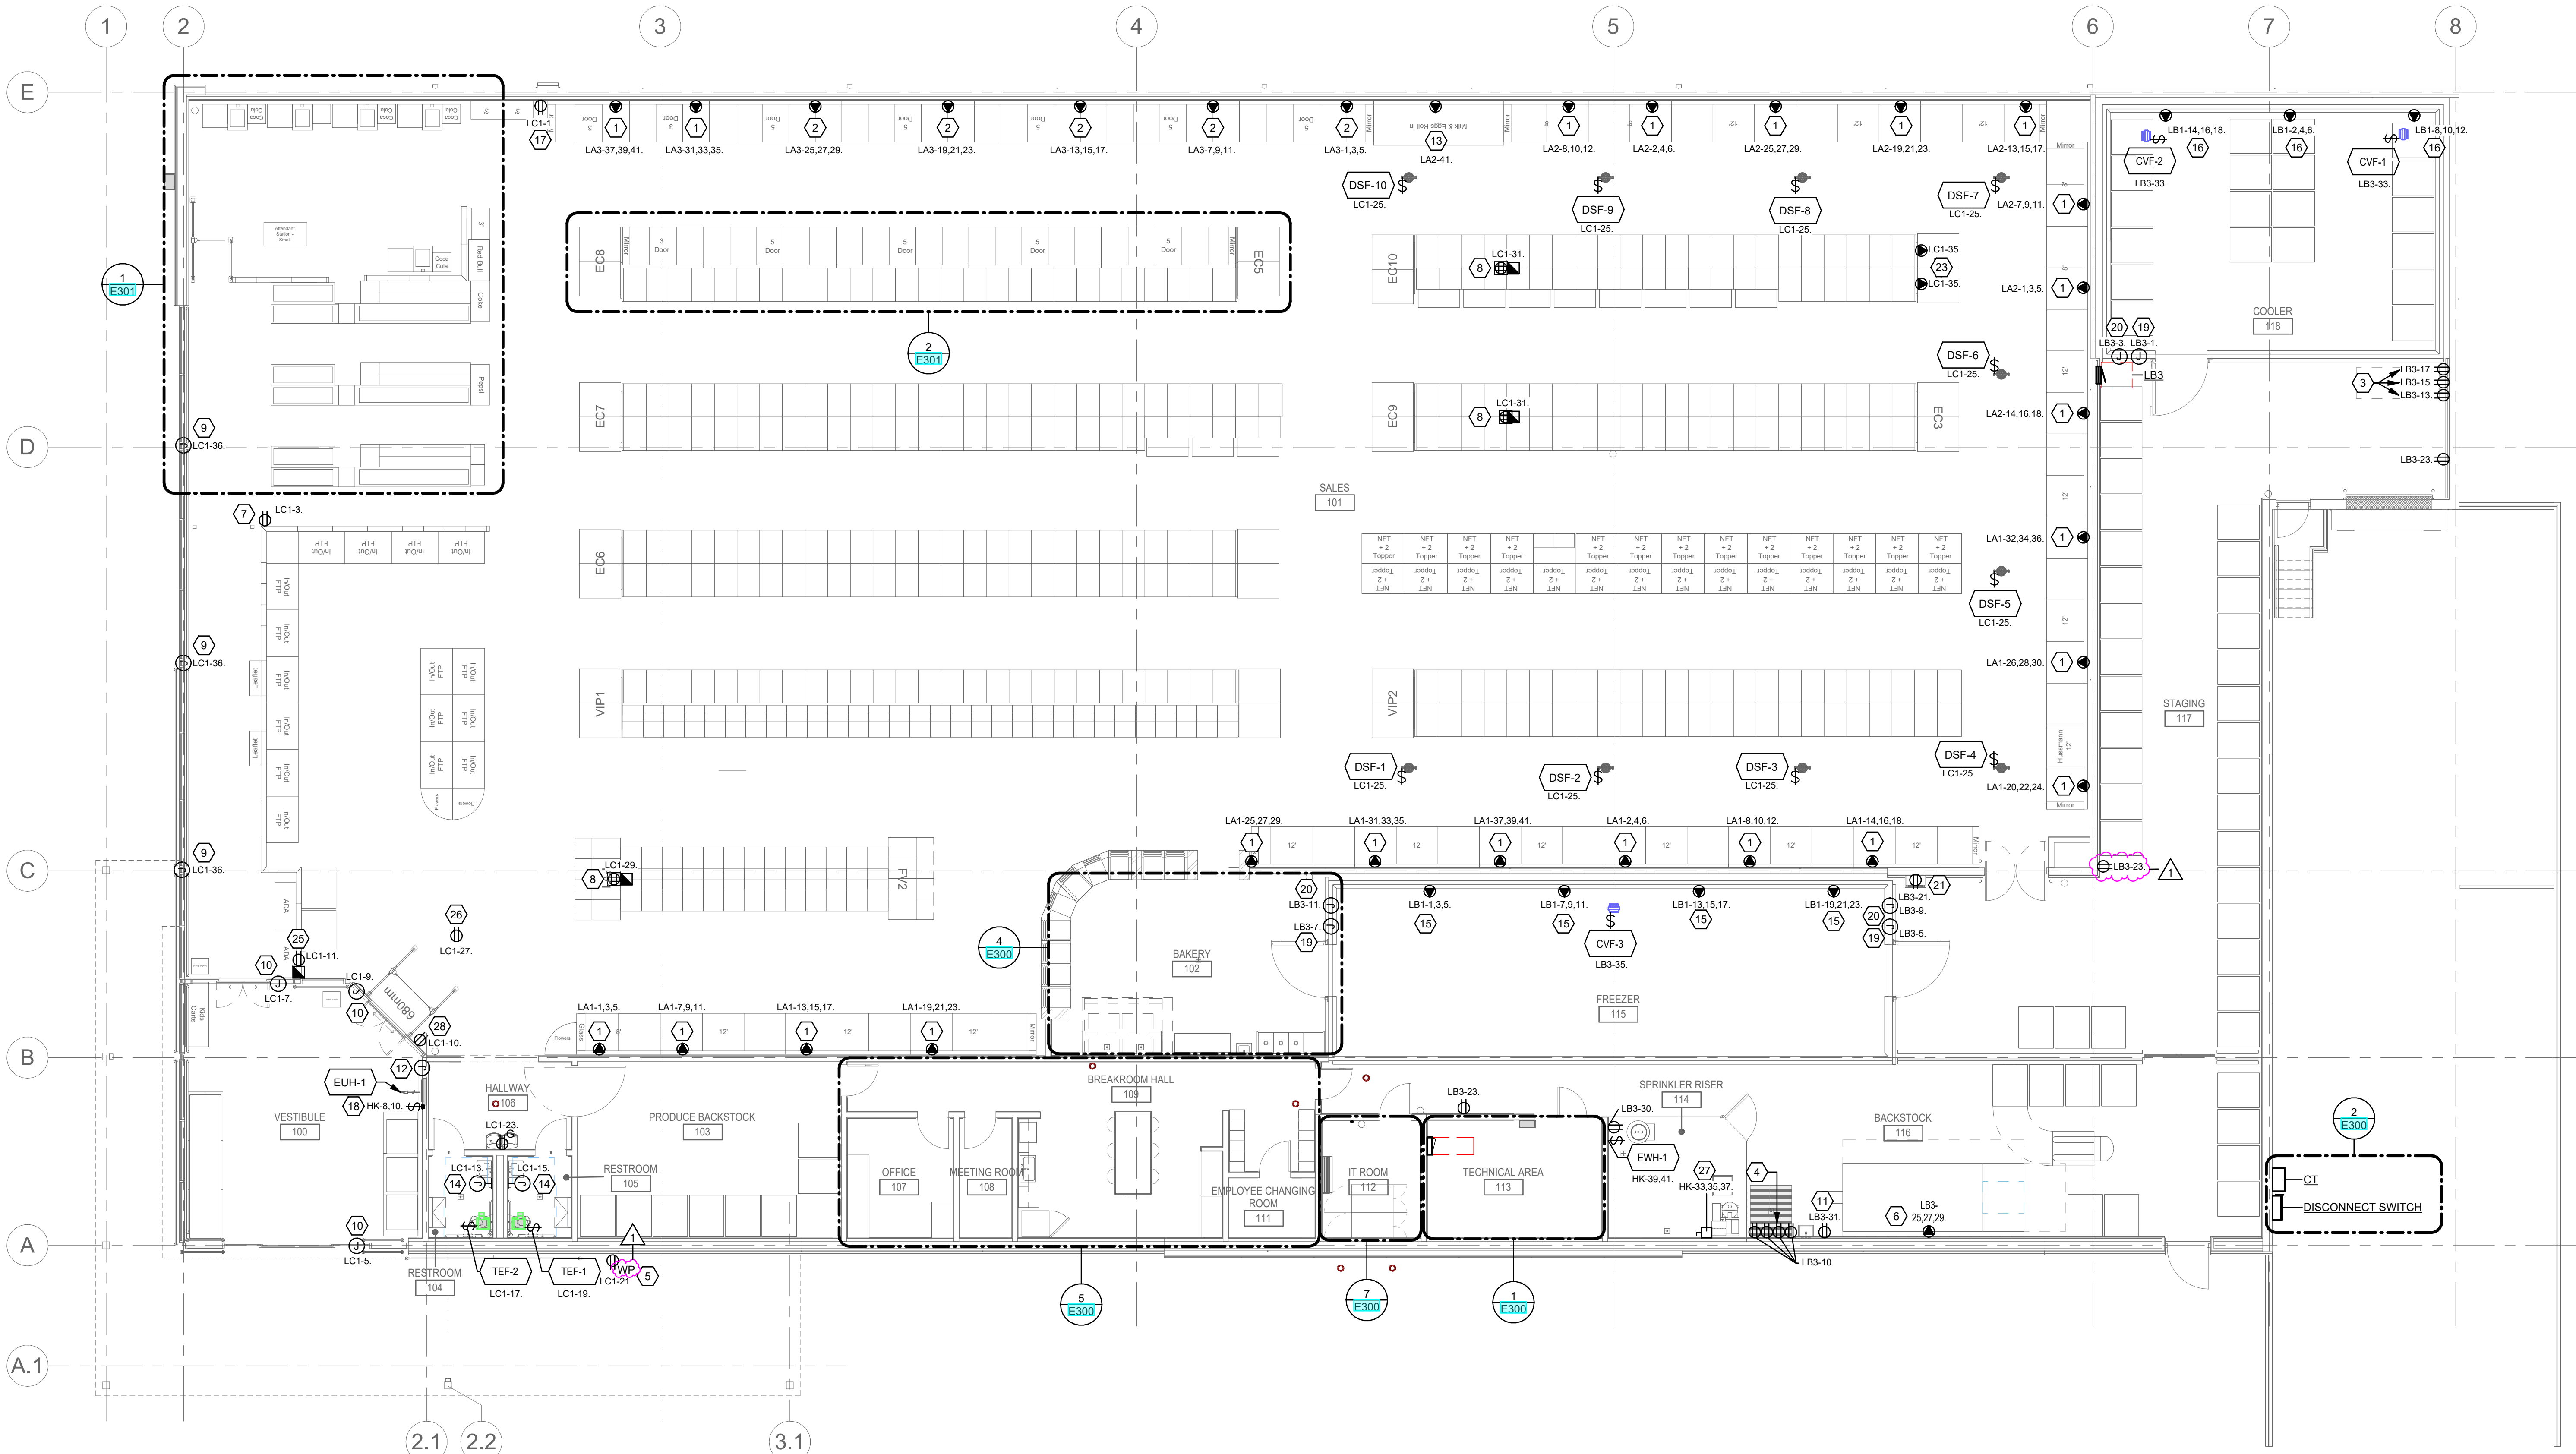

GROUND FLOOR - ELECTRICAL POWER PLAN
1/8" = 1'-0"

GENERAL SHEET NOTES

- REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- REFER TO SHEET E000 FOR MECHANICAL EQUIPMENT CONNECTION REQUIREMENTS.
- CONTRACTOR SHALL PROVIDE FACTORY BLUE FINISH WIRING DEVICES FOR ALL UPS OUTLETS FED FROM PANEL 1E11 IN STORES FOR IDENTIFICATION PURPOSES. COORDINATE WITH ARCHITECTS FOR EXACT DEVICE FINISH PRIOR TO PURCHASE.

SHEET KEYNOTES

- PROVIDE NEMA L21-20R RECEPTACLES FOR RL-3W FREEZER UNITS, ID6SU-8 MEDIUM TEMP CASES & ID6SU-12 REFRIGERATION UNITS. ELECTRICAL CONTRACTOR TO COORDINATE HEIGHT AND FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
- PROVIDE NEMA L21-30R RECEPTACLES FOR RL-5W UNITS. ELECTRICAL CONTRACTOR TO COORDINATE HEIGHT AND FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
- PROVIDE NEMA 5-15R 120V RECEPTACLES FOR PALLET JACKS. ALL RECEPTACLE BACKBOXES SHALL BE RECESSED MOUNTED WITHIN WALL. CONDUIT SHALL BE CONCEALED WITHIN WALL.
- BUG ZAPPER RECEPTACLE.
- RECEPTACLE TO BE RECESSED IN BRICK.
- PROVIDE HUBBELL CS8369 RECEPTACLE FOR BALER.
- EAS POWER SUPPLY DUPLEX RECEPTACLE.
- POWER FOR LED UNDERSHELF LIGHTING, 120V, 1-PHASE. PROVIDE RECEPTACLE IN JUNCTION BOX SURFACE MOUNTED TO THE FLOOR. ROUTE CIRCUIT THROUGH LIGHTING CONTACTOR. REFER TO SHEET E-203 FOR LIGHTING CONTACTOR DETAILS. SEE ARCHITECTURAL ELEVATIONS FOR EXACT LOCATION AND MOUNTING HEIGHTS. PROVIDE WIREMOLD WHITE POWERPOLE 250TC WITH EXTENSIONS AS REQUIRED.
- JUNCTION BOX FOR POWER TO ELECTRIC MOTOR FOR THE SHADES CONCEALED ON TOP OF STRUCTURE. INSTALL 3/4" CONDUIT FOR POWER CONCEALED WITHIN THE MULLIONS AND STRUCTURE. REFER TO SHEET E-204 FOR EXACT LOCATION AND ELEVATION.
- POWER FOR MAIN ENTRANCE DOORS. JUNCTION BOX TO BE CONCEALED.
- PROVIDE RECEPTACLE FOR X-WEB.
- LOCATION OF FAAP. REFER TO ARCHITECTURAL ELEVATIONS FOR EXACT ELEVATION AND LOCATION.
- PROVIDE HUBBELL CS8361C OR EQUIVALENT 50A 125V ULCSA RECEPTACLE FOR DDXSFRW REFRIGERATION UNIT. ELECTRICAL CONTRACTOR TO COORDINATE HEIGHT AND FINAL LOCATION WITH REFRIGERATION MANUFACTURER DRAWINGS.
- POWER FOR HAND DRYER. MOUNT AT 3'-0" AFF.
- CONTRACTOR TO PROVIDE AND INSTALL L15-30P RECEPTACLE IN BACK BOX AND MATCHING L15-30P CORD CAP. AFFIX BACK BOX TO METAL STUDS. REFER TO ARCHITECTURAL ELEVATIONS FOR FINAL LOCATION AND ELEVATIONS PRIOR TO ROUGH IN. CONTRACTOR TO CONFIRM CLOCKWISE PHASE ROTATION PRIOR TO WIRING/INSTALLATION AND MAKE FINAL CONNECTION BETWEEN RECEPTACLES AND AGGREGATE UNITS.

- CONTRACTOR TO PROVIDE AND INSTALL L15-20R RECEPTACLE IN BACK BOX AND MATCHING L15-20P CORD CAP. AFFIX BACK BOX TO METAL STUDS. REFER TO ARCHITECTURAL ELEVATIONS FOR FINAL LOCATION AND ELEVATIONS PRIOR TO ROUGH IN. CONTRACTOR TO CONFIRM CLOCKWISE PHASE ROTATION PRIOR TO WIRING/INSTALLATION AND MAKE FINAL CONNECTION BETWEEN RECEPTACLES AND AGGREGATE UNITS.
- POWER FOR STORE EQUIPMENT LED LIGHTS.
- POWER FOR ELECTRIC UNIT HEATER.
- PROVIDE A 120V/1P/20AMPS CIRCUIT FOR COOLER/FREEZER DOOR HEATER AND VENT HEATER. ELECTRICAL CONTRACTOR TO COORDINATE WITH MANUFACTURER FOR EXACT LOCATION AND MOUNTING HEIGHT OF JUNCTION BOXES FOR DOOR HEATER AND VENT HEATER.
- PROVIDE A 120V/1P/20AMPS CIRCUIT FOR COOLER/FREEZER DOOR ALARM. ELECTRICAL CONTRACTOR TO COORDINATE WITH MANUFACTURER FOR EXACT LOCATION AND MOUNTING HEIGHT OF JUNCTION BOX FOR ALARM.
- PROVIDE RECEPTACLE FOR SCALE.
- NOT USED.
- PROVIDE (2) 75' CORD REELS MOUNTED AT 13'-0" AFF. TERMINATE ONE CORD REEL WITH A NEMA 5-15R RECEPTACLE. TERMINATE ONE CORD REEL WITH A NEMA L5-15 TWIST LOCK RECEPTACLE. CORD ENDS SHOULD HANG AT 8'-0" AFF.
- NOT USED.
- PROVIDE DEDICATED DUPLEX OUTLET AT 1'-4" FOR MOBILITY SCOOTER.
- JOIST MOUNTED RECEPTACLE FOR PVM.
- PROVIDE POWER TO EVAC SYSTEM. CIRCUIT WITH 4 #12, 1 #12 G, 3/4" C. DISCONNECTING MEANS FURNISHED WITH EQUIPMENT.
- PROVIDE DUPLEX RECEPTACLE FOR ELECTRIC SECURITY GATES. WALL MOUNT AT 9'-0" AFF.

ISSUANCE
1 12/18/2025 PERMIT CYCLE 2

PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER

GROUND FLOOR -
ELECTRICAL
POWER PLAN
E101

PROGRESSIVE
COMPANIES
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com



LIDL US, LLC
LIDL 1517 NORCROSS, GA



This form has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.



- A. REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- B. SPOTLIGHTS TO BE ADJUSTED BY ELECTRICAL CONTRACTOR AFTER LID FITS OUT STORE.
- C. REFER TO SHEET E202 FOR LIGHTING FIXTURE SCHEDULE AND CONTROL SEQUENCE.
- D. ALL LIGHT FIXTURES IN THE SALES FLOOR AREA SHALL BE MOUNTED AT 11'-6" AFF. LIGHT FIXTURE HANGER LENGTH SHALL BE 9'-0" UNLESS OTHERWISE NOTED. REFER TO ARCH DRAWINGS FOR ADDITIONAL INFORMATION.
- E. ALL LIGHTING IN THE SALES AREA IS CONTROLLED BY BMS AND ROUTED THROUGH LIGHTING CONTROL FACTOR.
- F. ELECTRICAL CONTRACTOR TO PROVIDE ALL NECESSARY POWER FEEDS AND AIRCRAFT CABLE FOR FIXTURE RUNS.
- G. ALL VESTIBULE LIGHT FIXTURES SHALL BE MOUNTED AT 11'-6" AFF.
- H. ALL LIGHT FIXTURES WITHIN 15'-0" OF WINDOWS SHALL INTERFACE WITH DAYLIGHT SENSOR.
- I. SEE SHEET E202 FOR LIGHTING CONTROL SEQUENCE OF OPERATIONS AND LUMINAIRE SCHEDULE.
- J. ALL SPOTLIGHTS TO BE ADJUSTED BY ELECTRICAL CONTRACTOR AFTER LID FINISHES FIT OUT OF THE STORE.
- K. ALL SENSORS FOR BACK OF HOUSE LIGHTING SHALL BE INTEGRAL TO LIGHT FIXTURE.

SHEET KEYNOTES

1. EXTERIOR LIGHTING FOR EMERGENCY AND NORMAL LIGHTING.
2. LIGHTING AND CONTROLS FOR FREEZER SUPPLIED BY NATIONAL LIGHTING ACCOUNT VENDOR. INSTALLED BY ELECTRICAL CONTRACTOR.
3. LIGHTING AND CONTROLS FOR COOLER SUPPLIED BY NATIONAL LIGHTING ACCOUNT VENDOR. INSTALLED BY ELECTRICAL CONTRACTOR.
4. REFER TO SHEET **E600**, DETAIL #4 FOR INSTALLATION DETAILS OF PENDANT MOUNTED EXIT SIGNS.
5. ALL FIXTURES IN THIS LINEAR ROW ARE INSTALLED TO BALDUR TRUNK - FOR TRUNK TYPES AND QUANTITIES, REFER TO NORDGEON LIGHTING SUBMITTAL.
6.  INSTALL EMERGENCY BATTERIES FOR EM CANOPY FIXTURES ON THE INTERIOR OF THE BUILDING. INSTALL BATTERIES ABOVE BOTTOM OF JOISTS.
7. LIGHTING FOR THE LOADING DOCK WILL BE CONTROLLED VIA MOTION SENSOR AND PHOTOCELL INTEGRAL TO THE FIXTURE WP WALL PACK. CIRCUIT FOR THESE LIGHTING FIXTURES SHALL NOT BE ROUTED THROUGH THE LIGHTING CONTACTOR.
8. NOT USED.
9. NOT USED.
10. ALL LIGHTING CIRCUITRY SHALL BE WIRED BY ELECTRICAL CONTRACTOR SUCH THAT LIGHTING CONNECTORS INSIDE THE ROW ARE NOT EXCEEDING 6A LOAD AT 277V. CONTRACTOR TO COORDINATE POWER DROP LOCATIONS WITH NORDGEON.
11. LIGHTING FIXTURE IS UNSWITCHED AND STAYS ON 24 HOURS A DAY. EXTEND THE LIGHTING POWER CIRCUITRY AHEAD OF THE CONTROLS FOR THE IDENTIFIED NITE LITE.
12. ALL FIXTURES IN THE LINEAR ROW SHALL BE DAL-DIMMABLE D2 FIXTURE TYPES. THESE FIXTURES SHALL BE CONTROLLED VIA THE LOCAL DAYLIGHT SENSORS VIA A 7LV POWER CABLE AND A DALI CAPABLE BMS. REFER THE WIRING DIAGRAM, DETAIL #4 IN SHEET **E601**.

LIGHTING CONTROL SEQUENCE OF OPERATIONS									
ROOM TYPE	SENSOR TYPE	TIMEOUT	TECHNOLOGY	PHOTOCELL	CONTROLLED VIA BMS	SWITCH	EMERGENCY SWITCHED	SWITCHED RECEPTACLES	NOTES
SALES FLOOR	N/A	N/A	N/A	AS REQUIRED BY LOCAL CODE IN DAYLIGHT ZONES.	YES	BMS	SWITCHED	NO	BUILDING MANAGEMENT SYSTEM (BMS) CONTROLS ALL LIGHTS IN SALES FLOOR THROUGH LIGHTING RELAY PANEL. LIGHTS TURN ON AND OFF BASED ON OWNER DEFINED SCHEDULE.
									WHERE REQUIRED BY CODE. DAYLIGHT CONTROL ZONE AUTOMATICALL DIMS BAED ON DAYLIGHT CONTRIBUTION.
BAKERY	N/A	N/A	N/A	NO	YES	BMS	SWITCHED	NO	BUILDING MANAGEMENT SYSTEM (BMS) CONTROLS ALL LIGHTS IN BAKING AREA THROUGH LIGHTING RELAY PANEL. LIGHTS TURN ON AND OFF BASED ON OWNER DEFINED SCHEDULE.
FREEZERS	OCCUPANCY	20	PIR	NO	NO	INTEGRAL TO EQUIPMENT	N/A	N/A	SENSOR PROVIDED BY MANUFACTURER, INSTALLED BY EC.
OFFICE	VACANCY	15	DUAL	NO	NO	TOGGLE	SWITCHED	IF REQ. BY CODE	MANUAL ON, AUTOMATIC OFF.
ELEC/MECH	N/A	N/A	N/A	NO	NO	TOGGLE	SWITCHED	NO	MANUAL ON, AUTOMATIC OFF OPERATION WITH MANUAL DIMMING.
STAGING, STOCKROOM	OCCUPANCY	20	PIR - INTEGRAL TO LUMINAIRE	NO	NO	TOGGLE	SWITCHED	N/A	AUTOMATIC ON/ AUTOMATIC OFF BASED ON OCCUPANCY, WITH LOCAL OVERRIDE TO OFF.
AMENITY HALLWAY	OCCUPANCY	15	PIR	NO	YES	N/A	SWITCHED	NO	AUTOMATIC ON/ AUTOMATIC OFF BASED ON OCCUPANCY. NO LOCAL SWITCH.
RESTROOMS	OCCUPANCY	20	DUAL	NO	NO	KEYED	SWITCHED	NO	AUTOMATIC ON/ AUTOMATIC OFF WITH LOCAL KEYED SWITCH
EXTERIOR LOADING DOCK	OCCUPANCY	20	PIR - INTEGRAL TO LUMINAIRE	INTEGRAL TO LUMINAIRES	NO	SWITCH	NO	NO	AUTOMATIC ON/ AUTOMATIC OFF BASED ON OCCUPANCY, WITH PHOTOCELL OVERRIDE TO OFF DURING DAYTIME HOURS.
EXTERIOR BUILDING MOUNTED	OCCUPANCY	20	N/A	INTEGRAL TO LUMINAIRES	YES	SWITCH	SWITCHED	NO	TIMECLOCK CONTROL THROUGH BMS WITH PHOTOCELL OVERRIDE. ALLOWABLE HOURS OF OPERATION AND SCHEDULING REQUIREMENTS BASED ON LOCAL CODE REQUIREMENTS. DIM LIGHTS 30% WHEN OCCUPANCY NOT DETECTED.
NOTES: 1. FOR ALL SENSOR AND SWITCH DEVICES, PROVIDE QUANTITIES AS SHOWN ON LIGHTING PLANS 2. PROVIDE ONE SWITCH PER ONE CONTROL ZONE, AS SHOWN ON THE LIGHTING PLANS. 3. ALL COMPONENTS SHOWN AND INDICATED ON THIS SCHEDULE, BUT NOT SHOWN ON THE PLAN OR VICE VERSA, SHALL BE INCLUDED AS IF SHOWN ON BOTH. 4. PROVIDE LIGHTING CONTROL PANELS / RELAYS, CABLES, WIRES AND ACCESSORIES AS REQUIRED TO FULFILL THE CONTROL REQUIREMENTS SHOWN ABOVE. 5. CONTROLS ARE BASED ON IECC 2015, WHERE REQUIRED BY CODE. ALL AUTOMATIC DIMMING SHALL BE CONTINUOUS 6. FOR AREAS ON BMS TIMECLOCK, OVERRIDE SWITCHING CAPABLE OF OVERRIDING TIMECLOCK FOR 2 HOURS MAXIMUM. 7. SWITCHED EMERGENCY LIGHTS SHALL BE CONNECTED TO AN EMERGENCY LIGHTING RELAY AND CONTROLLED BY SPACE KEYPAD / SWITCH WHERE APPLICABLE. 8. THIS SEQUENCE OF OPERATIONS IS BASED ON A CENTRAL RELAY PANEL CONTROL OF MAIN SALES FLOOR AND SUPPORT AREAS, WITH STAND ALONE CONTROLS IN TYPICAL BACK OF HOUSE SPACES. GENERAL COMPONENTS INCLUDE TIMECLOCK WITH INTEGRAL OVERRIDE, MANUAL WIRED AND WIRELESS CONTROL POINTS, PHOTOCELLS IN DAYLIT AREAS, OCCUPANCY SENSORS, AND LOAD CONTROLLERS (CONTROL PANELS, OR DISTRIBUTED LOAD CONTROLLERS). CONTROL POINTS AND SENSING DEVICES TO BE LOW VOLTAGE, WITH THE EXCEPTION OF INTEGRATED WALLSWITCH SENSORS.									

LUMINAIRE SCHEDULE							
TYPE	DESCRIPTION	VOLTAGE	MOUNTING	UL/ETL JP Rating	WATTS	MANUFACTURER	CATALOG ORDER NUMBER
BB-2	BALDUR BLIND PLATE	0	SUSPEND		0	NORDEON	BBP-M1.8-WH-BALDUR BLIND PLATE
BB-4	BALDUR BLIND PLATE	0	SUSPEND		0	NORDEON	BBP-M3.7-WH-BALDUR BLIND PLATE
BB-6	BALDUR BLIND PLATE	0	SUSPEND		0	NORDEON	BBP-M5.5-WH-BALDUR BLIND PLATE
BB-DIM	BALDUR PHOTOCELL-DAYLIGHT SENSOR	0	SUSPEND		0	NORDEON	BBP-MINICLIP PHOTOCELL-DAYLIGHT SENSOR
BB-MS	BALDUR MOTION SENSOR	0	SUSPEND		0	NORDEON	BBP-MINI-P-PP-A-FC-MOTION SENSOR
DF2-4	LINEAR LED W/ BATTERY BACKUP	277	SUSPEND		32	NORDEON	BL 4000LM UNV DF2 3_7FT
DF2-4 'EM'	LINEAR LED W/ BATTERY BACKUP	277	SUSPEND		32	NORDEON	BL 4000LM UNV DF2 3_7FT-EMERGENCY BATTERY BACKUP
DF2-6	LINEAR LED W/ BATTERY BACKUP	277	SUSPEND		48	NORDEON	BL 7000LM UNV DF2 5_9FT
DF2-6 'EM'	LINEAR LED W/ BATTERY BACKUP	277	SUSPEND		48	NORDEON	BL 7000LM UNV DF2 5_5FT-EMERGENCY BATTERY BACKUP
DF2-8	LINEAR LED	277	SUSPEND		65	NORDEON	BL 9000LM UNV DF2 7_4FT
DF2-8 'EM'	LINEAR LED W/ BATTERY BACKUP	277	SUSPEND		65	NORDEON	BL 9000LM UNV DF2 7_4FT-EMERGENCY BATTERY BACKUP
DL4	ROUND LED DOWNLIGHT	277	SURFACE		15	NORDEON	NCAH2-430/15LE3
DL4 'EM'	ROUND LED DOWNLIGHT W/ BATTERY BACKUP	277	SURFACE		15	NORDEON	NCAH2-430/15LE3-EMERGENCY BATTERY BACKUP
FP	LED FLATPANEL	277	SURFACE		40	NORDEON	NFP1-8x240W-40K-UNV-WH
FP 'EM'	LED FLATPANEL	277	SURFACE		40	NORDEON	NFP1-2x240W-40K-UNV-WH-EMERGENCY BATTERY BACKUP
SK2	DIRECTIONAL SPOTLIGHT	277	SUSPEND		45	NORDEON	SK2-45W-UNV-830-WB-BL-DIM
T4	SITEROADWAY LUMINAIRE	277	POLE MOUNTED 24'-0" AFF		136	NORDEON	PAF3-136W-50K-T4-C
T4-V	SITEROADWAY LUMINAIRE	277	POLE MOUNTED 24'-0" AFF		136	NORDEON	PAF3-136W-50K-T4-VISOR
T42	SITEROADWAY LUMINAIRE	277	POLE MOUNTED 24'-0" AFF		272	NORDEON	2@180-PAF3-136W-50K-T4-C
VL	COOLER/FREEZER LIGHTING	277	SURFACE		38	NORDEON	NVT1-LED-40K-UNV
VL 'EM'	COOLER/FREEZER LIGHTING W. EM BATTERY	277	SURFACE		38	NORDEON	NVT1-LED-40K-UNV-EMERGENCY BATTERY BACKUP
WP	WALLPACK	277	WALL		37	NORDEON	PWP1-S/37W-50K-UNV-T4
WP 'EM'	WALLPACK W/EM BATTERY	277	WALL		37	NORDEON	PWP1-S/37W-50K-UNV-T4-EMERGENCY BATTERY BACKUP
WP-MS	WALLPACK WITH MOTION SENSOR	277	WALL		37	NORDEON	PWP1-S/37W-50K-UNV-T4-MSD-MOTION SENSOR
WP-MS 'EM'	WALLPACK W/ EM BATTERY AND MOTION SENSOR	277	WALL		37	NORDEON	PWP1-S/37W-50K-UNV-T4-MSD-MOTION SENSOR-EMERGENCY BATTERY BACKUP
X1	EXIT SIGN W/ EM BATTERY	277	SURFACE-MOUNTING/ SUSPENSION	YES	3	NORDEON	NX-812-LED

- NOTES
- 1

THIS LUMINAIRE SCHEDULE IS NOT COMPLETE WITHOUT A COPY OF THE PROJECT MANUAL CONTAINING THE ELECTRICAL SPECIFICATIONS.
- 2

DIMMING CONTROL PROTOCOL (0-10VDC, LINE VOLTAGE, DALI, ETC.) COMPATIBLE WITH LIGHTING CONTROL SYSTEM AS SPECIFIED AND SHOWN ON DRAWINGS.
- 3

PROVIDE +/- 12 INCH ADJUSTABILITY IN AIRCRAFT CABLE LENGTH WHERE USED.
- 4

COORDINATE ALL CEILING TYPES WITH LUMINAIRE LOCATIONS PRIOR TO ORDERING LUMINAIRES. COORDINATE INSTALLATION WITH REFLECTED CEILING PLAN.
- 5

SPECIFIED MANUFACTURERS ARE APPROVED TO SUBMIT BID. INCLUSION DOES NOT RELIEVE MANUFACTURER FROM SUPPLYING PRODUCT AS DESCRIBED.
- 6

PROVIDE SUBMITTALS THAT INCLUDE THE LUMINAIRE, LAMP AND BALLAST INFORMATION OF EACH LUMINAIRE, WITH APPLICABLE OPTIONS CLEARLY CHECKED OR HIGHLIGHTED. SUBMITTALS NOT INCLUDING THIS INFORMATION WILL BE RETURNED AS REJECTED BY THE ENGINEER OF RECORD.
- 7

REMOTE BALLASTS/DRIVERS: UL LISTED FOR THEIR APPLICATION. BALLASTS/DRIVERS MARKED AS UL RECOGNIZED COMPONENT BUT NOT UL LISTED ARE SUBJECT TO REMOVAL AND REPLACEMENT AT NO COST TO OWNER.



This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
1 12/16/2025 PERMIT CYCLE 2

PROJECT NUMBER
77850191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER

LIGHTING
CONTROLS AND
SCHEDULES
E202


LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD, NORCROSS, GA 30093



11/6/2025 5:24:34 PM Autodesk Docs/79650191 - Lbl 1517 Norcross GA/79650191 Lbl 1517 NORCROSS GA - ELEC-M

11/6/2025 5:24:34 PM
ELECTRICAL - LIGHTING CONTACTOR DETAIL
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF PROGRESSIVE ARCHITECTURE & PLANNING, LLC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PROGRESSIVE ARCHITECTURE & PLANNING, LLC. ALL RIGHTS ARE RESERVED. OTHER RIGHTS MAY BE RESERVED BY THIRD PARTIES.

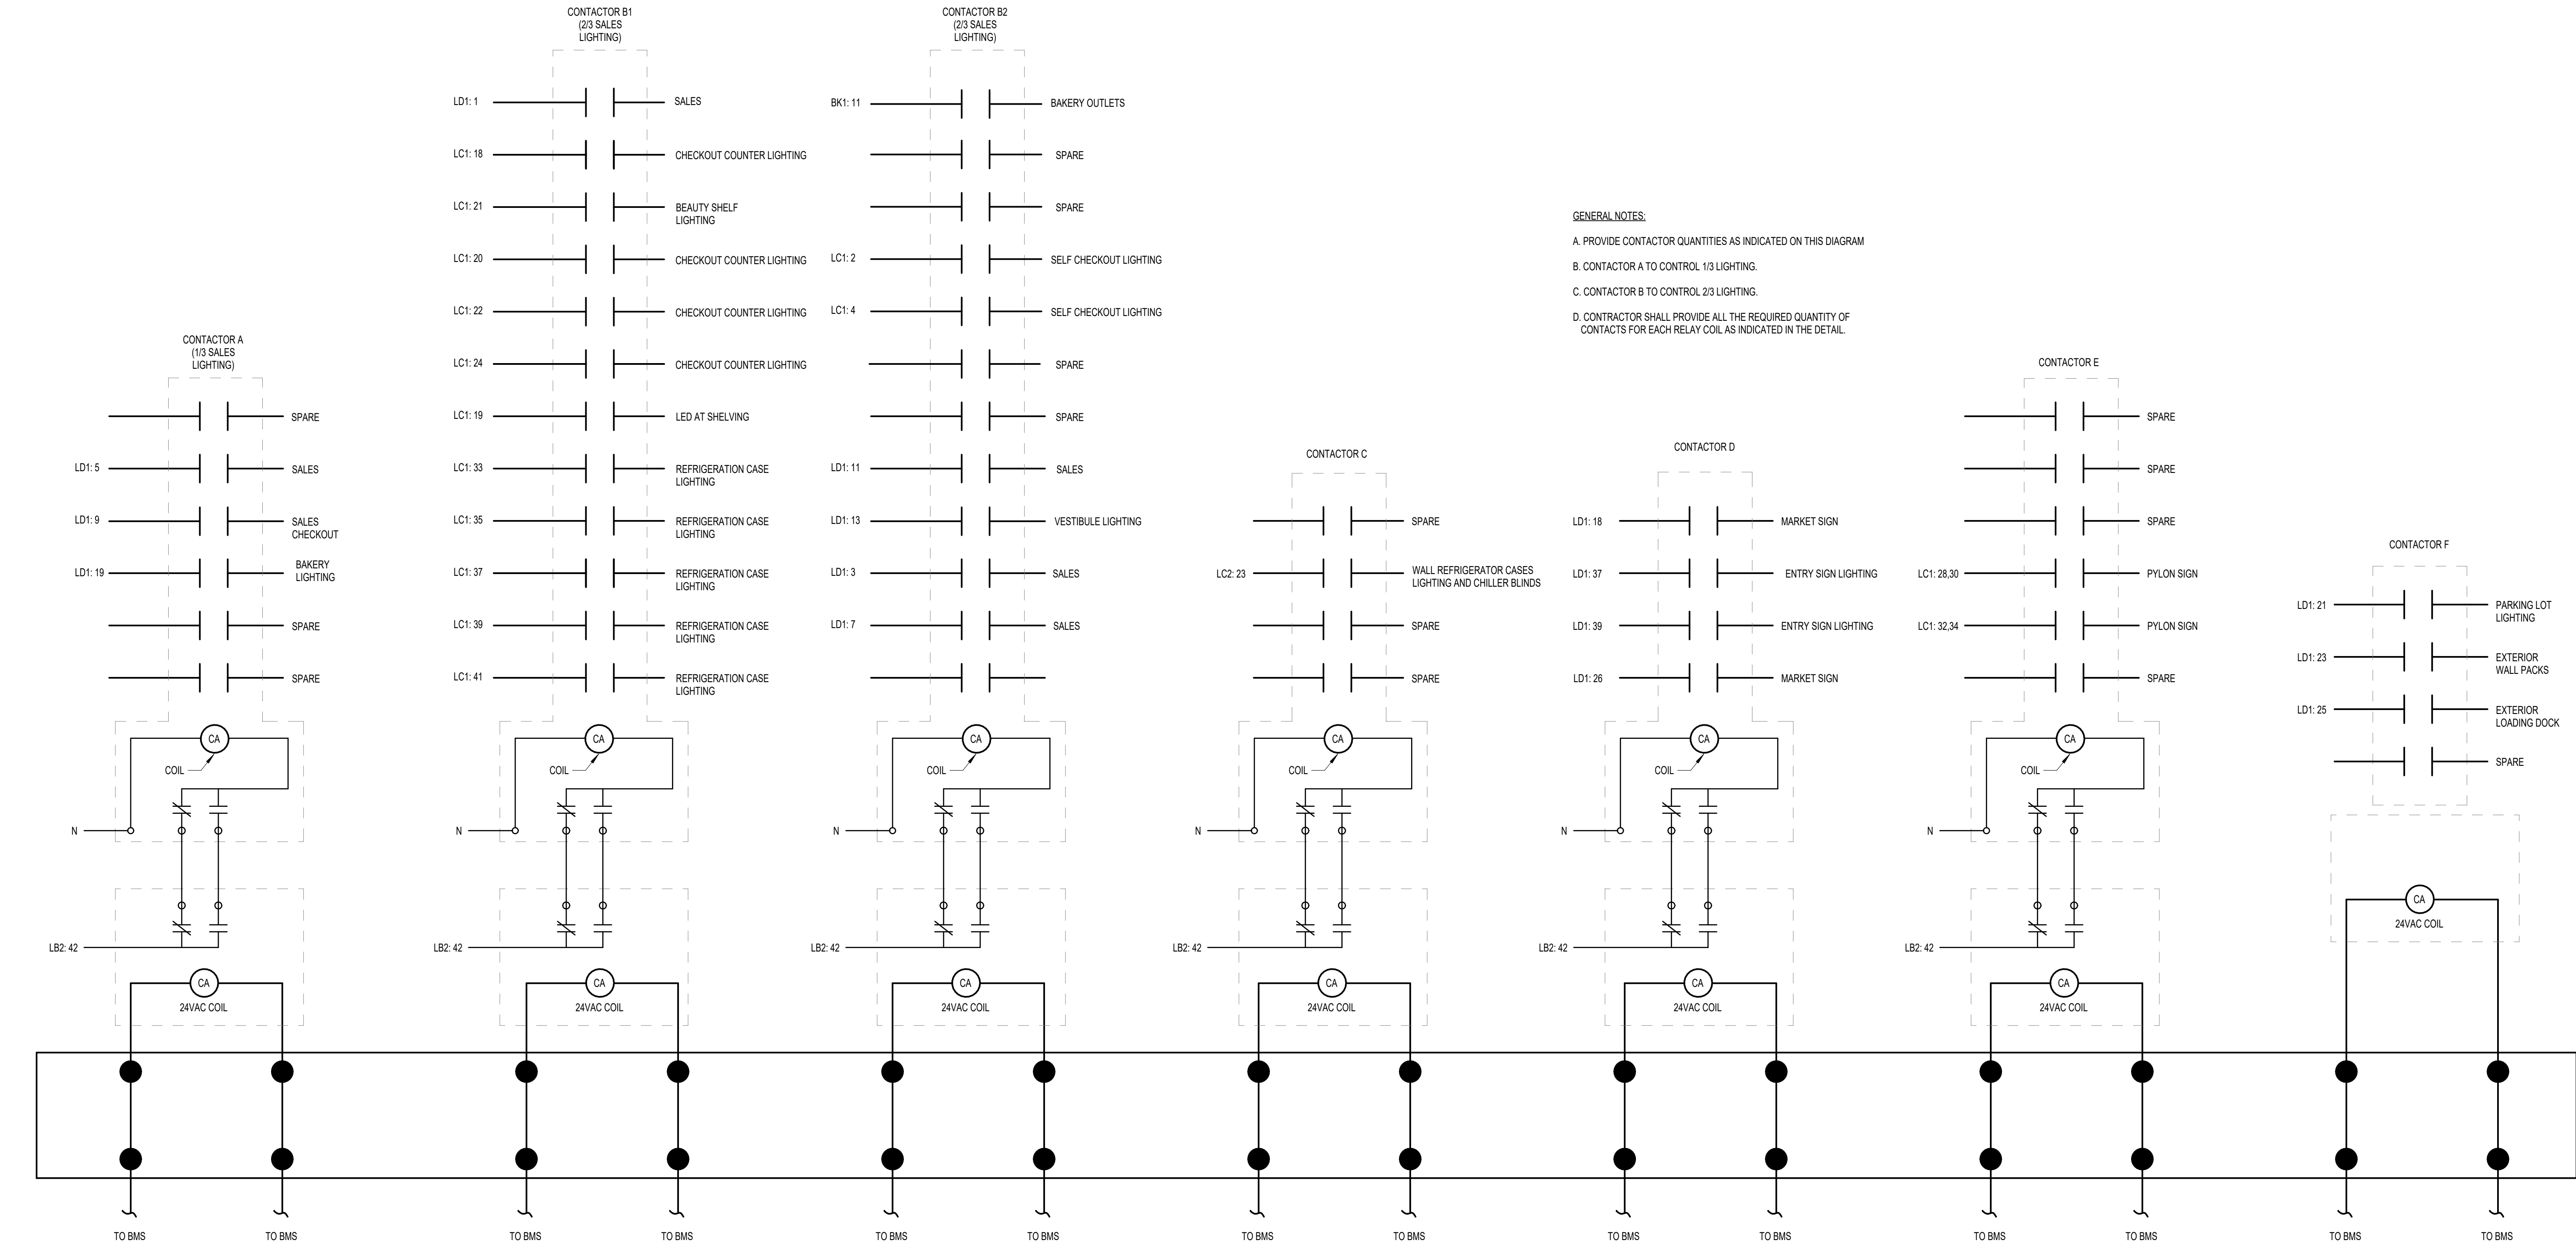


1 LIGHTING CONTACTOR DETAIL

NTS



LIDL US, LLC
LIDL 1517 NORCROSS, GA

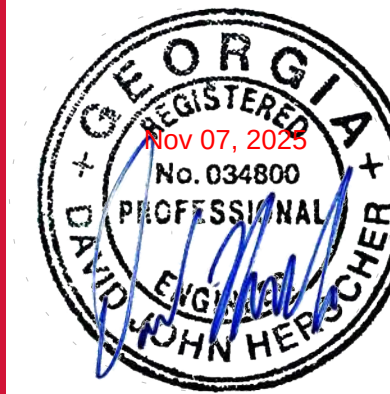


This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
11/07/2025 PERMIT CYCLE 1


PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER

ELECTRICAL -
LIGHTING
CONTACTOR
DETAIL
E203

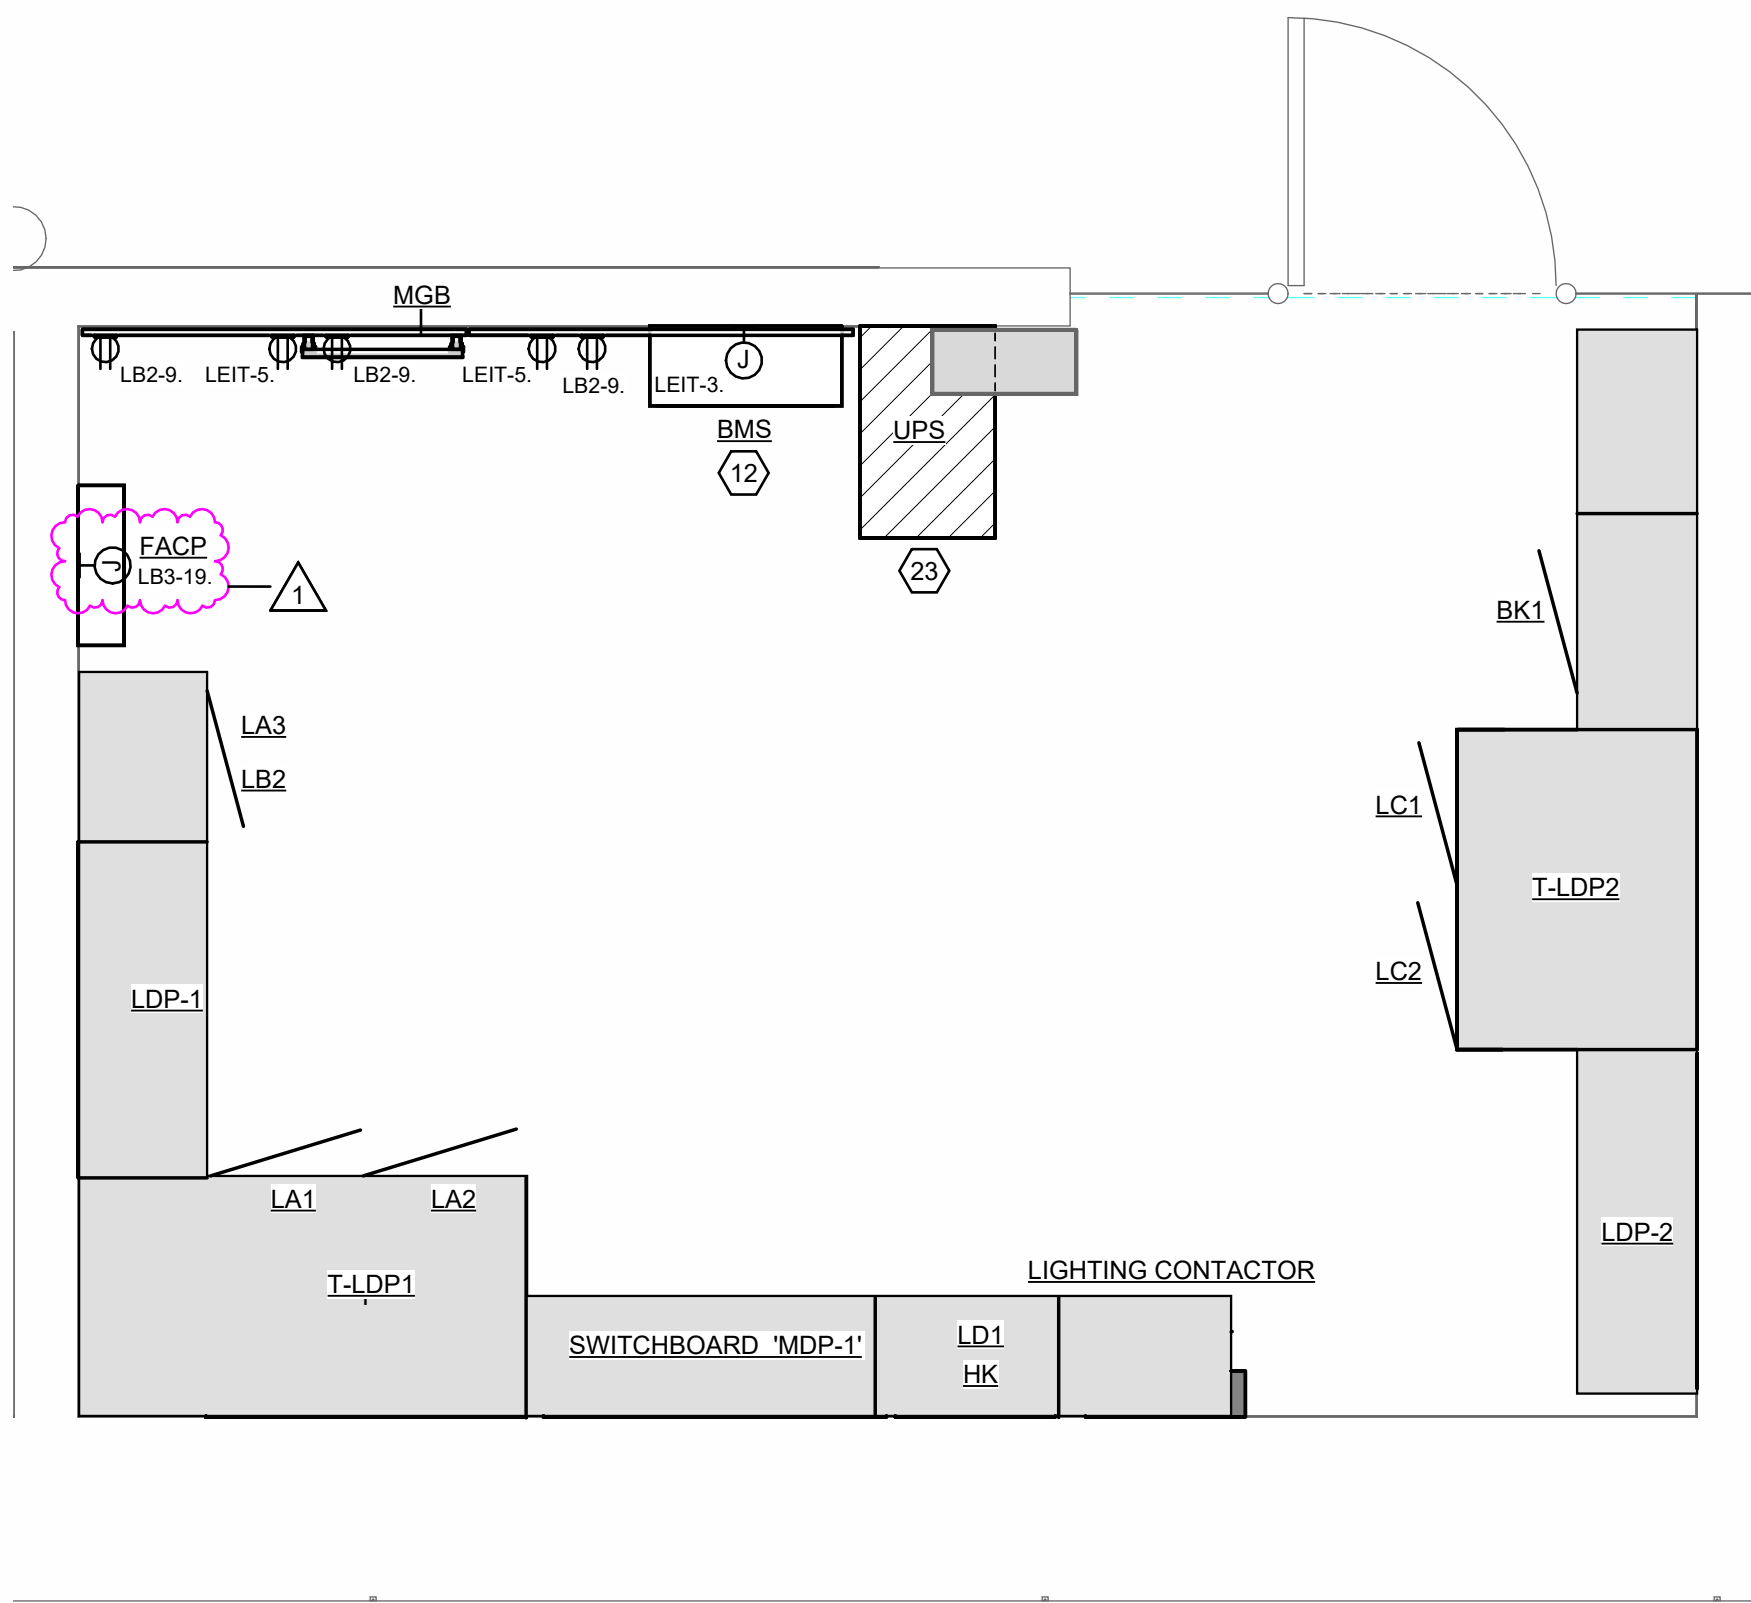


1 TECHNICAL ROOM

0' 4' 8' 16'
1/2" = 1'-0"

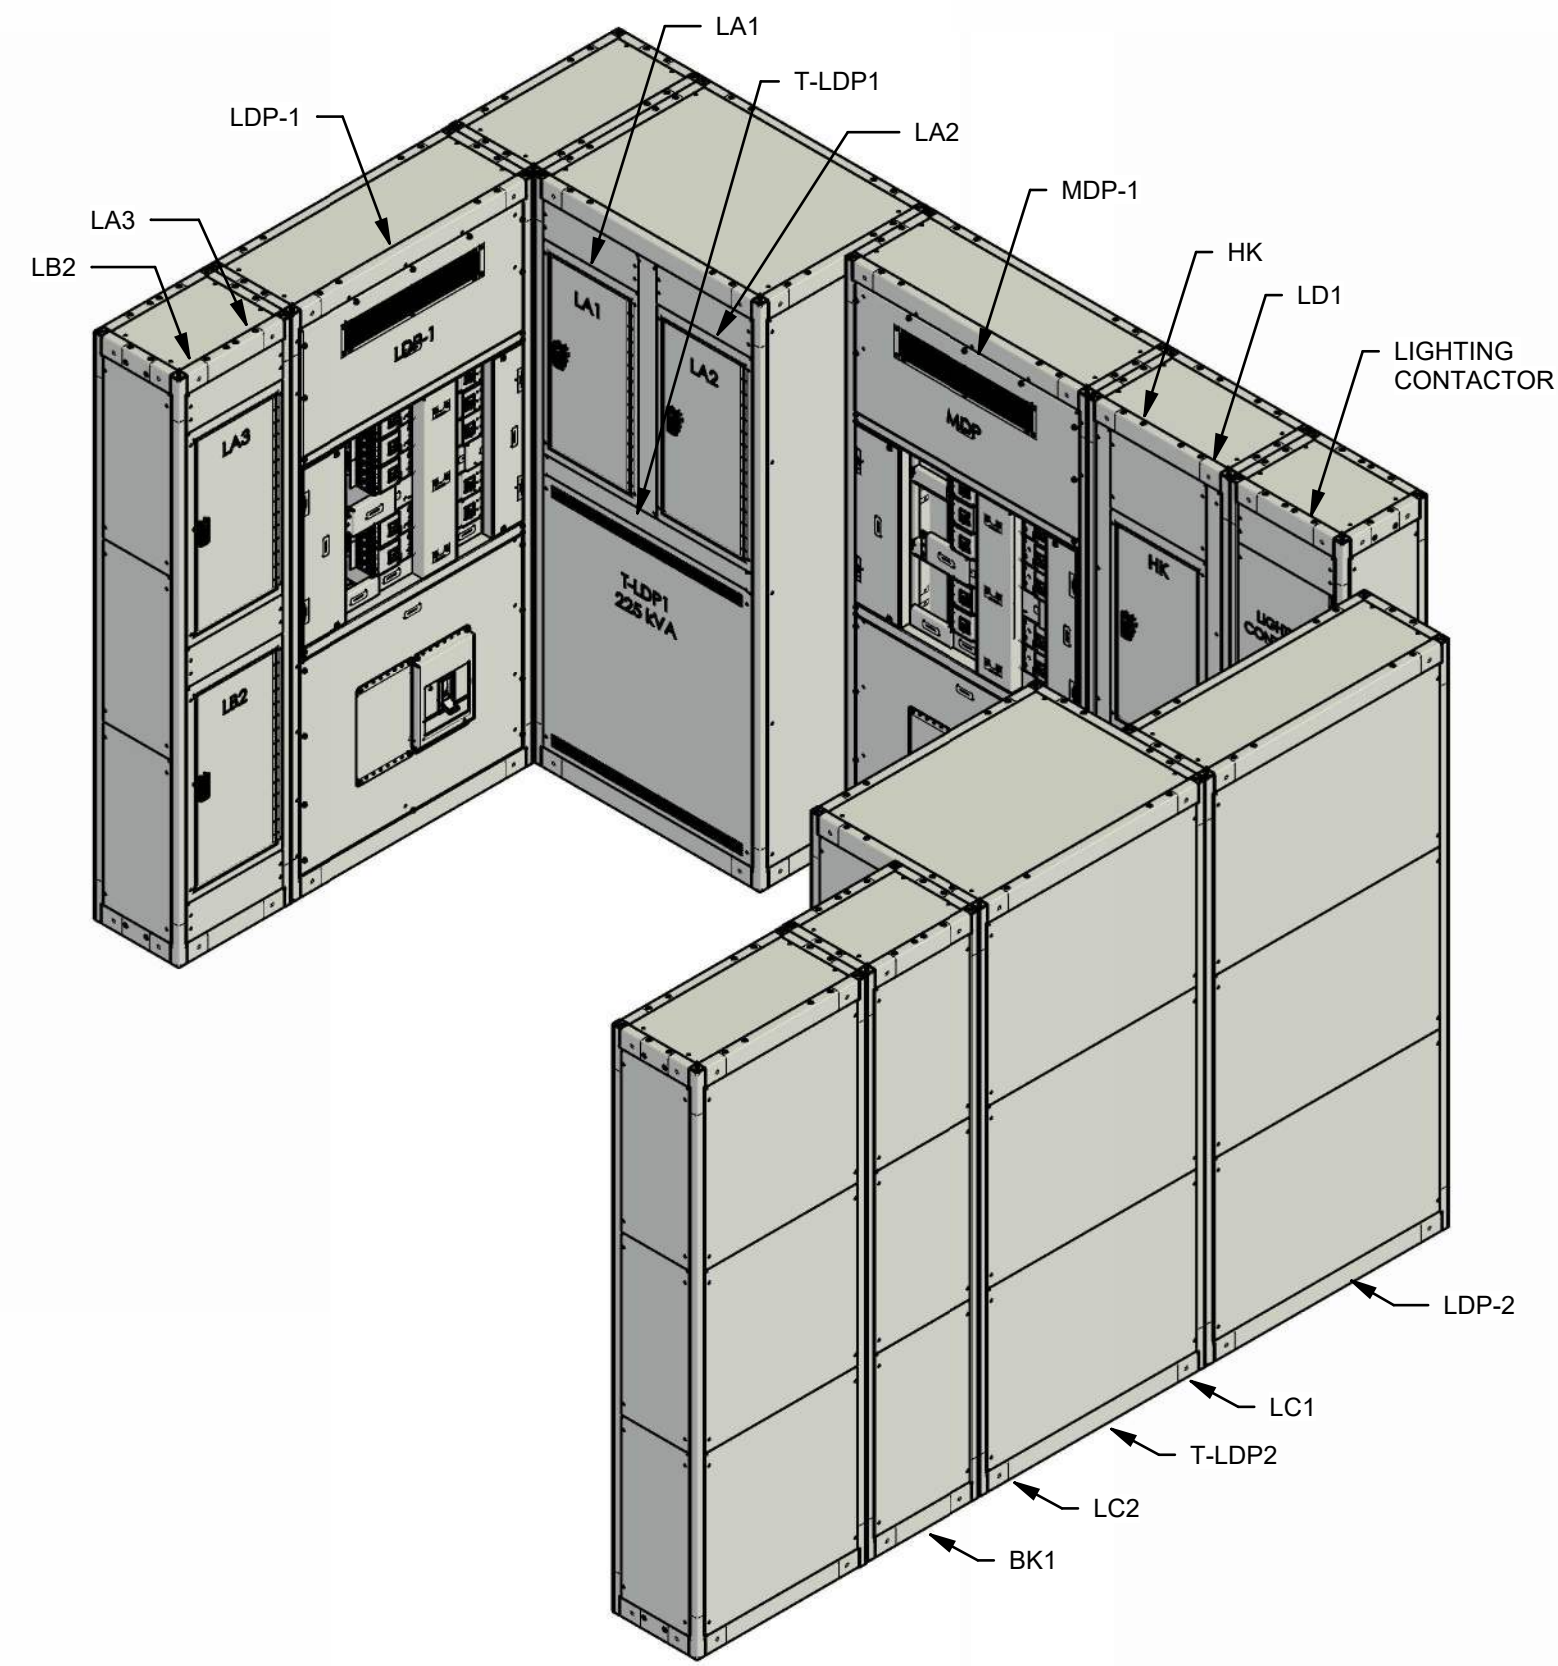


3 3D TECHNICAL ROOM

0' 4' 8' 16'
1/4" = 1'-0"

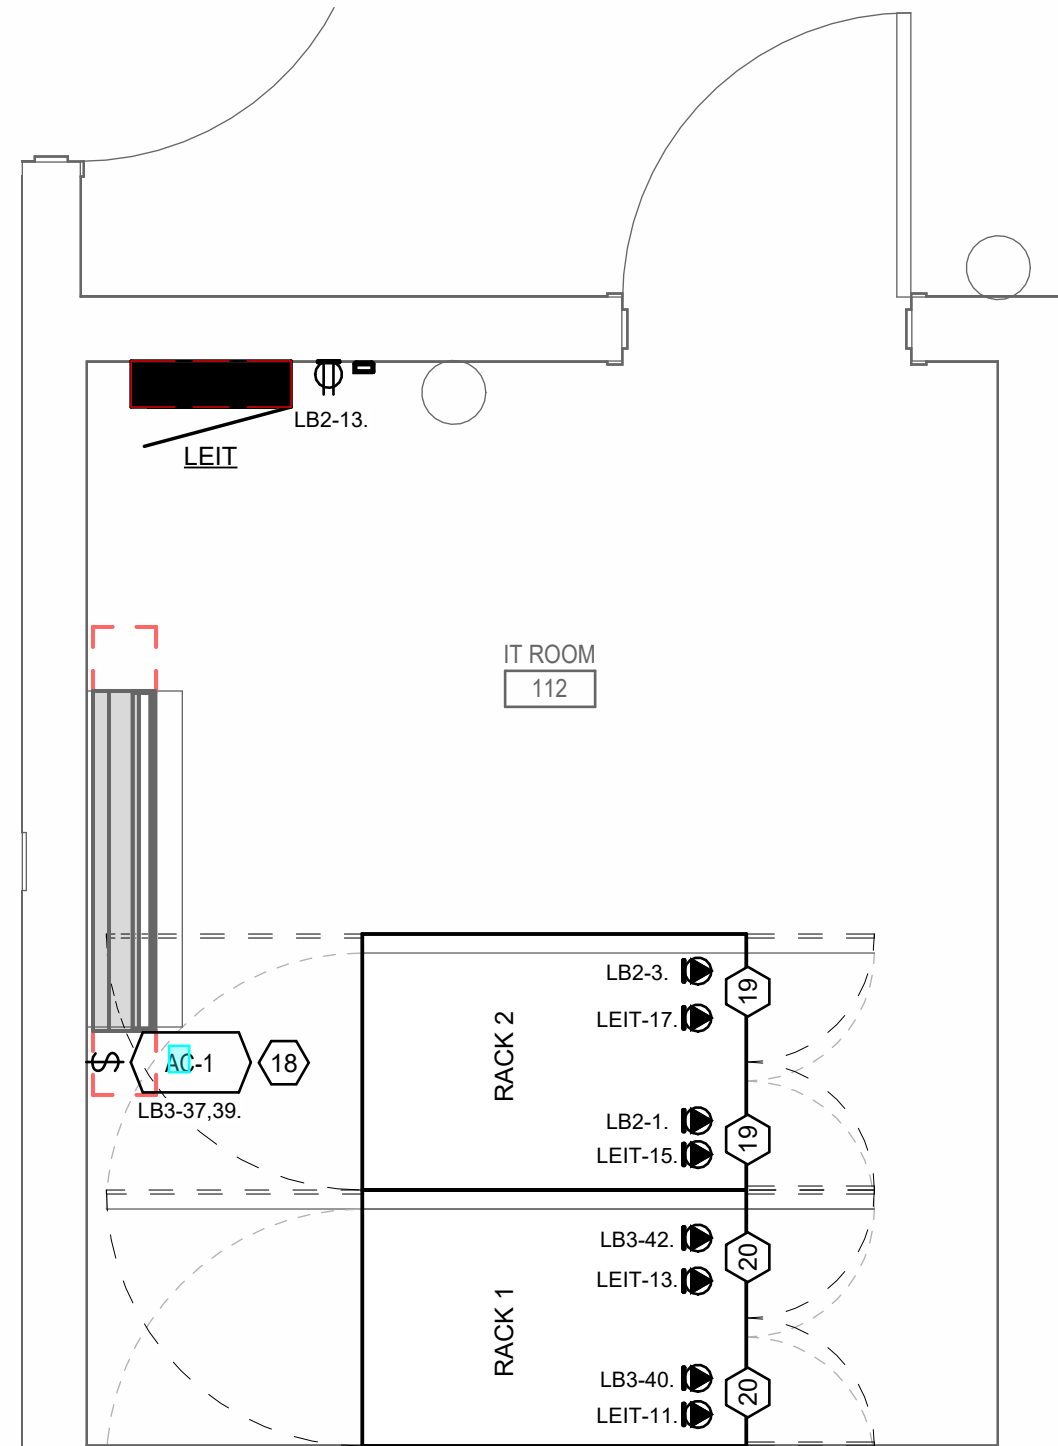


7 IT ROOM

0' 4' 8' 16'
1/2" = 1'-0"

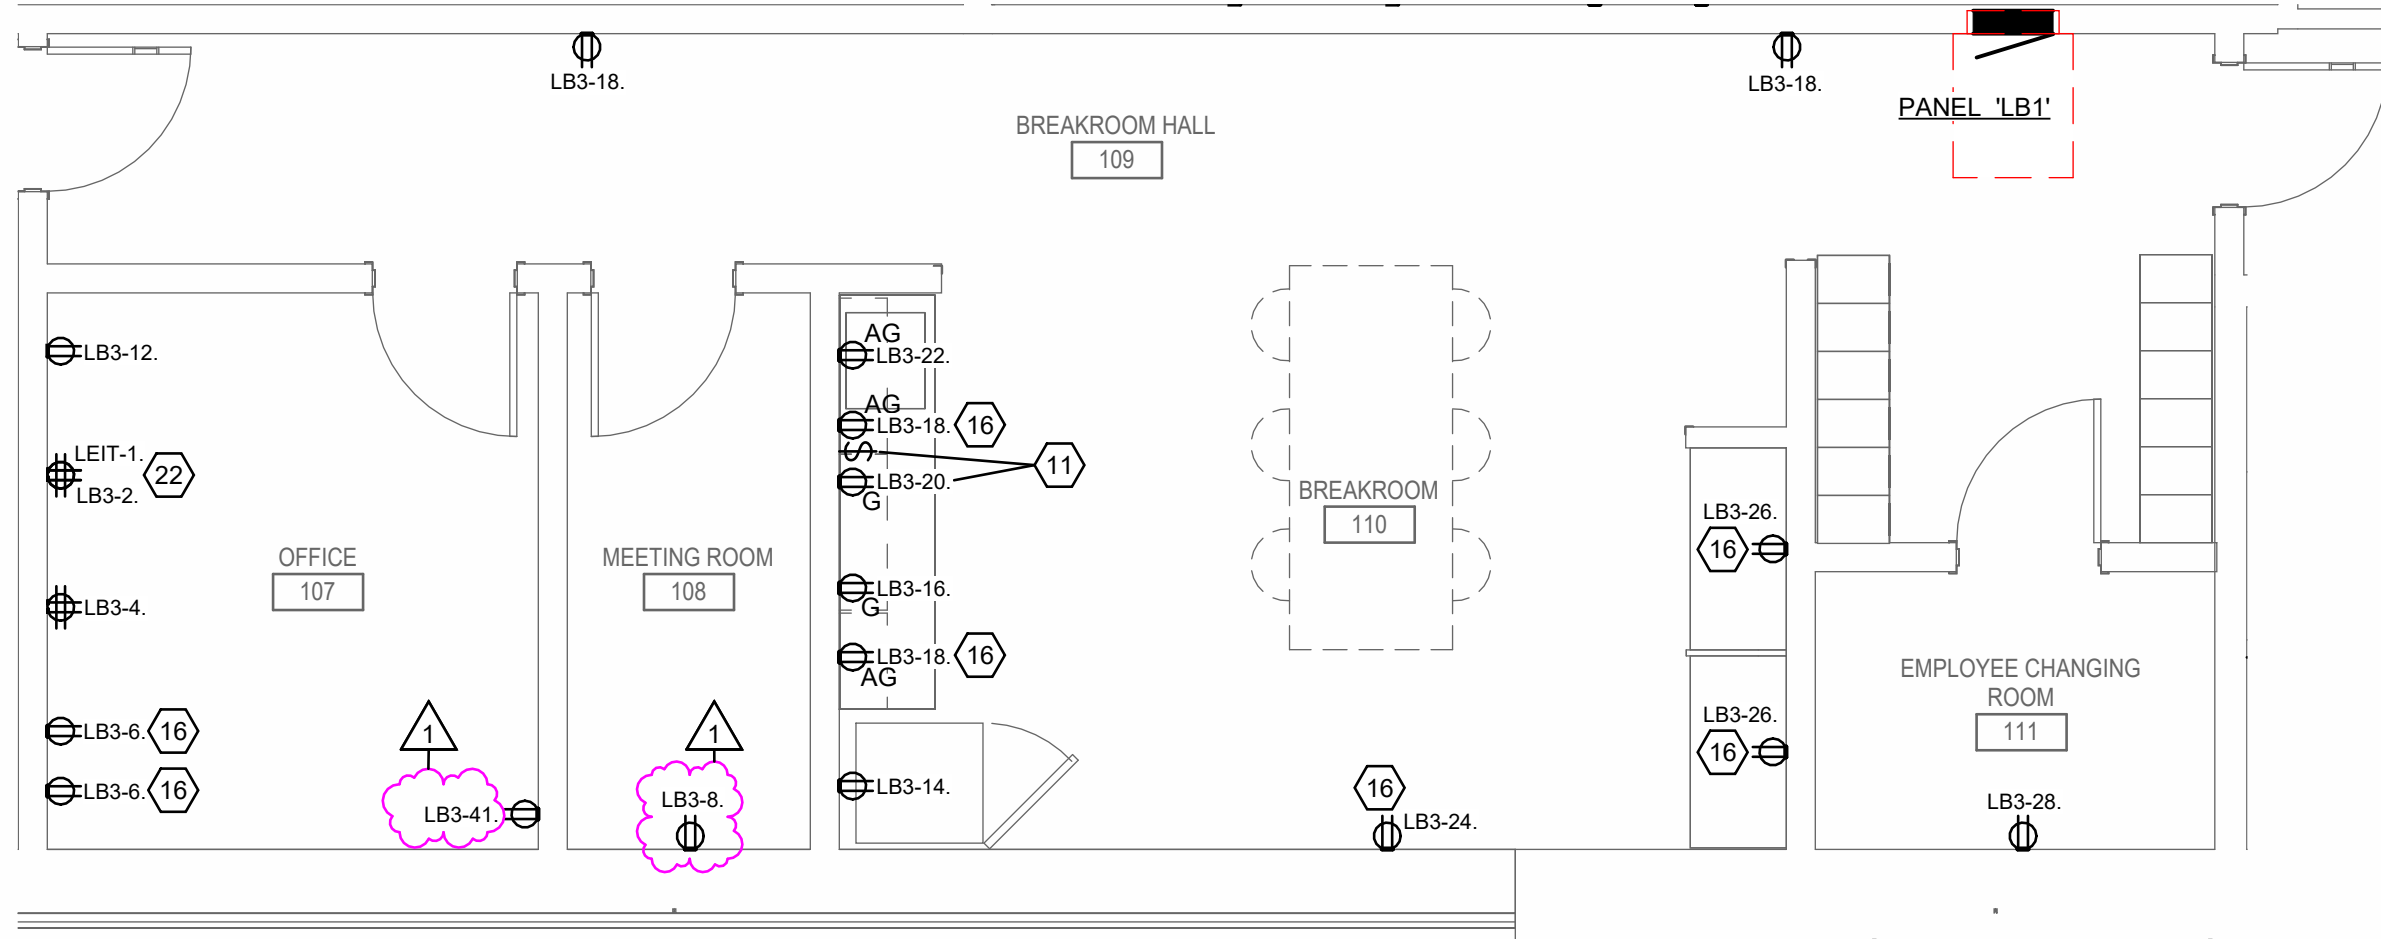


5 GROUND FLOOR - OFFICE/BREAKROOM POWER PLAN

0' 2' 4' 8'
1/4" = 1'-0"

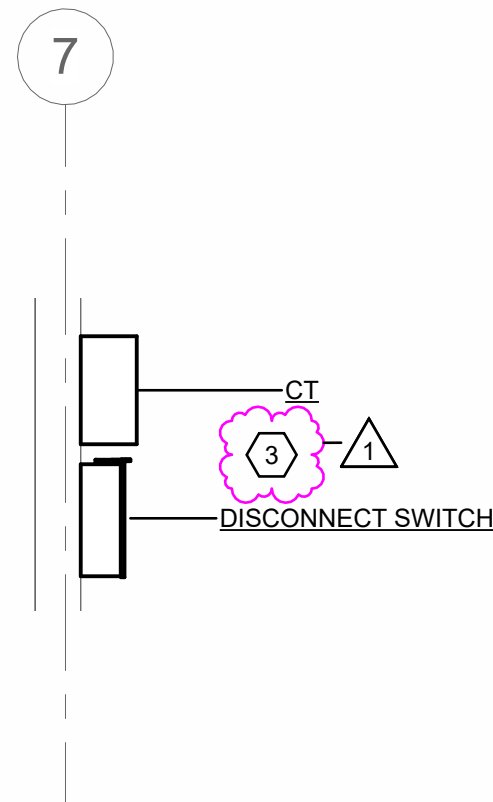

2 SERVICE DISCONNECT AREA

0' 4' 8' 16'
1/4" = 1'-0"

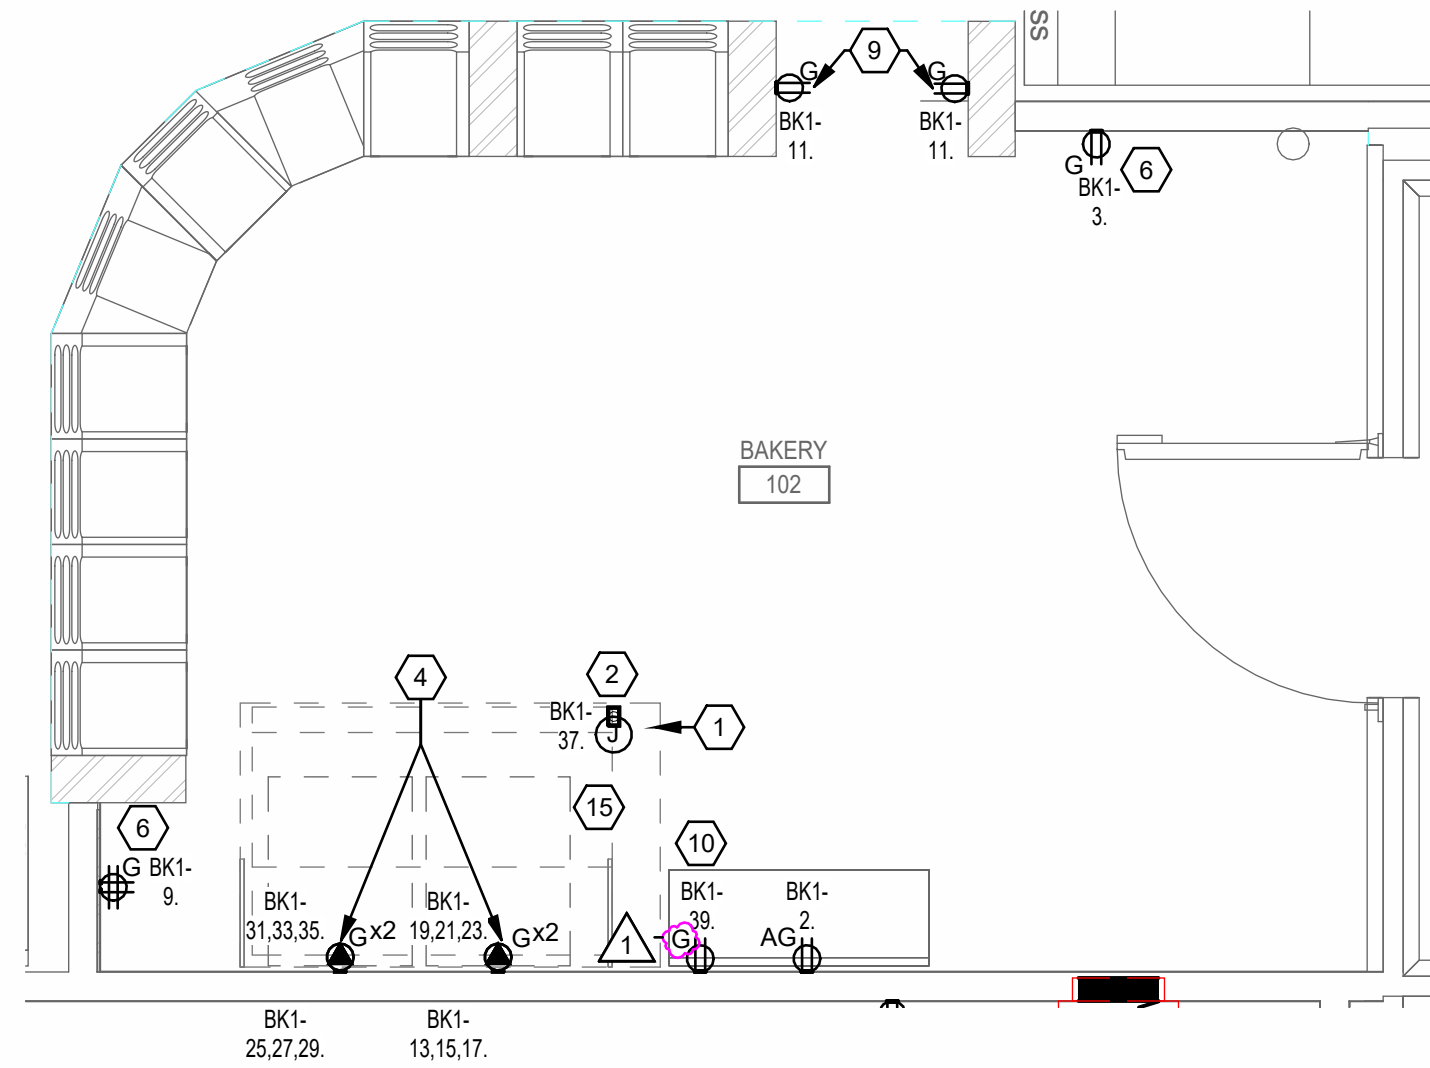

4 BAKERY - ENLARGED POWER PLAN

0' 2' 4' 8'
1/4" = 1'-0"

GENERAL SHEET NOTES

- REFER TO SHEET E600 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- CONTRACTOR SHALL PROVIDE FACTORY BLUE FINISH WIRING DEVICES FOR ALL UPS OUTLETS FED FROM PANEL "LEIT" IN STORES FOR IDENTIFICATION PURPOSES. COORDINATE WITH ARCHITECTS FOR EXACT DEVICE FINISH PRIOR TO PURCHASE.
- CONTRACTOR SHALL PROVIDE AND INSTALL STAINLESS STEEL COVER PLATES FOR ALL BAKERY OUTLETS. COORDINATE WITH ARCHITECTS FOR COVERPLATE FINISH.
- PROVIDE HOUSEKEEPING PADS FOR ALL FLOOR MOUNTED AND GRADE MOUNTED ELECTRICAL EQUIPMENT.
- SEE SHEET E600 FOR HOOD DETAILS.
- PROVIDE JUNCTION BOX FOR HOOD LIGHTING AND CONTROLS.
- PROVIDE NEMA 3R ENCLOSURES FOR THE CT CABINET AND THE SERVICE DISCONNECT.
- PROVIDE FOUR (4) NEMA 15-60R 250V RECEPTACLES FOR OVEN POWER. ALL RECEPTACLES SHOULD BE CLEARLY LABELED WITH PANEL AND CIRCUIT ID AND AMPERAGE.
- NOT USED.
- PROVIDE RECEPTACLE FOR BUG ZAPPER.
- NOT USED.
- NOT USED.
- CONTROLLED RECEPTACLES IDENTIFIED IN BAKERY SHALL BE POWERED FROM PANEL "BK" VIA RELAY COIL/CONTACTOR -B DEDICATED FOR 2/3 LIGHTING CIRCUITRY.
- POWER FOR BAKERY PRINTER.
- PROVIDE POWER DUPLEX AND ABOVE COUNTER SWITCH FOR GARBAGE DISPOSAL SYSTEM.
- PROVIDE JUNCTION BOX TO POWER BMS PANEL.
- PROVIDE QUADRECEPT FOR HEADSET CHARGING STATION.
- NOT USED.
- PROVIDE A SHUNT TRIP DEVICE FOR ALL RECEPTACLES AND EQUIPMENT LOCATED UNDER THE HOOD.
- PROVIDE QUAD RECEPTACLE IN PLACE OF DUPLEX. ONE HALF OF QUAD TO BE CONTROLLED BY OCCUPANCY SENSOR. PROVIDE DARK GREY DUPLEX RECEPTACLES TO DIFFERENTIATE FROM NON-SWITCHED RECEPTACLES OF CONTROLLED QUADRAPLEX RECEPTACLES.
- NOT USED.
- FLUSHMOUNT TOGGLE SWITCH FOR AC UNIT ON DRYWALL.
- MOUNT FOUR NEMA L5-20 TWISTLOCK RECEPTACLES FOR IT RACK-1 ON UNISTRUT SUPPORTS 0'-8" FROM CABLE TRAY AT MATCHED ELEVATION OF CABLE TRAY ABOVE RACKS. CIRCUIT (2) RECEPTACLES ON UPS POWER, AND (2) RECEPTACLES ON NORMAL POWER AS INDICATED ON PLAN.
- MOUNT FOUR NEMA L5-30 TWISTLOCK RECEPTACLES FOR IT RACK-2 ON UNISTRUT SUPPORTS 0'-8" FROM CABLE TRAY AT MATCHED ELEVATION OF CABLE TRAY ABOVE RACKS. CIRCUIT (2) RECEPTACLES ON UPS POWER, AND (2) RECEPTACLES ON NORMAL POWER AS INDICATED ON PLAN.
- NOT USED.
- MOUNT (1) UPS POWER QUADRAPLEX ABOVE COUNTER AT 3'-6" AND (1) UTILITY POWER DUPLEX BELOW COUNTER AT 1'-6".
- SO CORD TO BE USED IN LIEU OF METAL CONDUIT.

ISSUANCE
1 12/16/2025 PERMIT CYCLE 2

PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER

ENLARGED
ELECTRICAL
DRAWINGS
E300

LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD. NORCROSS, GA 30093





This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

GENERAL SHEET NOTES


A. REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES

SHEET KEYNOTES

- | | | | |
|----|---|-----|--|
| 1. | PROVIDE WHITE 2X2 POWER POLE AS MANUFACTURED BY WIREMOLD. CATALOG NUMBER 25DTC, WITH EXTENSIONS 25DTC AS REQUIRED. SECURE POWER POLE TO JOIST ABOVE. REFER TO CONDUIT ROUTING DRAWING E102 FOR CONNECTION TO POWER AND TECHNOLOGY INFRASTRUCTURE. | 10. | CONTRACTOR TO PROVIDE WIREMOLD WHITE POWERPOLE 25DTC AND RECEPTACLE FOR DRINK CHILLER. |
| 2. | POWER FOR TV MONITORS. INSTALL 3/4" FLEXIBLE CONDUIT THROUGH MULLION FOR POWER UNLESS OTHERWISE NOTED. INSTALL JUNCTION BOXES AND CONDUIT ON TOP OF STRUCTURE. COORDINATE EXACT LOCATION WITH ARCHITECT. | 11. | PROVIDE NEMA 121-20P RECEPTACLES FOR RL-3W FREEZER UNITS. PROVIDE NEMA 121-20P PLUG CORDS FOR FIELD WIRING OF FREEZER UNITS. |
| 3. | ELECTRICAL CONTRACTOR TO PROVIDE WIRING FOR (3) FACTORY INSTALLED SURFACE MOUNTED RECEPTACLES PROVIDED WITH CHECKPLANS. (1) DUPLEX & (1) QUAD, ARE COLORED ORANGE AND SHALL BE CONNECTED TO UPS POWER. (1) DUPLEX IS COLORED BROWN AND SHALL BE CONNECTED TO UTILITY POWER. CONTRACTOR TO PROVIDE WHITE COLORED SURFACE MOUNTED QUAD RECEPTACLE FOR LIGHTING IN POS COLORED. POWER WIRING FOR WHITE COLORED QUAD RECEPTACLE UTILIZE TYPE F CABLE. | 12. | PROVIDE NEMA 121-30P RECEPTACLES FOR RL-5W FREEZER UNITS. PROVIDE NEMA 121-30P PLUG CORDS FOR FIELD WIRING OF FREEZER UNITS. |
| 4. | PROVIDE (1) DUPLEX RECEPTACLE ON UPS POWER AND (1) RECEPTACLE ON UTILITY POWER FOR 2/3 LIGHTING WHEN SHOWN. RECEPTACLES SHALL BE INTEGRAL TO THE 4000 WIREMOLD AT EACH SELF-CHECKOUT POS. FLEXIBLE CONDUIT TO FEED CABLES FROM CABLE TRAY TO POWER POLE WHEN NEEDED. REFER TO ARCH DRAWINGS DETAIL FOR ADDITIONAL INFORMATION. | 13. | PROVIDE WALL MOUNTED DUPLEX RECEPTACLE FOR ELECTRIC SECURITY GATES. MOUNT AT 0'-8" AFF. |
| 5. | CONNECTION BETWEEN RECEPTACLES TO BE MADE WITH RIGID CONDUIT. | 14. | JOIST MOUNTED RECEPTACLE FOR P.V.M. |
| 6. | CONNECTION BETWEEN RECEPTACLES TO BE MADE WITH FLEX CONDUIT. | 15. | FLOOR RECEPTACLES FOR STORE EQUIPMENT LED LIGHTS. |
| 7. | PROVIDE NEMA 121-20R RECEPTACLES FOR INSIGHT ID6S-8W REFRIGERATION UNITS. PROVIDE NEMA 121-20P PLUG CORDS FOR FIELD WIRING OF REFRIGERATION UNITS. | 16. | PROVIDE (1) DUPLEX RECEPTACLE ON UPS POWER AND (1) RECEPTACLE ON UTILITY POWER FOR 2/3 LIGHTING WHEN SHOWN. ALL RECEPTACLES SHALL BE RECESSED INTO WALL AND MOUNTED AT 0'-4" AFF. REFER TO ARCH DRAWINGS DETAIL FOR ADDITIONAL INFORMATION. |
| 8. | NOT USED. | 17. | PROVIDE (1) DUPLEX RECEPTACLE ON UPS POWER FOR SELF-CHECKOUT STATION ATTENDANT. RECEPTACLE SHALL BE INTEGRAL TO THE 4000 WIREMOLD AT EACH SELF-CHECKOUT STATION. ATTENDANT STATION. FLEXIBLE CONDUIT TO FEED CABLES FROM CABLE TRAY TO POWER POLE WHEN NEEDED. |
| 9. | NOT USED. | | |

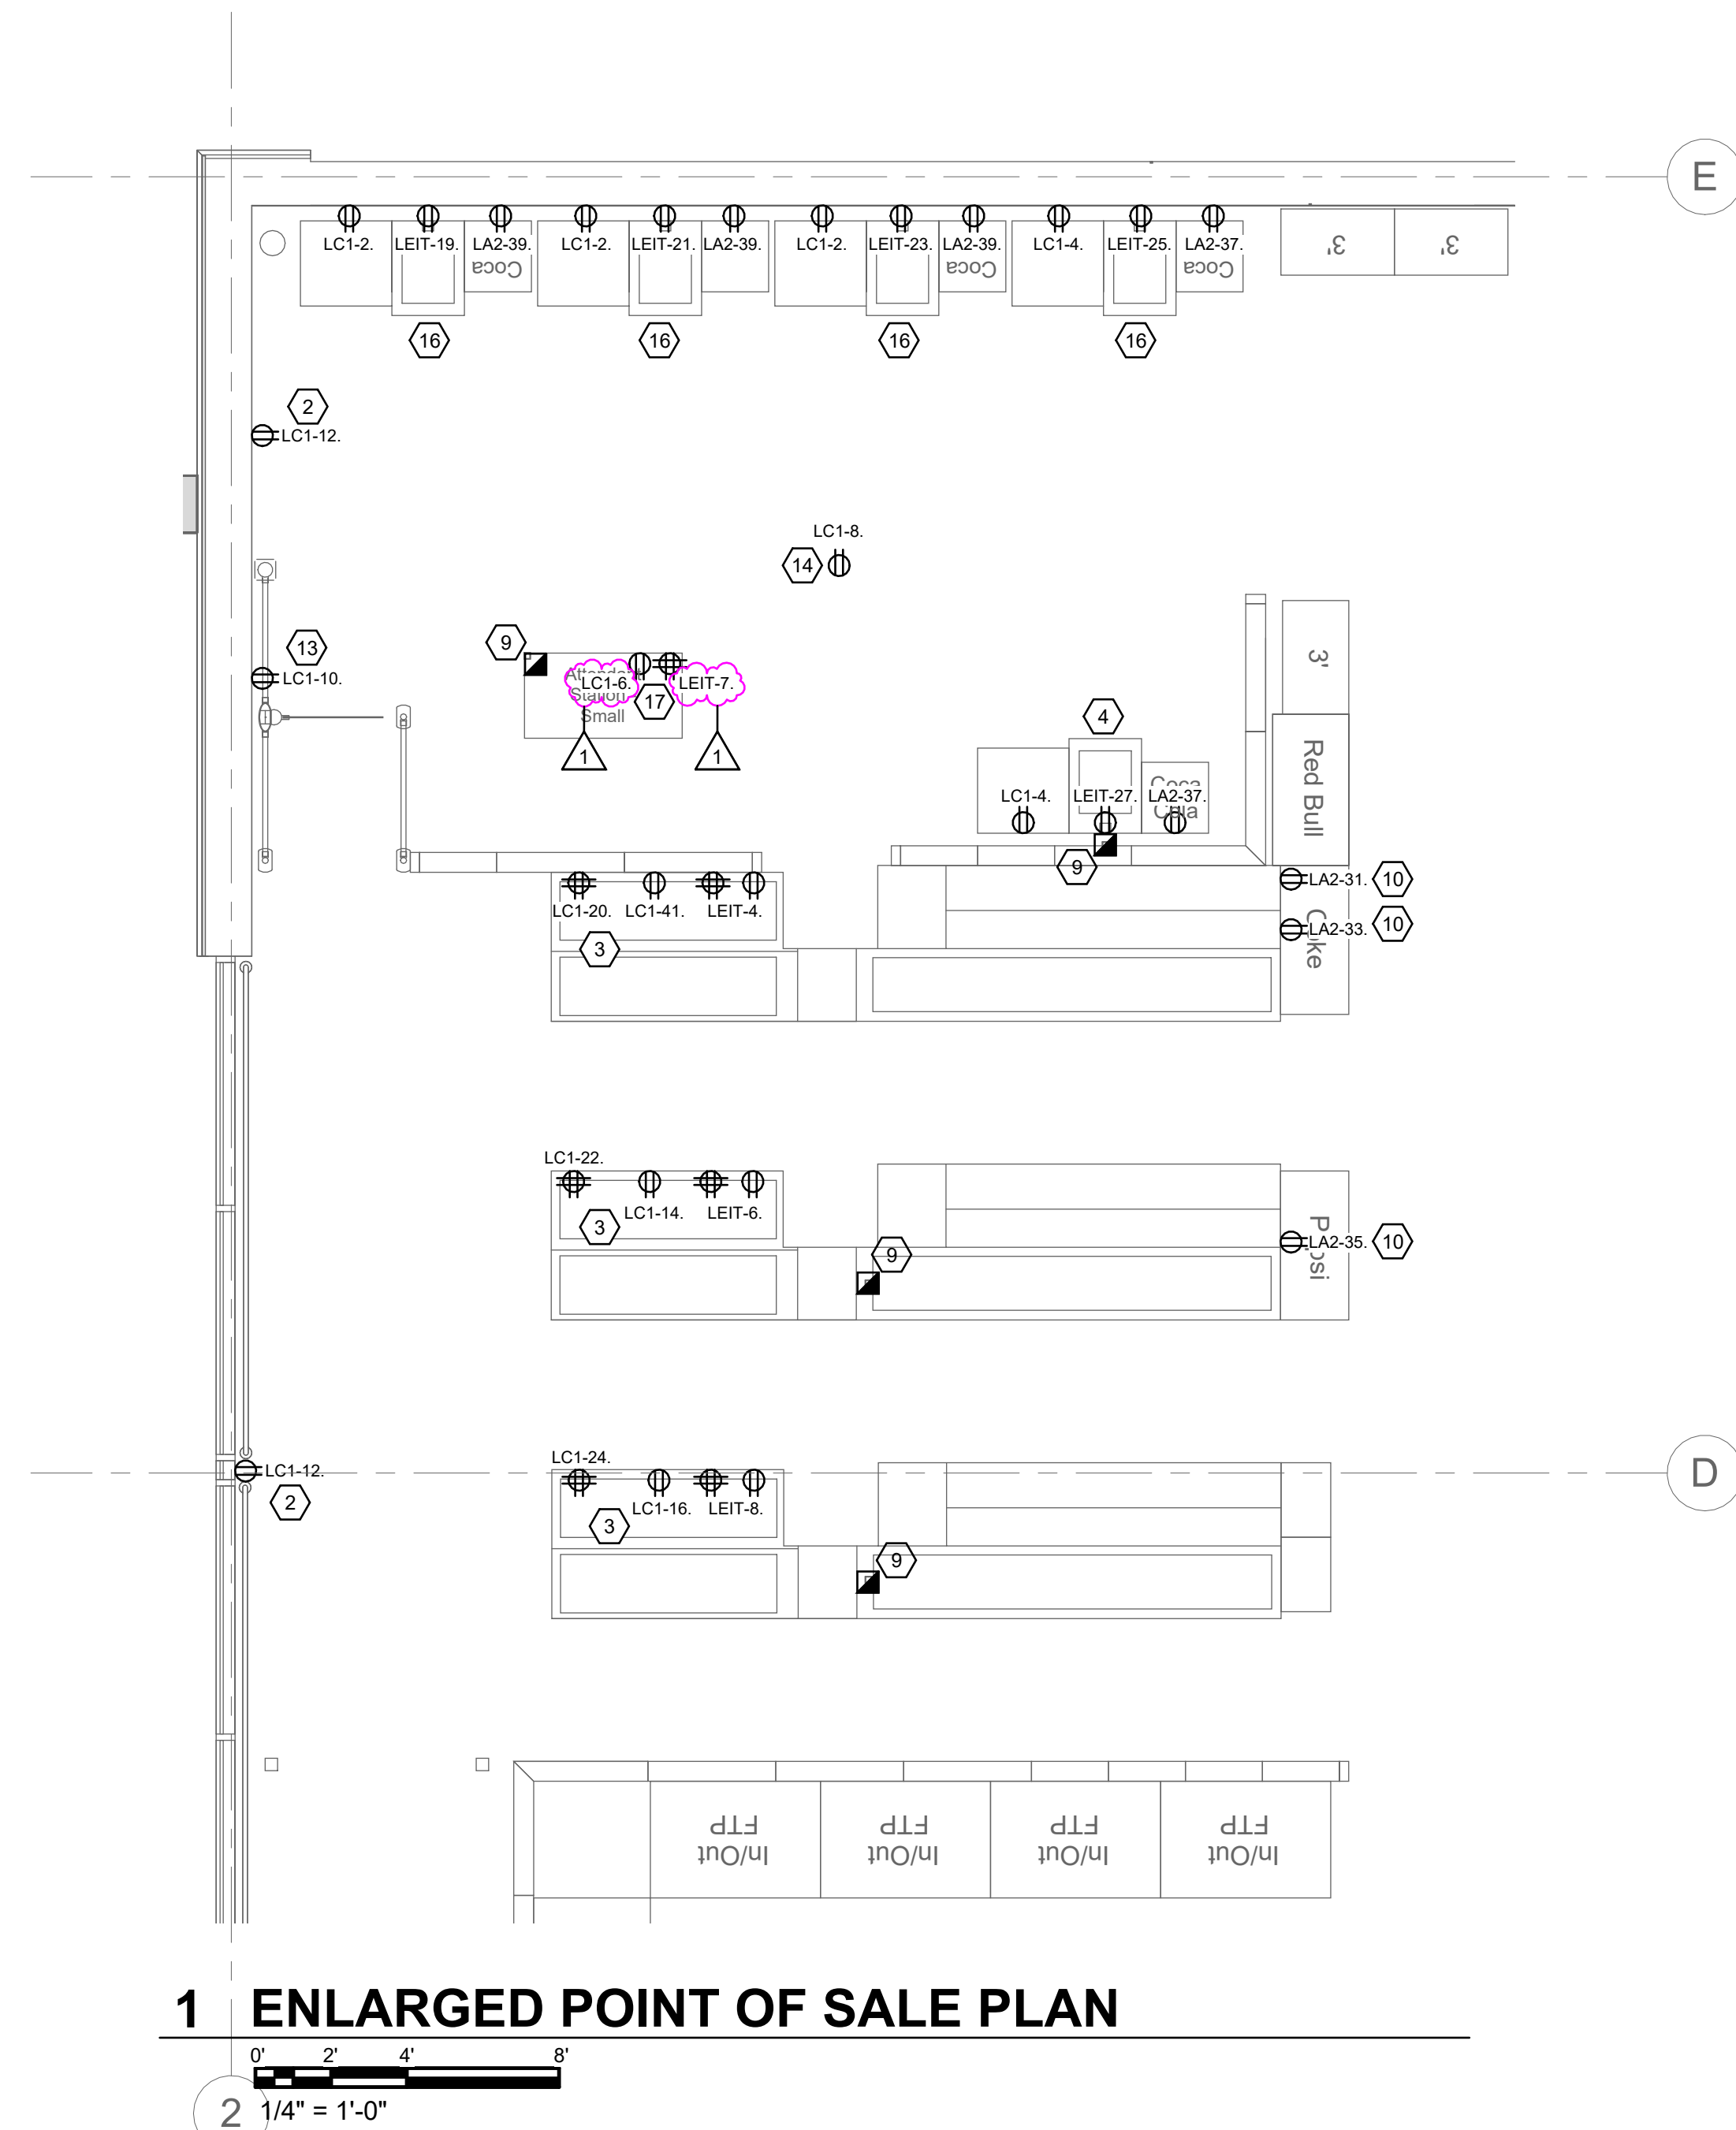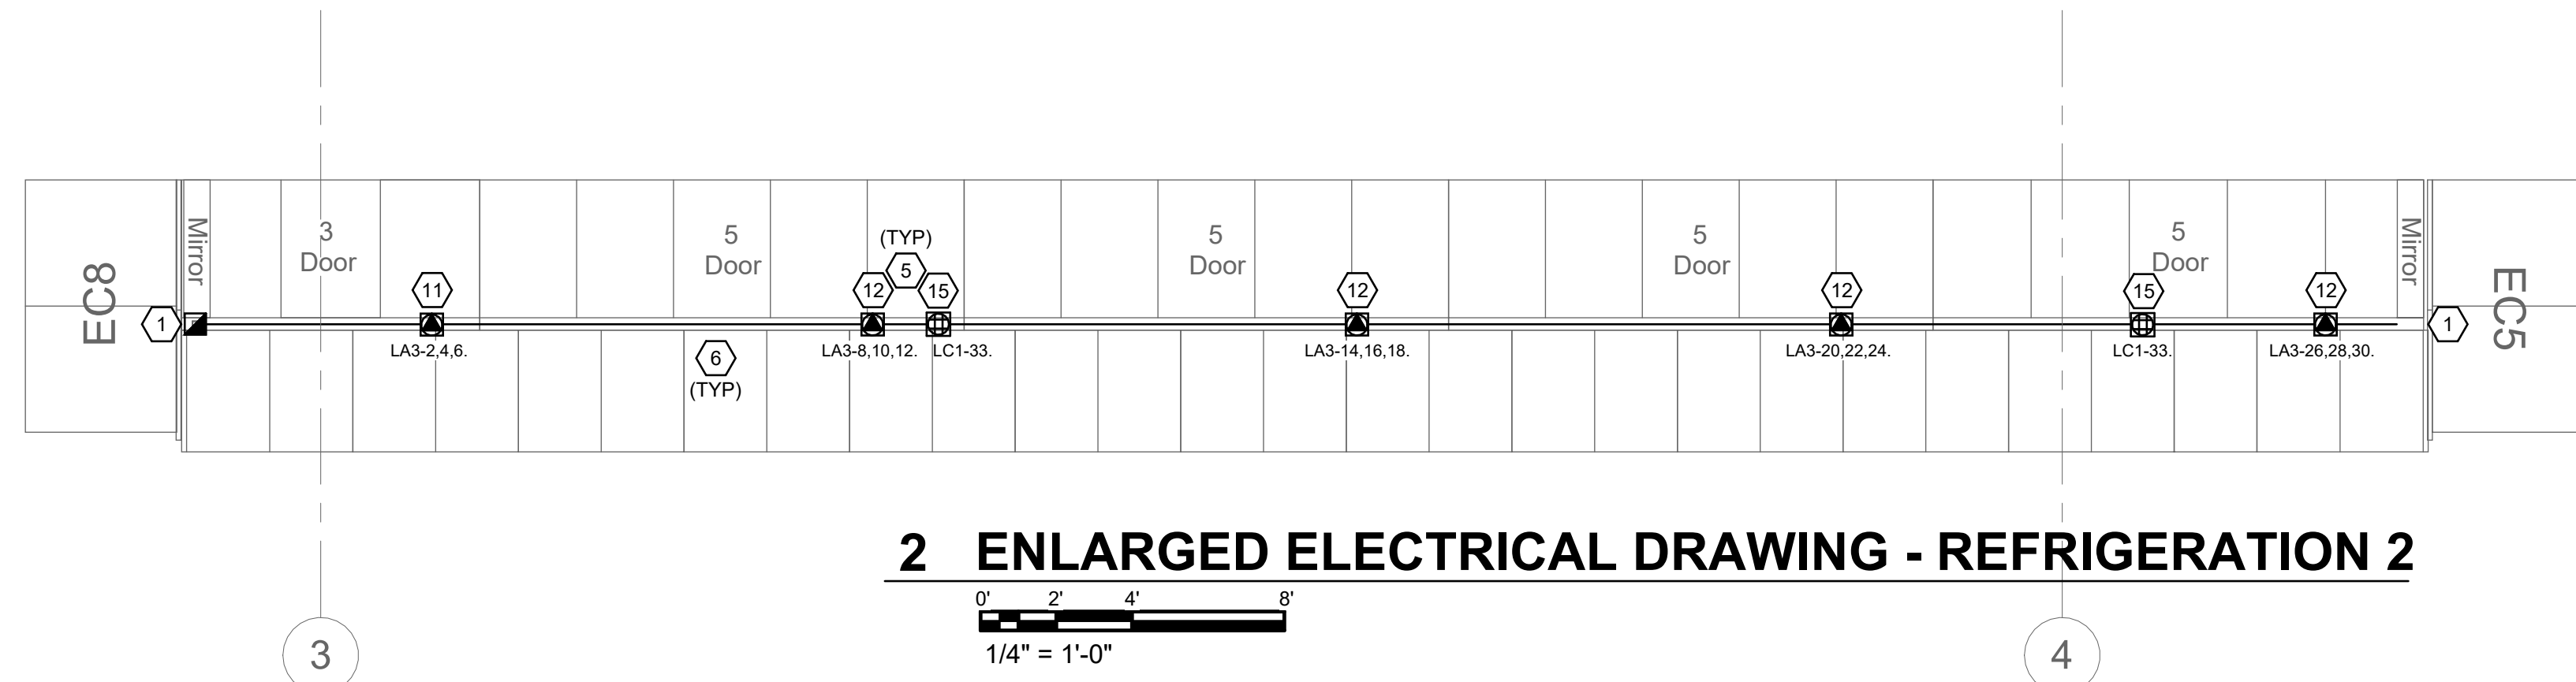

1 ENLARGED POINT OF SALE PLAN

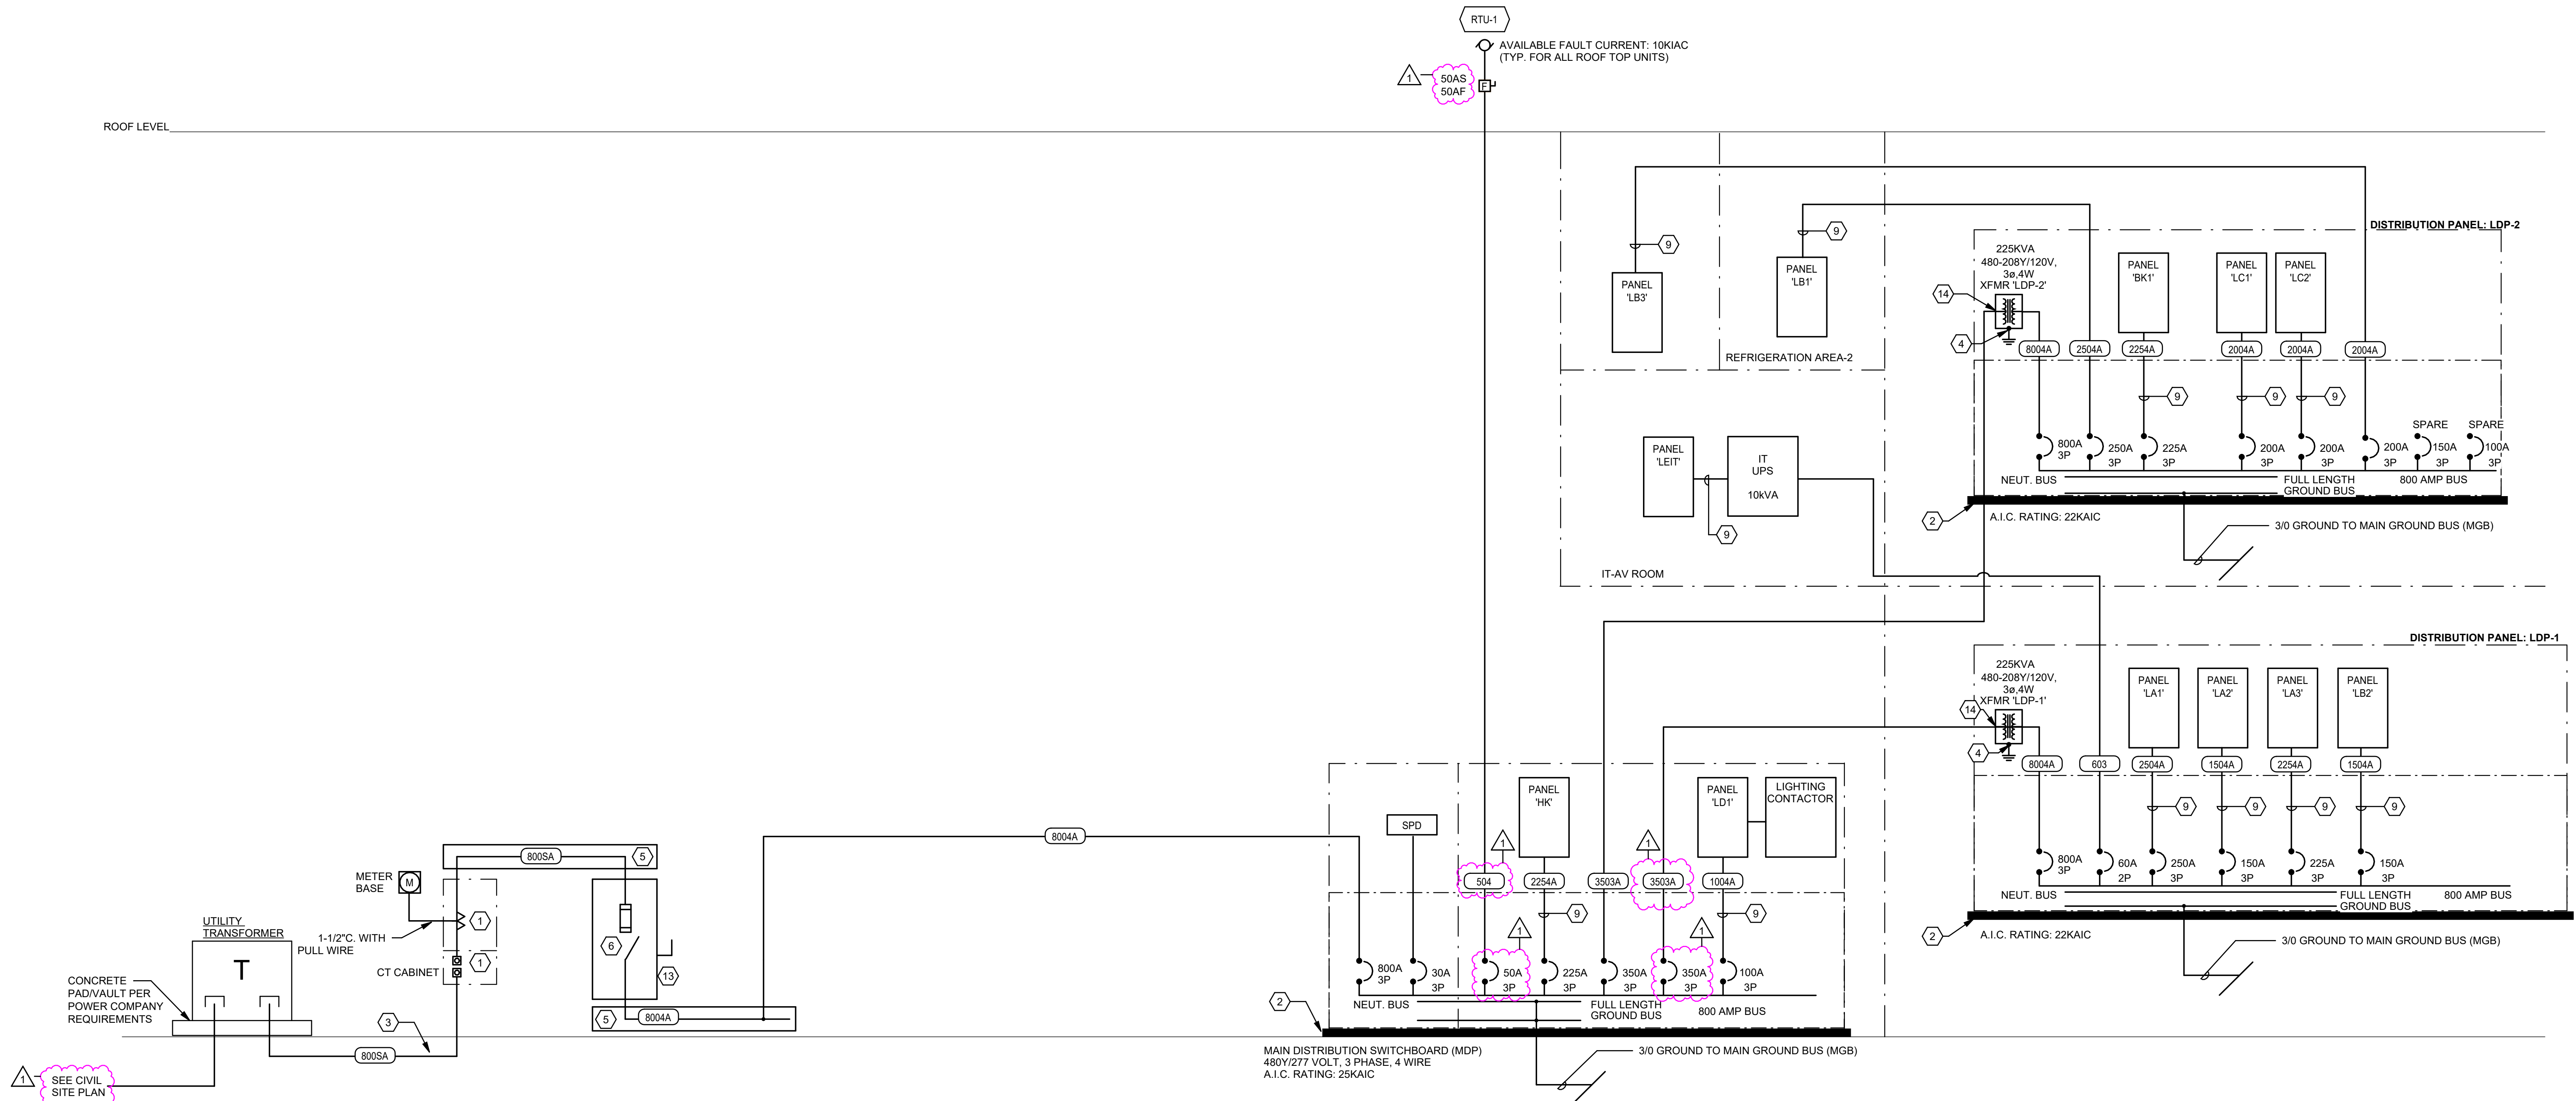

1 ONE-LINE POWER DISTRIBUTION DIAGRAM

NO SCALE

GENERAL SHEET NOTES

- REFER TO SHEET E000 FOR LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- REFER TO PANEL SCHEDULES FOR EXACT SPACES AND SPARE BREAKER QUANTITIES.
- INSTALL FEEDER FROM TRANSFORMER TO SECONDARY TO MAIN BREAKER IN SWITCHBOARD/PANEL. NOT TO EXCEED 25 FEET PER NEC 240.21(C)(6).
- ALL CIRCUIT BREAKERS 200A AND HIGHER A SHALL BE ELECTRONIC TRIP WITH LSI FUNCTIONS.

SHEET KEYNOTES

- PROVIDE CURRENT TRANSFORMER/TERMINAL CABINET PER POWER UTILITY REQUIREMENTS. PROVIDE 4/0 BONDING JUMPER TO CABINET AND METER.
- PROVIDE 3-1/2 INCH HIGH CONCRETE HOUSEKEEPING PAD UNDER TRANSFORMER/SWITCHBOARD.
- CONTRACTOR SHALL VERIFY AND PROVIDE SERVICE CONDUITS/CONDUCTORS AS PER POWER UTILITY REQUIREMENTS FOR INCOMING SERVICE.
- CONNECT GROUNDING ELECTRODE CONDUCTOR FROM TRANSFORMER GROUNDING LUG TO AVAILABLE GROUNDING ELECTRODES PER NEC 250.30 AND 250.104. FOR FEEDER SIZING REFER TO DETAIL E600.
- PROVIDE NEMA 3R WIRE TROUGH AS PER NEC 376.
- PROVIDE NEMA 3R, 600V, 800A/800AF SERVICE DISCONNECT. INSTALL AS PER LOCAL UTILITY REQUIREMENTS.
- NOT USED.
- NOT USED.
- PROVIDE ENERGY METERING AT ALL LOADS LISTED ON METERING DETAIL. ENERGY METERING SHALL BE INSTALLED TO COMPLY WITH LOCAL ADOPTION OF IEC 603. PROVIDE CTs SIZED FOR EACH FEEDER AND ENERGY SUB METER. ALL ENERGY METERING SHALL BE PROVIDED TO INTERFACE WITH BMS SYSTEM AND PROVIDED TO FACILITATE THE COLLECTION OF DATA FOR EACH BUILDING ENERGY USE CATEGORY (SEE METERING DETAIL FOR CATEGORY AND MONITORING OF INDIVIDUAL CIRCUITS):
 - HVAC TOTAL SYSTEM ENERGY USE.
 - LIGHTING SYSTEM TOTAL ENERGY USE.
 - BAKERY OVENS ENERGY USE.
 - REFRIGERATION CASES & DRY COOLERS TOTAL ENERGY USE.
 - WALK-IN FREEZER & COOLER TOTAL ENERGY USE.
 - TOTAL BUILDING ENERGY USE.

CONTRACTOR IS RESPONSIBLE FOR PROVIDED A FULL OPERATIONAL SYSTEM COMPLETE WITH THE FOLLOWING ITEMS PROVIDED BY DENT INSTRUMENTS OR APPROVED EQUAL: POWERSCOUT 48 NETWORK SUB METER (TECHNICAL ROOM), ROICIL FLEXIBLE CTs, HIGH PERFORMANCE MIDI HINGED CTs, AND MEDIUM SPLIT CORE CTs. CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL QUANTITIES, WIRING, CONNECTORS, CABLES, ACCESSORIES AND MAKING ALL CONNECTIONS FOR A COMPLETE AND OPERABLE SYSTEM PER MANUFACTURER'S INSTRUCTIONS.
CONTACT: REINO MATTILA, DENT INSTRUMENTS 541-668-4181; rmattila@dentinstruments.com

PROVIDE A PERMANENT READILY ACCESSIBLE AND VISIBLE DISPLAY ADJACENT TO THE MAIN BUILDING ENTRANCE OR ON A PUBLICLY AVAILABLE INTERNET WEBSITE. THE DISPLAY SHALL PROVIDE THE FOLLOWING:

- CURRENT DEMAND FOR WHOLE BUILDING ENERGY LEVEL MEASUREMENTS
- THE AVERAGE PEAK DEMANDS FOR THE PREVIOUS DAY AND THE SAME DAY PREVIOUS YEAR
- THE TOTAL ENERGY USAGE FOR THE PREVIOUS 18 MONTHS

PROVIDE IN ACCORDANCE WITH LOCAL ADOPTION OF IEC 603.6. PROVIDE OBVIOUS ACQUISITE OR APPROVED EQUAL. CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL WIRING, CONNECTORS, CABLES, ACCESSORIES AND MAKING ALL CONNECTIONS FOR A COMPLETE AND OPERABLE SYSTEM PER MANUFACTURER'S INSTRUCTIONS.
CONTACT: IAN MAAREFI, OBVIOUS 503-505-3849; ian.maarefi@obvious.com

- NOT USED.
- NOT USED.
- NOT USED.
- MAIN BONDING JUMPER SHALL BE SIZED #4/0 AL. CONTRACTOR TO INSTALL MAIN BONDING JUMPER AS PER NEC 250.28 AND CONNECTED TO THE MAIN GROUNDING BUS BAR.
- MANUFACTURER TO PROVIDE #1/0 AWG COPPER SUPPLY-SIDE BONDING JUMPER FOR TRANSFORMERS AS PER NEC 250.66

FEEDER SCHEDULE

A.C.S.X		A=Aluminum CU=Copper C=Conduit only (RIGID METAL CONDUIT) S=Service secondary X=Separately derived system
504	3 #6 CU, 1 #10 CU GND., IN 3/4" C.	
600SA	2 SETS OF (4 - #500 kcmil AL IN 2 1/2" C.)	
603	3 #4 CU, 1 #10 CU GND., IN 1" C.	
604	4 #4 CU, 1 #10 CU GND., IN 1 1/4" C.	
604T	4 #4 CU, 1 #4 CU GND., IN 1 1/4" C.	
703	3 #4 CU, 1 #8 CU GND., IN 1" C.	
800SA	3 SETS OF (4 - #400 kcmil AL IN 2 1/2" C.)	
1004A	4 #1/0 AL, 1 #6 CU GND., IN 1 1/2" C.	
1254A	4 #2/0 AL, 1 #6 CU GND., IN 2" C.	
1504A	4 #3/0 AL, 1 #6 CU GND., IN 2" C.	
2004A	4 - #250 kcmil AL, 1 #6 CU GND., IN 2 1/2" C.	
2254A	4 - #300 kcmil AL, 1 #4 CU GND., IN 2 1/2" C.	
2504A	4 - #350 kcmil AL, 1 #4 CU GND., IN 2 1/2" C.	
3503A	2 SETS OF (3 #4/0 AL, 1 #2 CU GND., IN 2" C.)	
6004A	2 SETS OF (4 - #500 kcmil AL, 1 #1 CU GND., IN 3" C.)	
8004A	3 SETS OF (4 - #400 kcmil AL, 1 #1/0 CU GND., IN 3" C.)	

MINIMUM SIZE EQUIPMENT GROUNDING CONDUCTORS FOR GROUNDING RACEWAY & EQUIPMENT		
RATING OR SETTING OF AUTOMATIC OVER CURRENT DEVICE IN CIRCUIT AHEAD OF EQUIPMENT, CONDUIT ETC. NOT EXCEEDING (AMPERES)	SIZE (AWG/kcmil)	
	COPPER	ALUMINUM OR COPPER-CLAD ALUMINUM
15	14	12
20	12	10
30	10	8
40	10	8
60	10	8
100	8	6
200	6	4
300	4	2
400	3	1
500	2	1/0
600	1	2/0
800	1/0	3/0
1000	2/0	4/0
1200	3/0	250
1600	4/0	350
2000	250	400
2500	350	600
3000	400	600
4000	500	750
5000	700	1200
6000	800	1200


EQUIPMENT GROUNDING CONDUCTORS MAY NEED TO BE SIZED LARGER THAN SPECIFIED IN THIS SCHEDULE IN ORDER TO COMPLY WITH N.E.C. SECTION 250.4(A)(5) or (B)(4)

GROUNDING ELECTRODE CONDUCTOR FOR AC SYSTEMS			
PER TABLE 250.66 N.E.C.			
SIZE OF LARGEST SERVICE ENTRANCE CONDUCTOR OR EQUIVALENT AREA FOR PARALLEL CONDUCTORS (AWG/kcmil)	SIZE OF GROUNDING ELECTRODE CONDUCTOR		
	COPPER	ALUMINUM OR COPPER-CLAD ALUMINUM	ALUMINUM OR COPPER-CLAD ALUMINUM
COPPER			
2 OR SMALLER	8	6	6
1 OR 1/0	6	4	4
2/0 OR 3/0	4	2	2
4/0 THRU 350 kcmil	2	1/0	1/0
400 kcmil THROUGH 600 kcmil	1/0	3/0	3/0
600 kcmil THROUGH 900 kcmil	2/0	4/0	4/0
900 kcmil THROUGH 1100 kcmil	3/0	250	250
1100 kcmil THROUGH 1750 kcmil			
1750 kcmil THROUGH 2500 kcmil			
2500 kcmil THROUGH 3500 kcmil			
3500 kcmil THROUGH 5000 kcmil			
5000 kcmil THROUGH 7500 kcmil			
7500 kcmil THROUGH 10000 kcmil			
10000 kcmil THROUGH 15000 kcmil			
15000 kcmil THROUGH 20000 kcmil			
20000 kcmil THROUGH 25000 kcmil			
25000 kcmil THROUGH 30000 kcmil			
30000 kcmil THROUGH 35000 kcmil			
35000 kcmil THROUGH 40000 kcmil			
40000 kcmil THROUGH 45000 kcmil			
45000 kcmil THROUGH 50000 kcmil			
50000 kcmil THROUGH 55000 kcmil			
55000 kcmil THROUGH 60000 kcmil			
60000 kcmil THROUGH 65000 kcmil			
65000 kcmil THROUGH 70000 kcmil			
70000 kcmil THROUGH 75000 kcmil			
75000 kcmil THROUGH 80000 kcmil			
80000 kcmil THROUGH 85000 kcmil			
85000 kcmil THROUGH 90000 kcmil			
90000 kcmil THROUGH 95000 kcmil			
95000 kcmil THROUGH 100000 kcmil			
100000 kcmil THROUGH 105000 kcmil			
105000 kcmil THROUGH 110000 kcmil			
110000 kcmil THROUGH 115000 kcmil			
115000 kcmil THROUGH 120000 kcmil			
120000 kcmil THROUGH 125000 kcmil			
125000 kcmil THROUGH 130000 kcmil			
130000 kcmil THROUGH 135000 kcmil			
135000 kcmil THROUGH 140000 kcmil			
140000 kcmil THROUGH 145000 kcmil			
145000 kcmil THROUGH 150000 kcmil			
150000 kcmil THROUGH 155000 kcmil			
155000 kcmil THROUGH 160000 kcmil			
160000 kcmil THROUGH 165000 kcmil			
165000 kcmil THROUGH 170000 kcmil			
170000 kcmil THROUGH 175000 kcmil			
175000 kcmil THROUGH 180000 kcmil			
180000 kcmil THROUGH 185000 kcmil			
185000 kcmil THROUGH 190000 kcmil			
190000 kcmil THROUGH 195000 kcmil			
195000 kcmil THROUGH 200000 kcmil			
200000 kcmil THROUGH 205000 kcmil			
205000 kcmil THROUGH 210000 kcmil			
210000 kcmil THROUGH 215000 kcmil			
215000 kcmil THROUGH 220000 kcmil			
220000 kcmil THROUGH 225000 kcmil			
225000 kcmil THROUGH 230000 kcmil			
230000 kcmil THROUGH 235000 kcmil			
235000 kcmil THROUGH 240000 kcmil			
240000 kcmil THROUGH 245000 kcmil			
245000 kcmil THROUGH 250000 kcmil			
250000 kcmil THROUGH 255000 kcmil			
255000 kcmil THROUGH 260000 kcmil			
260000 kcmil THROUGH 265000 kcmil			
265000 kcmil THROUGH 270000 kcmil			
270000 kcmil THROUGH 275000 kcmil			
275000 kcmil THROUGH 280000 kcmil			
280000 kcmil THROUGH 285000 kcmil			
285000 kcmil THROUGH 290000 kcmil			
290000 kcmil THROUGH 295000 kcmil			
295000 kcmil THROUGH 300000 kcmil			
300000 kcmil THROUGH 305000 kcmil			
305000 kcmil THROUGH 310000 kcmil			
310000 kcmil THROUGH 315000 kcmil			
315000 kcmil THROUGH 320000 kcmil			
320000 kcmil THROUGH 325000 kcmil			
325000 kcmil THROUGH 330000 kcmil			
330000 kcmil THROUGH 335000 kcmil			
335000 kcmil THROUGH 340000 kcmil			
340000 kcmil THROUGH 345000 kcmil			
345000 kcmil THROUGH 350000 kcmil			
350000 kcmil THROUGH 355000 kcmil			
355000 kcmil THROUGH 360000 kcmil			
360000 kcmil THROUGH 365000 kcmil			
365000 kcmil THROUGH 370000 kcmil			
370000 kcmil THROUGH 375000 kcmil			
375000 kcmil THROUGH 380000 kcmil			
380000 kcmil THROUGH 385000 kcmil			
385000 kcmil THROUGH 390000 kcmil			
390000 kcmil THROUGH 395000 kcmil			
395000 kcmil THROUGH 400000 kcmil			
400000 kcmil THROUGH 405000 kcmil			
405000 kcmil THROUGH 410000 kcmil			
410000 kcmil THROUGH 415000 kcmil			
415000 kcmil THROUGH 420000 kcmil			
420000 kcmil THROUGH 425000 kcmil			
425000 kcmil THROUGH 430000 kcmil			
430000 kcmil THROUGH 435000 kcmil			
435000 kcmil THROUGH 440000 kcmil			
440000 kcmil THROUGH 445000 kcmil			
445000 kcmil THROUGH 450000 kcmil			
450000 kcmil THROUGH 455000 kcmil			
455000 kcmil THROUGH 460000 kcmil			
460000 kcmil THROUGH 465000 kcmil			
465000 kcmil THROUGH 470000 kcmil			
470000 kcmil THROUGH 475000 kcmil			
475000 kcmil THROUGH 480000 kcmil			
480000 kcmil THROUGH 485000 kcmil			
485000 kcmil THROUGH 490000 kcmil			
490000 kcmil THROUGH 495000 kcmil			
495000 kcmil THROUGH 500000 kcmil			
500000 kcmil THROUGH 505000 kcmil			
505000 kcmil THROUGH 510000 kcmil			
510000 kcmil THROUGH 515000 kcmil			
515000 kcmil THROUGH 520000 kcmil			
520000 kcmil THROUGH 525000 kcmil			
525000 kcmil THROUGH 530000 kcmil			
530000 kcmil THROUGH 535000 kcmil			
535000 kcmil THROUGH 540000 kcmil			
540000 kcmil THROUGH 545000 kcmil			
545000 kcmil THROUGH 550000 kcmil			
550000 kcmil THROUGH 555000 kcmil			
555000 kcmil THROUGH 560000 kcmil			
560000 kcmil THROUGH 565000 kcmil			
565000 kcmil THROUGH 570000 kcmil			
570000 kcmil THROUGH 575000 kcmil			
575000 kcmil THROUGH 580000 kcmil			
580000 kcmil THROUGH 585000 kcmil			
585000 kcmil THROUGH 590000 kcmil			
590000 kcmil THROUGH 595000 kcmil			
595000 kcmil THROUGH 600000 kcmil			
600000 kcmil THROUGH 605000 kcmil			
605000 kcmil THROUGH 610000 kcmil			
610000 kcmil THROUGH 615000 kcmil			
615000 kcmil THROUGH 620000 kcmil			
620000 kcmil THROUGH 625000 kcmil			
625000 kcmil THROUGH 630000 kcmil			
630000 kcmil THROUGH 635000 kcmil			
635000 kcmil THROUGH 640000 kcmil			
640000 kcmil THROUGH 645000 kcmil			
645000 kcmil THROUGH 650000 kcmil			
650000 kcmil THROUGH 655000 kcmil			
655000 kcmil THROUGH 660000 kcmil			
660000 kcmil THROUGH 665000 kcmil			
665000 kcmil THROUGH 670000 kcmil			
670000 kcmil THROUGH 675000 kcmil			
675000 kcmil THROUGH 680000 kcmil			
680000 kcmil THROUGH 685000 kcmil			
685000 kcmil THROUGH 690000 kcmil			
690000 kcmil THROUGH 695000 kcmil			
695000 kcmil THROUGH 700000 kcmil			
700000 kcmil THROUGH 705000 kcmil			
705000 kcmil THROUGH 710000 kcmil			
710000 kcmil THROUGH 715000 kcmil			
715000 kcmil THROUGH 720000 kcmil			
720000 kcmil THROUGH 725000 kcmil			
725000 kcmil THROUGH 730000 kcmil			
730000 kcmil THROUGH 735000 kcmil			
735000 kcmil THROUGH 740000 kcmil			
740000 kcmil THROUGH 745000 kcmil			
745000 kcmil THROUGH 750000 kcmil			
750000 kcmil THROUGH 755000 kcmil			
755000 kcmil THROUGH 760000 kcmil			
760000 kcmil THROUGH 765000 kcmil			
765000 kcmil THROUGH 770000 kcmil			
770000 kcmil THROUGH 775000 kcmil			
775000 kcmil THROUGH 780000 kcmil			
780000 kcmil THROUGH 785000 kcmil			
785000 kcmil THROUGH 790000 kcmil			
790000 kcmil THROUGH 795000 kcmil			
795000 kcmil THROUGH 800000 kcmil			
800000 kcmil THROUGH 805000 kcmil			
805000 kcmil THROUGH 810000 kcmil			
810000 kcmil THROUGH 815000 kcmil			
815000 kcmil THROUGH 820000 kcmil			
820000 kcmil THROUGH 825000 kcmil			
825000 kcmil THROUGH 830000 kcmil			
830000 kcmil THROUGH 835000 kcmil			
835000 kcmil THROUGH 840000 kcmil			
840000 kcmil THROUGH 845000 kcmil			
845000 kcmil THROUGH 850000 kcmil			
850000 kcmil THROUGH 855000 kcmil			
855000 kcmil THROUGH 860000 kcmil			
860000 kcmil THROUGH 865000 kcmil			
865000 kcmil THROUGH 870000 kcmil			
870000 kcmil THROUGH 875000 kcmil			
875000 kcmil THROUGH 880000 kcmil			
880000 kcmil THROUGH 885000 kcmil			
885000 kcmil THROUGH 890000 kcmil			
890000 kcmil THROUGH 895000 kcmil			
895000 kcmil THROUGH 900000 kcmil			
900000 kcmil THROUGH 905000 kcmil			
905000 kcmil THROUGH 910000 kcmil			
910000 kcmil THROUGH 915000 kcmil			
915000 kcmil THROUGH 920000 kcmil			
920000 kcmil THROUGH 925000 kcmil			
925000 kcmil THROUGH 930000 kcmil			
930000 kcmil THROUGH 935000 kcmil			
935000 kcmil THROUGH 940000 kcmil			
940000 kcmil THROUGH 945000 kcmil			
945000 kcmil THROUGH 950000 kcmil			
950000 kcmil THROUGH 955000 kcmil			
955000 kcmil THROUGH 960000 kcmil			
960000 kcmil THROUGH 965000 kcmil			
965000 kcmil THROUGH 970000 kcmil			
970000 kcmil THROUGH 975000 kcmil			
975000 kcmil THROUGH 980000 kcmil			
980000 kcmil THROUGH 985000 kcmil			
985000 kcmil THROUGH 990000 kcmil			
990000 kcmil THROUGH 995000 kcmil			
995000 kcmil THROUGH 1000000 kcmil			

TRANSFORMER GROUNDING CONDUCTORS	
TRANSFORMER KVA RATING	COPPER GROUND CONDUCTOR SIZE (AWG/kcmil)
3	8
6	8
9	8
15	8

1 METERING DETAIL

NTS

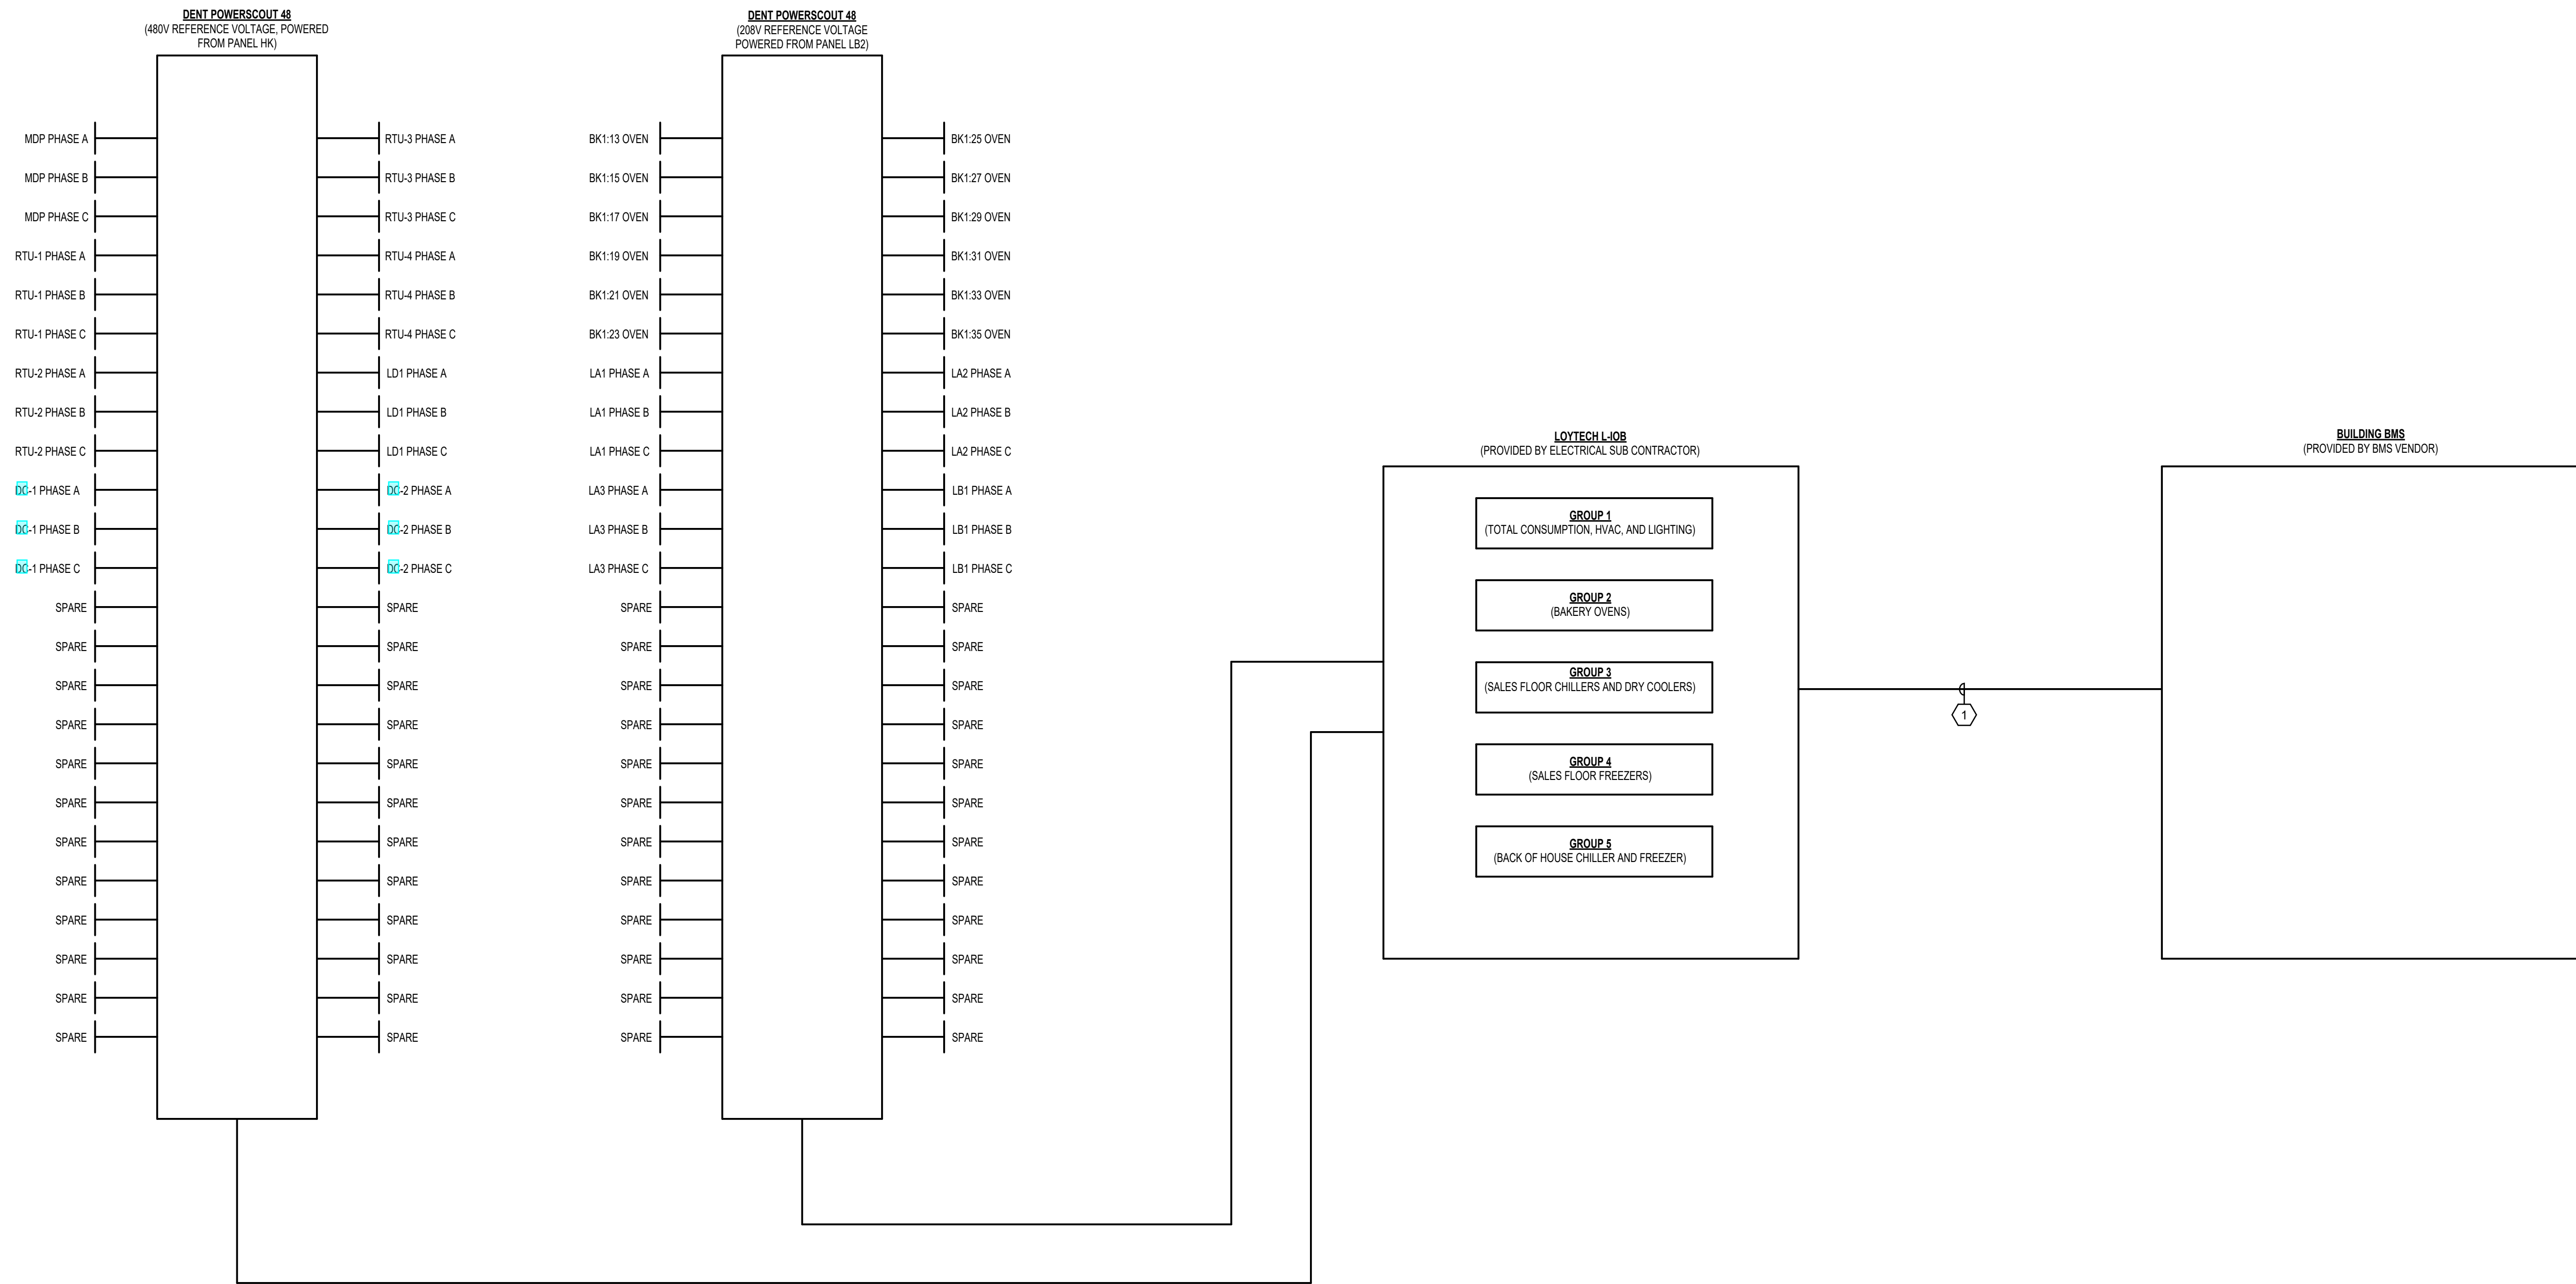

GENERAL SHEET NOTES

- A. REFER TO PANEL SCHEDULES FOR EXACT CIRCUIT NUMBERS.

SHEET KEYNOTES

1. FINAL INTEGRATION TO BMS PANEL BY COPELAND.

ISSUANCE
11/07/2025 PERMIT CYCLE 1

PROJECT NUMBER
7650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER

ELECTRICAL -
METERING
DETAIL
E401

LIDL US, LLC
LIDL 1517 NORCROSS, GA



This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

499 JIMMY CARTER BLVD. NORCROSS, GA 30093



PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, LLC
**PROGRESSIVE
COMPANIES**
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com



This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.



MECHANICAL EQUIPMENT CONNECTION SCHEDULE											
SYMBOL	DESCRIPTION	LOCATION	VOLTS	PH	LOAD(VA)	HP	MCA	MOC	CIRCUIT NUMBER	WIRE / CONDUIT	NOTES
AC-1	AIR CONDITIONING UNIT	IT ROOM 110	208	3	6373.9 41.6		2	15	HK-33,35,37 LB3-37,39	(none) 202	SINGLE POINT POWER CONNECTION. INDOOR UNIT POWERED FROM OUTDOOR UNIT CU-1.
CU-1	CONDENSING UNIT	ROOF	208	1	3120.0		15	15	LB3-32,34,36	202	
CVF-1	INLINE BOOSTER	SALES	120	1	152.4		1.27	20	LB3-33	202	
CVF-2	INLINE BOOSTER	SALES	120	1	152.4		1.27	20	LB3-33	202	
CVF-3	INLINE BOOSTER	SALES	120	1	152.4		1.27	20	LB3-35	202	
DC-1	DRY COOLER DC-1	ROOF	480	3	22627.5		27.22	35	HK-27,29,31	403	
DC-2	DRY COOLER DC-2	ROOF	480	3	28284.4		34	45	HK-7,9,11	503	
DSP	DESTRATIFICATION FAN	SALES	120	1	45.0		0.32	20	LC1-25	202	
EUH-1	ELECTRIC UNIT HEATER	VESTIBULE	480	1	8160.0		17	25	HK-8,10	302	
EW-H1	ELECTRIC WATER HEATER	STAGING 113	480	1	12000.0		15	20	HK-39,41	202	
KEF-1	KITCHEN EXHUAIST FAN	SALES	120	1	756.0		6.3	20	BK1-5	202	
RTU-1	ROOF TOP UNIT	ROOF	480	3	46211.1		58	60	MDP-1-13,15,17	603	
RTU-2	ROOF TOP UNIT	ROOF	480	3	46211.1		58	60	HK-1,3,5	603	
RTU-3	ROOF TOP UNIT	ROOF	480	3	25495.8		32	35	HK-13,15,17	403	1
RTU-4	ROOF TOP UNIT	ROOF	480	3	9560.9		12	15	HK-19,21,23	203	1
TEF-1	EXHAUST FAN	SALES	120	1	54.0		.16	20	LC1-19	202	
TEF-2	EXHAUST FAN	SALES	120	1	54.0		.16	20	LC1-17	202	

WIRE/CONDUIT SCHEDULE

200S	4 #3/0 CU IN 2" C.
202	2 #12 CU, 1 #12 CU GND., IN 3/4" C.
203	3 #12 CU, 1 #12 CU GND., IN 3/4" C.
302	2 #10 CU, 1 #10 CU GND., IN 3/4" C.
403	3 #8 CU, 1 #10 CU GND., IN 3/4" C.
503	3 #6 CU, 1 #10 CU GND., IN 3/4" C.
603	3 #4 CU, 1 #10 CU GND., IN 1" C.

GENERAL MECHANICAL EQUIPMENT CONNECTION NOTE:

- A. THE ABOVE INFORMATION IS FOR A SPECIFIC MANUFACTURER. ACTUAL MANUFACTURER FOR EQUIPMENT MAY BE DIFFERENT. COORDINATE WITH MECHANICAL EQUIPMENT SUBMITTALS FOR LOADS AND OVER CURRENT PROTECTION REQUIREMENTS PRIOR TO INSTALLATION OF WIRING.
- B. MOC = MAXIMUM OVER CURRENT PROTECTION.
MCA = MINIMUM CIRCUIT AMPACITY
- C. PROVIDE DISCONNECTING MEANS FOR EACH ITEM OF EQUIPMENT LISTED IN THE SCHEDULE ABOVE, EXCEPT AS SPECIFICALLY NOTED OTHERWISE IN SCHEDULE NOTES, BELOW.

MECHANICAL EQUIPMENT CONNECTION SCHEDULE NOTES

- 1 RTU PROVIDED WITH LOCAL SERVICE DISCONNECT. BY MECHANICAL CONTRACTOR.

MAIN LUGS ONLY										MOUNTING: SURFACE						Accessories:	
BUS AMPACITY: 125A										ENCLOSURE: TYPE 1							
EQUIPMENT RATING: 480/277 V, 3PH, 4 WIRE										LOCATION: TECHNICAL AREA...							
AIC RATING:										SUPPLIED FROM: MDP-1							
										Load (VA)							
CKT	Description/Location	Type	C.B.	Pole	Note	A	B	C	A	B	C	Note	Pole	C.B.	Type	Description/Location	CKT
1	SALES LIGHTING 2/3	LIG.	20 A	1		3,119			400			1	20 A	LIG.	--	BAKERY LIGHTING	2
3	SALES LIGHTING 2/3	LIG.	20 A	1			3,685			1,068		1	20 A	LIG.	--	RESTROOM AND OFFICE BLOCK	4
5	SALES LIGHTING 1/3	LIG.	20 A	1				3,113		0		1	20 A	--	--	SPARE BREAKER	6
7	CHECKOUT LIGHTING 2/3	LIG.	20 A	1		2,122			0			1	20 A	--	--	SPARE BREAKER	8
9	CHECKOUT LIGHTING 1/3	LIG.	20 A	1			881		0	0		1	20 A	--	--	SPARE BREAKER	10
11	VEGETABLE LIGHTING	LIG.	20 A	1				432		0	0	1	20 A	--	--	SPARE BREAKER	12
13	CANOPY LIGHTING	LIG.	20 A	1		135			0			1	20 A	--	--	SPARE BREAKER	14
15	BACK OF HOUSELIGHTING	LIG.	20 A	1			1,505		0	0		1	20 A	--	--	SPARE BREAKER	16
17	ENDCAP LIGHTING	LIG.	20 A	1				720	0	0		1	20 A	--	--	SPARE BREAKER	18
19	EXIT SIGNS	LIG.	20 A	1		75			0			1	20 A	--	--	SPARE BREAKER	20
21	PARKING LOT	LIG.	20 A	1			1,768					--	--	--	--	BUSSIED SPACE	22
23	EXTERIOR WALL PACKS	LIG.	20 A	1				111		--	--	1	--	--	--	BUSSIED SPACE	24
25	LOADING WALL PACKS	LIG.	20 A	1		185						1	--	--	--	BUSSIED SPACE	26
27	BUSSIED SPACE	--	--	1			--	--	--	--	--	1	--	--	--	BUSSIED SPACE	28
29	BUSSIED SPACE	--	--	1			--	--	--	--	--	1	--	--	--	BUSSIED SPACE	30
31	BUSSIED SPACE	--	--	1		--	--	--	--	--	--	1	--	--	--	BUSSIED SPACE	32
33	BUSSIED SPACE	--	--	1		--	--	--	--	--	--	1	--	--	--	BUSSIED SPACE	34
35	BUSSIED SPACE	--	--	1		--	--	--	--	--	--	1	--	--	--	BUSSIED SPACE	36
37	BUSSIED SPACE	--	--	1		--	--	--	--	--	--	1	--	--	--	BUSSIED SPACE	38
39	BUSSIED SPACE	--	--	1		--	--	--	--	--	--	1	--	--	--	BUSSIED SPACE	40
41	BUSSIED SPACE	--	--	1		--	--	--	--	--	--	1	--	--	--	BUSSIED SPACE	42
Total Connected Load Ph. A						23 A	Panel Connected Load: 19.3 KVA						23.2 A				
Total Connected Load Ph. B						33 A	Total Demand Load: 23.7 KVA						28.5 A				
Total Connected Load Ph. C						16 A											

MAIN LUGS ONLY										MOUNTING: SURFACE										Accessories:			
BUS AMPACITY: 225A										ENCLOSURE: TYPE 1													
EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE										LOCATION: TECHNICAL AREA...													
AIC RATING:										SUPPLIED FROM: LDP-2													
												Load (VA)											
CKT	Description/Location	Type	C.B.	Pole	Note	A	B	C	A	B	C	Note	Pole	C.B.	Type	Description/Location	CKT						
1	SPARE BREAKER	REC.	20 A	1	--	0			180			1	20 A	REC.	--	WORKTOP RECEPTACLE	2						
3	BUG ZAPPER	REC.	20 A	1	--		900			0		1	20 A	--	--	SPARE BREAKER	4						
5	KEF-1	Motor	20 A	1	--			756				1	20 A	--	--	SPARE BREAKER	6						
7	SHUNT TRIP	--	--	--	--	--			0			1	20 A	--	--	SPARE BREAKER	8						
9	BUG ZAPPER	REC.	20 A	1	--		900			0		1	20 A	--	--	SPARE BREAKER	10						
11	BAKERY CASE LIGHTING	REC.	20 A	1	--			360			0	1	20 A	--	--	SPARE BREAKER	12						
13	BAKERY OVEN	KIT.	20 A	3	--		3,200			0		1	20 A	--	--	SPARE BREAKER	14						
15	--	--	--	--	--	--		3,200				1	20 A	--	--	SPARE BREAKER	16						
17	--	--	--	--	--	--			3,200	0	0	1	20 A	--	--	SPARE BREAKER	18						
19	BAKERY OVEN	KIT.	20 A	3	--		3,200					1	20 A	--	--	SPARE BREAKER	20						
21	--	--	--	--	--	--		3,200				1	20 A	--	--	SPARE BREAKER	22						
23	--	--	--	--	--	--			3,200			1	--	--	--	BUSSED SPACE	24						
25	--	--	--	--	--	--						1	--	--	--	BUSSED SPACE	26						
26	BAKERY OVEN	KIT.	20 A	3	--		5,367			--		1	--	--	--	BUSSED SPACE	28						
27	--	--	--	--	--	--			5,367			1	--	--	--	BUSSED SPACE	30						
29	--	--	--	--	--	--			5,367		--	1	--	--	--	BUSSED SPACE	32						
31	BAKERY OVEN	KIT.	20 A	3	--		5,367			--		1	--	--	--	BUSSED SPACE	34						
33	--	--	--	--	--	--			5,367			1	--	--	--	BUSSED SPACE	36						
35	--	--	--	--	--	--			5,367		--	1	--	--	--	BUSSED SPACE	38						
39	OVEN HOOD LTG. AND CONT. (G)	KIT.	20 A	1	--			180		--		1	--	--	--	BUSSED SPACE	40						
41	BAKERY PRINTER	GE.	20 A	1	--			300		--		1	--	--	--	BUSSED SPACE	42						
49	SPARE BREAKER	REC.	20 A	1	--				0			1	--	--	--	BUSSED SPACE	40						
Total Connected Load Ph. A						146 A						Panel Connected Load: 55.0 kVA						152.6 A					
Total Connected Load Ph. B						161 A						Total Demand Load: 39.7 kVA						110.2 A					
Total Connected Load Ph. C						153 A																	

REFER TO THE NOTES COLUMN IN EACH PANELBOARD SCHEDULE FOR CIRCUIT ENERGY MONITORING CATEGORY. ENERGY MONITORING CATEGORY FOR THE TOTAL PANELBOARD (REMAINING LOAD) SHALL BE AS INDICATED IN THE TOP RIGHTHAND CORNER OF EACH PANELBOARD SCHEDULE.

- REFER TO THE NOTES COLUMN IN EACH PANELBOARD SCHEDULE FOR CIRCUIT ENERGY MONITORING CATEGORY. ENERGY MONITORING CATEGORY FOR THE TOTAL PANELBOARD (REMAINING LOAD) SHALL BE AS INDICATED IN THE TOP RIGHTHAND CORNER OF EACH PANELBOARD SCHEDULE.
- C/T-G = RECEPTACLES AND GENERAL LOADS
 - C/T-L = LIGHTING LOADS
 - C/T-H = HVAC LOADS
 - C/T-R = REFRIGERATION CASE & DRY COOLER LOADS
 - C/T-W = WALK-IN COOLER & FREEZER LOADS
 - C/T-B = BAKERY LOADS

MAIN LUGS ONLY BUS AMPACITY: 225 A EQUIPMENT RATING: 480/277 V, 3PH, 4 WIRE AIC RATING: 4502										MOUNTING: SURFACE ENCLOSURE: TYPE 1 LOCATION: TECHNICAL AREA... SUPPLIED FROM: MDP-1										Accessories:			
Load (VA)																							
CKT	Description/Location	Type	C.B.	Pole	Note	A	B	C	A	B	C	Note	Pole	C.B.	Type	Description/Location	CKT						
1	RTU-2	HVAC	60 A	3	15.4...				0				3	20 A	--	480V METER	4						
3	--	--	--	--	--	15,404			0			--	--	--	--		2						
5	--	--	--	--	--		15,404			0		--	--	--	--		6						
7	DC-2	CO...	45 A	3	9,428			4,080		4,080		2	25 A	HEA...	--	EUH-1	8						
9	--	--	--	--	--	9,428					--	1	--	--	--		10						
11	--	--	--	--	--		9,428				--	1	--	--	--	BUSSED SPACE	12						
13	RTU-3	HVAC	35 A	3	8,499							1	--	--	--	BUSSED SPACE	14						
15	--	--	--	--	--	8,499					--	1	--	--	--	BUSSED SPACE	16						
17	--	--	--	--	--		8,499				--	1	--	--	--	BUSSED SPACE	18						
19	RTU-4	HVAC	15 A	3	3,187							1	--	--	--	BUSSED SPACE	20						
21	--	--	--	--	--	3,187					--	1	--	--	--	BUSSED SPACE	22						
23	--	--	--	--	--		3,187				--	1	--	--	--	BUSSED SPACE	24						
25	--	--	--	--	--						--	1	--	--	--	BUSSED SPACE	26						
27	DC-1	CO...	35 A	3		7,543		7,543			--	1	--	--	--	BUSSED SPACE	28						
29	--	--	--	--	--		7,543				--	1	--	--	--	BUSSED SPACE	30						
31	--	--	--	--	--	7,543					--	1	--	--	--	BUSSED SPACE	32						
33	EVAC	Motor	20 A	3		2,125		2,125			--	1	--	--	--	BUSSED SPACE	34						
35	--	--	--	--	--		2,125				--	1	--	--	--	BUSSED SPACE	36						
37	--	--	--	--	--	2,125					--	1	--	--	--	BUSSED SPACE	38						
39	HOT WATER HEATING	HOT	35 A	2		6,000					--	1	--	--	--	BUSSED SPACE	40						
41	--	--	--	--	--		6,000				--	1	--	--	--	BUSSED SPACE	42						
Total Connected Load Ph. A						181 A						Panel Connected Load: 158.7 KVA						190.9 A					
Total Connected Load Ph. B						204 A						Total Demand Load: 160.8 KVA						193.4 A					
Total Connected Load Ph. C						189 A																	

MAIN CIRCUIT BREAKER: 800 A										MOUNTING: SURFACE					Accessory...				
BUS AMPCACITY: 800 A										ENCLOSURE: TYPE 1									
EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE										LOCATION: TECHNICAL AREA 113									
AIC RATING:										SUPPLIED FROM: T-LDP2									
										Load (VA)									
KT	Description/Location	Type	C.B.	Poles	Note	A	B	C	A	B	C	Note	Poles	C.B.	Type	Description/Location	CKT		
2	BK1	Motor...	225 A	3		17,493						1	--	--	--	BUSSED SPACE	2		
3							19,2		--	--		1	--	--	--	BUSSED SPACE	4		
4								18,249				1	--	--	--	BUSSED SPACE	6		
5	LC1	Motor...	200 A	3		8,181			--	--		1	--	--	--	BUSSED SPACE	8		
6							6,829		--	--		1	--	--	--	BUSSED SPACE	10		
7								7,626				1	--	--	--	BUSSED SPACE	12		
8	LC2	Spare...	200 A	3		9,984			--	--		1	--	--	--	BUSSED SPACE	14		
9							6,666		--	--		1	--	--	--	BUSSED SPACE	16		
10								3,328				1	--	--	--	BUSSED SPACE	18		
11	LB1	Spare...	250 A	3		9,444			--	--		1	--	--	--	BUSSED SPACE	20		
12							9,444		--	--		1	--	--	--	BUSSED SPACE	22		
13								9,444				1	--	--	--	BUSSED SPACE	24		
14	LB3	Motor...	200 A	3		14,257			--	--		1	--	--	--	BUSSED SPACE	26		
15								13,6				1	--	--	--	BUSSED SPACE	28		
16								11,049				1	--	--	--	BUSSED SPACE	30		
17	BUSSED SPACE	--	--	1					--	--		1	--	--	--	BUSSED SPACE	32		
18	BUSSED SPACE	--	--	1			--		--	--		1	--	--	--	BUSSED SPACE	34		
19	BUSSED SPACE	--	--	1					--	--		1	--	--	--	BUSSED SPACE	36		
20	BUSSED SPACE	--	--	1					--	--		1	--	--	--	BUSSED SPACE	38		
21	BUSSED SPACE	--	--	1					--	--		1	--	--	--	BUSSED SPACE	40		
22	BUSSED SPACE	--	--	1			--		--	--		1	--	--	--	BUSSED SPACE	42		
Total Connected load Ph. A						59,359 VA	502 A		Panel Connected Load: 164.9 kVA						457.6 A				
Total Connected load Ph. B						59,894 VA	473 A		Total Demand Load: 150.9 kVA						418.5 A				
Total Connected load Ph. C						49,696 VA	414 A												


MAIN CIRCUIT BREAKER: 800 A BUS AMPACITY: 800 EQUIPMENT RATING: 480/277 V, 3PH, 4 WIRE AIC RATING: 25,000 A										MOUNTING: PAD ENCLOSURE: MODULAR NEMA 1 LOCATION: TECHNICAL AREA 113 SUPPLIED FROM:										Accessories...							
Load (VA)																											
CKT	Description/Location	Type	C.B.I.	Poles	Note	A	B	C	A	B	C	Note	Poles	C.B.I.	Type	Description/Location	CKT										
1	T-LDP2	Motor...	400 A	3		59,359			64,568				3	400 A	Spare...	T-LDP1	2										
3							55.8...			66.9...							4										
5							49.696			61.528							6										
7	HK	Motor...	225 A	3		50,265			6,036	8,905			3	100 A	Spare...	LD1	8										
9						56.2...											10										
11								52,185			4,376						12										
13	RTU-1	HVAC	60 A	3		15,404							1			BUSSED SPACE	14										
15						15.4...										BUSSED SPACE	16										
17								15,404					1			BUSSED SPACE	18										
19	BUSSED SPACE												1			BUSSED SPACE	20										
21	BUSSED SPACE			1									1			BUSSED SPACE	22										
23	BUSSED SPACE			1									1			BUSSED SPACE	24										
25	BUSSED SPACE			1									1			BUSSED SPACE	26										
27	BUSSED SPACE			1									1			BUSSED SPACE	28										
29	BUSSED SPACE			1									1			BUSSED SPACE	30										
31	BUSSED SPACE			1									1			BUSSED SPACE	32										
33	BUSSED SPACE			1									1			BUSSED SPACE	34										
35	BUSSED SPACE			1									1			BUSSED SPACE	36										
37	BUSSED SPACE			1									1			BUSSED SPACE	38										
39	BUSSED SPACE			1									1			BUSSED SPACE	40										
41	BUSSED SPACE			1									1			BUSSED SPACE	42										
Total Connected load Ph. A						195,632 VA	713 A						Panel Connected Load: 582.2 KVA														
Total Connected load Ph. B						203,962 VA	741 A						Total Demand Load: 568.2 KVA														
Total Connected load Ph. C						183,189 VA	661 A						700.3 A 653.5 A														

DISTRIBUTION PANELBOARD:LDP-1		
MAIN CIRCUIT BREAKER: 800 A	MOUNTING: SURFACE	Accessories...
BUS AMPACITY: 800 A	ENCLOSURE: TYPE 1	
EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE	LOCATION: TECHNICAL AREA 113	
AIC RATING:	SUPPLIED FROM: T-LDP1	


MAIN CIRCUIT BREAKER: 800 A BUS AMPACITY: 800 A EQUIPMENT RATING: 120/208 V, 3PH, 4 WIRE AIC RATING:					MOUNTING: SURFACE ENCLOSURE: TYPE 1 LOCATION: TECHNICAL AREA 113 SUPPLIED FROM: T-LDP1					Accessories...							
					Load (VA)												
CKT	Description/Location	Type	C.B.	Poles	Note	A	B	C	A	B	C	Note	Poles	C.B.	Type	Description/Location	CKT
1	LEIT	REFR.	60 A	2		2,820							1	--	--	BUSSED SPACE	2
3	--	--	--	--	--		3,380						1	--	--	BUSSED SPACE	4
5	LA1	REFR.	250 A	3				24,186		--	--		1	--	--	BUSSED SPACE	6
7	--	--	--	--	--	24,186				--	--		1	--	--	BUSSED SPACE	8
9	--	--	--	--	--		24,1--			--	--		1	--	--	BUSSED SPACE	10
11	LA2	Spare	150 A	3				13,886		--	--		1	--	--	BUSSED SPACE	12
13	--	--	--	--	--	14,286				--	--		1	--	--	BUSSED SPACE	14
15	--	--	--	--	--	16,5--				--	--		1	--	--	BUSSED SPACE	16
17	LA3	REFR.	225 A	3				22,337		--	--		1	--	--	BUSSED SPACE	18
19	--	--	--	--	--	22,337				--	--		1	--	--	BUSSED SPACE	20
21	--	--	--	--	--	22,3--				--	--		1	--	--	BUSSED SPACE	22
23	LB2	Spare	150 A	3				1,120		--	--		1	--	--	BUSSED SPACE	24
25	--	--	--	--	--	940				--	--		1	--	--	BUSSED SPACE	26
27	--	--	--	--	--			540		--	--		1	--	--	BUSSED SPACE	28
29	BUSSED SPACE	--	--	--	--					--	--		1	--	--	BUSSED SPACE	30
31	BUSSED SPACE	--	--	1						--	--		1	--	--	BUSSED SPACE	32
33	BUSSED SPACE	--	--	1						--	--		1	--	--	BUSSED SPACE	34
35	BUSSED SPACE	--	--	1						--	--		1	--	--	BUSSED SPACE	36
37	BUSSED SPACE	--	--	1		--				--	--		1	--	--	BUSSED SPACE	38
39	BUSSED SPACE	--	--	1						--	--		1	--	--	BUSSED SPACE	40
41	BUSSED SPACE	--	--	1						--	--		1	--	--	BUSSED SPACE	42
Total Connected load Ph. A		64,568	VA			542 A			Panel Connected Load: 193.1 kVA							535.9 A	
Total Connected load Ph. B		66,984	VA			562 A			Total Demand Load: 193.1 kVA							535.9 A	
Total Connected load Ph. C		61,528	VA			513 A											

PANELBOARD: LEIT		
MAIN CIRCUIT BREAKER: 60 A	MOUNTING: SURFACE	Accessories:
BUS AMPACITY: 100A	ENCLOSURE: TYPE 1	
EQUIPMENT RATING: 120/208 V, 1PH, 3 WIRE	LOCATION: IT ROOM 112	
AIC RATING: 10,000 A	SUPPLIED FROM: LDP-1	

MAIN CIRCUIT BREAKER: 60 A BUS SYSTEM: 100A EQUIPMENT RATING: 120/208 V, 1PH, 3 WIRE AIC RATING: 10,000 A										ENCLOSURE: TYPE 1 LOCATION: IT ROOM 112 SUPPLYING FROM: LDP-1										Accessories:																																																																																																																																																																																																																																																																																																																			
Load (VA) <table> <tr> <th>CKT</th><th>Description/Location</th><th>Type</th><th>C.B.</th><th>Pole</th><th>Note</th><th>A</th><th>B</th><th>A</th><th>B</th><th>Note</th><th>Pole</th><th>C.B.</th><th>Type</th><th>Description/Location</th><th>CKT</th></tr> <tr> <td>1</td><td>CASH OFFICE</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td>360</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>2</td></tr> <tr> <td>3</td><td>BMS SYSTEM</td><td>GEN.</td><td>20 A</td><td>1</td><td></td><td></td><td>200</td><td></td><td>540</td><td></td><td>1</td><td>20 A</td><td>REC.</td><td>CASH REGISTER</td><td>4</td></tr> <tr> <td>5</td><td>TECHNICAL ROOM</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td>360</td><td></td><td>540</td><td></td><td></td><td>1</td><td>20 A</td><td>REC.</td><td>CASH REGISTER</td><td>6</td></tr> <tr> <td>7</td><td>ATTENDANT STATION</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td></td><td>360</td><td></td><td>540</td><td></td><td>1</td><td>20 A</td><td>REC.</td><td>CASH REGISTER</td><td>8</td></tr> <tr> <td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>10</td></tr> <tr> <td>11</td><td>NETWORK CABINET</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td></td><td>800</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>12</td></tr> <tr> <td>13</td><td>NETWORK CABINET</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td>800</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>14</td></tr> <tr> <td>15</td><td>NETWORK CABINET</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td></td><td>400</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>16</td></tr> <tr> <td>17</td><td>NETWORK CABINET</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td>400</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>18</td></tr> <tr> <td>19</td><td>SELF CHECKOUT REGISTER</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td></td><td>180</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>20</td></tr> <tr> <td>21</td><td>SELF CHECKOUT REGISTER</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td>180</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>22</td></tr> <tr> <td>23</td><td>SELF CHECKOUT REGISTER</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td></td><td>180</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>24</td></tr> <tr> <td>25</td><td>SELF CHECKOUT REGISTER</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td>180</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>26</td></tr> <tr> <td>27</td><td>SELF CHECKOUT REGISTER</td><td>REC.</td><td>20 A</td><td>1</td><td></td><td></td><td>180</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>28</td></tr> <tr> <td>29</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>30</td></tr> <tr> <td colspan="6">Total Connected Load Ph. A</td><td>27 A</td><td colspan="2">Panel...</td><td>6.2 kVA</td><td colspan="4"></td><td>29.8 A</td><td colspan="2"></td></tr> <tr> <td colspan="6">Total Connected Load Ph. B</td><td>32 A</td><td colspan="2">Total Demand...</td><td>6.2 kVA</td><td colspan="4" rowspan="8"></td><td>29.8 A</td><td colspan="2" rowspan="7"></td></tr> <tr> <td colspan="6">Total Connected Load Ph. C</td><td>0 A</td><td colspan="10" rowspan="3"></td></tr> </table>																					CKT	Description/Location	Type	C.B.	Pole	Note	A	B	A	B	Note	Pole	C.B.	Type	Description/Location	CKT	1	CASH OFFICE	REC.	20 A	1		360									2	3	BMS SYSTEM	GEN.	20 A	1			200		540		1	20 A	REC.	CASH REGISTER	4	5	TECHNICAL ROOM	REC.	20 A	1		360		540			1	20 A	REC.	CASH REGISTER	6	7	ATTENDANT STATION	REC.	20 A	1			360		540		1	20 A	REC.	CASH REGISTER	8	9															10	11	NETWORK CABINET	REC.	20 A	1			800								12	13	NETWORK CABINET	REC.	20 A	1		800									14	15	NETWORK CABINET	REC.	20 A	1			400								16	17	NETWORK CABINET	REC.	20 A	1		400									18	19	SELF CHECKOUT REGISTER	REC.	20 A	1			180								20	21	SELF CHECKOUT REGISTER	REC.	20 A	1		180									22	23	SELF CHECKOUT REGISTER	REC.	20 A	1			180								24	25	SELF CHECKOUT REGISTER	REC.	20 A	1		180									26	27	SELF CHECKOUT REGISTER	REC.	20 A	1			180								28	29															30	Total Connected Load Ph. A						27 A	Panel...		6.2 kVA					29.8 A			Total Connected Load Ph. B						32 A	Total Demand...		6.2 kVA					29.8 A			Total Connected Load Ph. C						0 A										
CKT	Description/Location	Type	C.B.	Pole	Note	A	B	A	B	Note	Pole	C.B.	Type	Description/Location	CKT																																																																																																																																																																																																																																																																																																																								
1	CASH OFFICE	REC.	20 A	1		360									2																																																																																																																																																																																																																																																																																																																								
3	BMS SYSTEM	GEN.	20 A	1			200		540		1	20 A	REC.	CASH REGISTER	4																																																																																																																																																																																																																																																																																																																								
5	TECHNICAL ROOM	REC.	20 A	1		360		540			1	20 A	REC.	CASH REGISTER	6																																																																																																																																																																																																																																																																																																																								
7	ATTENDANT STATION	REC.	20 A	1			360		540		1	20 A	REC.	CASH REGISTER	8																																																																																																																																																																																																																																																																																																																								
9															10																																																																																																																																																																																																																																																																																																																								
11	NETWORK CABINET	REC.	20 A	1			800								12																																																																																																																																																																																																																																																																																																																								
13	NETWORK CABINET	REC.	20 A	1		800									14																																																																																																																																																																																																																																																																																																																								
15	NETWORK CABINET	REC.	20 A	1			400								16																																																																																																																																																																																																																																																																																																																								
17	NETWORK CABINET	REC.	20 A	1		400									18																																																																																																																																																																																																																																																																																																																								
19	SELF CHECKOUT REGISTER	REC.	20 A	1			180								20																																																																																																																																																																																																																																																																																																																								
21	SELF CHECKOUT REGISTER	REC.	20 A	1		180									22																																																																																																																																																																																																																																																																																																																								
23	SELF CHECKOUT REGISTER	REC.	20 A	1			180								24																																																																																																																																																																																																																																																																																																																								
25	SELF CHECKOUT REGISTER	REC.	20 A	1		180									26																																																																																																																																																																																																																																																																																																																								
27	SELF CHECKOUT REGISTER	REC.	20 A	1			180								28																																																																																																																																																																																																																																																																																																																								
29															30																																																																																																																																																																																																																																																																																																																								
Total Connected Load Ph. A						27 A	Panel...		6.2 kVA					29.8 A																																																																																																																																																																																																																																																																																																																									
Total Connected Load Ph. B						32 A	Total Demand...		6.2 kVA					29.8 A																																																																																																																																																																																																																																																																																																																									
Total Connected Load Ph. C						0 A																																																																																																																																																																																																																																																																																																																																	
Notes: 1. PROVIDE (2) CTS ON THE INCOMING FEEDER TO THIS PANELBOARD TO MONITOR THE ENTIRE LOAD ON THIS PANELBOARD																																																																																																																																																																																																																																																																																																																																							
Load Type Definitions: Motor (125% largest Motor + 100% remaining motors) R = Receptacles (to 10VA/100, over 10 kVA 50%) E = Existing Load 30-day metered (125%) K = Kitchen (Demand as per NEC Table 220.56/C = Continuous Load (125%) X = X-Rays (Demand per NEC 860.6) G = General Load (Non-continuous) (100%) EL = Elevator (Demand as per NEC Table...) L = Lighting (125%) W = Water Heater (125%) H = Heating (100%)																																																																																																																																																																																																																																																																																																																																							
Load Type		Connected Load		NEC Demand Factor		NEC Demand Load		Panel Totals																																																																																																																																																																																																																																																																																																																															
GENERAL		200.0		100.00%		200.0																																																																																																																																																																																																																																																																																																																																	
RECEPTACLE		6000.0		100.00%		6000.0																																																																																																																																																																																																																																																																																																																																	
															Total Connected Load: 6200.0 VA																																																																																																																																																																																																																																																																																																																								

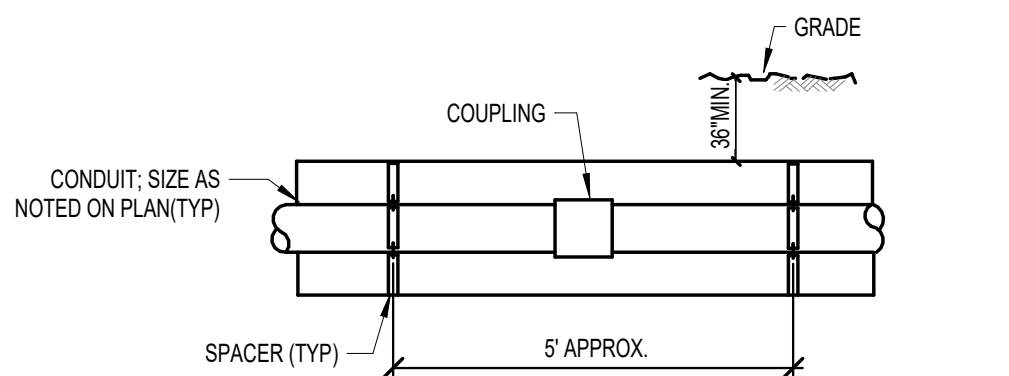


SECTION

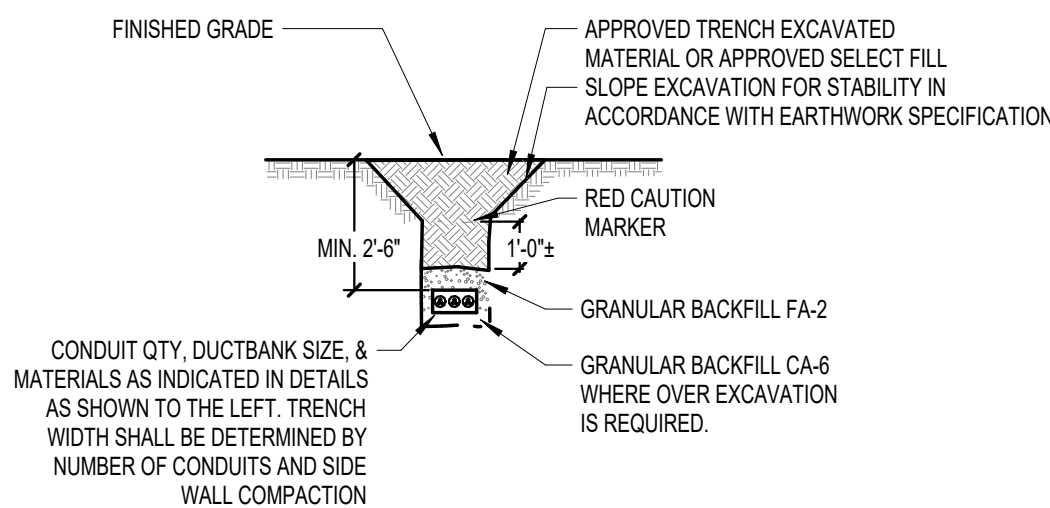

CROSS SECTION

7 NON-CONCRETE UNDERGROUND CONDUITS


NTS

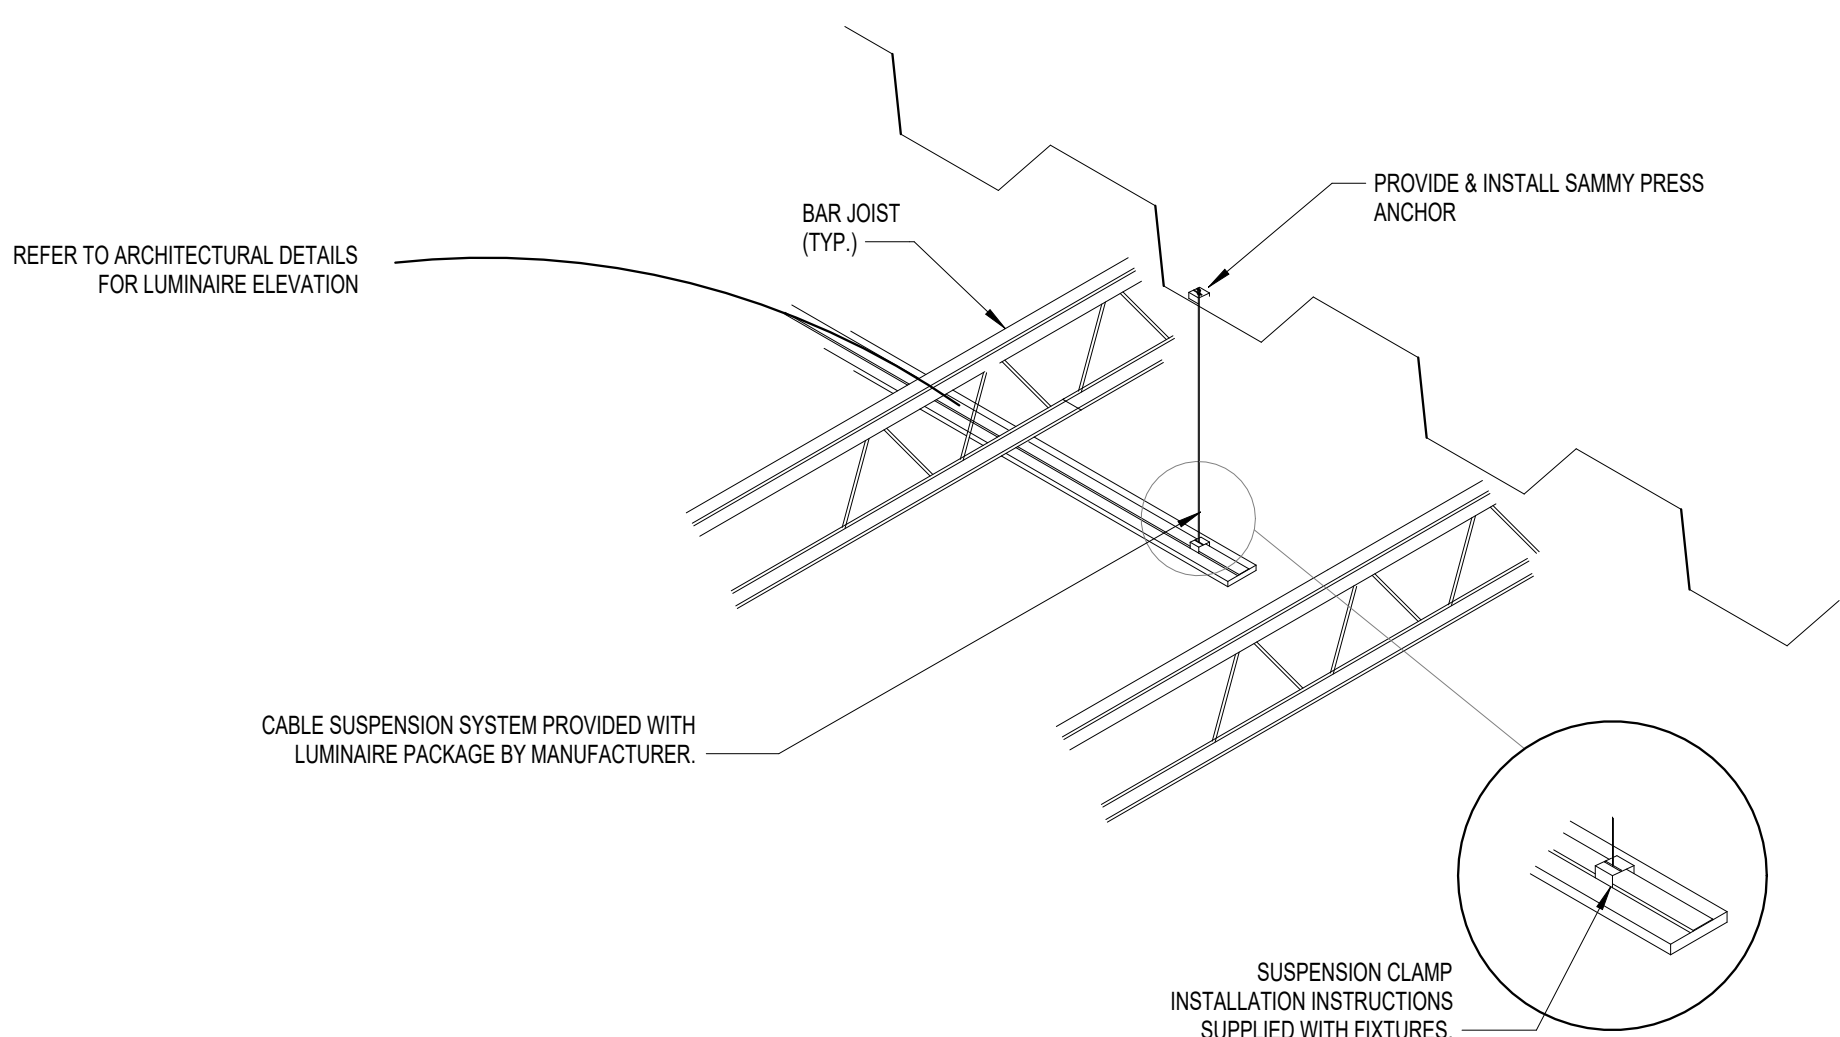

NOTE: LIGHT FIXTURES IN THE SALES FLOOR AREA SHALL NOT BE ATTACHED TO THE JOIST.

8 SALES FLOOR LIGHTING DETAIL


NTS

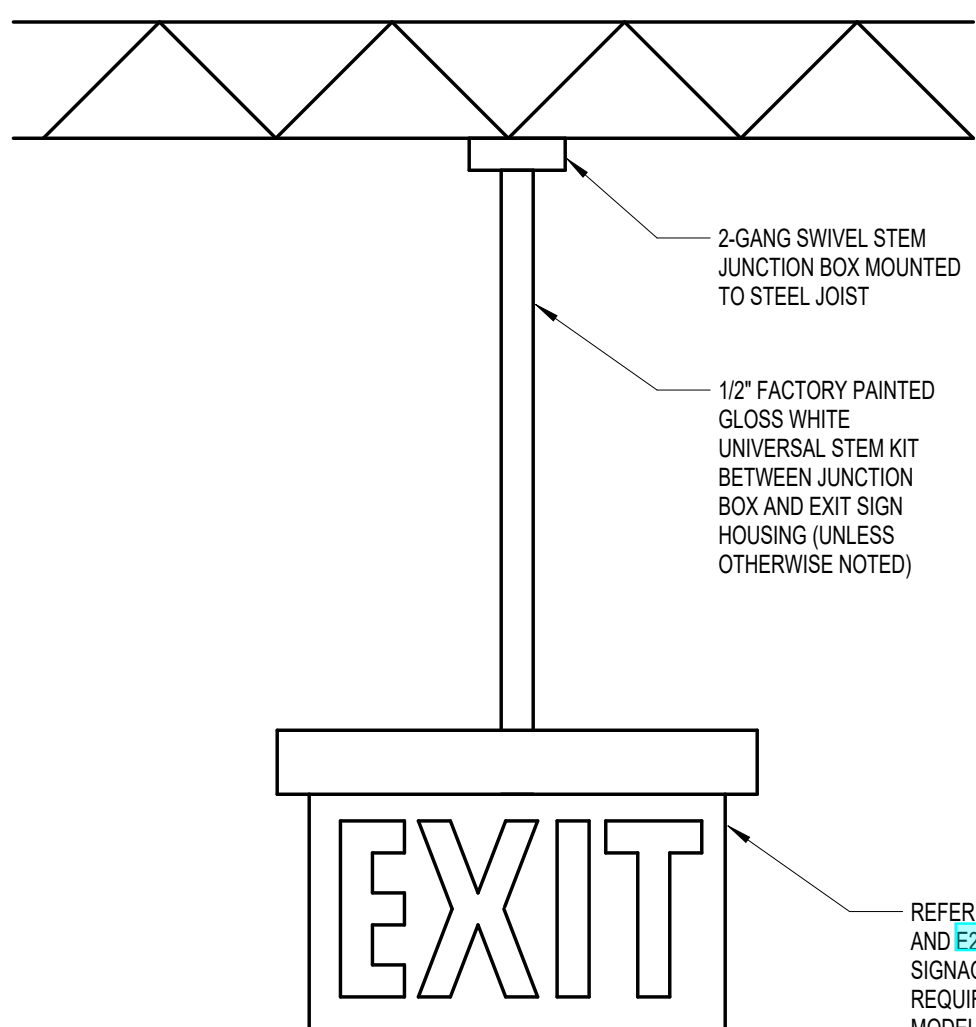

REFER TO SHEET E201 AND E202 FOR EXIT SIGNAGE POWER REQUIREMENTS AND MODEL


4 EXIT SIGN -PENDANT MOUNTING-INSTALLATION DETAIL

NTS

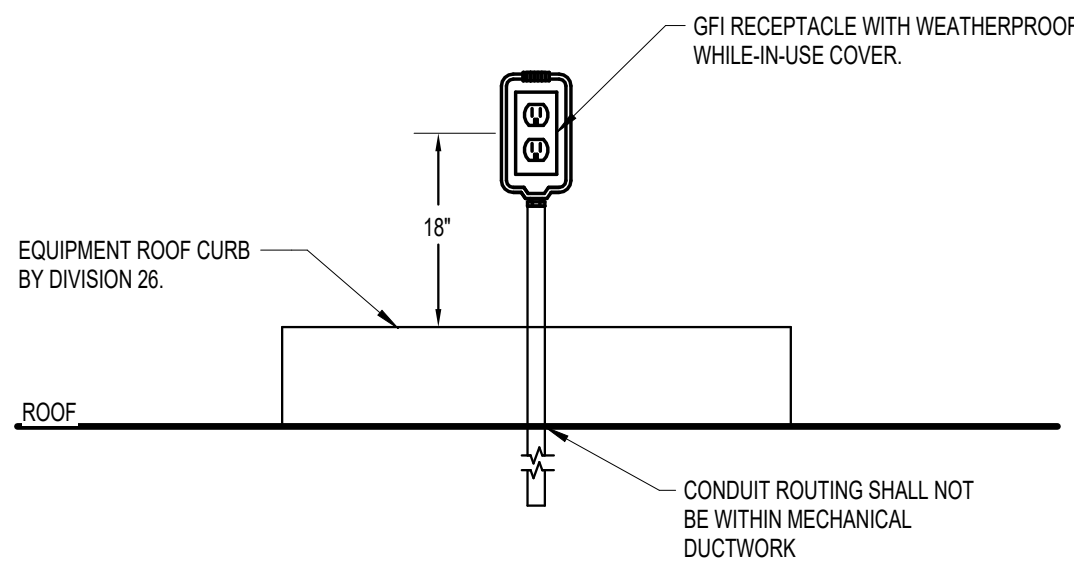


5 ROOFTOP RECEPTACLE MOUNTING DETAIL

NTS

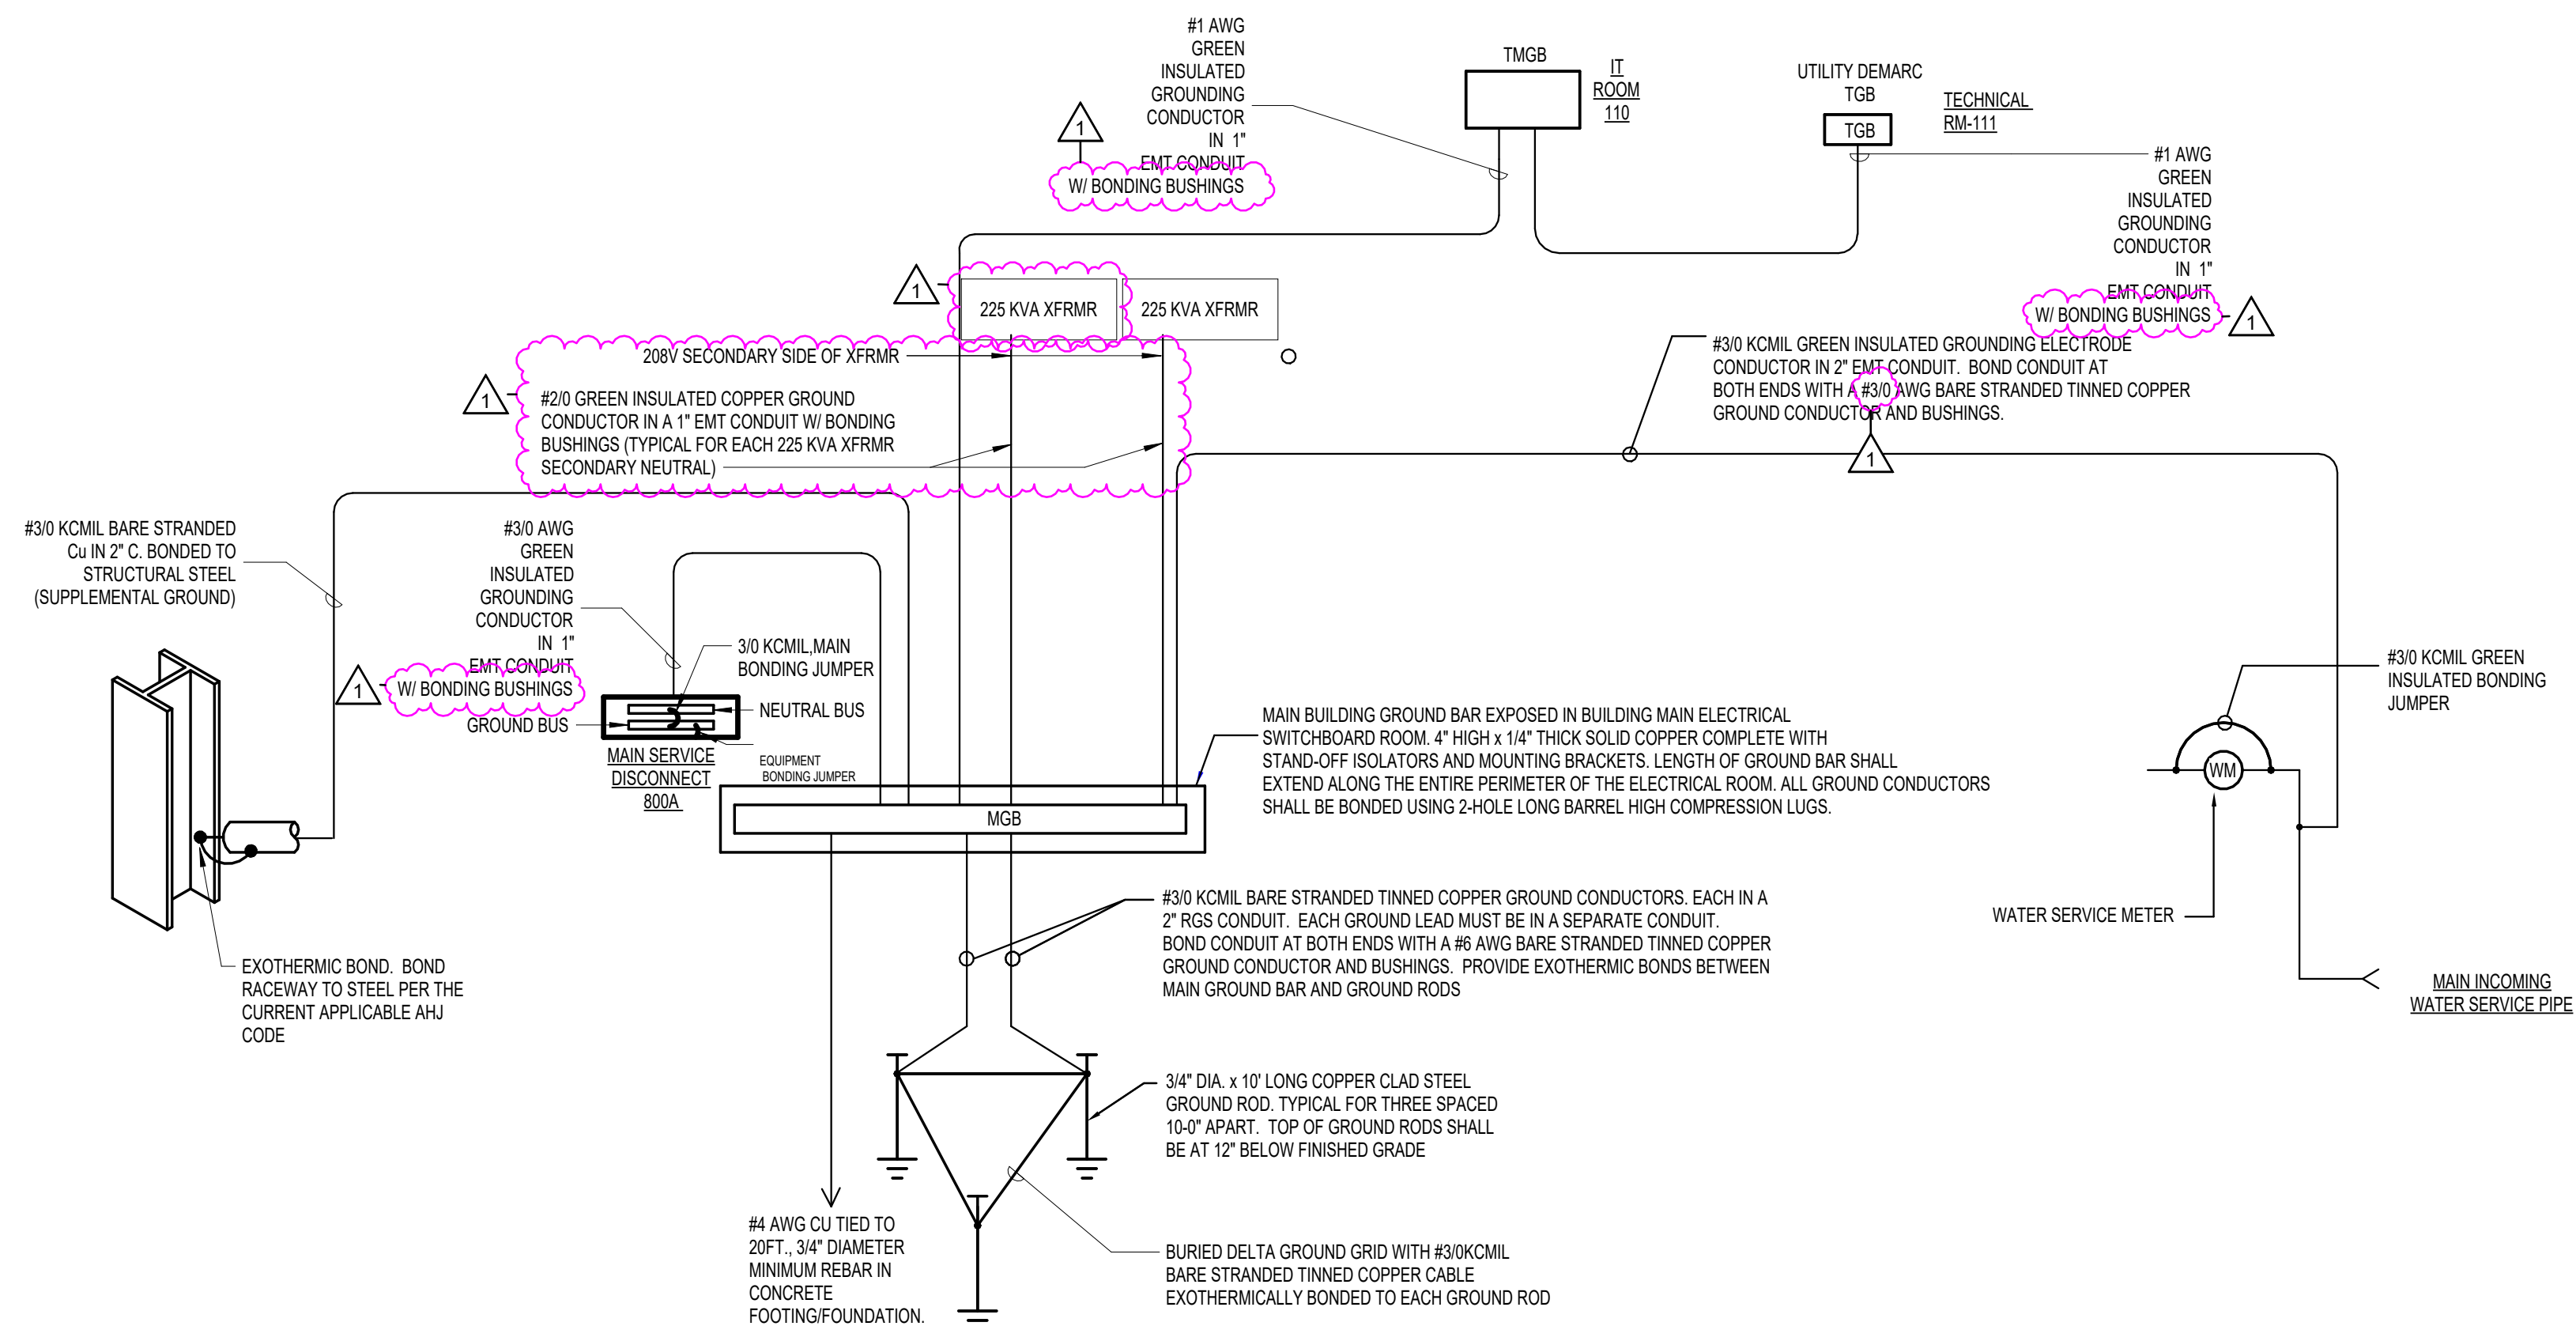


6 GROUNDING SYSTEM ONE-LINE RISER DIAGRAM

NTS

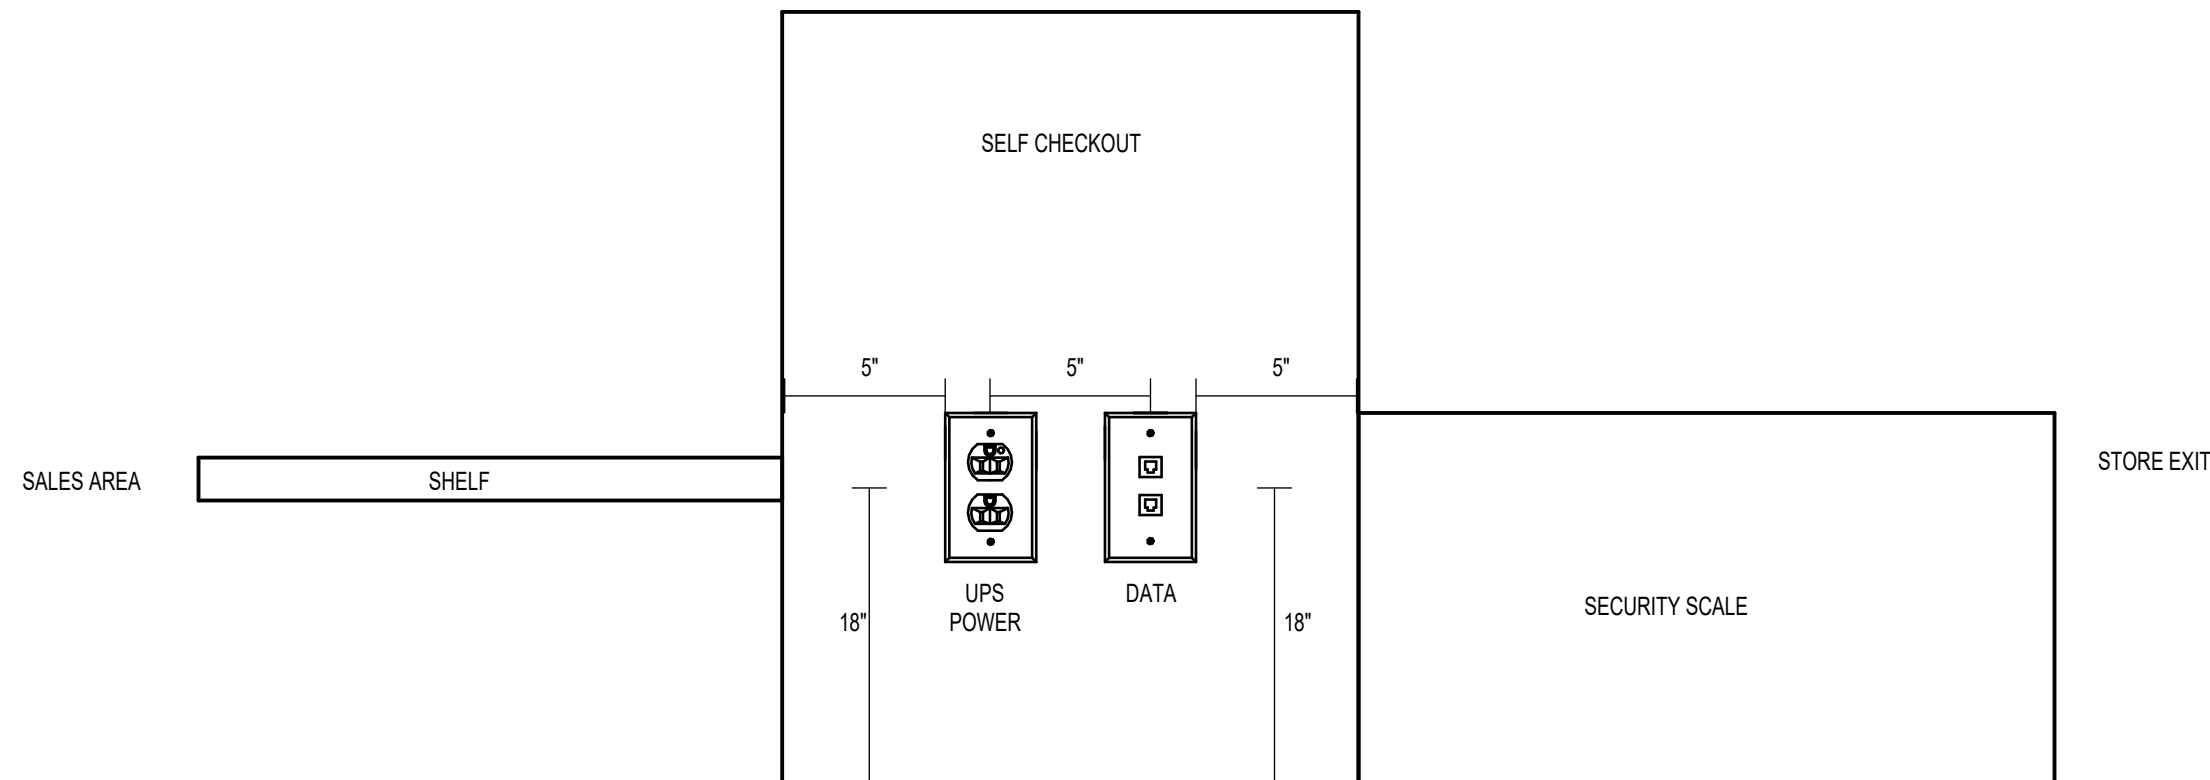



VERSION A - CUSTOMER TRAFFIC FROM LEFT TO RIGHT

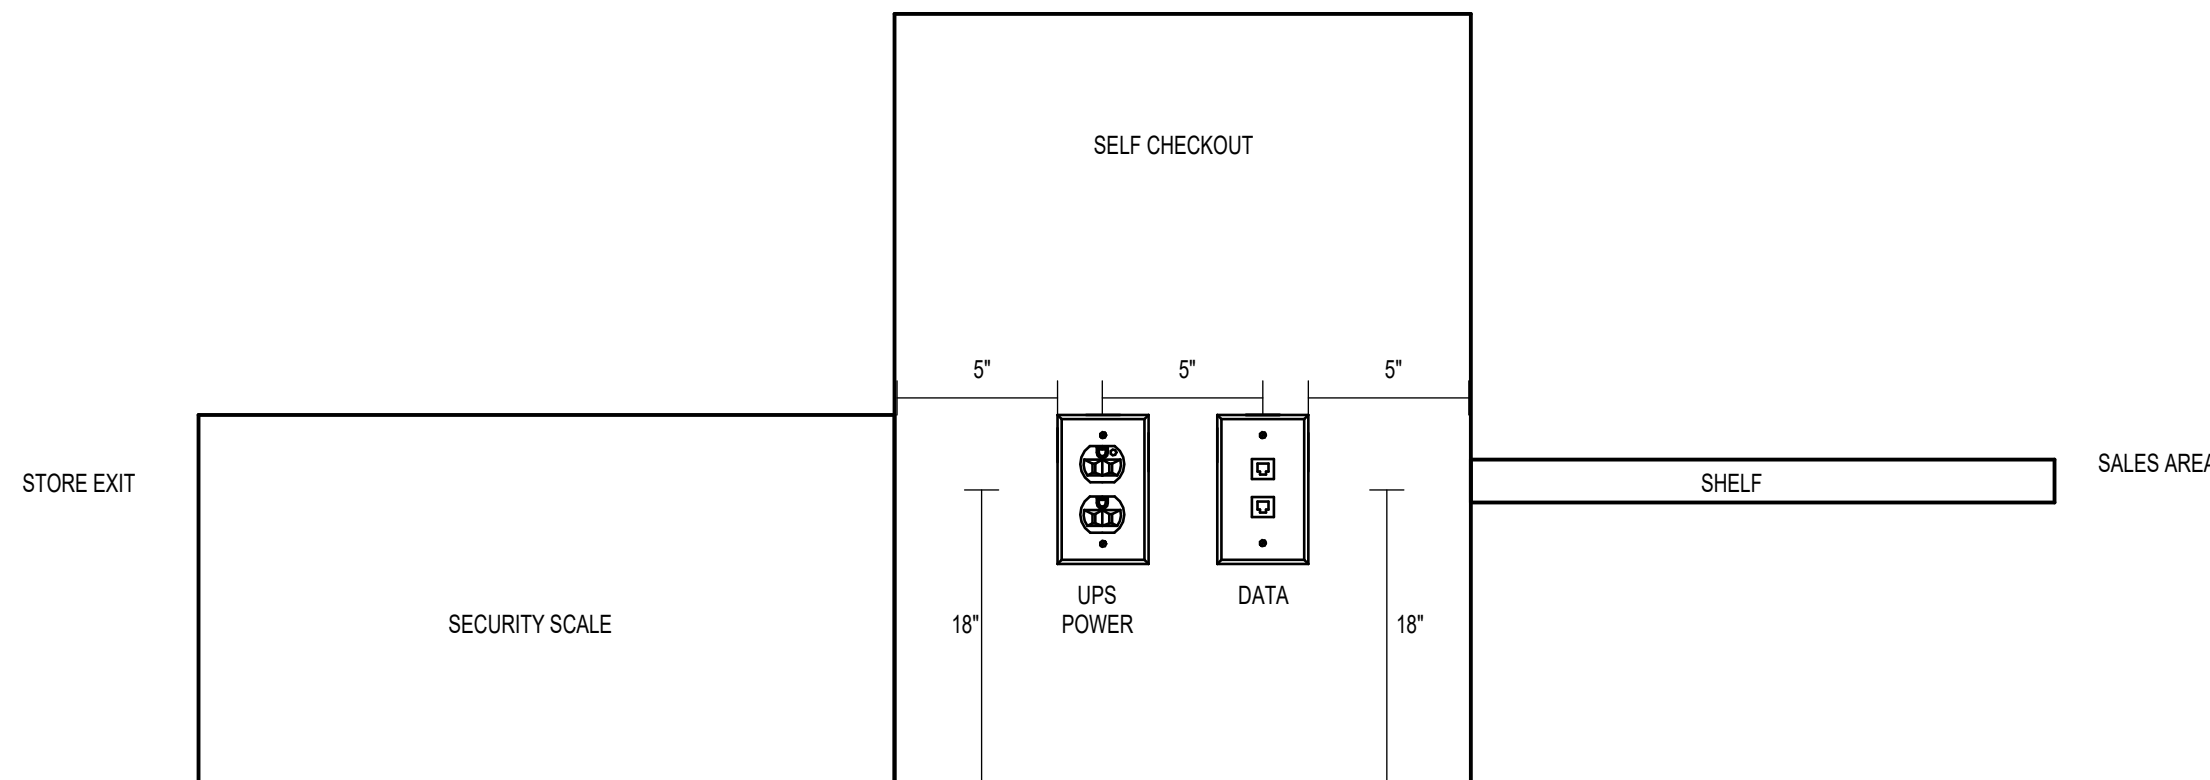

VERSION B - CUSTOMER TRAFFIC FROM RIGHT TO LEFT

1 SCO VERSION A,B FRONT VIEW DATA UPS

NTS

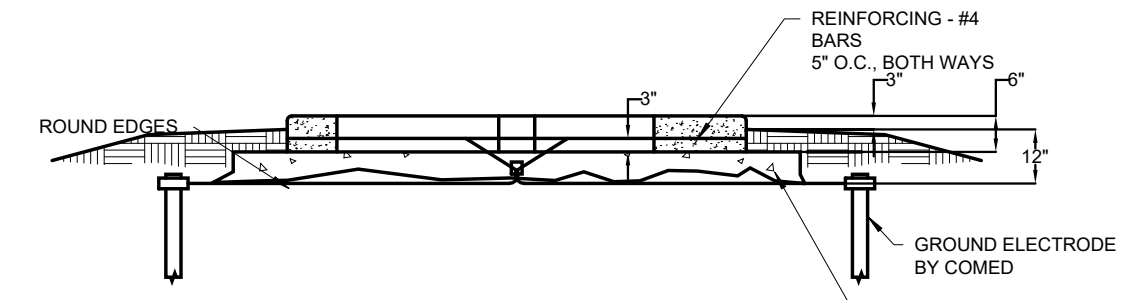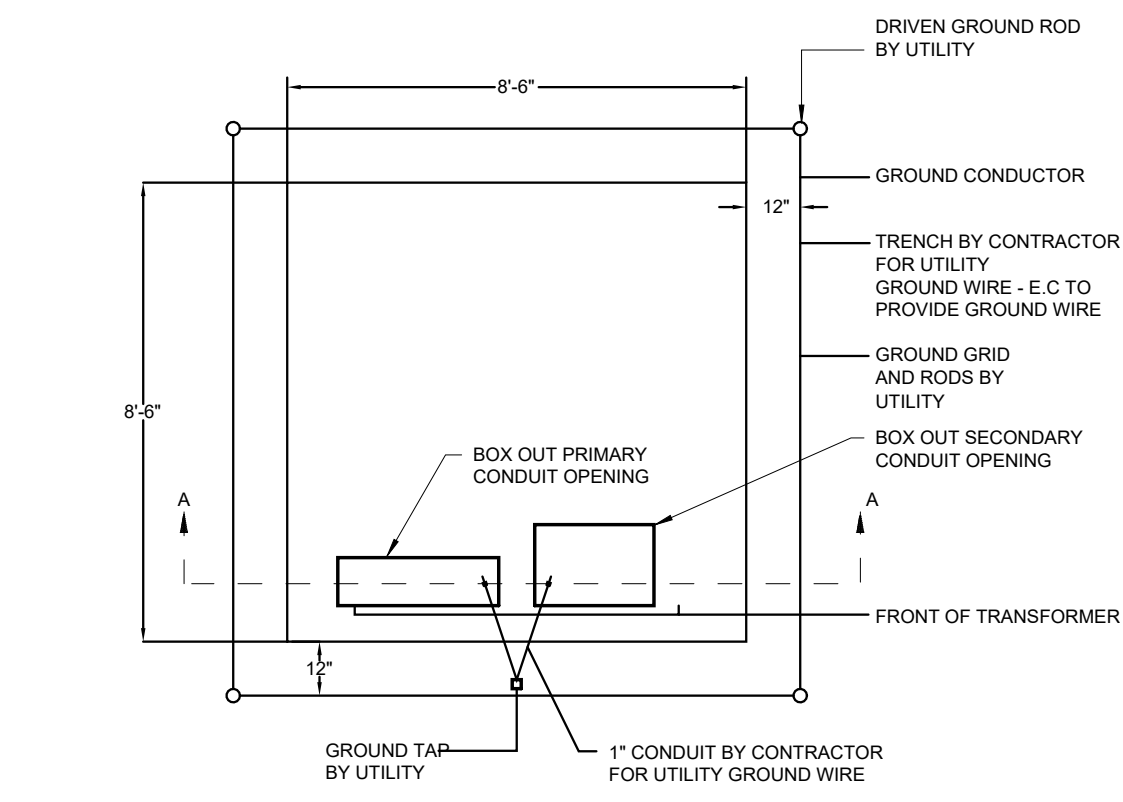


1. E.C. TO CONSTRUCT TRANSFORMER PAD IN ACCORDANCE WITH UTILITY STANDARD AND INSTALL IN ACCORDANCE WITH UTILITY STANDARD
2. E.C. SHALL PROVIDE THE GROUND WIRE. COMED TO MAKE FINAL CONNECTIONS. COORDINATE EXACT REQUIREMENTS WITH UTILITY. GROUNDING SHALL BE IN ACCORDANCE WITH UTILITY STANDARD
3. PAD SHALL BE CAST IN PLACE. COORDINATE EXACT REQUIREMENTS WITH UTILITY.
4. E.C. SHALL COORDINATE ALL GROUNDING SCOPE OF WORK WITH UTILITY.

DIMENSIONS TO BE VERIFIED WITH TRANSFORMER SHOP DRAWINGS.

2 UTILITY TRANSFORMER PAD DETAILS AND GROUNDING

NTS

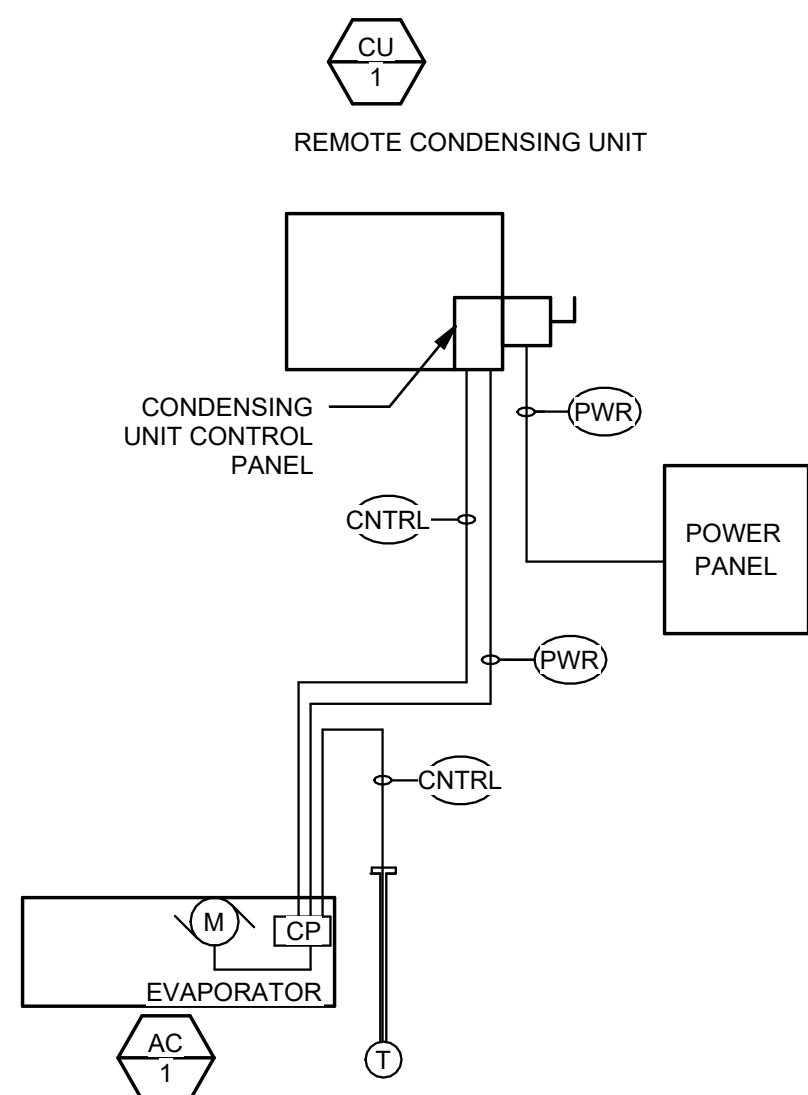

GENERAL NOTES:

1. CONDITION No1: CONDENSING UNIT RECEIVES MAIN POWER FROM A LOCAL POWER PANEL. THEN VIA INTERNAL CONTROLS POWER IS THEN FROM THE CONDENSING UNIT TO THE EVAPORATOR UNIT. IN SHORT, ONE POWER CIRCUIT FOR BOTH UNITS THAT MAKE-UP THE DX SPLIT SYSTEM. NOTE: THE E.C. SHALL COVER THIS COST FOR THE POWER CIRCUIT TO ROUTE FROM THE CONDENSING UNIT TO THE EVAPORATOR UNIT.
2. CONDITION No2: CONDENSING UNIT RECEIVES MAIN POWER FROM A LOCAL POWER PANEL. THE EVAPORATOR UNIT AND ITS ASSOCIATED CONDENSATE PUMP RECEIVES MAIN POWER FROM A LOCAL POWER PANEL. IN SHORT, THREE POWER CIRCUITS ONE FOR CONDENSING UNIT AND TWO FOR EVAPORATOR UNIT EACH MAKE-UP THE DX SPLIT SYSTEM. IF CONDITION TWO IS TRUE THEN POWER MAY COME FROM LOCAL POWER PANELS BASED UPON THE DISTANCE.
3. THE E.C. SHALL PROVIDE A 3/4" CONDUIT AND ALL NECESSARY CONTROL BETWEEN THE EVAPORATOR AND THE REMOTE MOUNTED CONDENSING UNIT FOR THE WORK TYPICAL LOW-VOLTAGE ON/OFF CONTROL WORK.
4. THE E.C. SHALL PROVIDE WIRING FOR REMOTE ALARM CONNECTION TO THE NEAREST TEMPERATURE CONTROL PANEL.

3 DX SPLIT SYSTEMS POWER AND CONTROLS DIAGRAM

NTS




This item has been electronically signed and sealed by David John Henscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

12/16/2025 2:49:58 PM Autodesk Docs/778551191-Lid 1517 Norcross GA/78551191 Lid 1517 NORCROSS GA - ELEC-04


ED:1

THIS DOCUMENT AND ANY INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, LLC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, LLC. ALL RIGHTS RESERVED. OTHER RESERVED RIGHTS INCLUDING THE COPYRIGHT THEREIN.

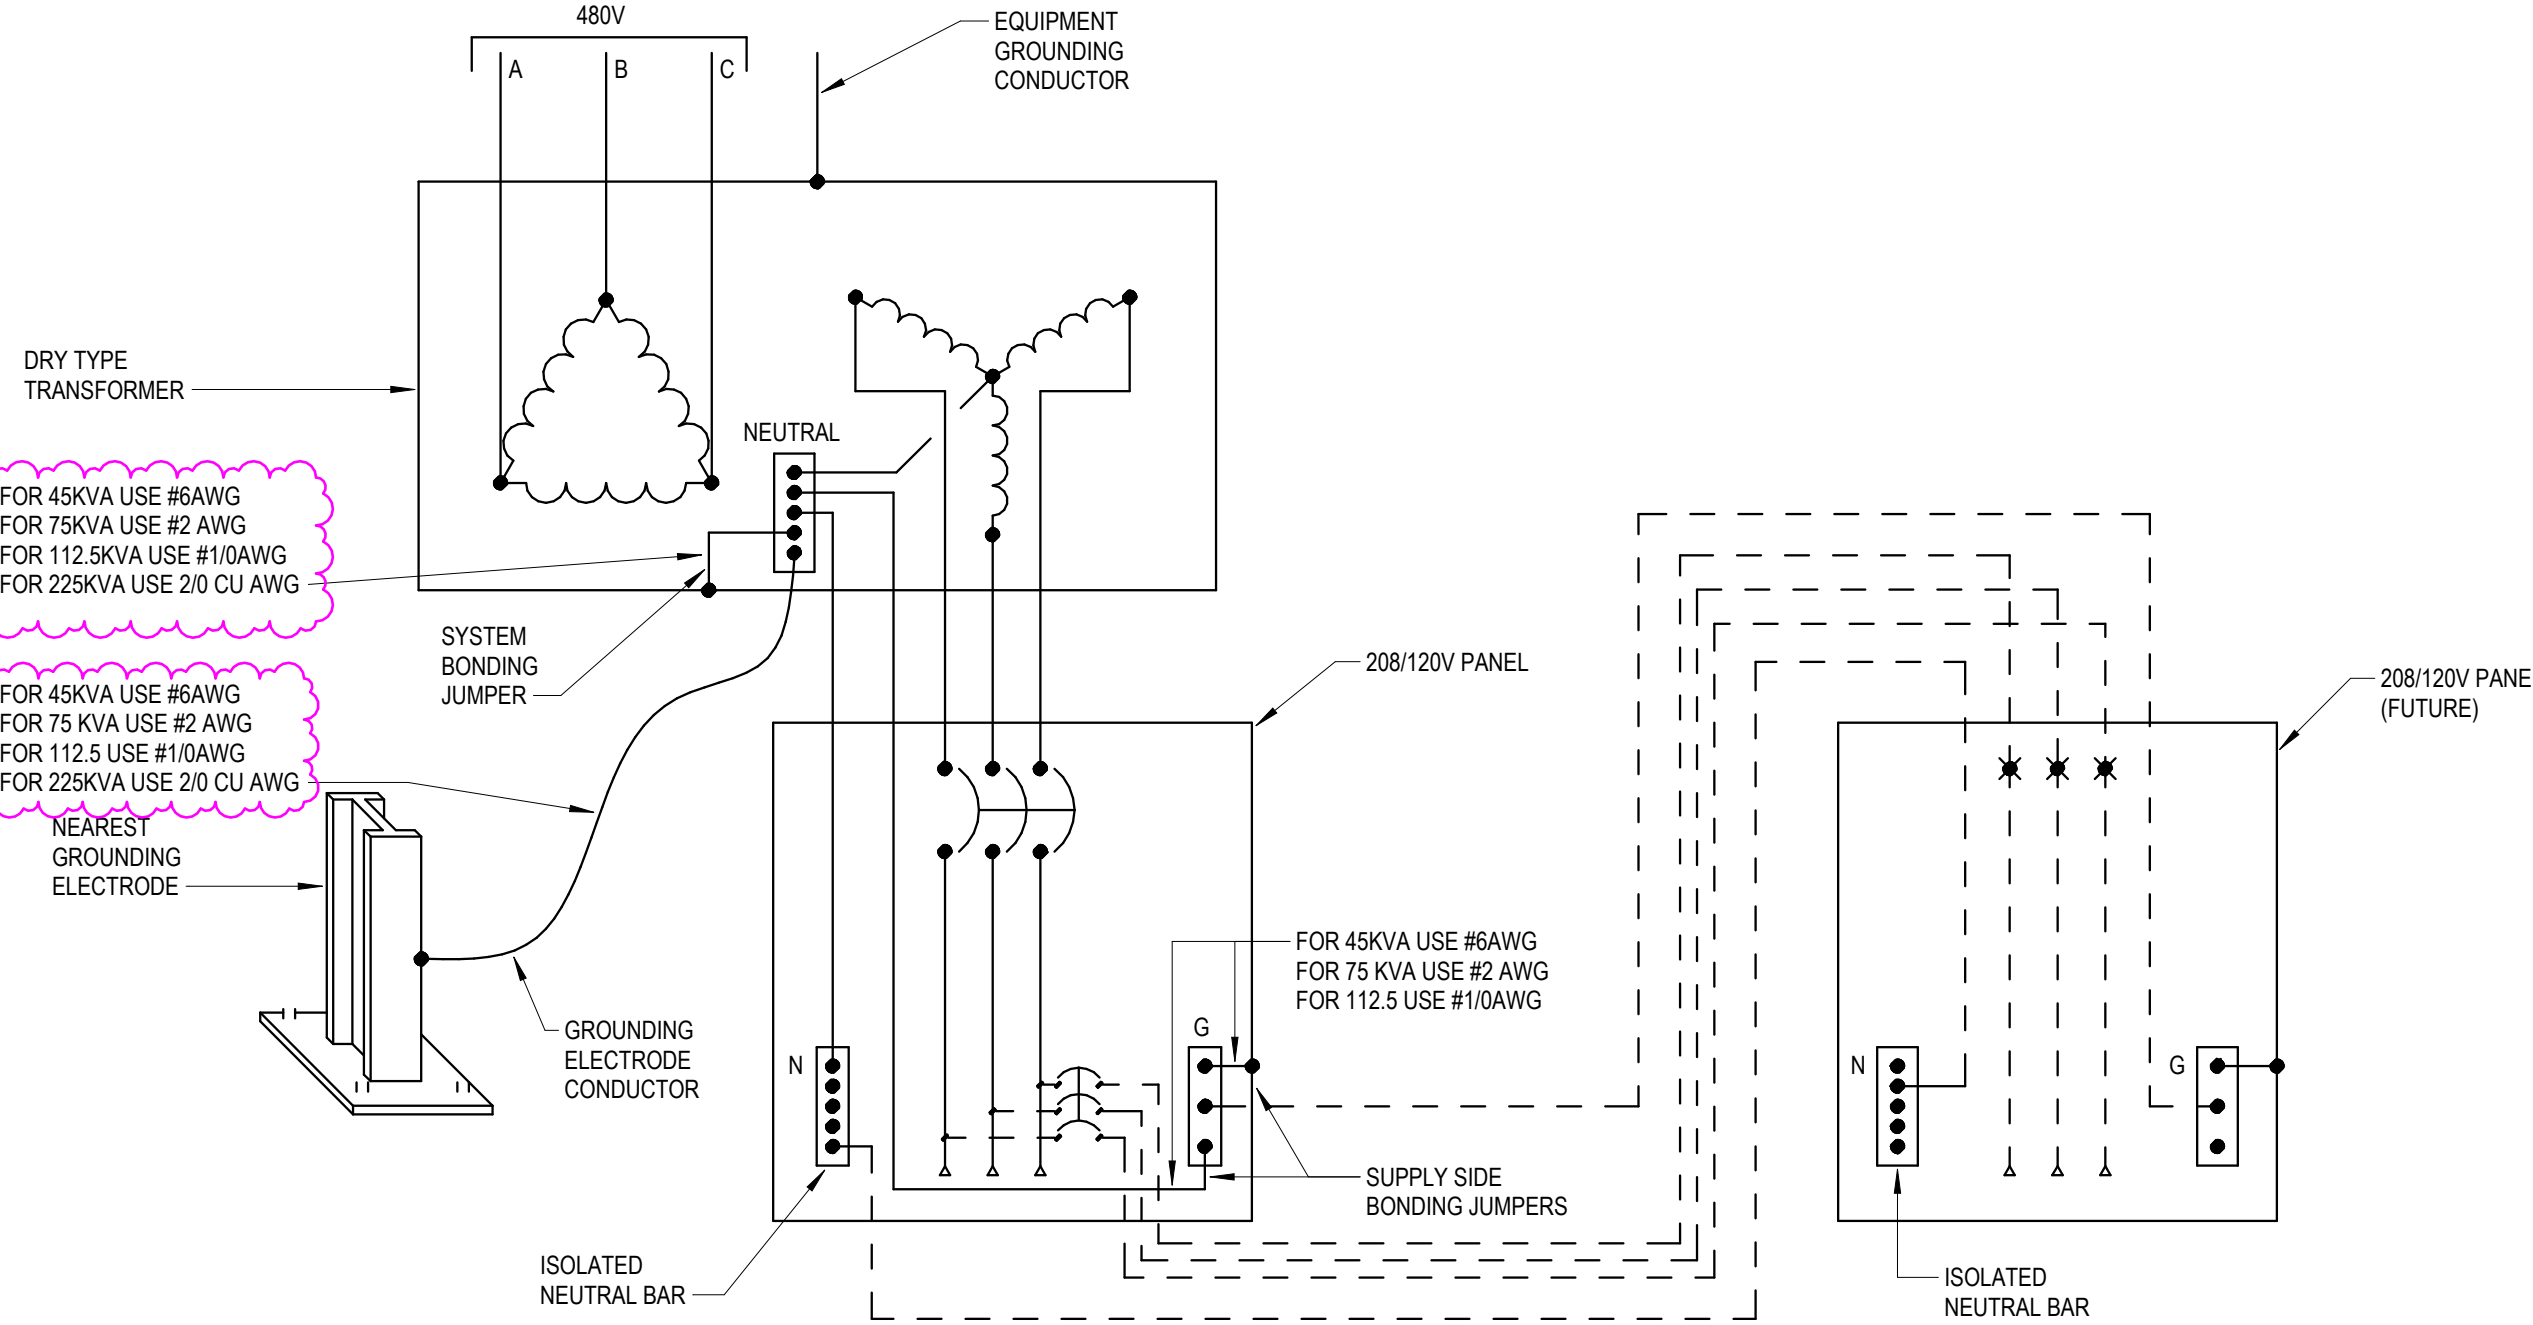

1 TYPICAL DISTRIBUTION TRANSFORMER GROUNDING DETAIL

NTS

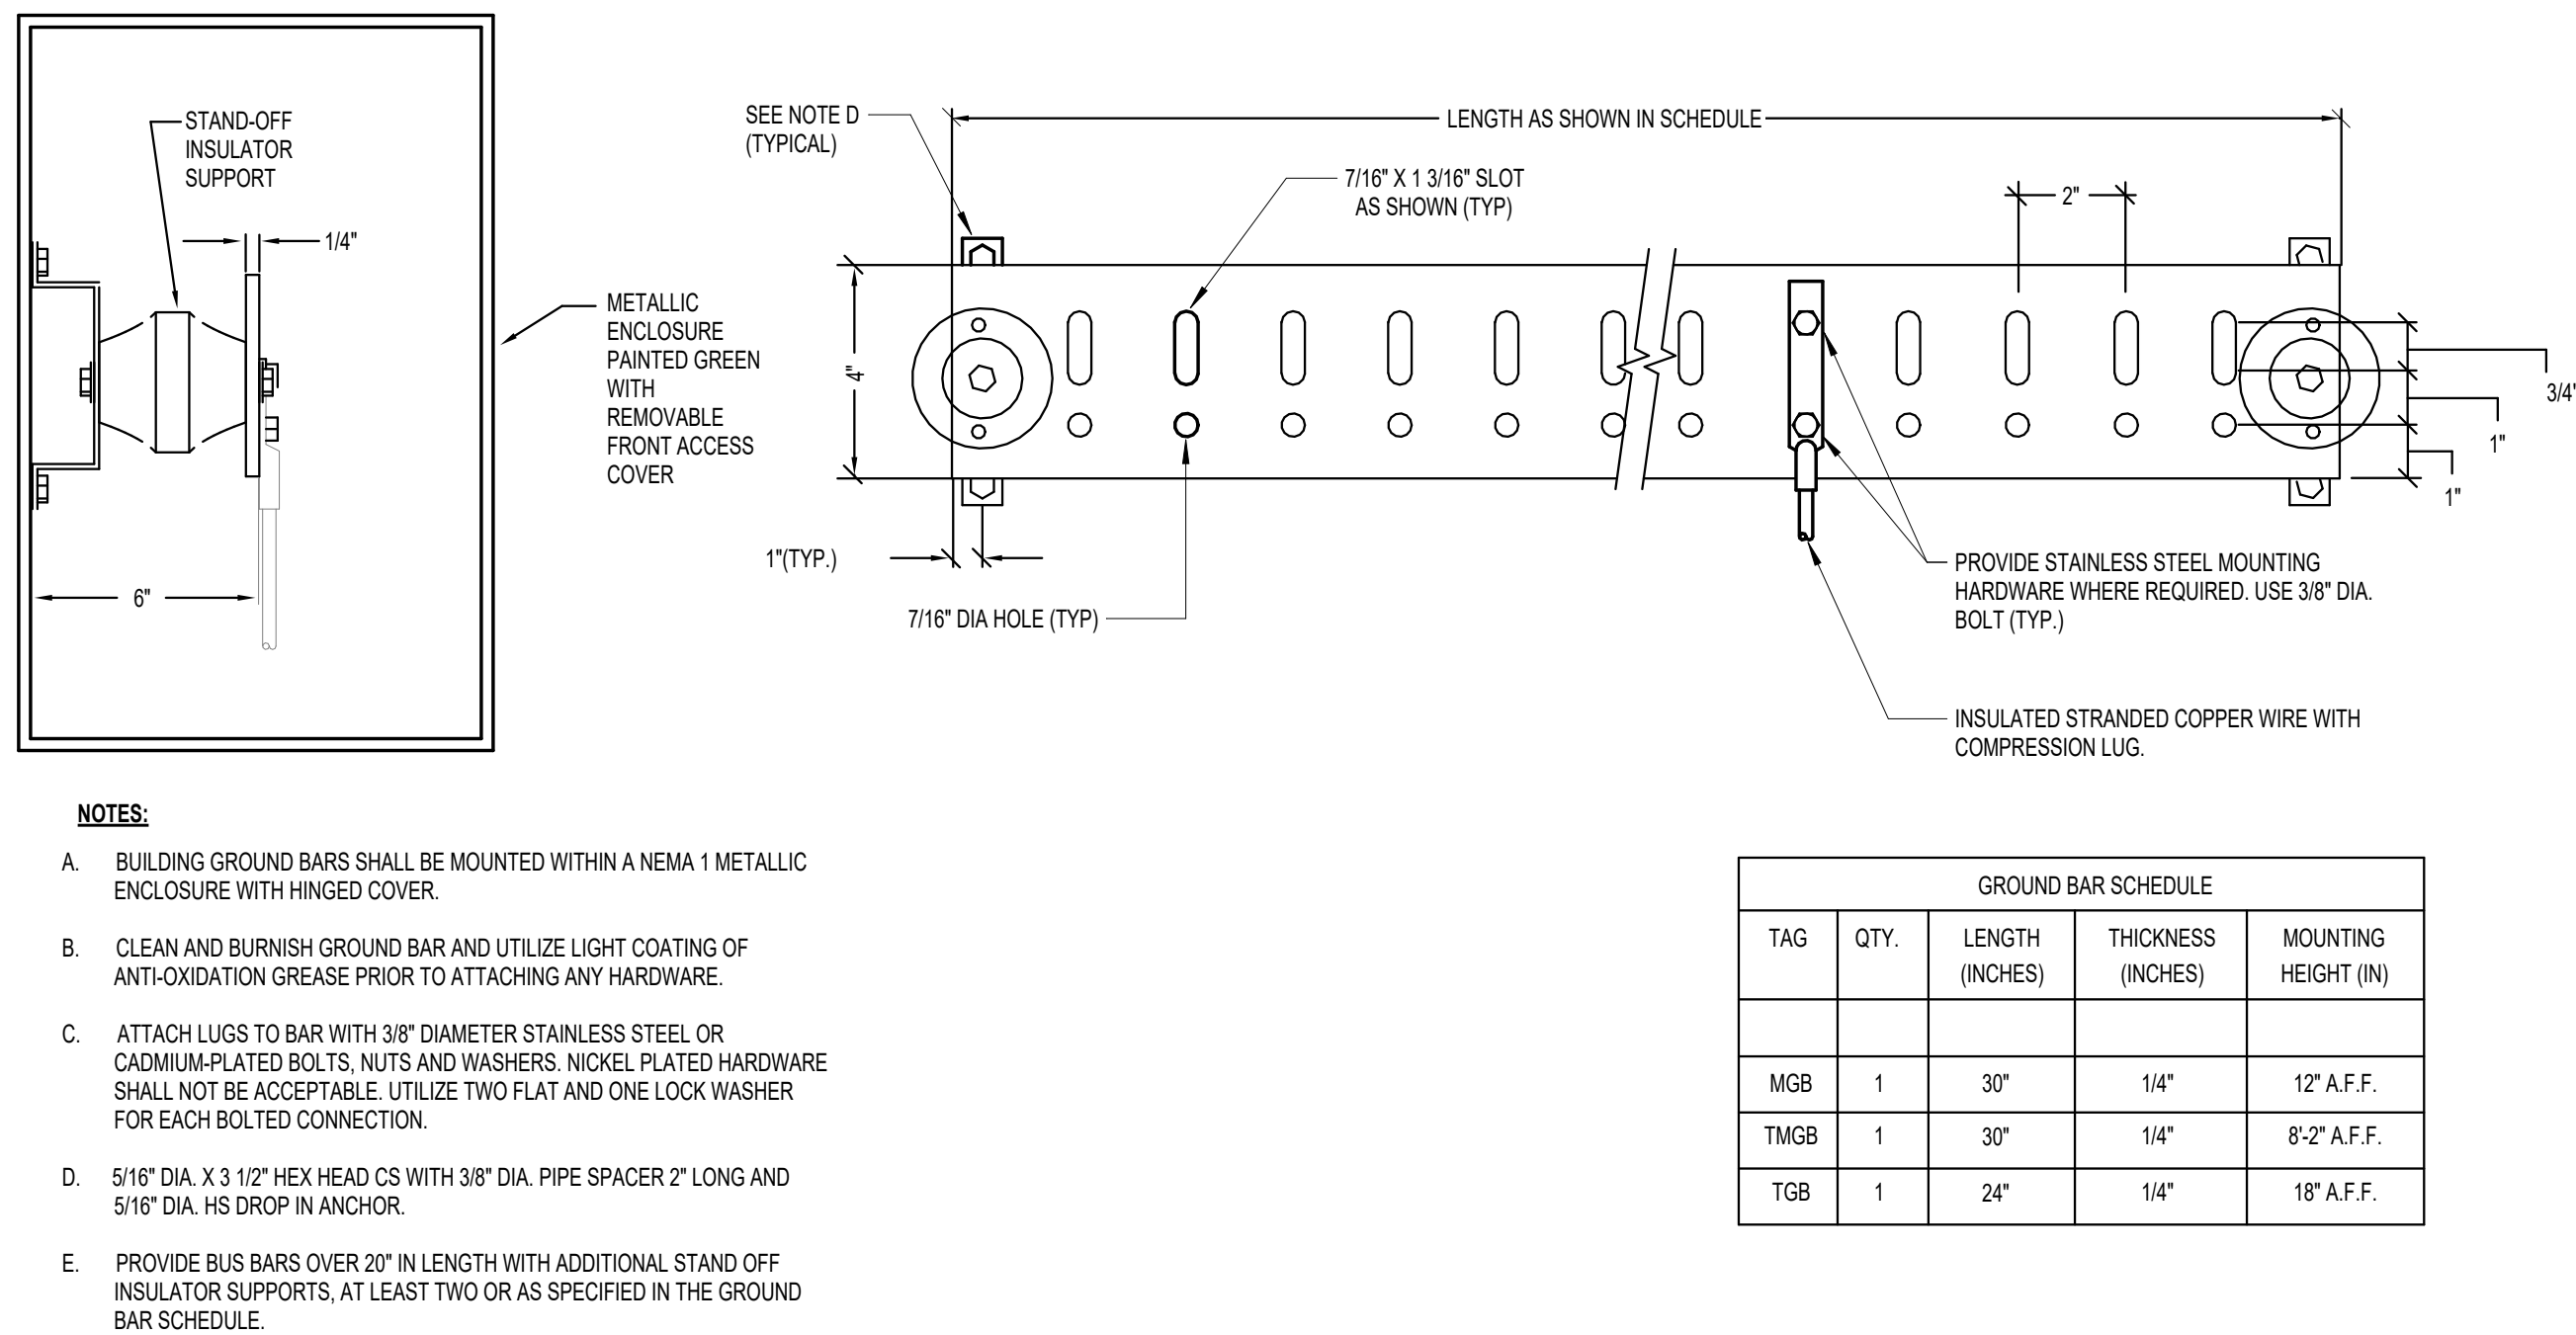


NOTES:

- BUILDING GROUND BARS SHALL BE MOUNTED WITHIN A NEMA 1 METALLIC ENCLOSURE WITH HINGED COVER.
- CLEAN AND BURNISH GROUND BAR AND UTILIZE LIGHT COATING OF ANTI-OXIDATION GREASE PRIOR TO ATTACHING ANY HARDWARE.
- ATTACH LUGS TO BAR WITH 3/8" DIAMETER STAINLESS STEEL OR CADMIUM-PLATED BOLTS, NUTS AND WASHERS. NICKEL-PLATED HARDWARE SHALL NOT BE ACCEPTABLE. UTILIZE TWO FLAT AND ONE LOCK WASHER FOR EACH BOLTED CONNECTION.
- 5/16" DIA. X 3 1/2" HEX HEAD CS WITH 3/8" DIA. PIPE SPACER 2" LONG AND 5/16" DIA. HS DROP IN ANCHOR.
- PROVIDE BUS BARS OVER 20" IN LENGTH WITH ADDITIONAL STAND OFF INSULATOR SUPPORTS, AT LEAST TWO OR AS SPECIFIED IN THE GROUND BAR SCHEDULE.

4 MAIN GROUND BAR LOCATED IN TECHNICAL ROOM

NTS

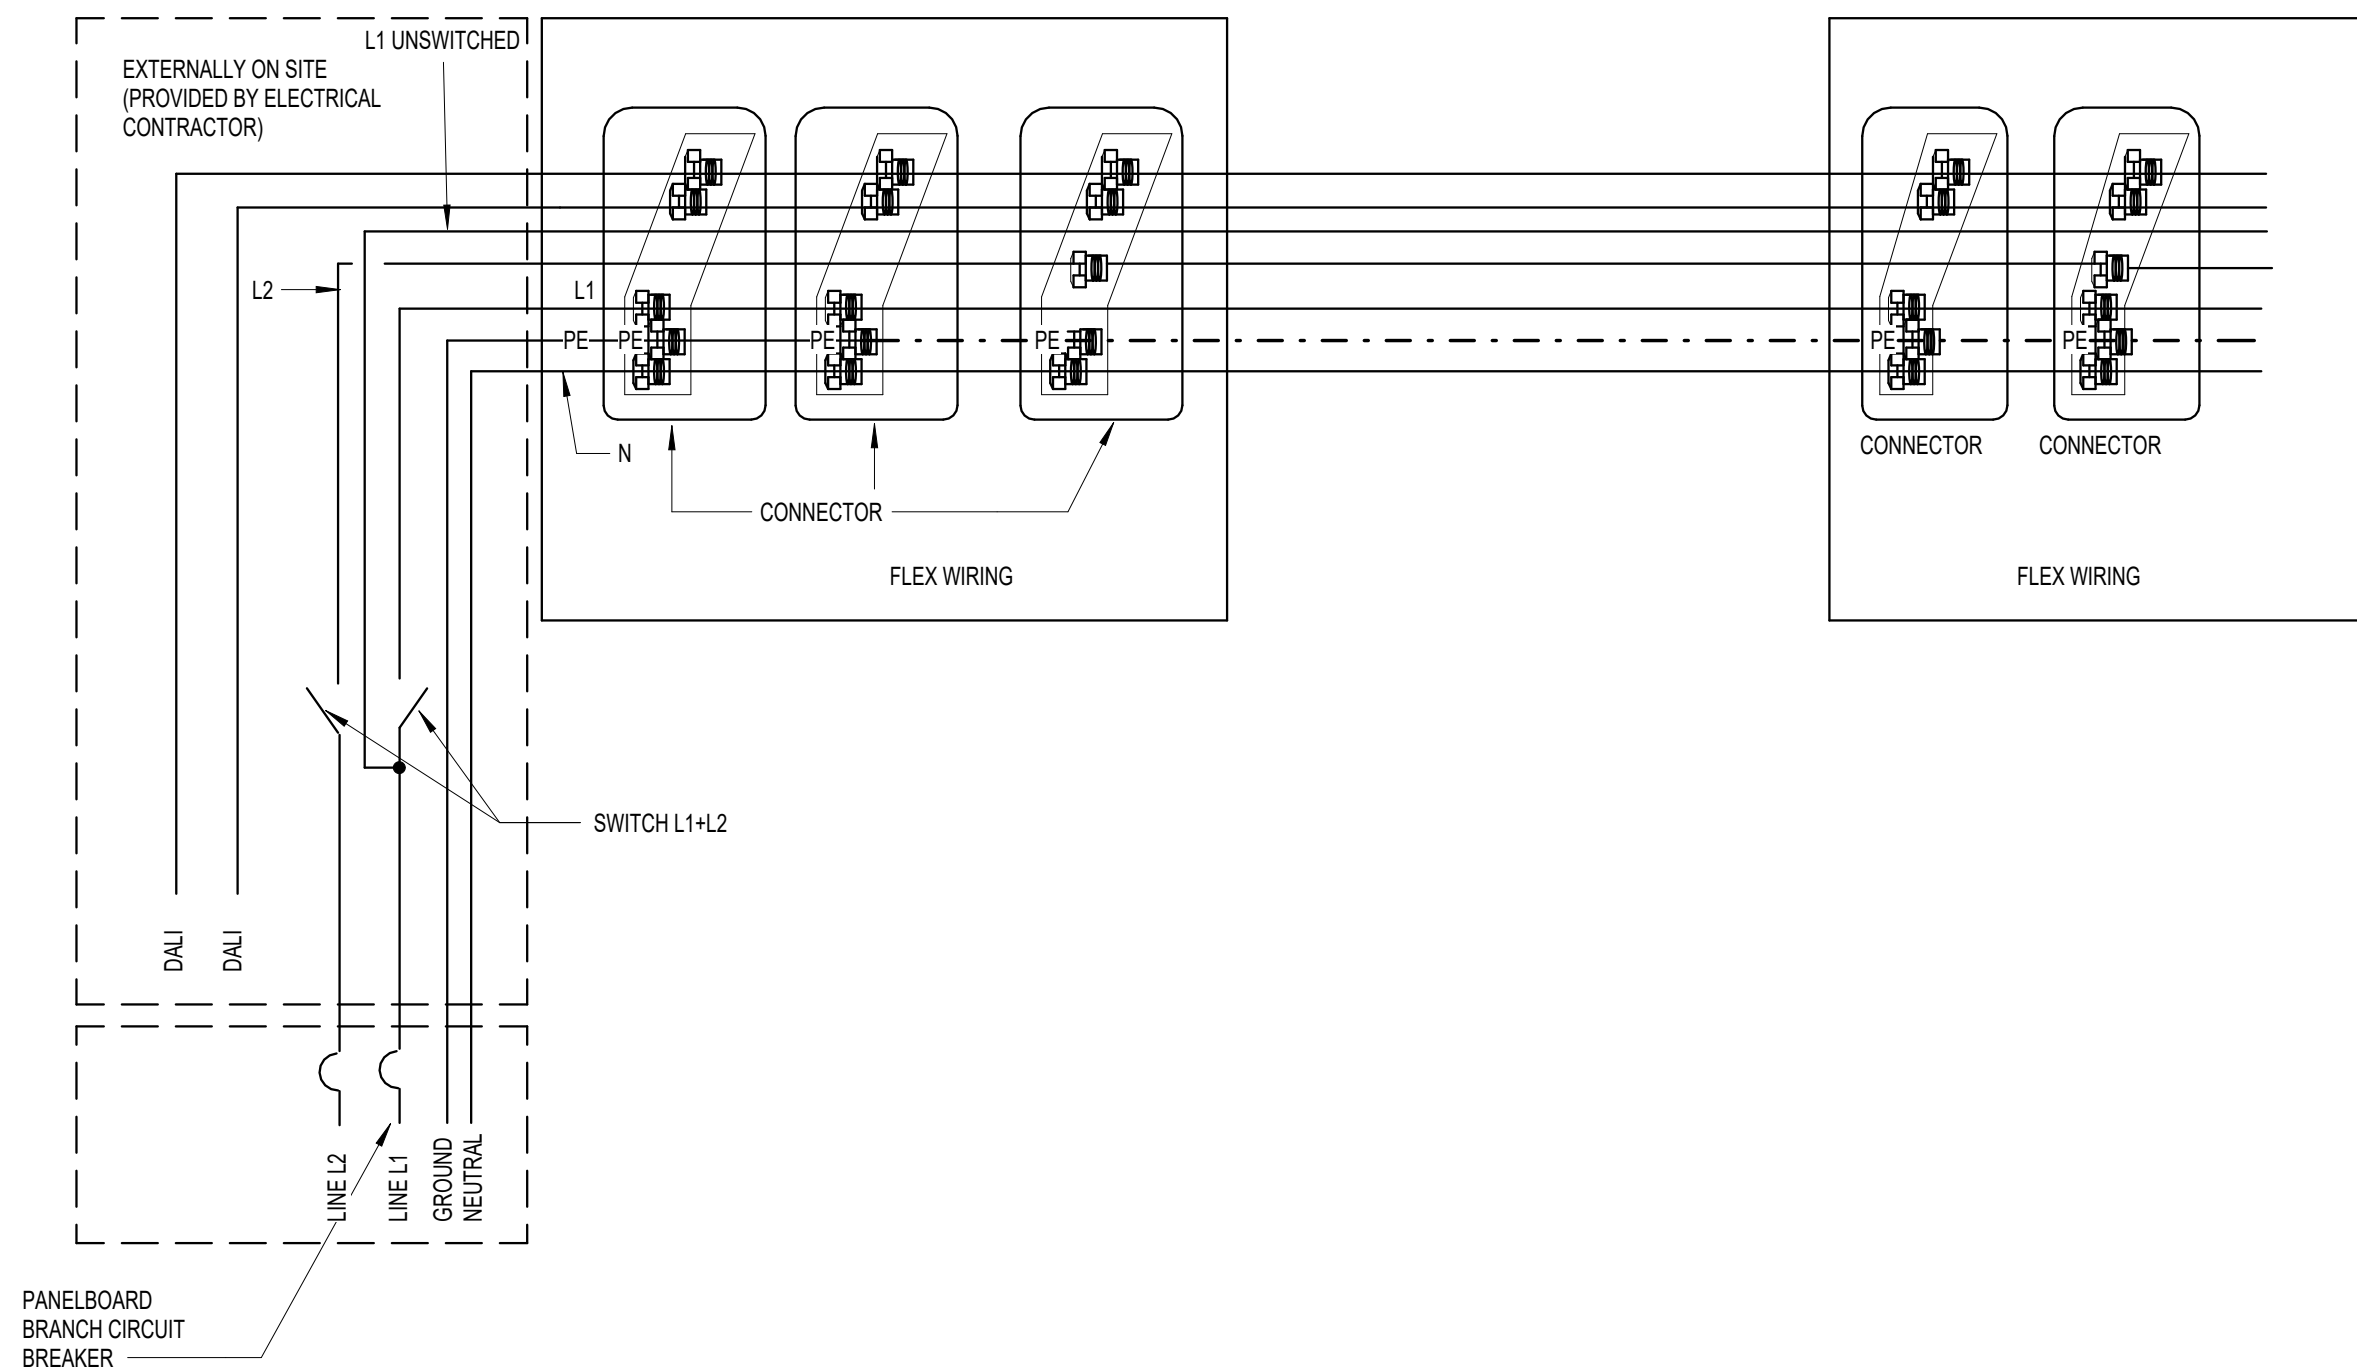

5 TYPICAL WIRING SCHEMATICS FOR LINEAR ROW OF FIXTURES WITHIN 15'-0" FROM WINDOW

NTS



This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
1 12/16/2025 PERMIT CYCLE 2


PROJECT NUMBER
78551191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. HERSCHER
DRAWN BY
M. GONZALEZ
CHECKED BY
D. HERSCHER

ELECTRICAL
DETAILS
E601





LIDL US, LLC
LIDL 1517 NORCROSS, GA


499 JIMMY CARTER BLVD. NORCROSS, GA 30093

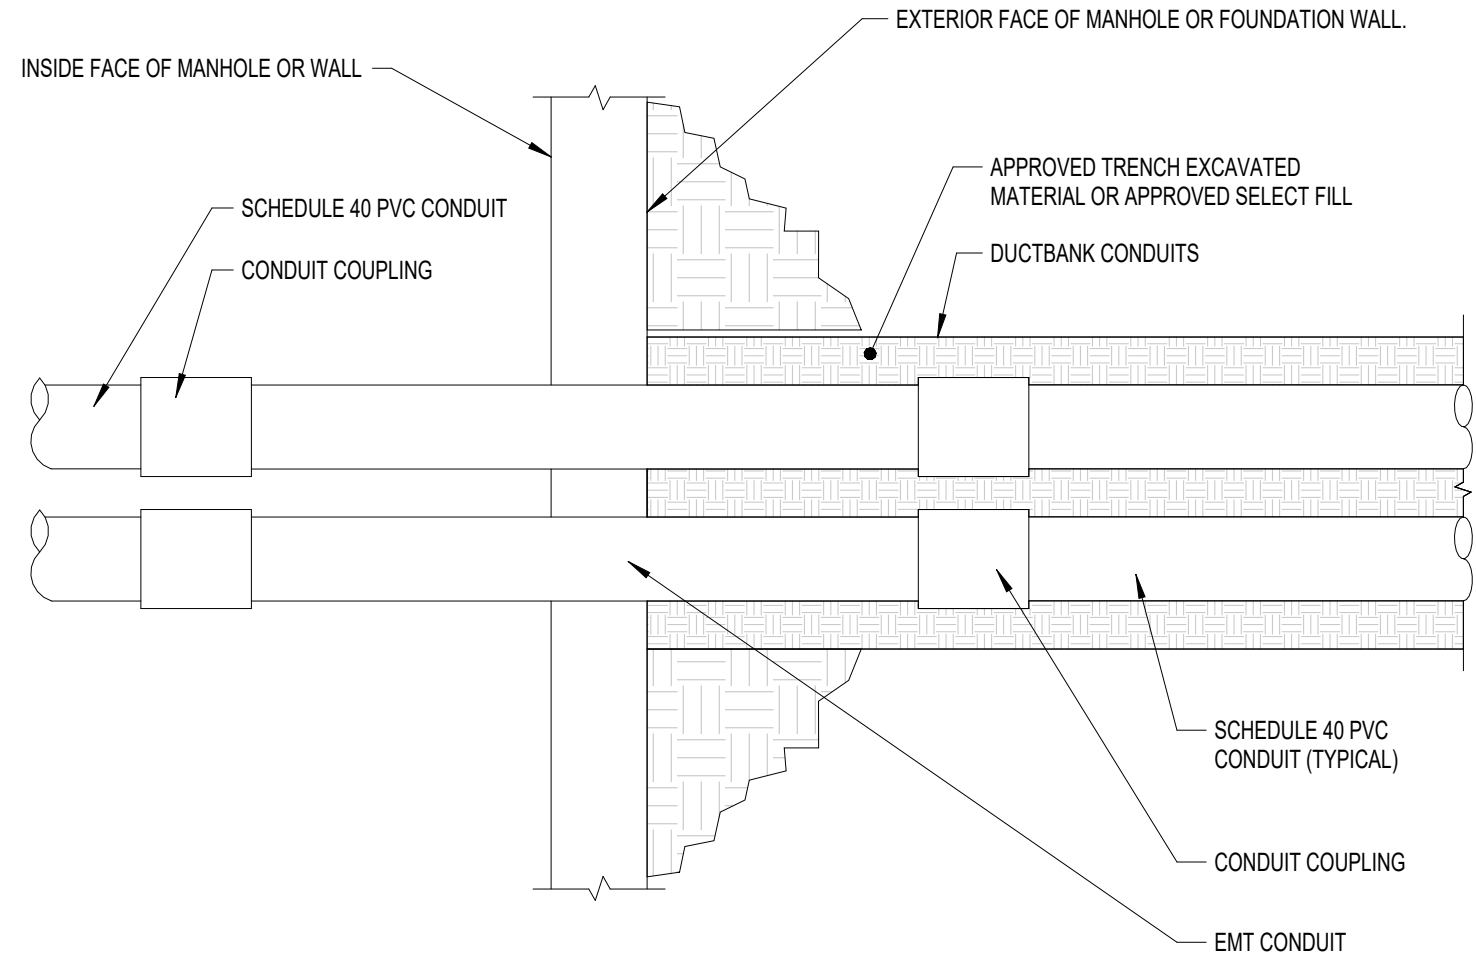


DETAIL NOTES:
1. REFER TO THE TECHNOLOGY SITE PLAN AND DUCT BANK DETAILS FOR THE EXACT CONDUIT CONFIGURATION ENTERING THE FOUNDATION WALL.
2. COORDINATE CONDUIT PENETRATION THROUGH FOUNDATION WALL WITH THE STRUCTURAL PLANS AND ENGINEER PRIOR TO INSTALLATION.
3. CONDUIT PASSING THROUGH FOUNDATION WALL SHALL BE EMT. EMT CONDUIT SHALL CONTINUE A MINIMUM OF 6'-0" INTO BUILDING BEFORE TRANSITIONING TO PVC CONDUIT.

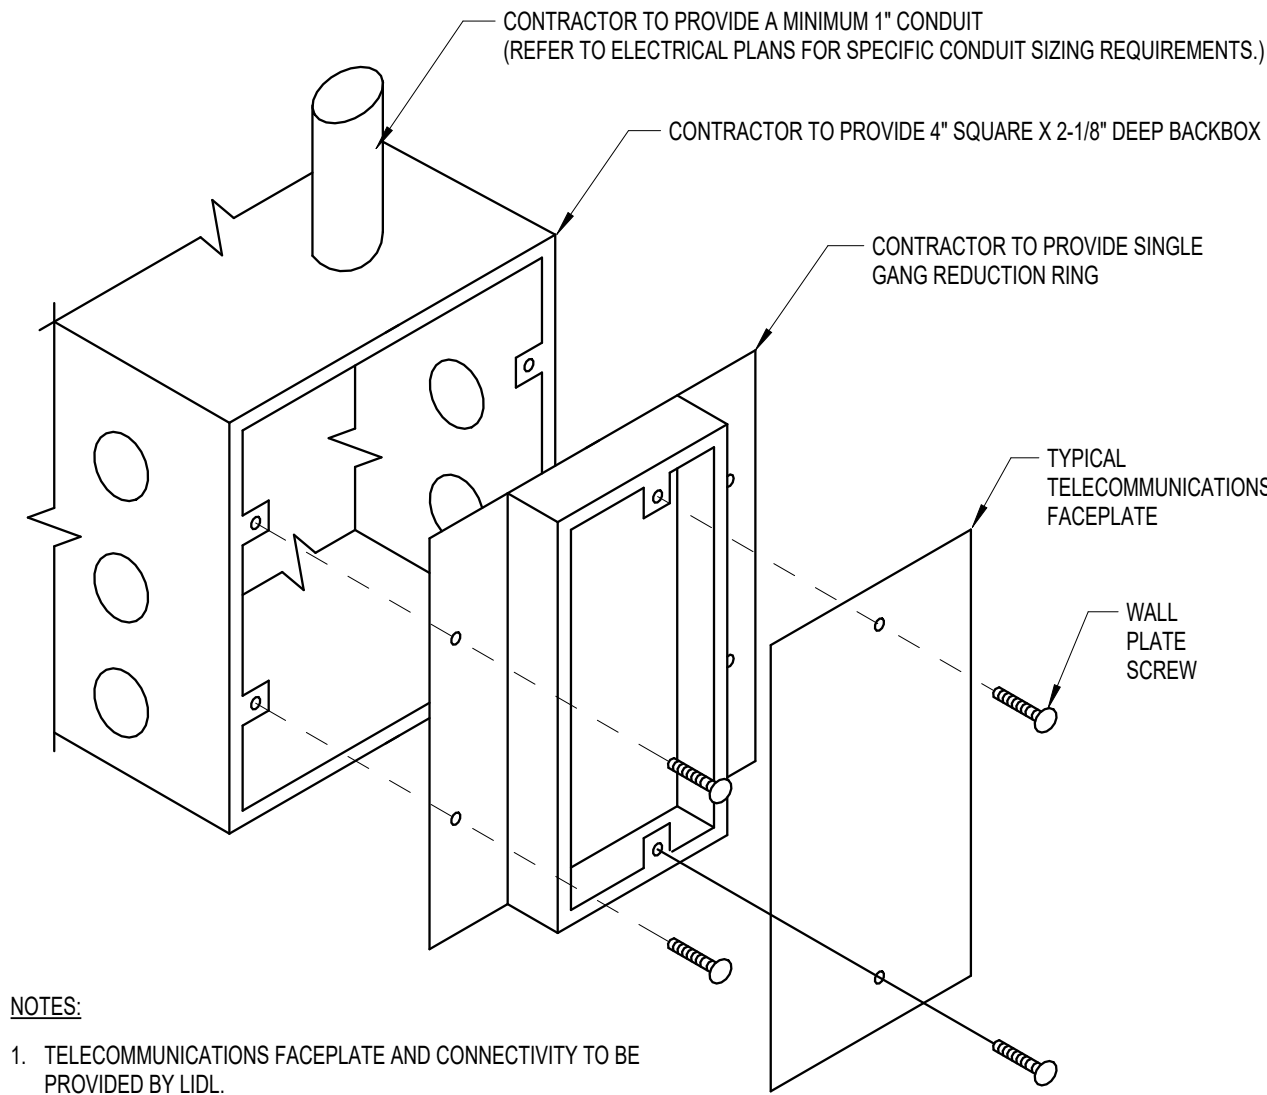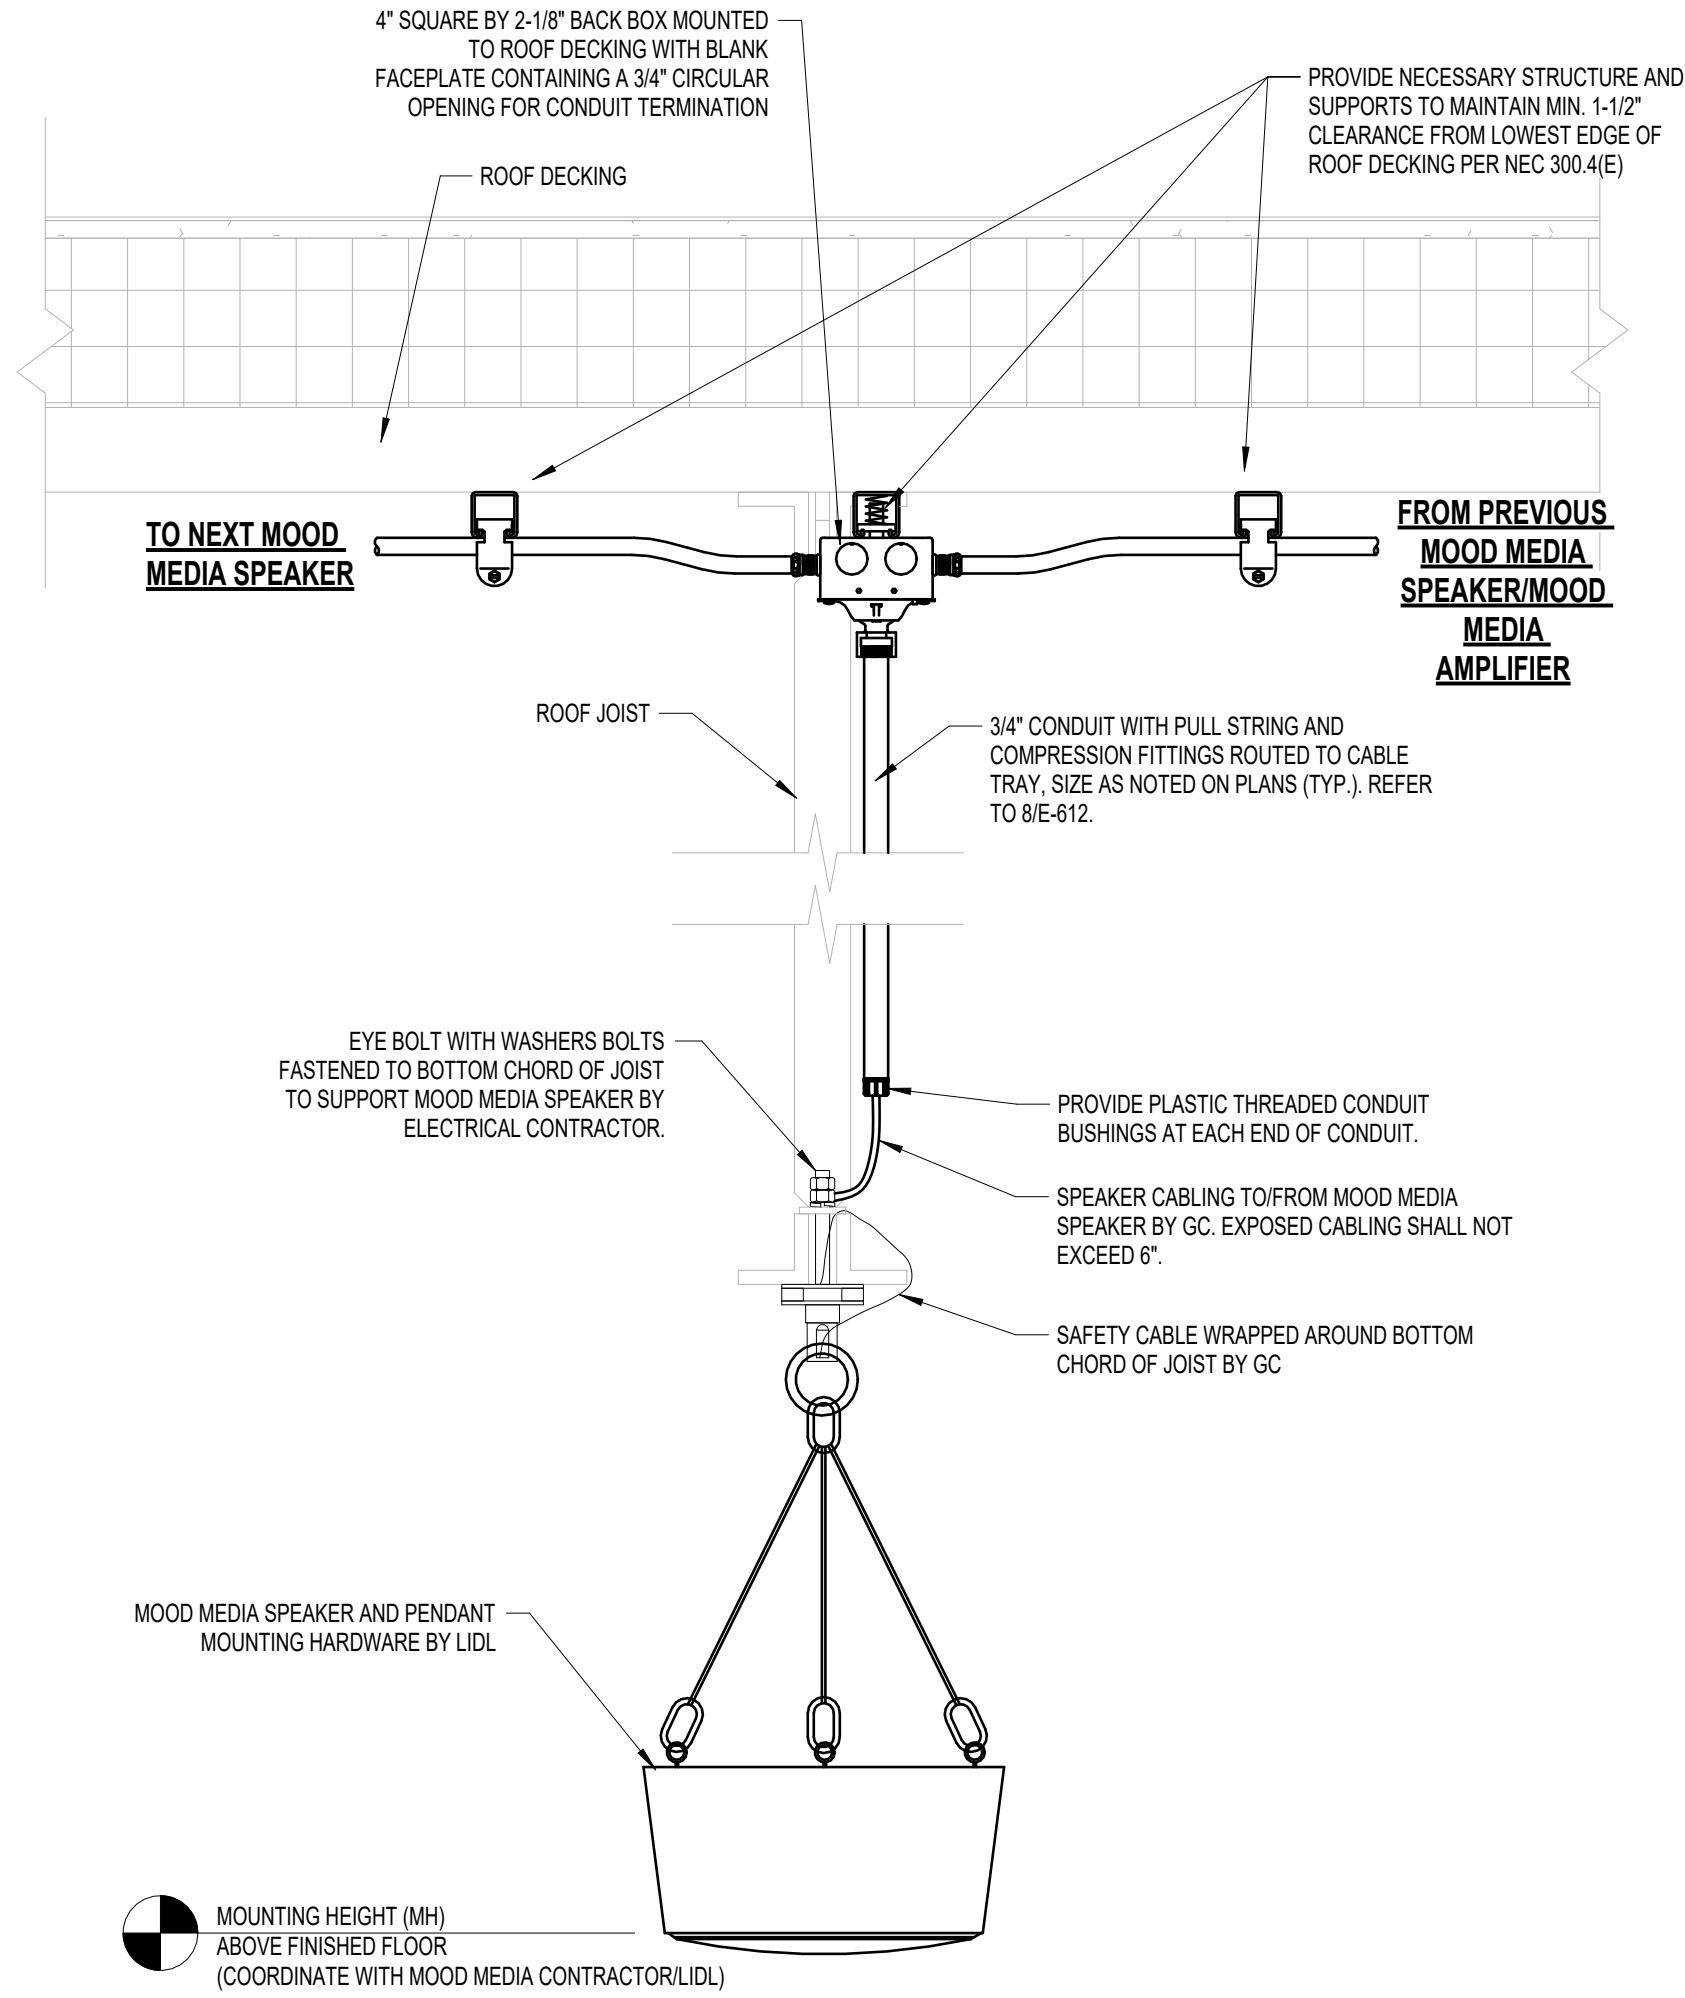


NOTES:
1. TELECOMMUNICATIONS FACEPLATE AND CONNECTIVITY TO BE PROVIDED BY LIDL.
2. ROUTE A CONDUIT BETWEEN THE TELECOMMUNICATIONS DEVICE BACK-BOX AND THE NEAREST TELECOMMUNICATION ROOM OR ACCESSIBLE PATHWAY.
3. REFER TO TECHNOLOGY PLANS FOR DEVICE LOCATIONS AND QUANTITIES, CABLE ROUTING AND DESTINATIONS.
4. PROVIDE A PULL STRING ROUTED THROUGH EACH TELECOMMUNICATIONS CONDUIT.
5. PROVIDE A PLASTIC CONDUIT BUSHING AT THE ACCESSIBLE CABLE PATHWAY END OF EACH CONDUIT.
6. PAINT ALL EXPOSED CONDUIT THE SAME AS THE CEILING UNLESS DIRECTED OTHERWISE BY THE OWNER'S REPRESENTATIVE OR ARCHITECT.

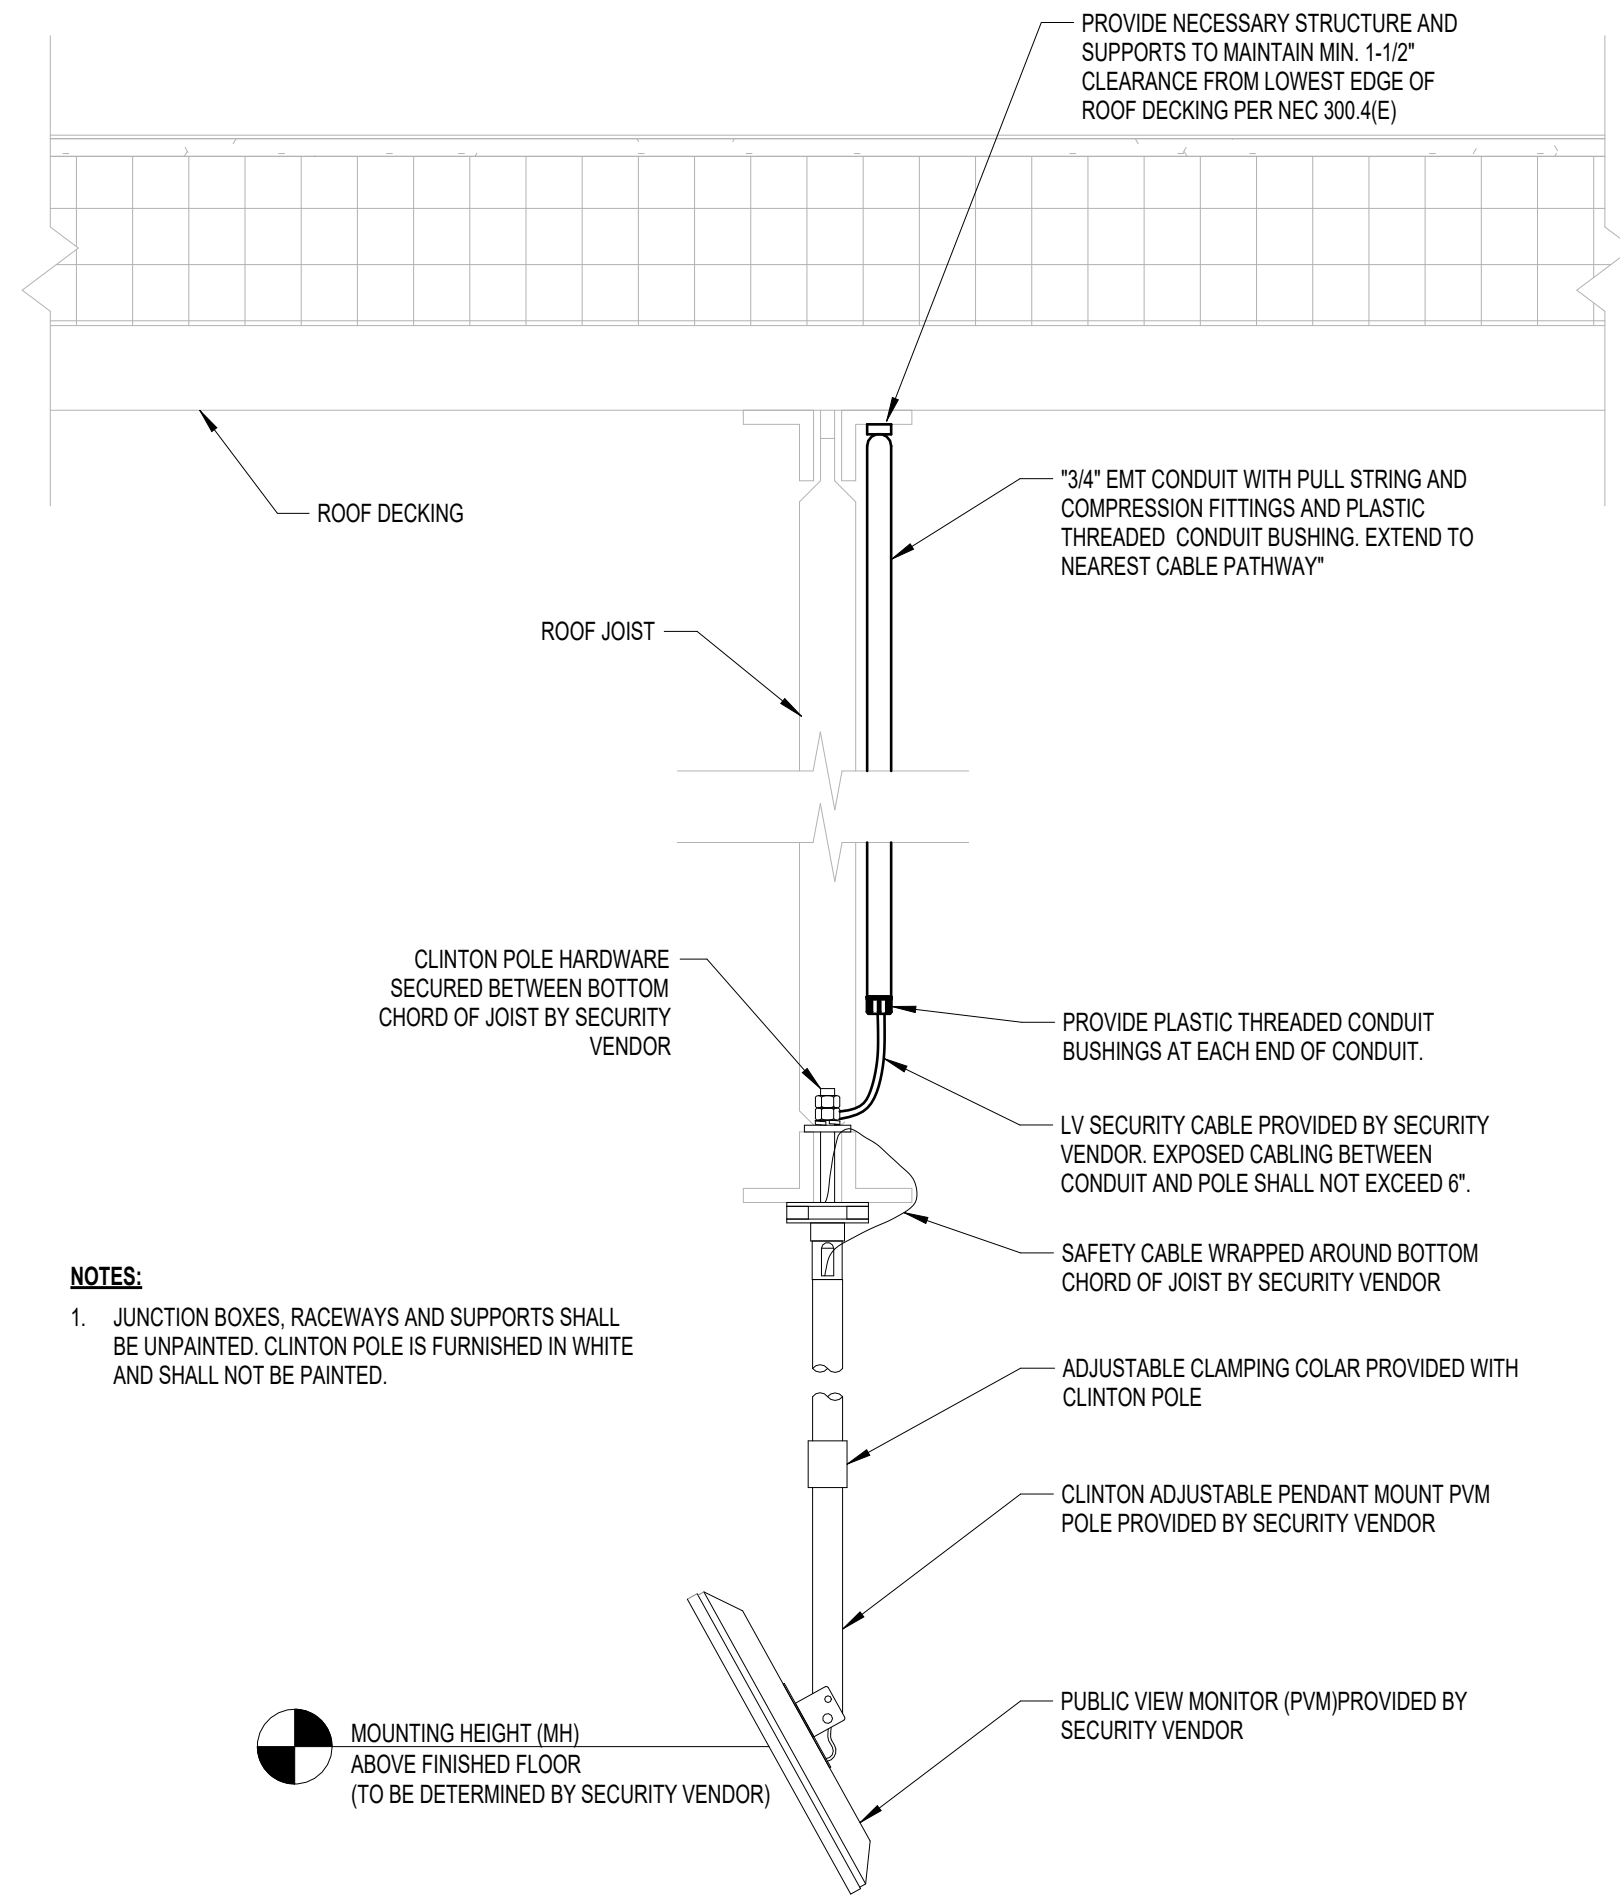

NOTES:
1. JUNCTION BOXES, RACEWAYS AND SUPPORTS SHALL BE UNPAINTED. CLINTON POLE IS FURNISHED IN WHITE AND SHALL NOT BE PAINTED.

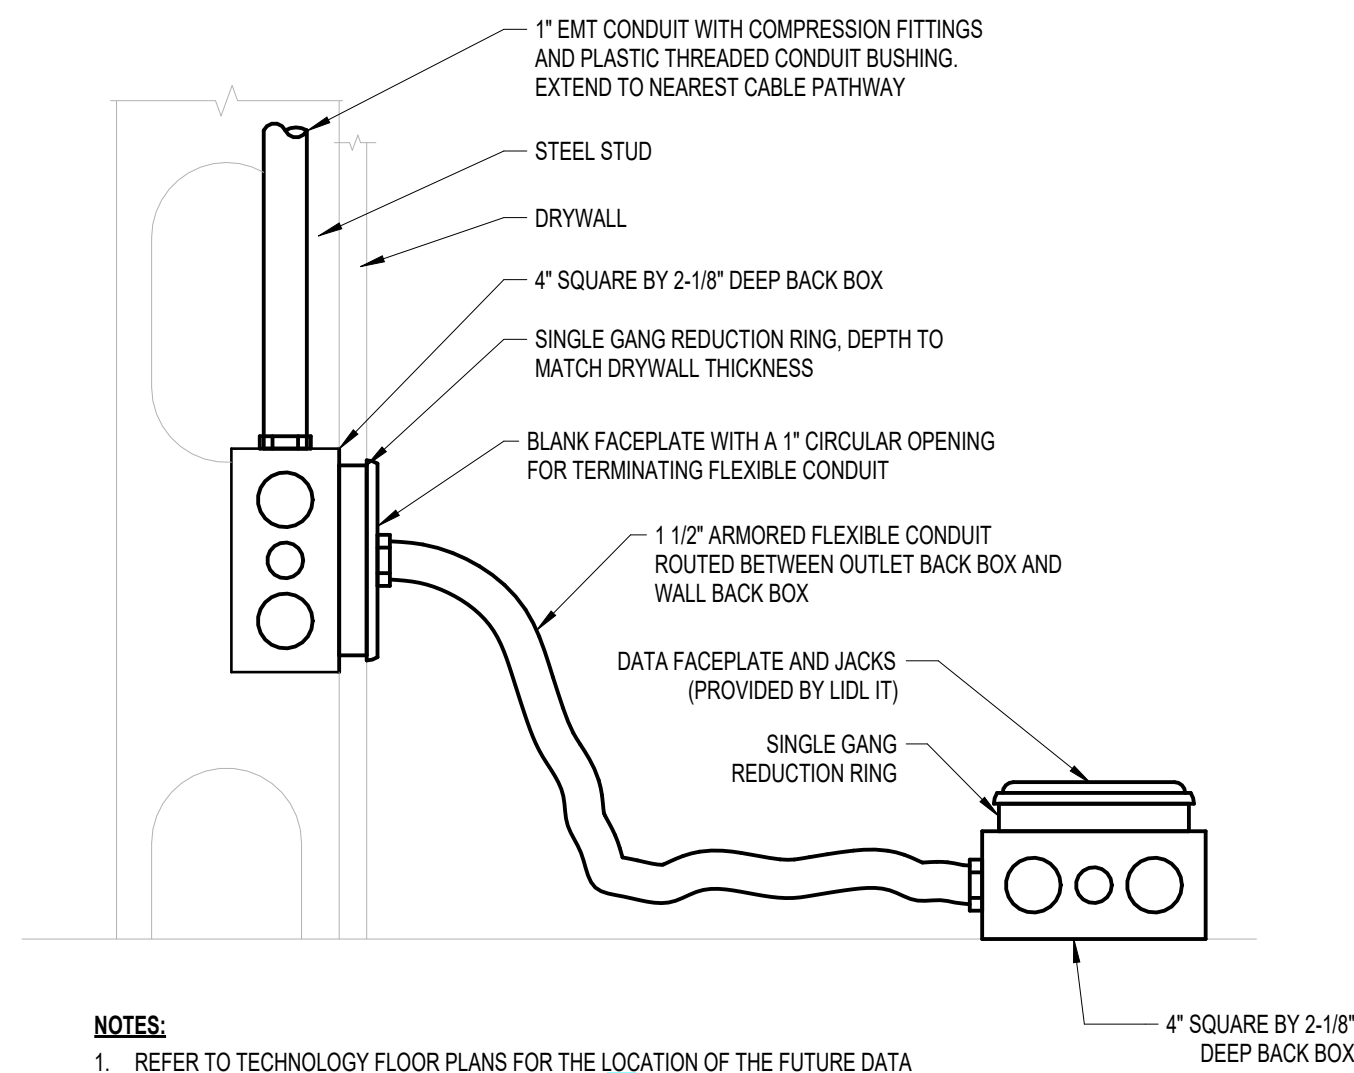

NOTES:
1. REFER TO TECHNOLOGY FLOOR PLANS FOR THE LOCATION OF THE FUTURE DATA OUTLET AND ASSOCIATED JUNCTION BOX, SHEET 1001.
2. ROUTE THE ARMORED FLEXIBLE CONDUIT THROUGH/BELOW THE BAKERY FURNITURE PROVIDED BY LIDL. COORDINATE ROUTING WITH LIDL.
3. LENGTH OF THE ARMORED FLEXIBLE CONDUIT WILL VARY BASED ON THE FINAL LOCATION OF THE WORKSTATION OUTLET. REFER TO THE TECHNOLOGY FLOOR PLANS AND COORDINATE THE EXACT LOCATION WITH LIDL PRIOR TO ROUGH-IN.
4. ELECTRICAL CONTRACTOR SHALL ROUTE FLEXIBLE CONDUIT THROUGH MILLWORK AFTER MILLWORK IS SET AND SHELVES ARE INSTALLED. ROUTE CONDUIT THROUGH A MAXIMUM DIAMETER 2\"/>

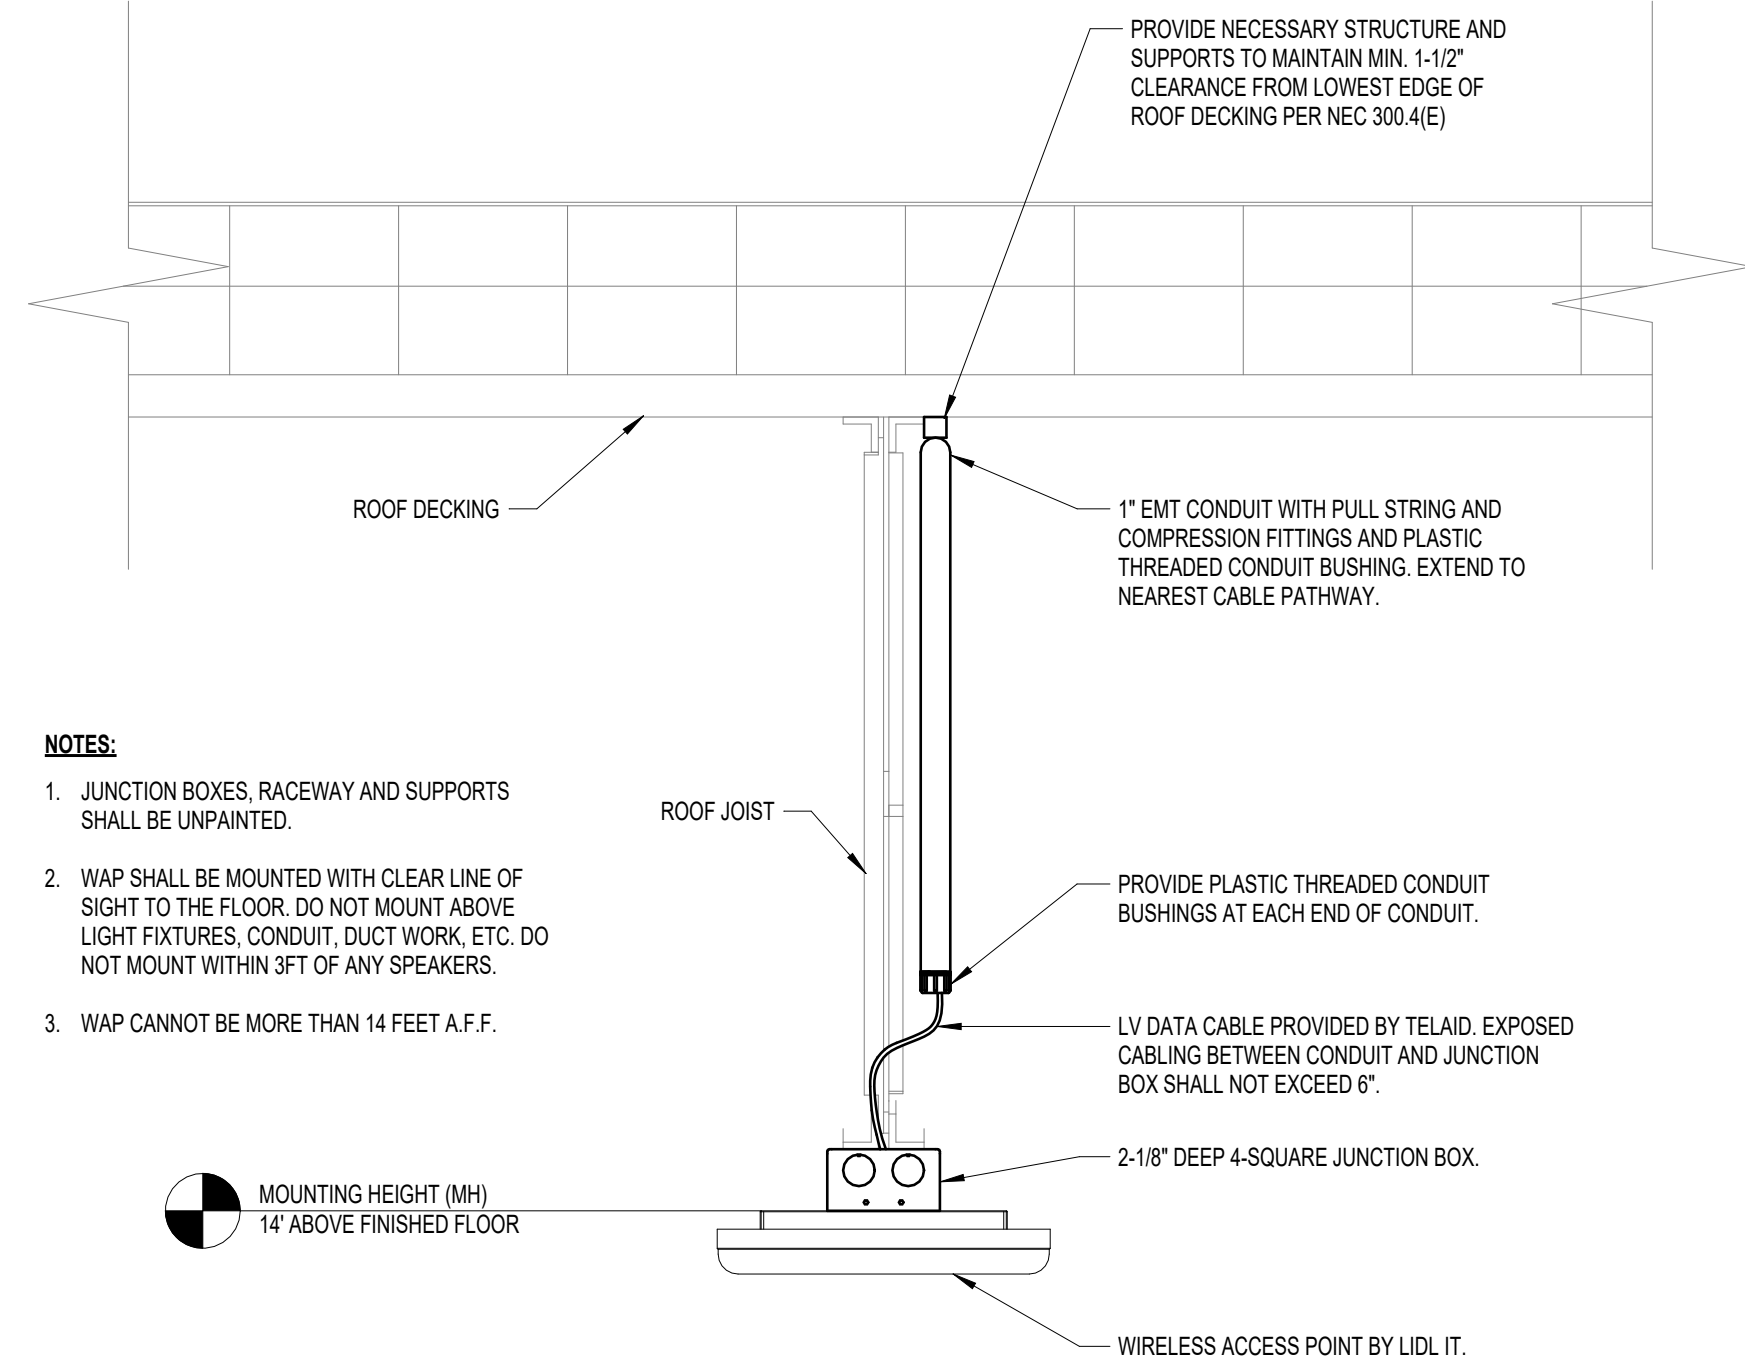

NOTES:
1. JUNCTION BOXES, RACEWAY AND SUPPORTS SHALL BE UNPAINTED.
2. WAP SHALL BE MOUNTED WITH CLEAR LINE OF SIGHT TO THE FLOOR. DO NOT MOUNT ABOVE LIGHT FIXTURES, CONDUIT, DUCT WORK, ETC. DO NOT MOUNT WITHIN 3FT OF ANY SPEAKERS.
3. WAP CANNOT BE MORE THAN 14 FEET A.F.F.

MOUNTING HEIGHT (MH)
14\"/>

5 CONDUIT DUCTBANK TERMINATION AT FOUNDATION WALL DETAIL

NTS

3 MOOD MEDIA SPEAKER MOUNTING DETAIL

NTS

1 TYPICAL FLUSH MOUNTED TELECOMMUNICATIONS DEVICE ROUGH-IN DETAIL

NTS

6 SALES AREA PENDANT MOUNTED PUBLIC VIEW MONITOR (PVM) DETAIL

NTS

4 BAKERY FUTURE DATA OUTLET DETAIL

NTS

2 SALES AREA JOIST MOUNTED WIRELESS ACCESS POINT DETAIL

NTS

7

1

6

1

5

1

4

1


3

1

2


1

1

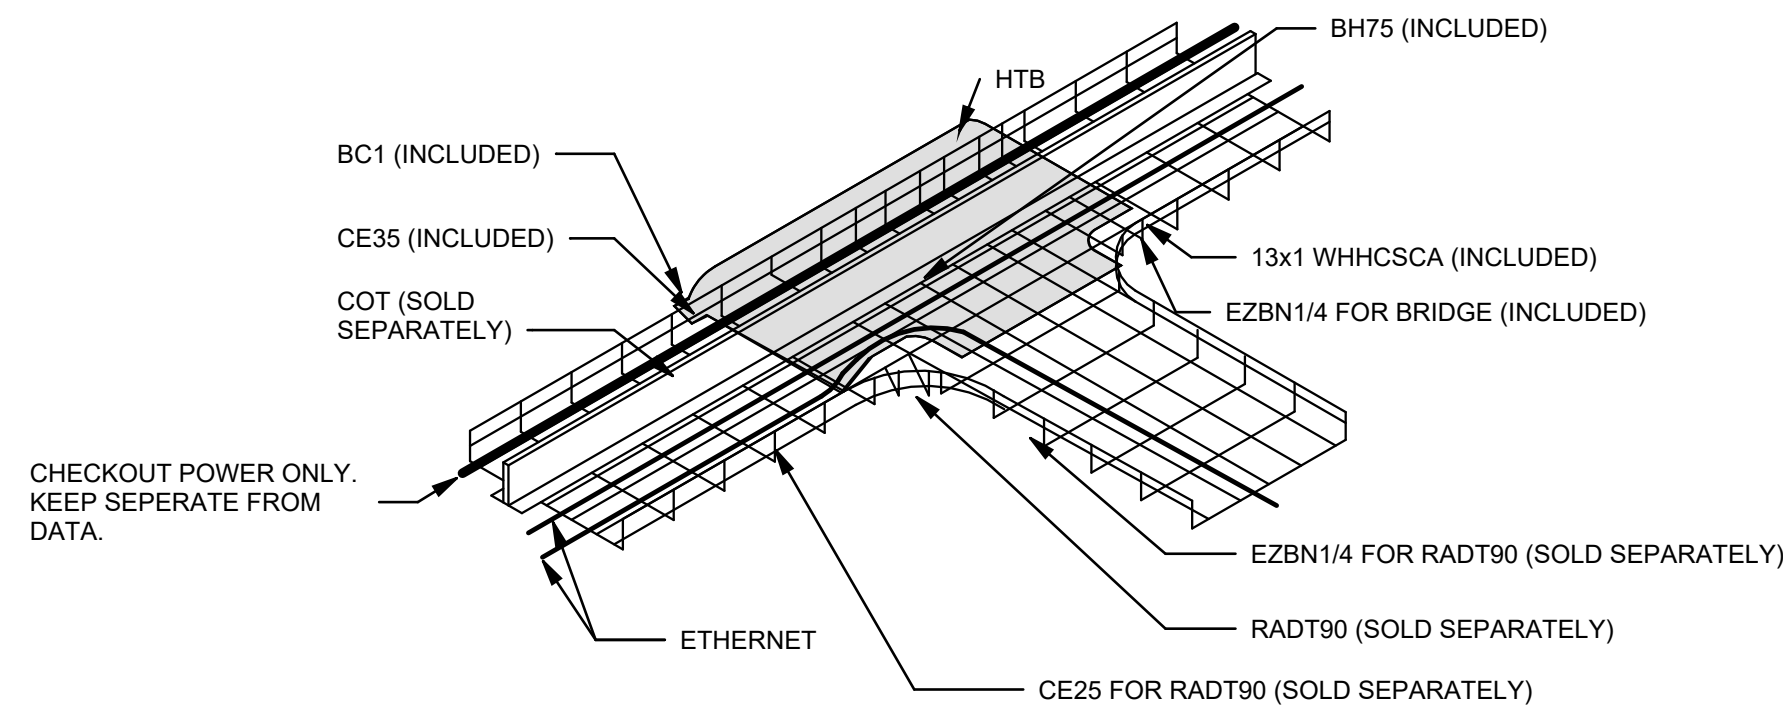

3 CABLE WIREWAY ACCESORIES (HTB HXB RHXB)

NTS

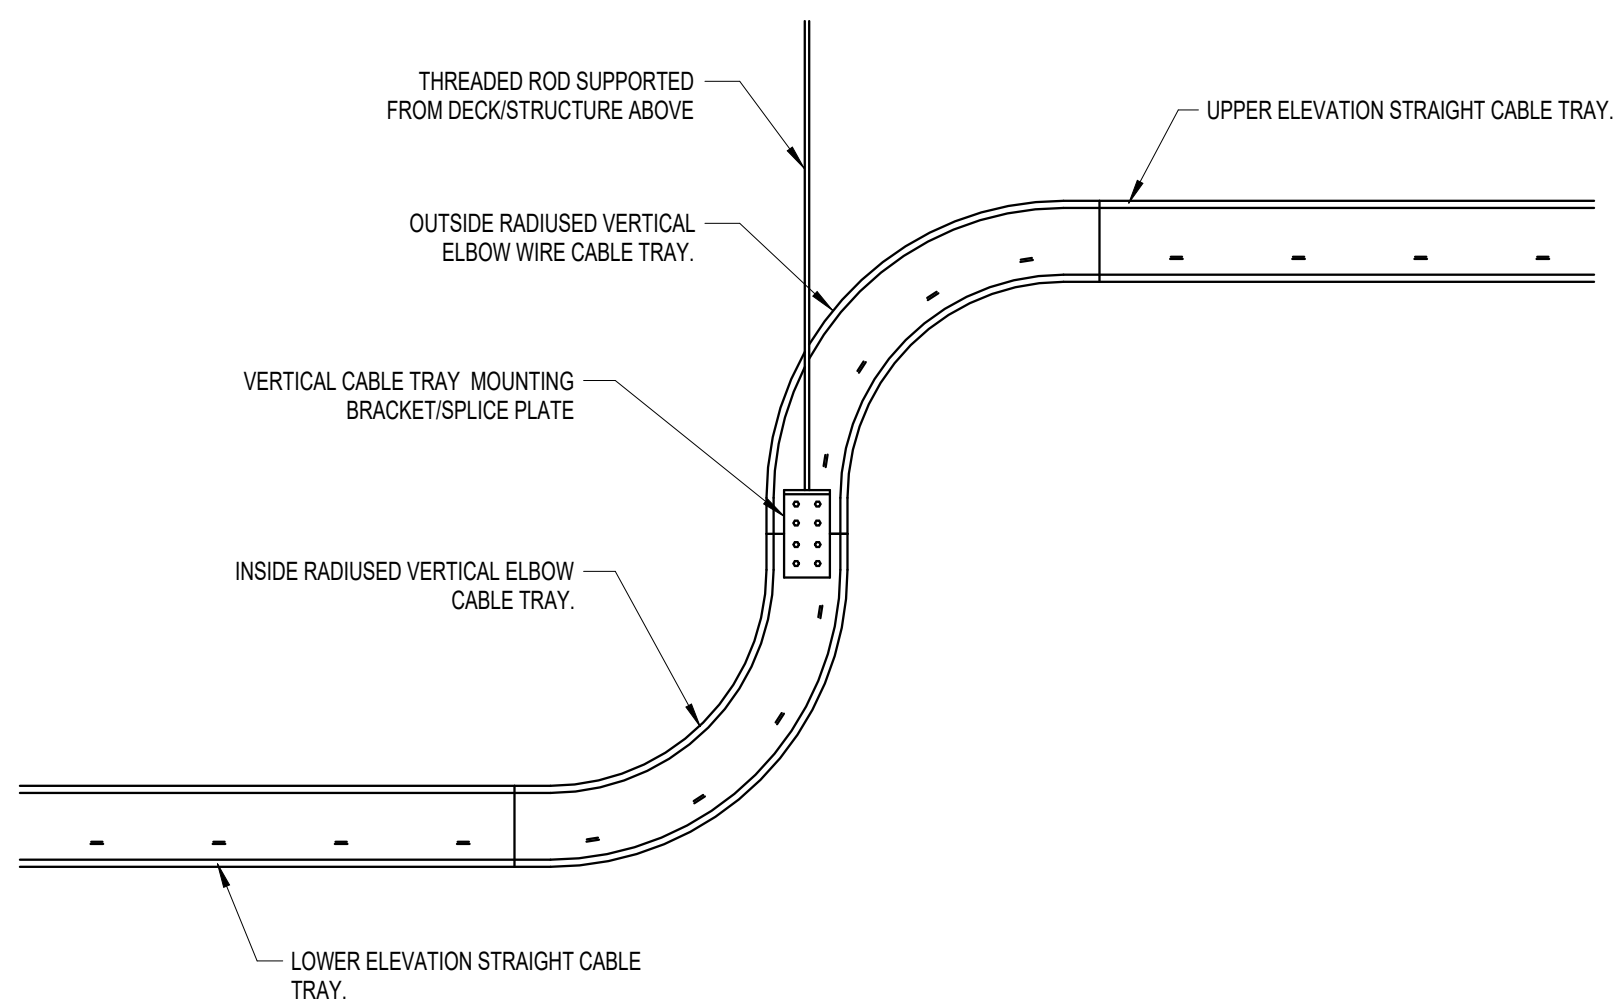


NOTES:

1. REFER TO PLANS FOR CABLE TRAY ROUTING CONTAINING WIRE MESH CABLE TRAY.
2. VERTICAL ELBOWS SHALL MATCH THE SECTIONS OF TRAY THEY ARE CONNECTED TO.

4 90 DEGREE VERTICAL CABLE TRAY TRANSITION DETAIL

NTS

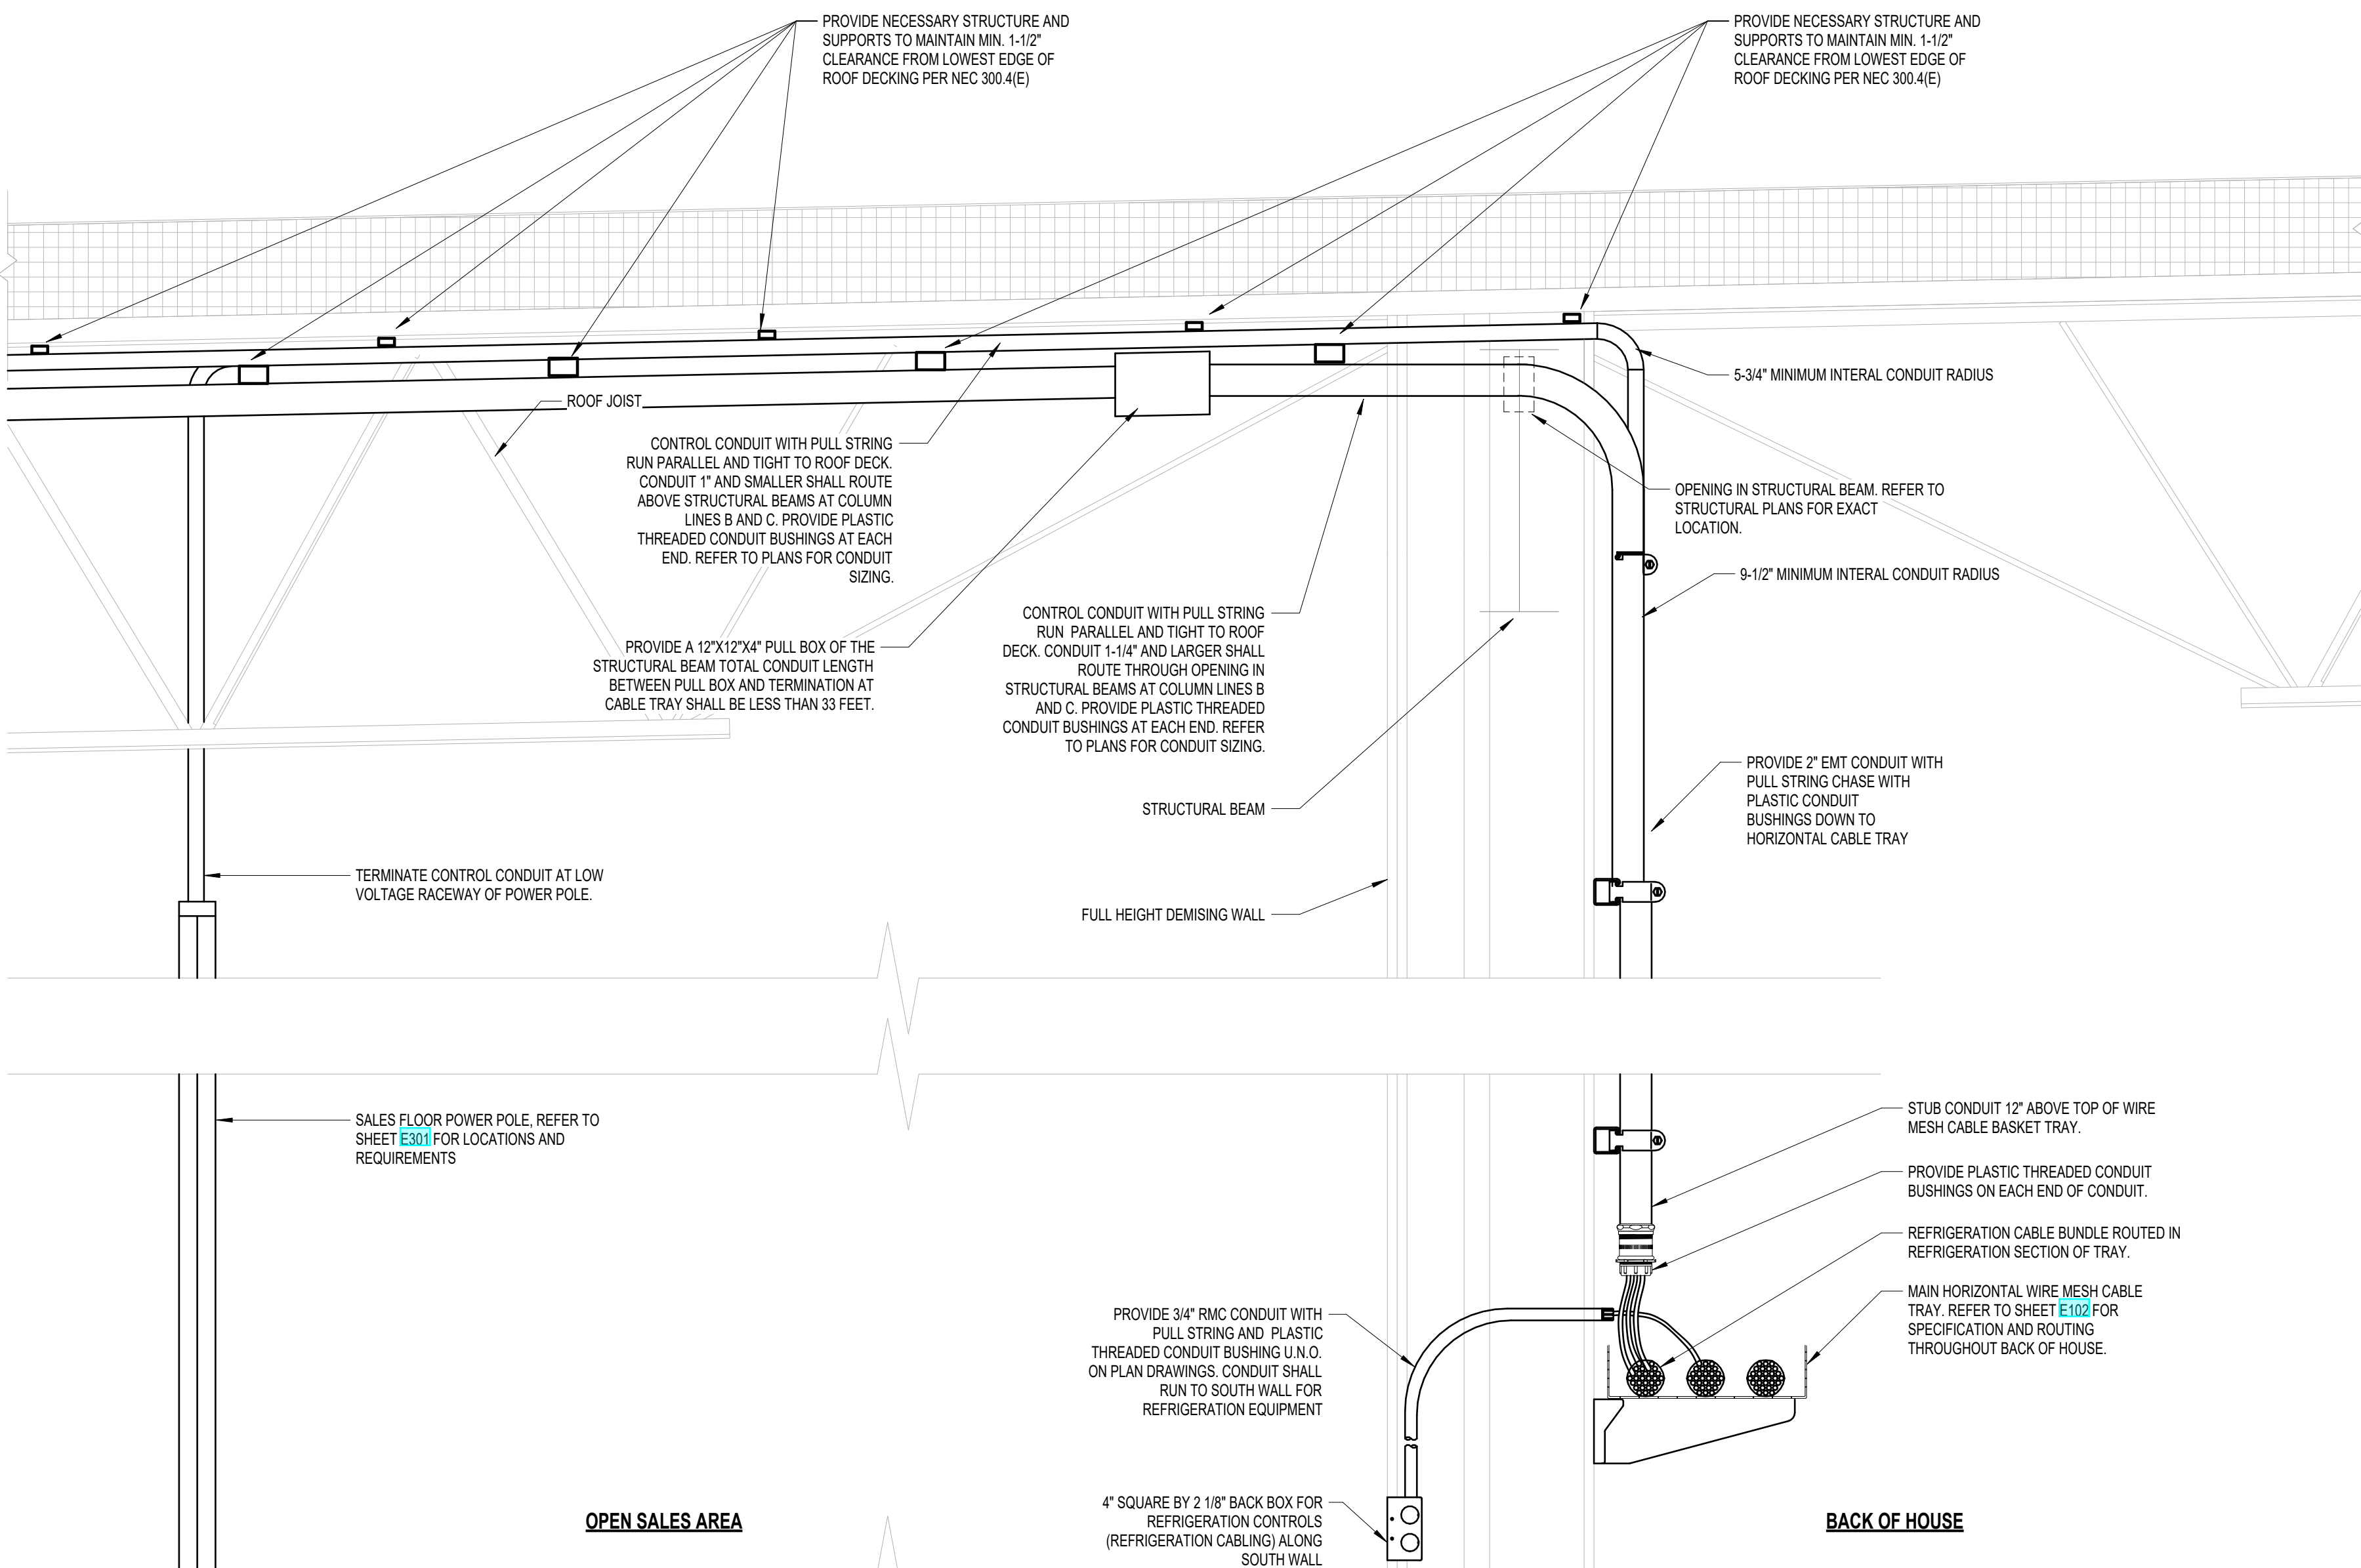


GENERAL NOTES

A. ELECTRICAL CONTRACTOR TO PROVIDE PROTECTION FOR RACEWAYS/CABLES/BOXES AT THE ROOF DECK AS PER NEC SECTION 300.4(E).

1 SALES AREA REFRIGERATION CONTROLS LOW VOLTAGE CONDUIT DETAIL - COLUMN LINE B

NTS

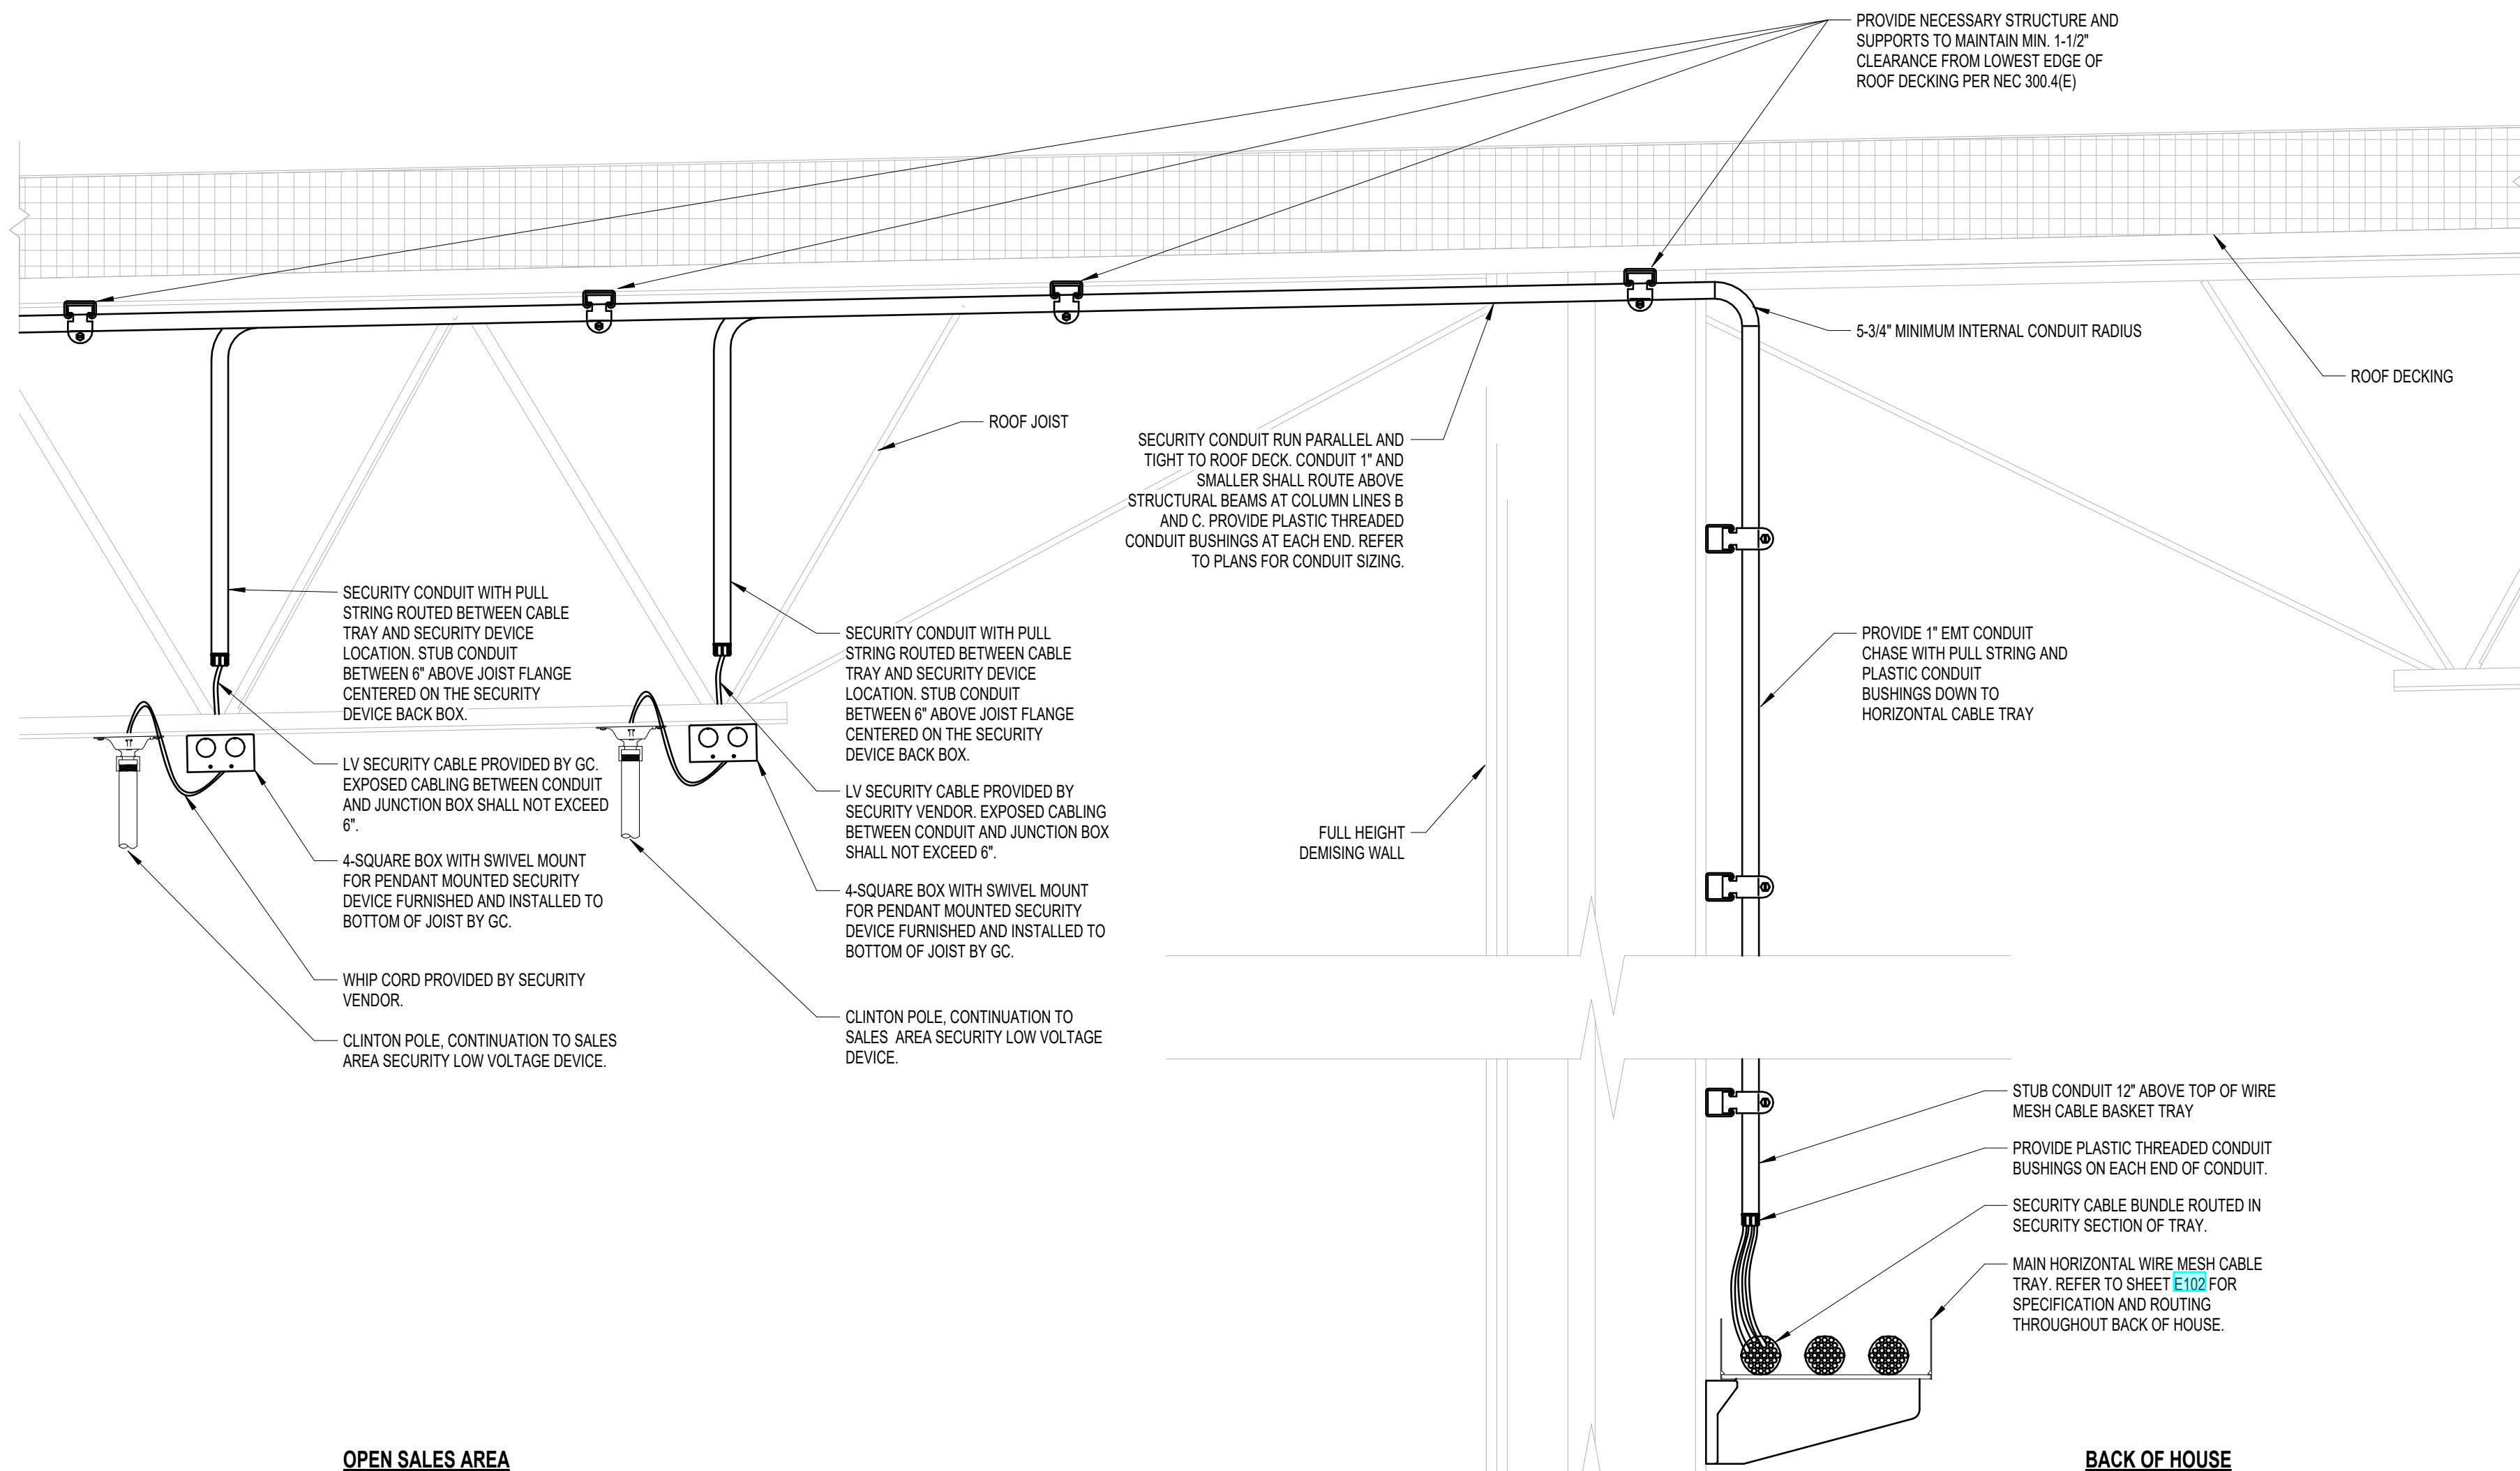

GENERAL NOTES


A. ELECTRICAL CONTRACTOR TO PROVIDE PROTECTION FOR RACEWAYS/CABLES/BOXES AT THE ROOF DECK AS PER NEC SECTION 300.4(E).

2 SALES AREA SECURITY LOW VOLTAGE CONDUIT DETAIL

NTS


BUILDING EXTERIOR
CART CORRAL CANOPY

BACK OF HOUSE

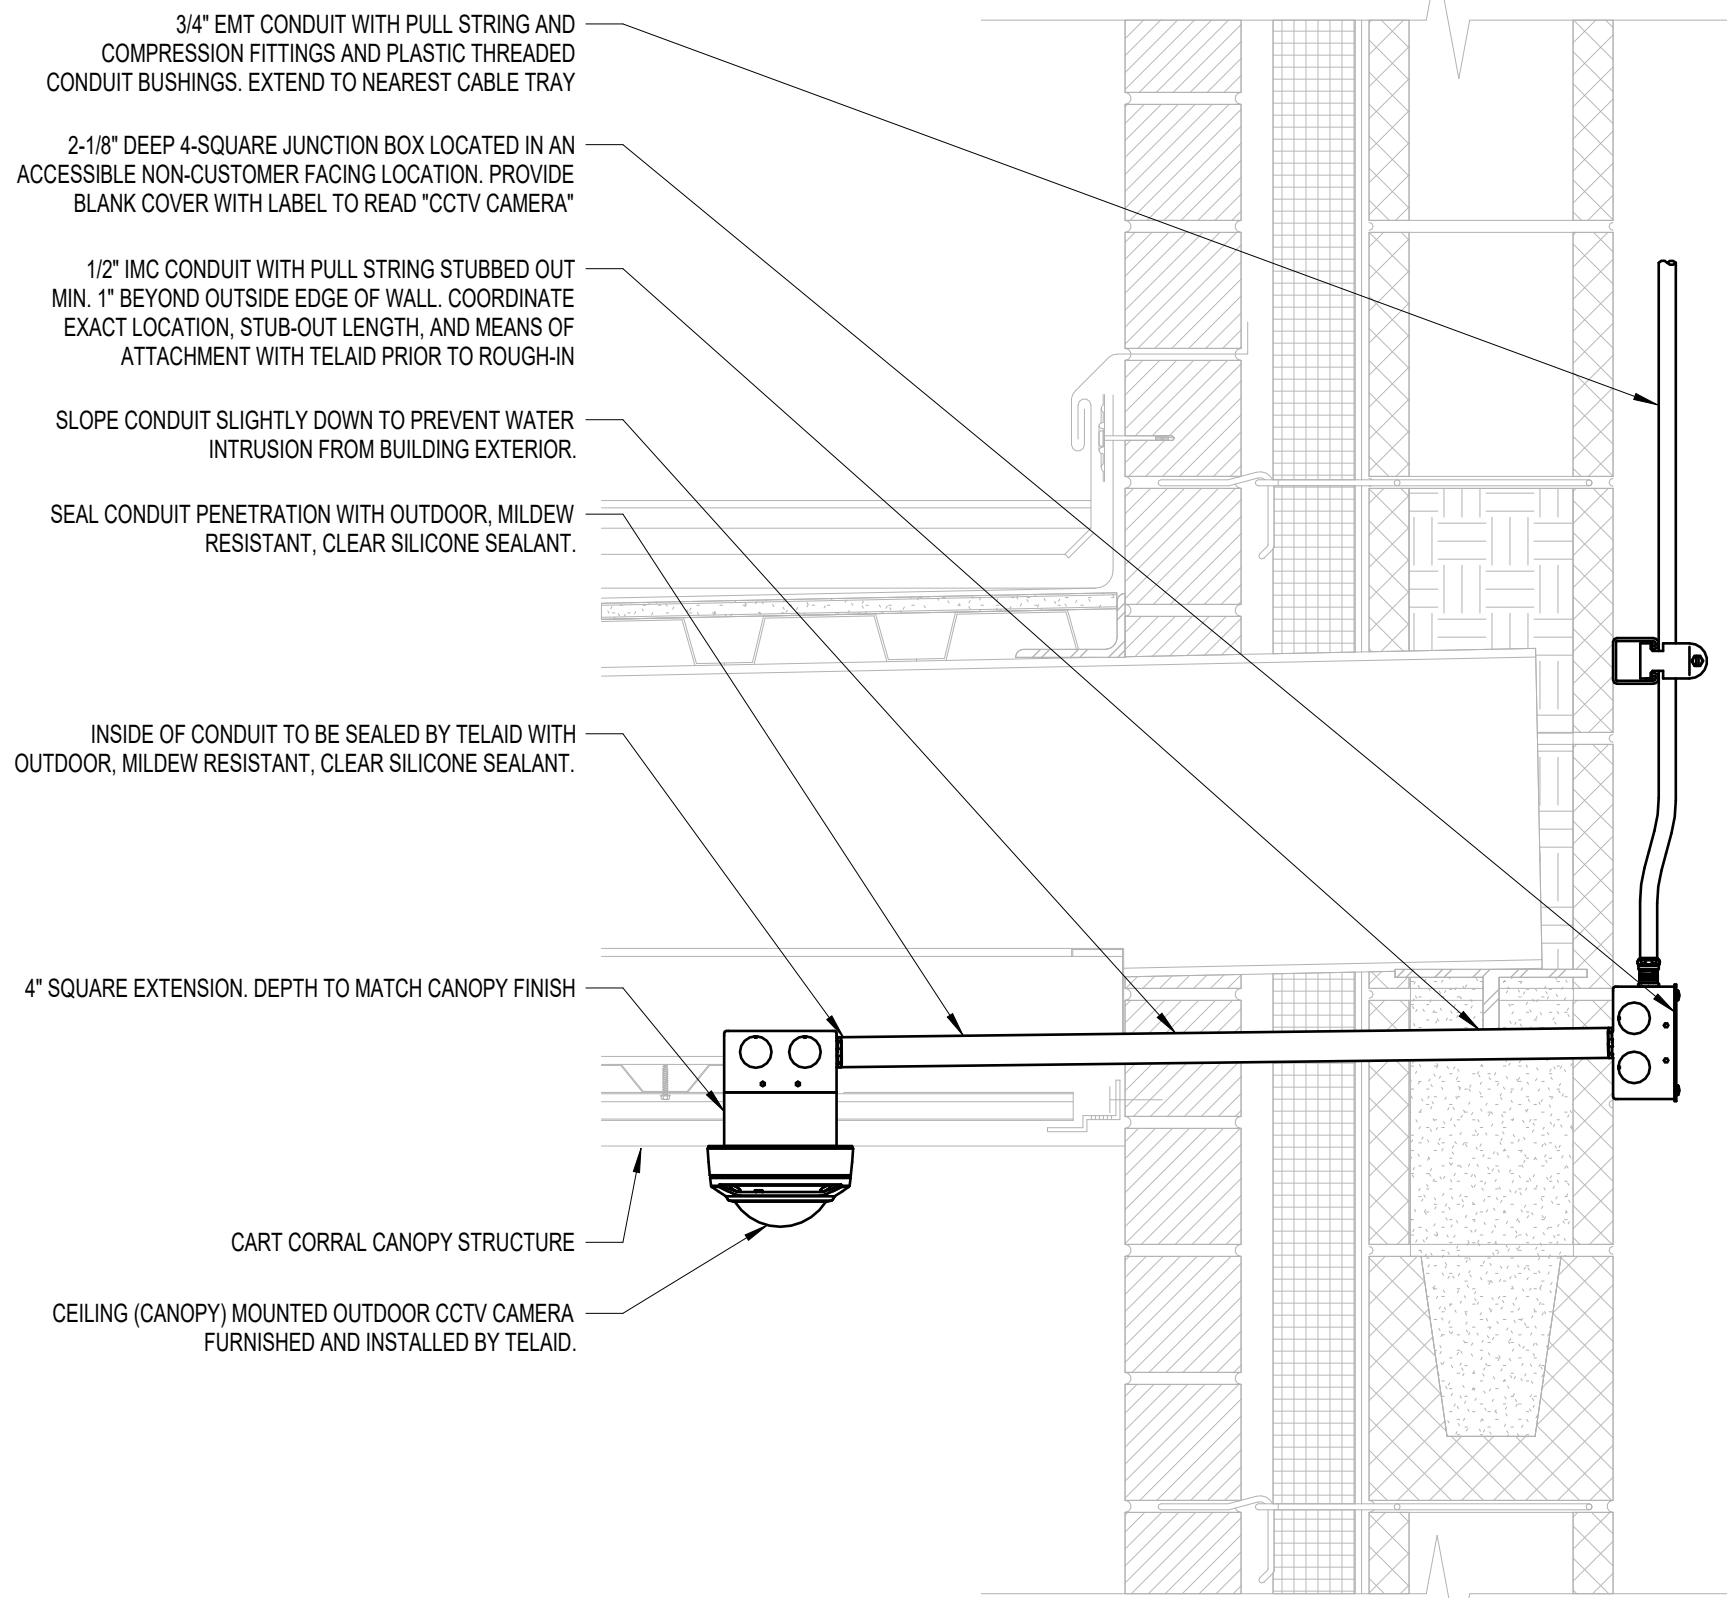

7 OUTDOOR CART CORRAL CANOPY MOUNTED CCTV CAMERA DETAIL

1/8" = 1'-0"

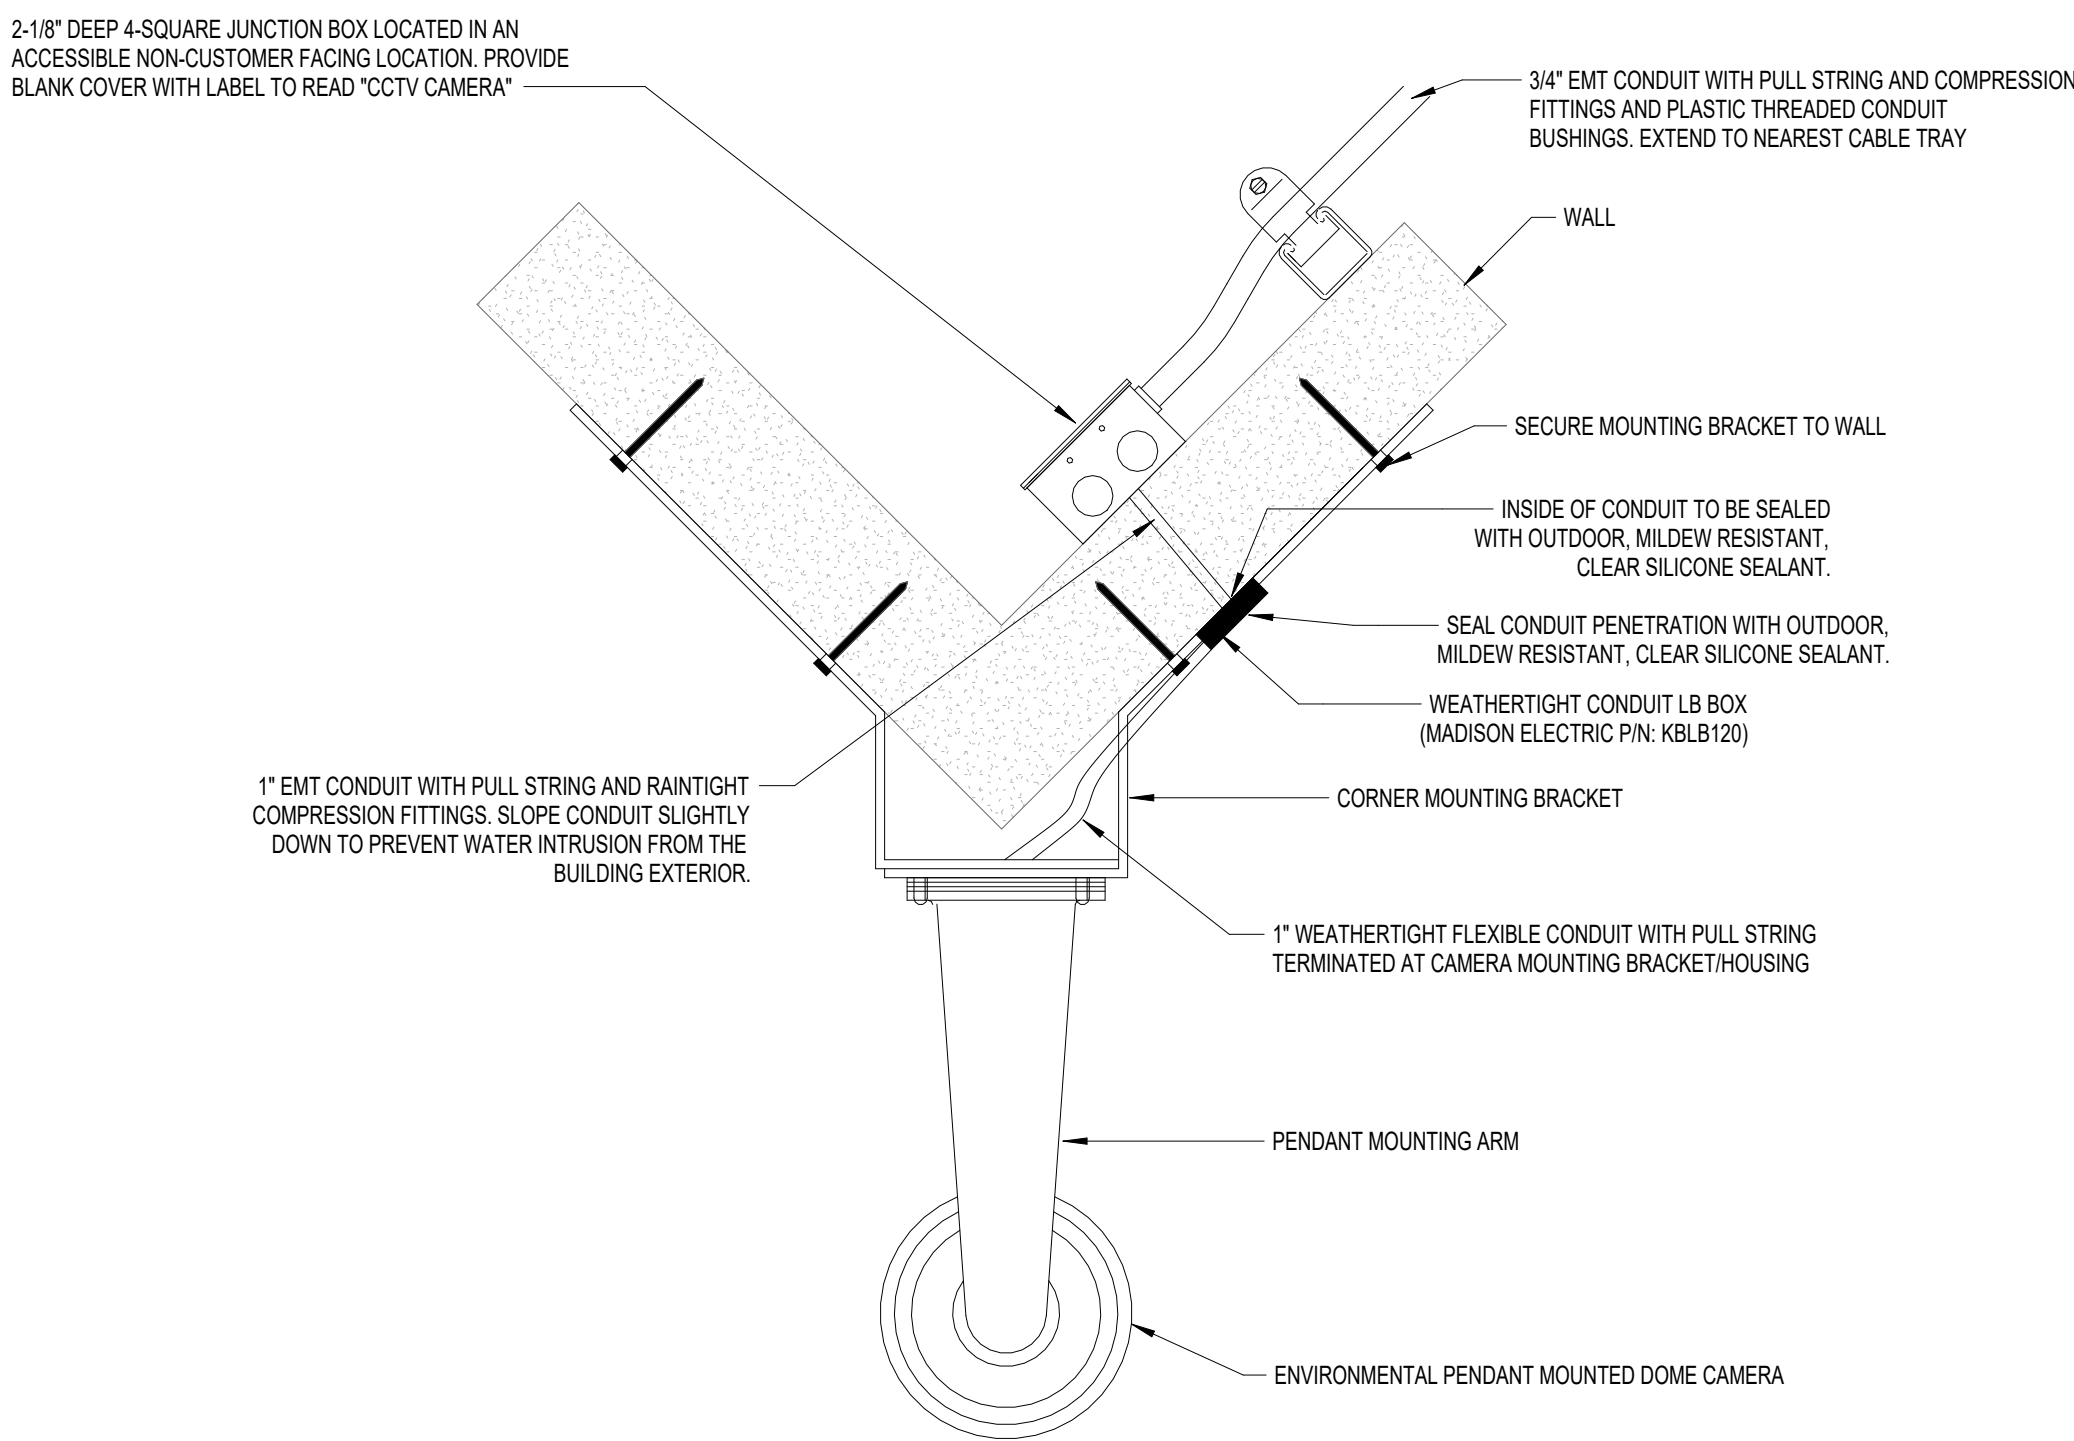


DETAIL NOTES:
1. FASTEN AND SECURE CAMERA TO EXTERIOR WALL. COORDINATE MOUNTING WITH THE STRUCTURAL ENGINEER AND ARCHITECT PRIOR TO INSTALLATION.

TOP VIEW

8 EXTERIOR CORNER MOUNTED PENDANT CCTV CAMERA DETAIL

12" = 1'-0"

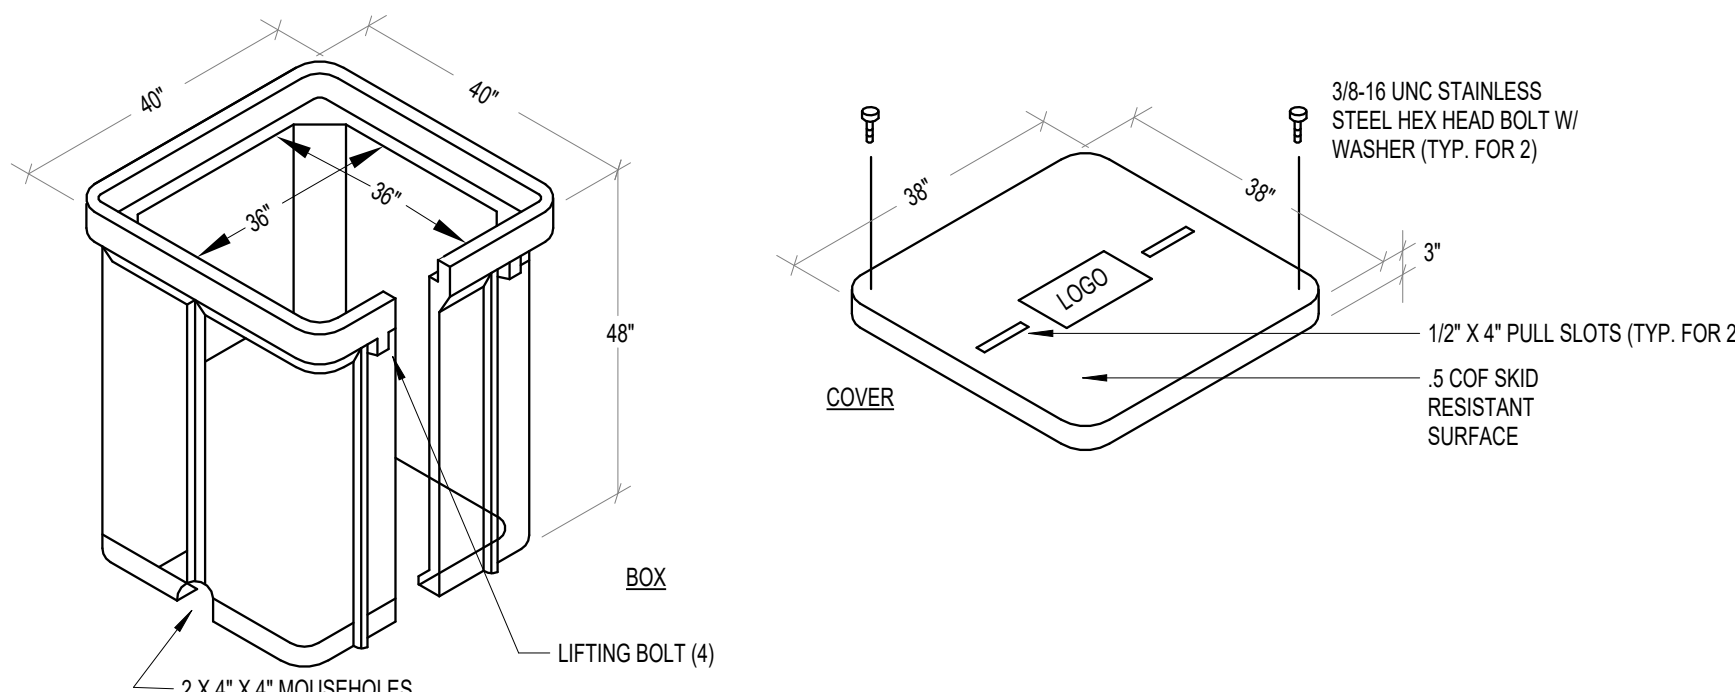


- NOTES:
1. PROVIDE QUARTZ/COMPOSITE #PG STYLE WITH MOUSEHOLES.
 2. COORDINATE DEPTH OF HANDHOLES WITH EXISTING CONDITIONS IN THE FIELD. CONTRACTOR SHALL PROVIDE EXTENSION BOXES AS REQUIRED.
 3. PROVIDE CRUSHED STONE BELOW HANDHOLE FOR DRAINAGE.

4 SITE HANDHOLE

NTS


BACK OF HOUSE

BUILDING EXTERIOR

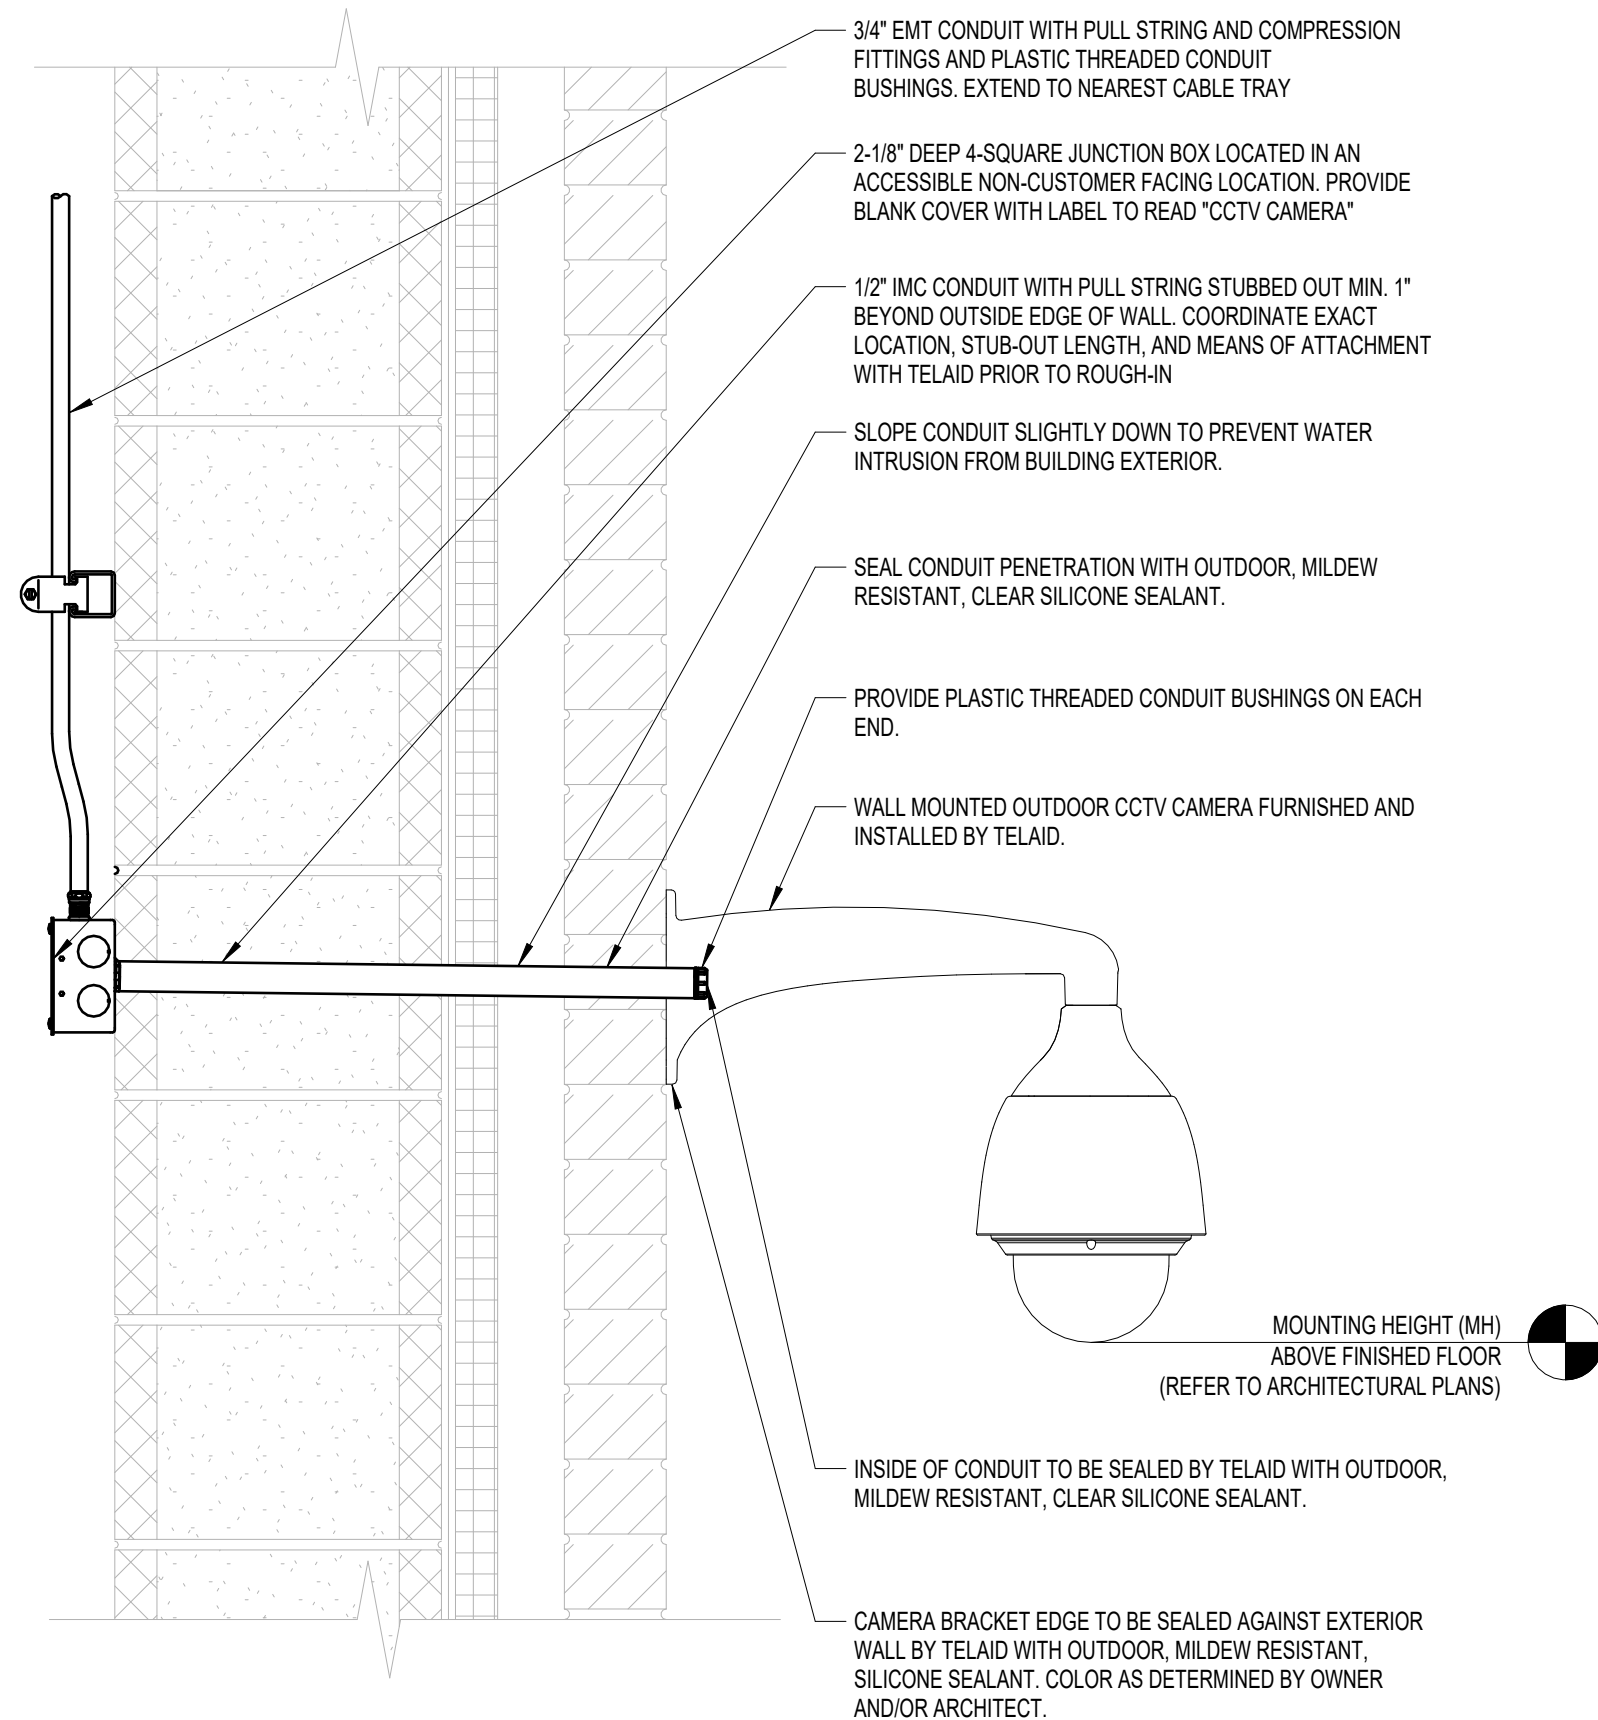

5 OUTDOOR WALL MOUNTED CCTV CAMERA DETAIL


1/8" = 1'-0"

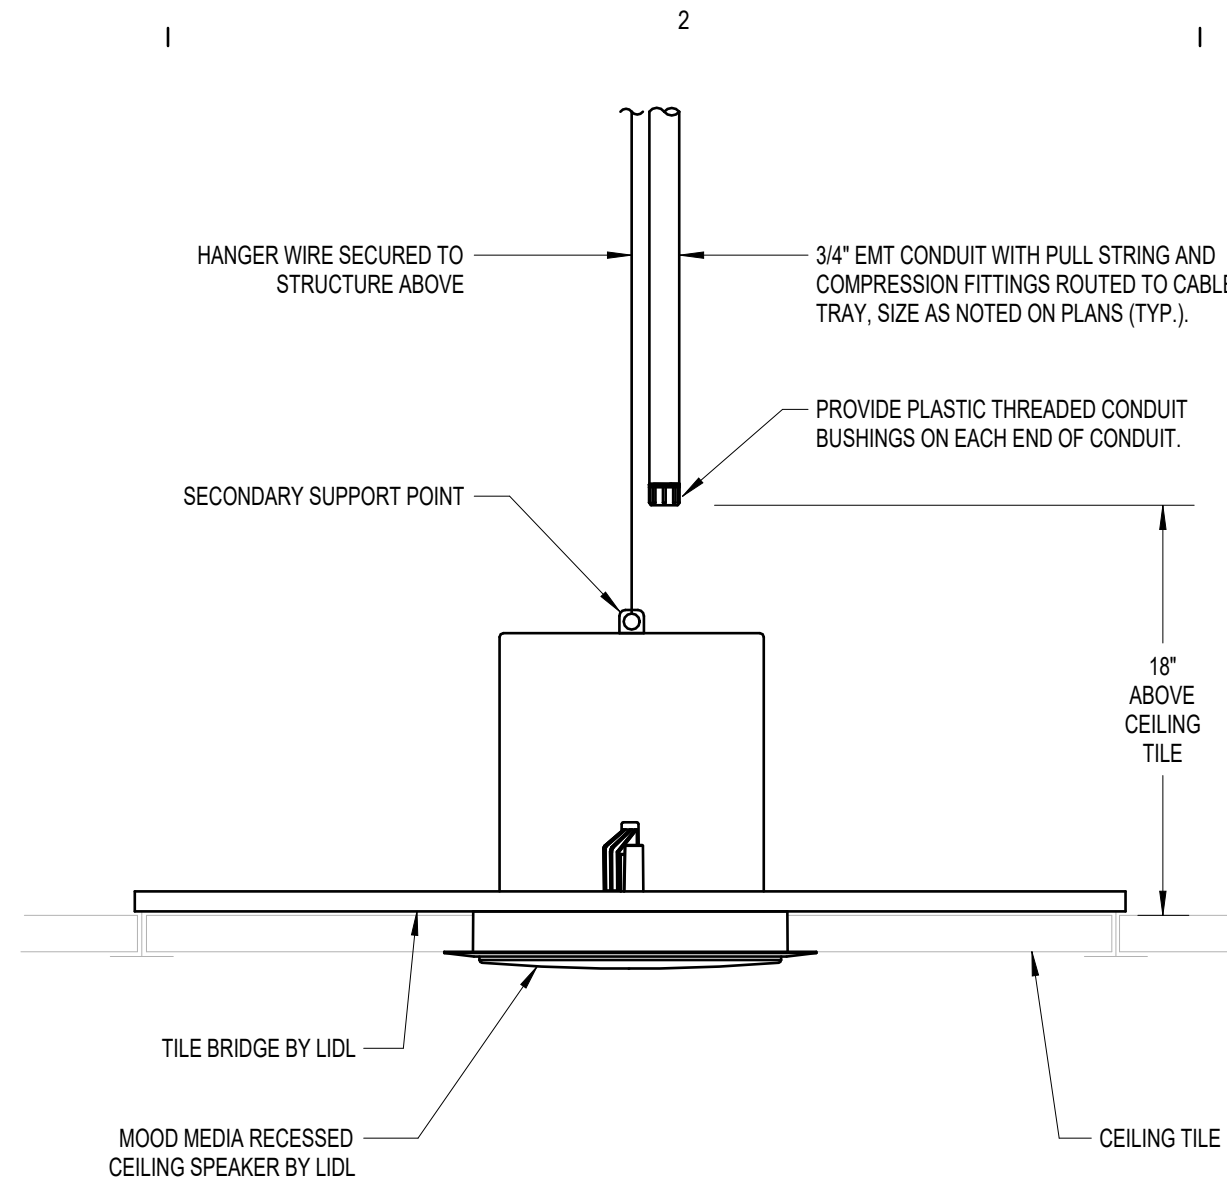

- NOTES:
1. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR CUTTING AND PATCHING AS NECESSARY TO FACILITATE MOUNTING OF THE CEILING SPEAKER. REFER TO MANUFACTURER INSTALLATION SPECIFICATIONS.
 2. COORDINATE WITH LIDL IT PRIOR TO CONDUIT INSTALLATION.
 3. CABLING AND TERMINATION AT MOOD MEDIA SPEAKER TO BE PROVIDED BY LIDL IT. EXPOSED CABLING BETWEEN CONDUIT AND SPEAKER ENCLOSURE SHALL NOT EXCEED 6".
 4. REFER TO MANUFACTURERS RECOMMENDED MOUNTING INSTRUCTIONS. MOUNT TO ACCESSIBLE CEILING TILE OR UTILIZE CEILING TILE BRIDGE AS NECESSARY.

1 BACK OF HOUSE ACCESSIBLE CEILING MOUNTED SPEAKER DETAIL



NTS

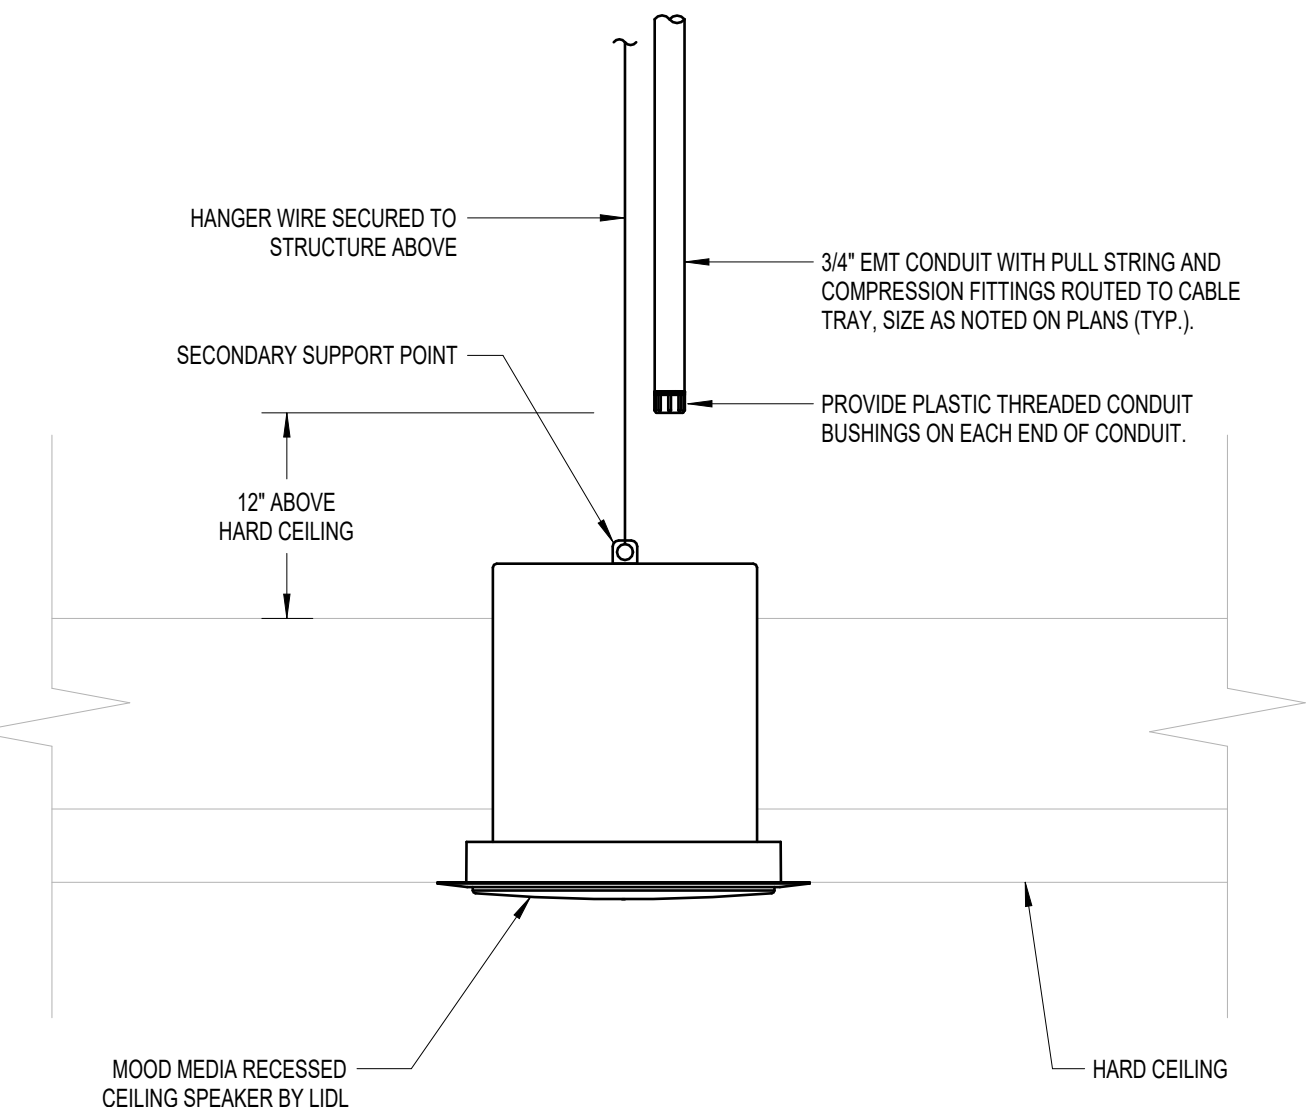

- NOTES:
1. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR CUTTING AND PATCHING AS NECESSARY TO FACILITATE MOUNTING OF THE CEILING SPEAKER. REFER TO MANUFACTURER INSTALLATION SPECIFICATIONS.
 2. COORDINATE WITH LIDL IT PRIOR TO CONDUIT INSTALLATION.
 3. CABLING AND TERMINATION AT MOOD MEDIA SPEAKER TO BE PROVIDED BY LIDL IT. EXPOSED CABLING BETWEEN CONDUIT AND SPEAKER ENCLOSURE SHALL NOT EXCEED 6".
 4. REFER TO MANUFACTURERS RECOMMENDED MOUNTING INSTRUCTIONS. MOUNT TO NON-ACCESSIBLE CEILING OR UTILIZE MOUNTING HARDWARE AS NECESSARY.

2 BACK OF HOUSE NON-ACCESSIBLE CEILING MOUNTED SPEAKER DETAIL

NTS

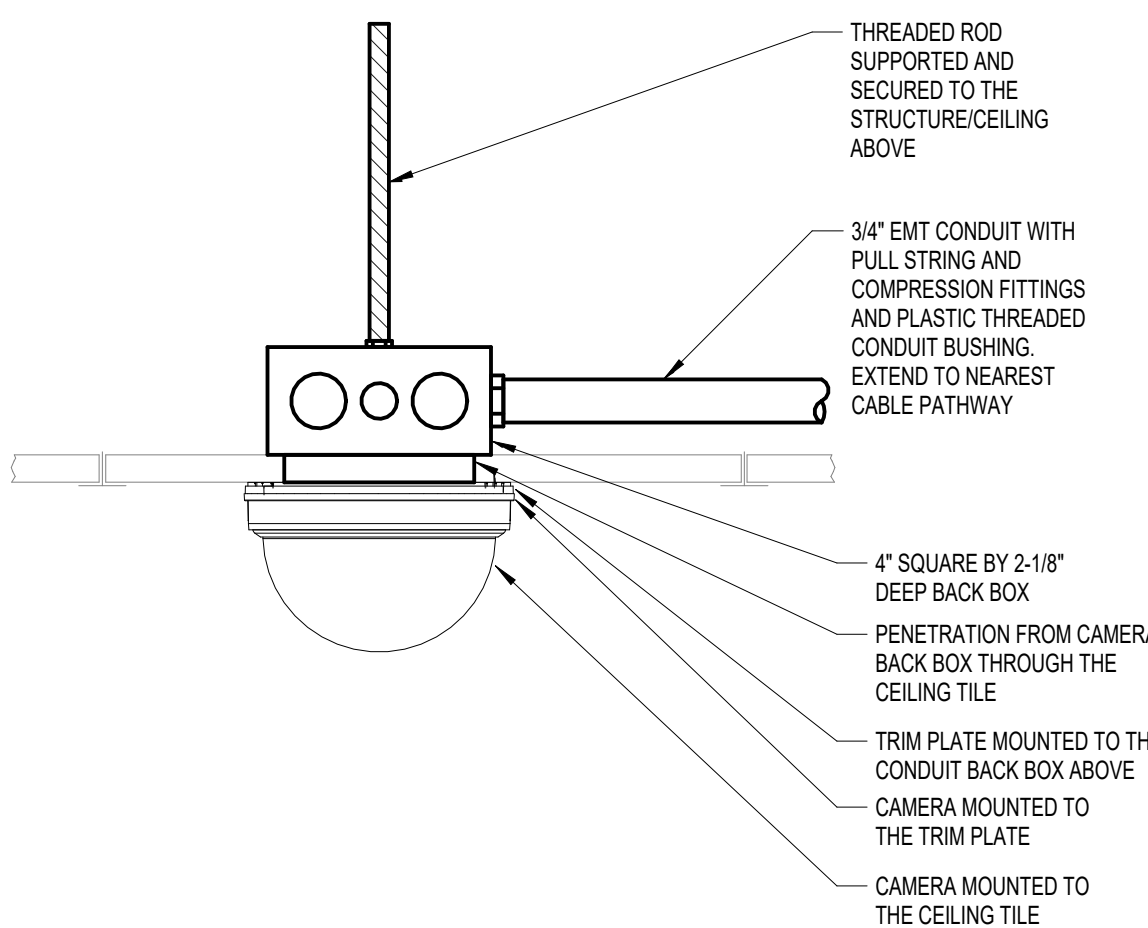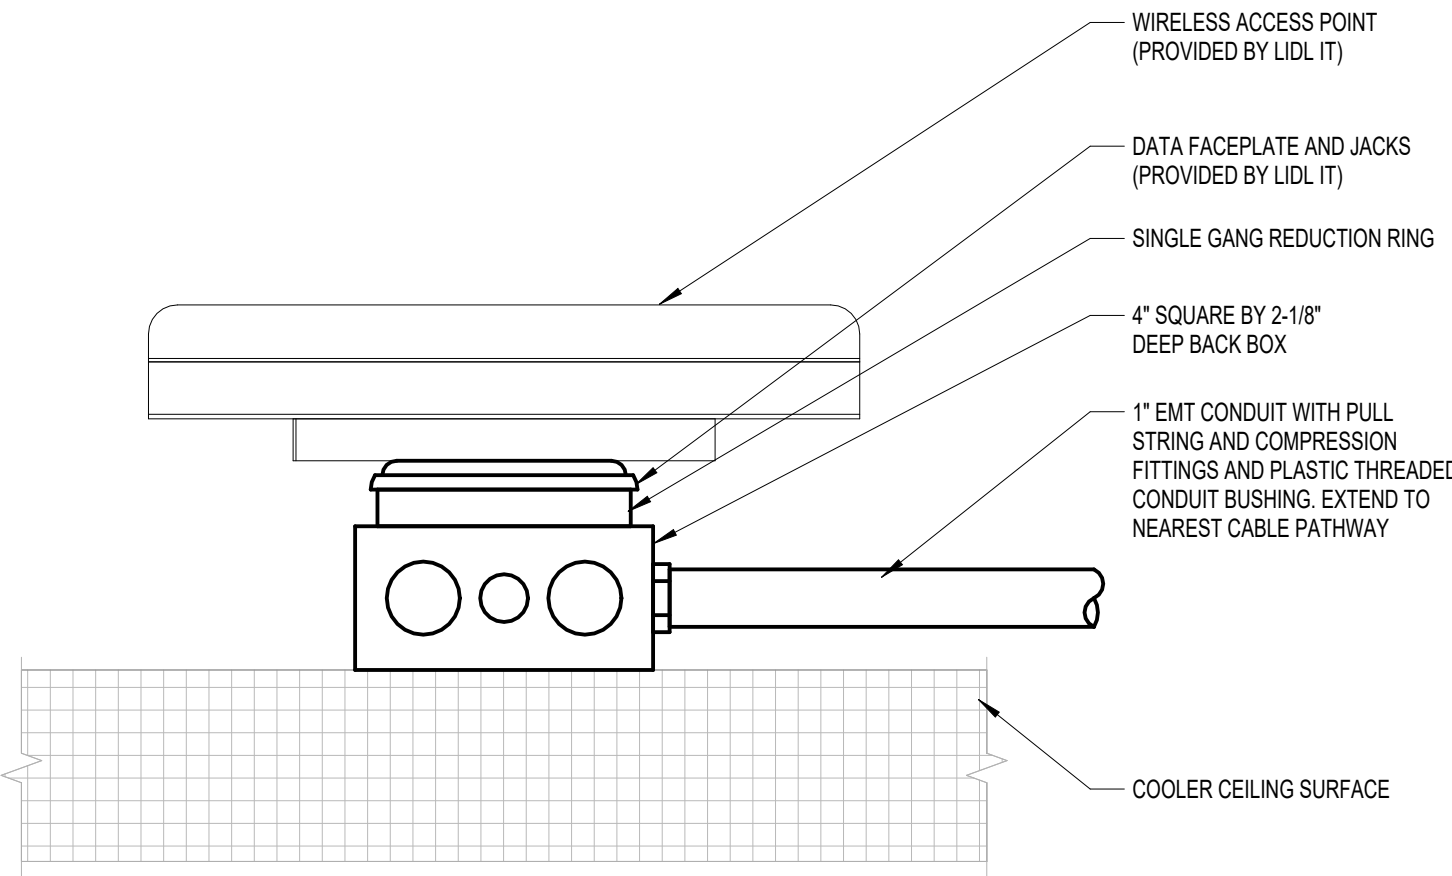


6 BAKERY CEILING MOUNTED CAMERA DETAIL

NTS

3 INTERIOR SURFACE MOUNTED WIRELESS ACCESS POINT DETAIL

NTS

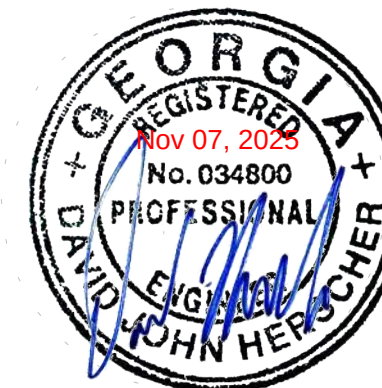

This item has been electronically signed and sealed by David John Henschler using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.


NO.	TAG	PACKAGE #	LOCATION	SWITCHES		OPTION	FANS CONTROLLED					
				LOCATION	QUANTITY		FAN TAG	TYPE	#	HP.	VOLT	FLA
1		DCV-1011	Utility Cabinet Right	04 - Utility Cabinet Right Hood # 1	1 Light 1 Fan	Smart Controls DCV	KEF-1	Exhaust	1	0.500	115	5.6

1. DRAWING FOR REFERENCE ONLY. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING AND INSTALLING ALL CABLE, CONDUCTOR AND CONDUIT ASSOCIATED WITH "FIELD WIRING" ONLY.




JOB/BLD-PROTOTYPE [RIGHT WALL]	
LOCATION	
DATE 10/26/2022	JOB # VARIES
DWG # 7	DRAWN BY BT-32
REV.	SCALE

FIRE SYSTEM NO	TAG	TYPE	SIZE	FLOW POINTS	INSTALLATION	
					SYSTEM	LOCATION ON HOOD
1		TANK FS	4.0	12	FIRE CABINET LEFT	LEFT, HOOD 1



- FACTORY PIPING EXTENDS A MAXIMUM OF 6' ABOVE THE TOP OF THE HOOD.
- THIS FIRE SYSTEM COMPLIES WITH U.L. 300 REQUIREMENTS

Job Name: LIDL-PROTOTYPE-V4 (LEFT CAB)_R1
 Drawn By:
 System Size: TANK-4.0 Total FP required: 3
 Hood # 1 11' 300" Long x 66" Wide x 24" High
 Riser # 1 Size: 12" Dia.
 Hood # 1 Metal Blow-Off Caps Included.

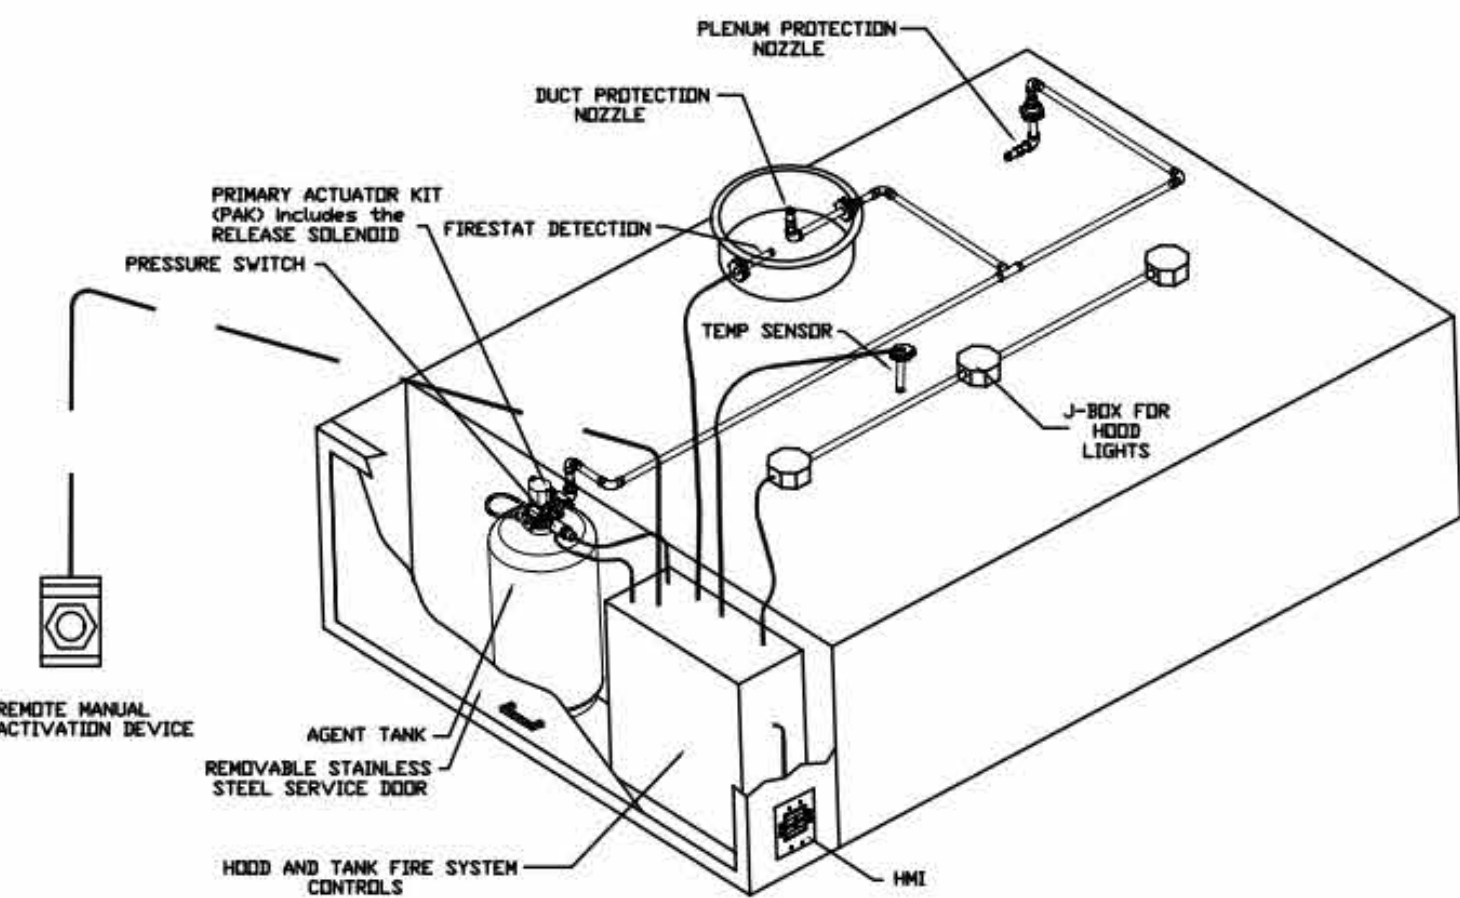

TYPICAL HOOD and TANK FIRE SYSTEM LAYOUT
THIS DETAIL IS GENERIC AND IS NOT INTENDED TO COVER ALL POSSIBLE, ACCEPTABLE SCENARIOS.
REFER TO PROJECT DRAWINGS/SCHEMATICS FOR DETAILS.



<i>JOBLIDL-PROTOTYPE [RIGHT WALL]</i>	
<i>LOCATION</i>	
<i>DATE</i> 10/26/2022	<i>JOB #</i> VARIES
<i>DWG #</i> 4	<i>DRAWN BY</i> BT-32
<i>REV.</i>	<i>SCALE</i>

Technical drawing of the hood assembly, showing the plan view and a detailed view of the control screen.

Plan View - Hood #1
 7' 9.00" LONG 66.24IN-2

Control Screen

Labels and dimensions in the plan view:

- UL LISTED L30 SERIES E85 CANOPY LIGHT FIXTURE - HIGH TEMP ASSEMBLY.
- PRE-PIPED TANK - FIRE SUPPRESSED
- PRE-WIRED HOOD CONTROL PANEL
- UTILITY CABINET
- Dimensions: 66", 3", 9", 46 1/2", 7' 9" DIA./7' 9.00" DIA., 8'-9.00" OVERALL LENGTH, 12"



JOB LIDL-PROTOTYPE [RIGHT WALL]	
LOCATION	
DATE 10/26/2022	JOB # VARIES
DWG # 2	DRAWN BY BT-32
REV.	SCALE



This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

11/07/2025 PERMIT CYCLE 1

PROJECT NUMBER
0650191
PROJECT MANAGER
HENGSTEBECK
PROFESSIONAL
HERSCHER
DRAWN BY
GONZALEZ
CHECKED BY
HERSCHER

ELECTRICAL - BAKERY HOOD DETAILS E606


**PROGRESSIVE
COMPANIES**

Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com



LIDL US, LLC
LIDL 1517 NORCROSS, GA


4990 JIMMY CARTER BLVD. NORCROSS, GA 30093

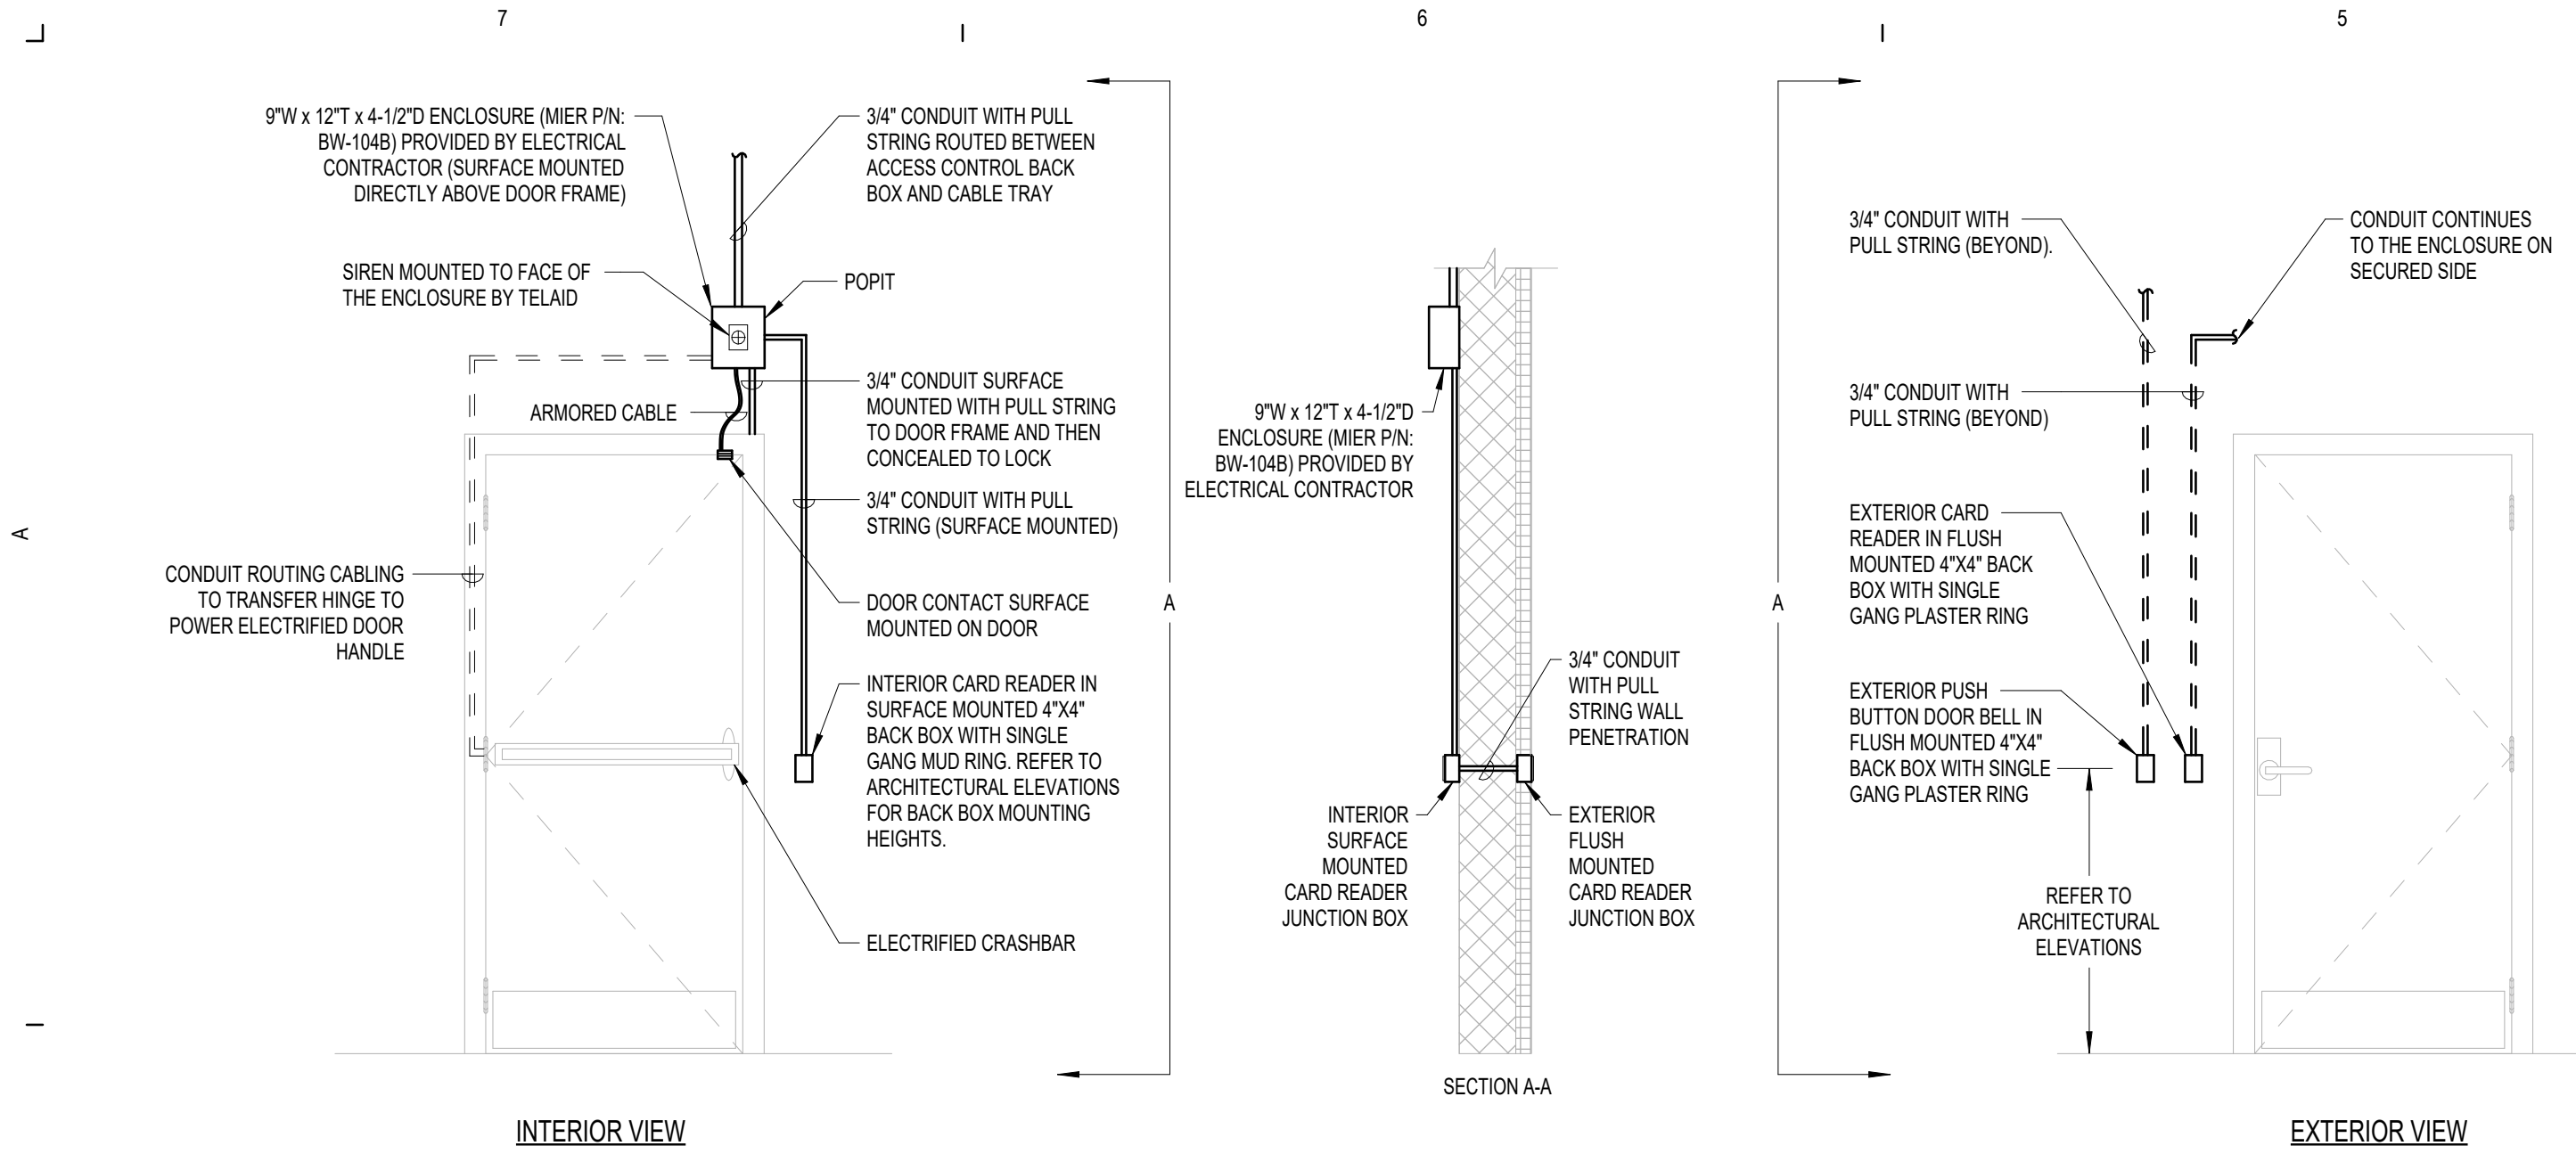

- NOTES:
1. ALL CONDUITS SHALL BE 3/4" UNLESS NOTED OTHERWISE.
 2. REFER TO FLOOR PLANS FOR EXACT DOOR SWING.
 3. REFER TO SHOP DRAWINGS FOR EXACT CONDUIT ROUGH-IN LOCATIONS.
 4. PROVIDE PULL STRINGS IN ALL CONDUITS.

3 SINGLE DOOR - TYPE 4


NTS

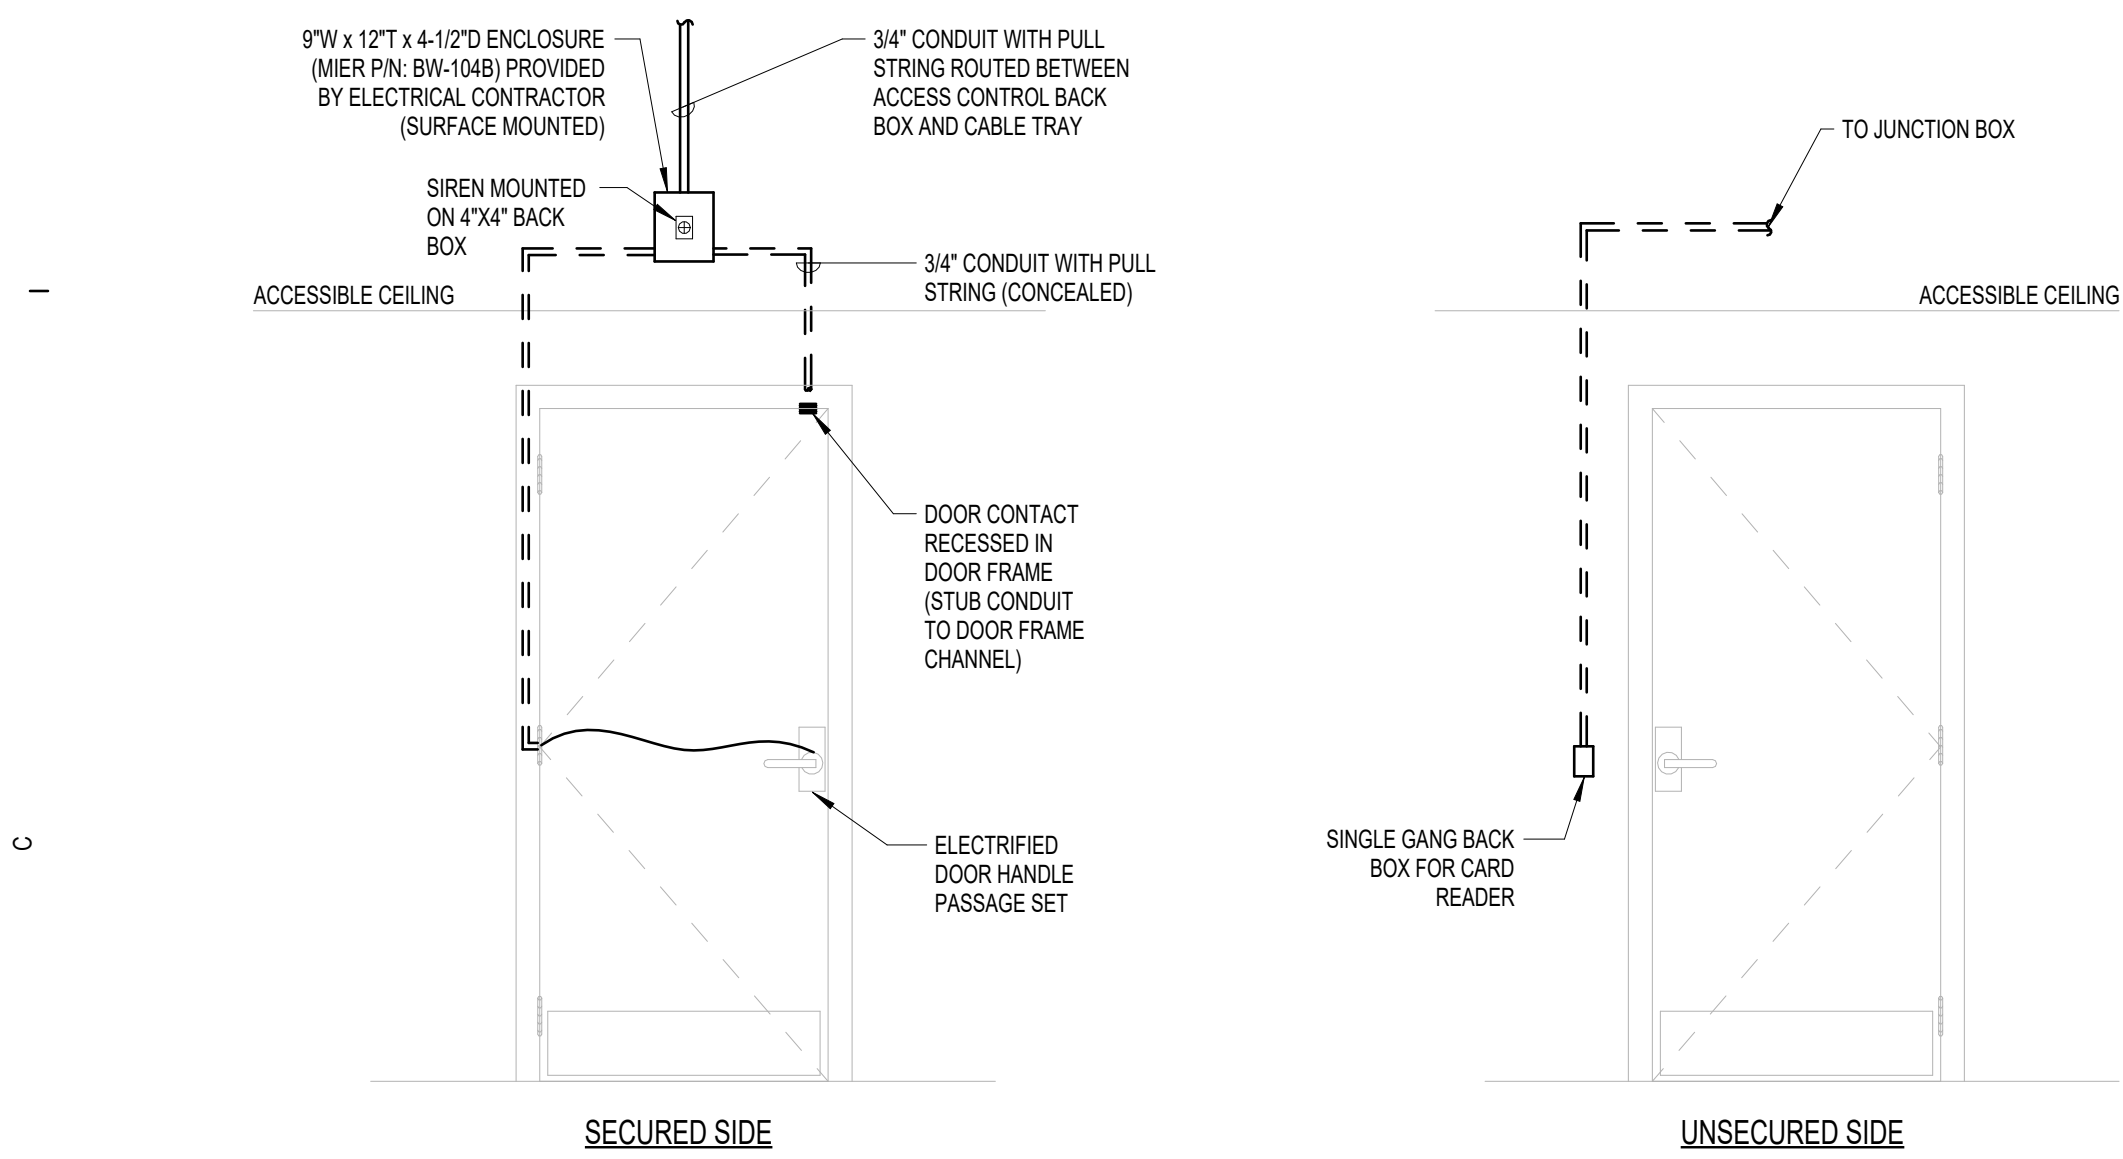

- NOTES:
1. ALL CONDUITS SHALL BE 3/4" UNLESS NOTED OTHERWISE.
 2. REFER TO FLOOR PLANS FOR EXACT DOOR SWING.
 3. REFER TO SHOP DRAWINGS FOR EXACT CONDUIT ROUGH-IN LOCATIONS.
 4. PROVIDE PULL STRINGS IN ALL CONDUITS.

4 SINGLE DOOR WITH CARD READER, SIREN & ELECTRIC STRIKE


NTS

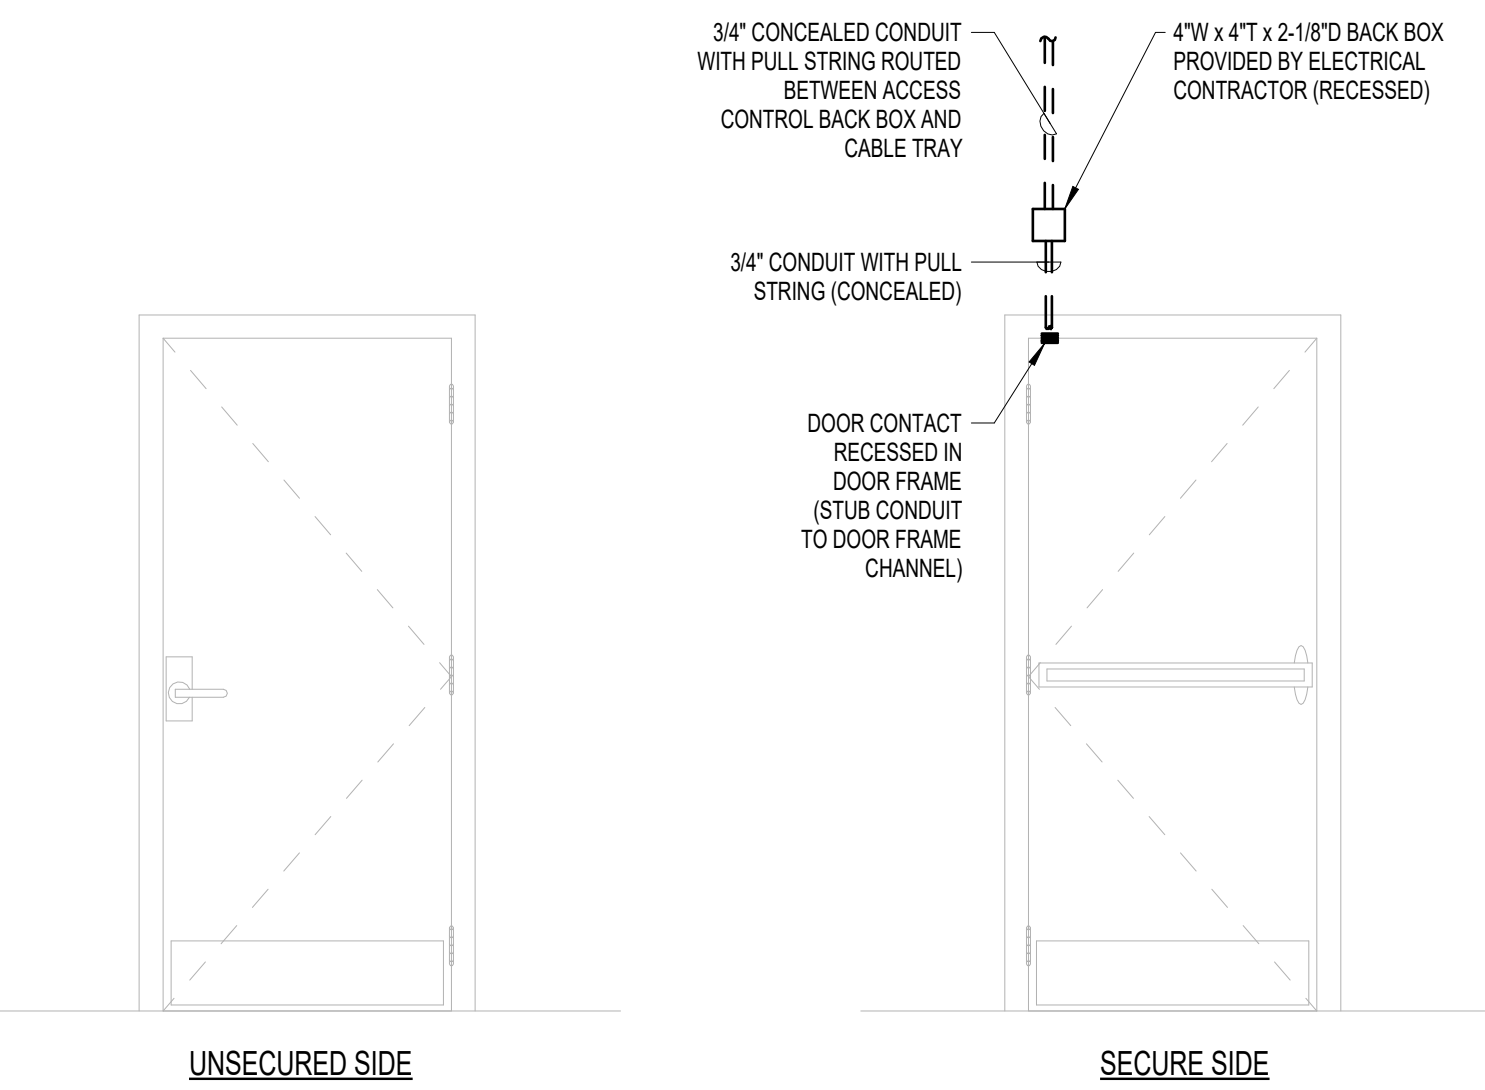

- NOTES:
1. ALL CONDUITS SHALL BE 3/4" UNLESS NOTED OTHERWISE.
 2. REFER TO FLOOR PLANS FOR EXACT DOOR SWING.
 3. REFER TO SHOP DRAWINGS FOR EXACT CONDUIT ROUGH-IN LOCATIONS.
 4. STUB CONDUIT INTO DOOR FRAME.
 5. PROVIDE PULL STRINGS IN ALL CONDUITS.

5 SINGLE DOOR WITH DOOR POSITION SWITCH

NTS

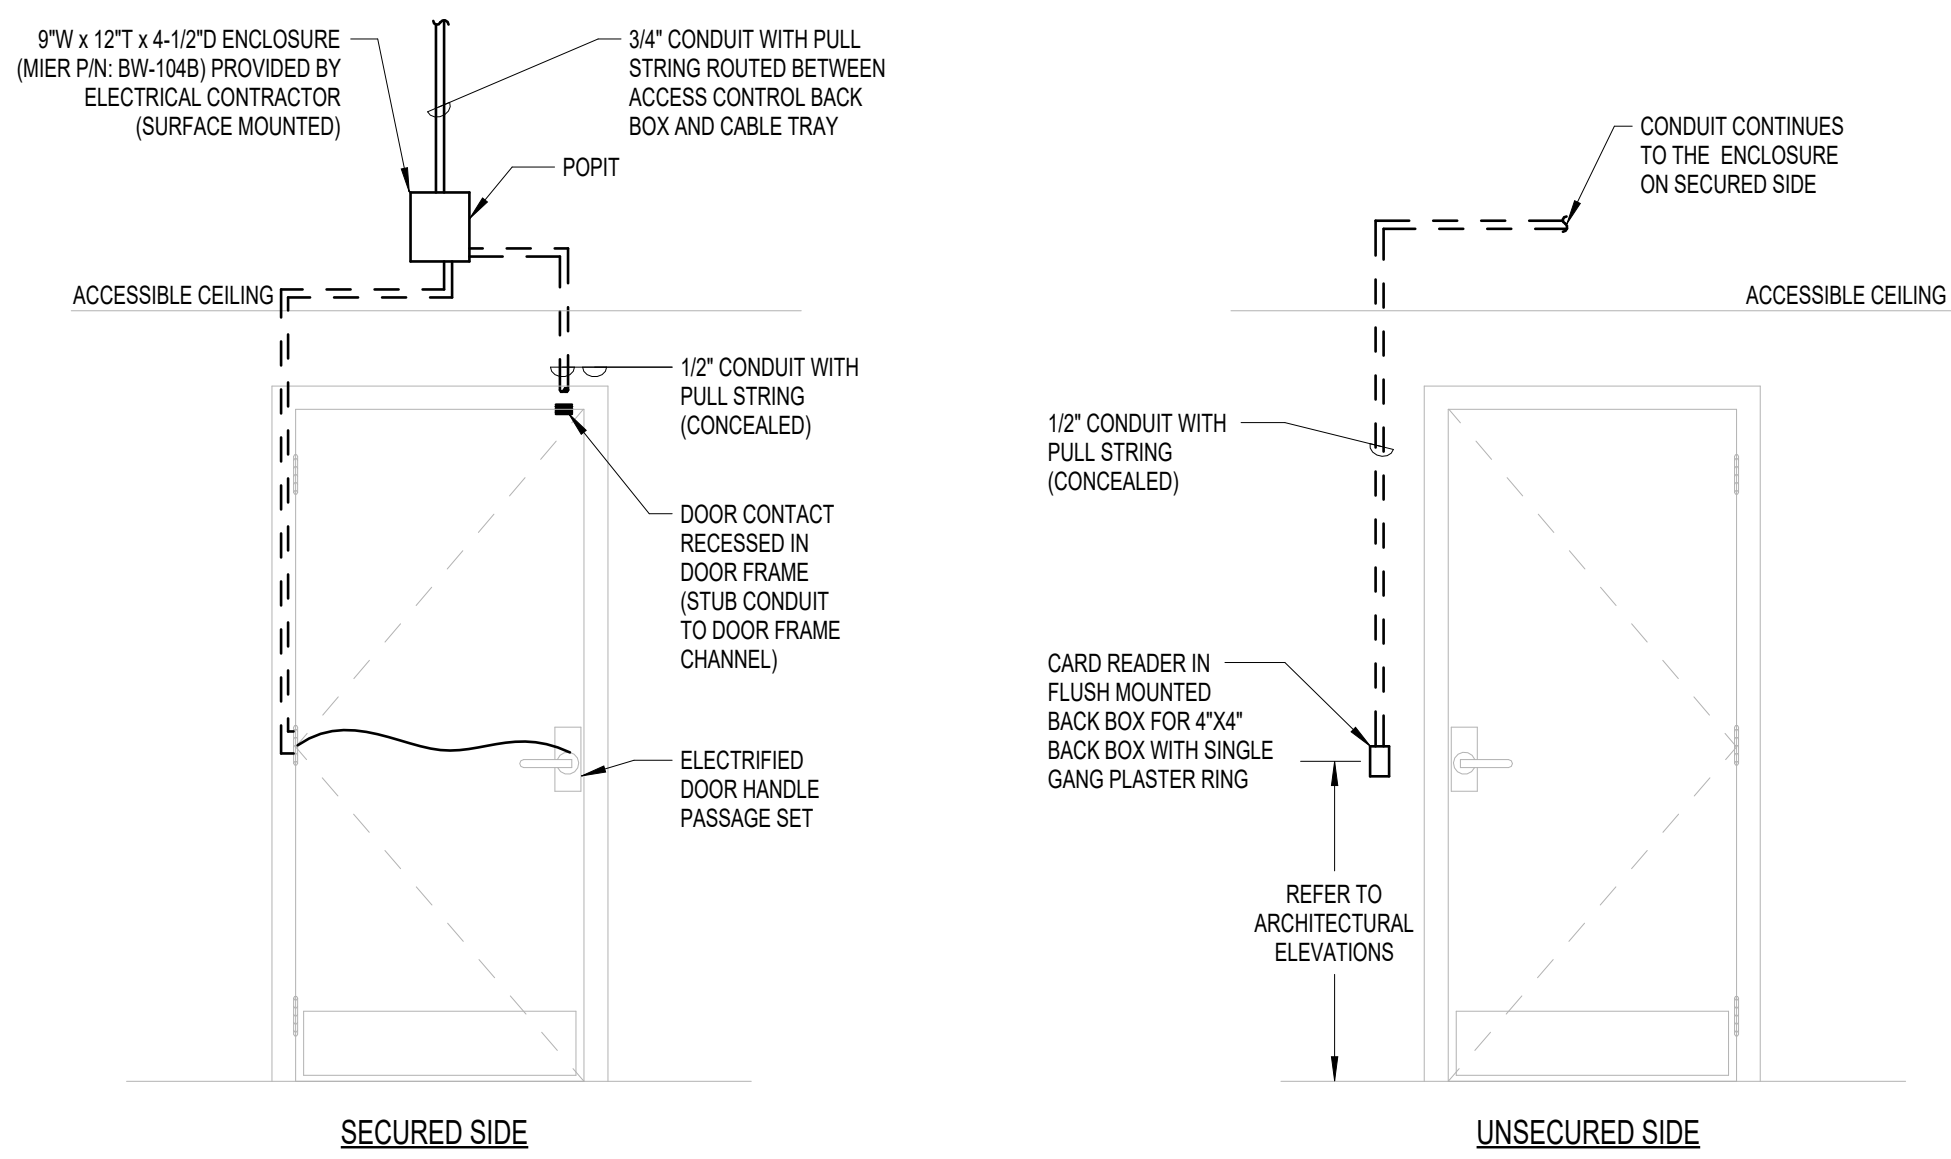

- NOTES:
1. ALL CONDUITS SHALL BE 3/4" UNLESS NOTED OTHERWISE.
 2. REFER TO FLOOR PLANS FOR EXACT DOOR SWING.
 3. REFER TO SHOP DRAWINGS FOR EXACT CONDUIT ROUGH-IN LOCATIONS.
 4. PROVIDE PULL STRINGS IN ALL CONDUITS.

1 SINGLE DOOR WITH CARD READER & ELECTRIC STRIKE

1/8" = 1'-0"



This item has been electronically signed and sealed by David John Herscher using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.