

LIDL US, LLC

LIDL 1517 NORCROSS, GA


4990 JIMMY CARTER BLVD. NORCROSS, GA 30093



RENDERING IS FOR ILLUSTRATIVE PURPOSES ONLY AND NOT TO BE USED FOR CONSTRUCTION

PROJECT DIRECTORY							
OWNER LIDL US OPERATIONS, LLC 3500 SOUTH CLARK STREET ARLINGTON, VA 22202	ARCHITECT PROGRESSIVE COMPANIES 1801 N. GRAHAM STREET SUITE 200 CHARLOTTE, NC 28206	CIVIL ENGINEER CHA 3700 CRESTWOOD PARKWAY SUITE 700 DULUTH, GA 30096	MECHANICAL, PLUMBING, ELECTRICAL, AND FIRE PROTECTION ENGINEER PROGRESSIVE COMPANIES 1801 N. GRAHAM STREET SUITE 200 CHARLOTTE, NC 28206	STRUCTURAL ENGINEER DEVITA & ASSOCIATES 33 VILLA RD SUITE 300 GREENVILLE, SC 29615	BMS PROGRESSIVE COMPANIES 1801 N. GRAHAM STREET SUITE 200 CHARLOTTE, NC 28206	TECHNOLOGY PROGRESSIVE COMPANIES 1801 N. GRAHAM STREET SUITE 200 CHARLOTTE, NC 28206	REFRIGERATION HUSSMANN CORPORATION 13770 RAMONA AVE CHINO, CA 91710

Civil development plan approval: EPN# 2024-00519

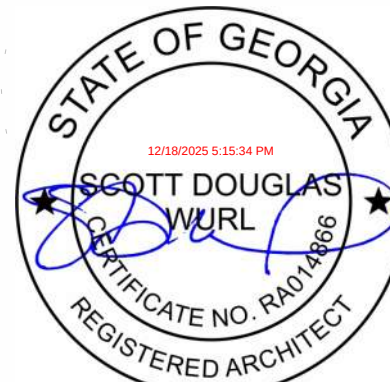

This item has been electronically signed and sealed by Scott Douglas Wurl using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE	11/07/2025	PERMIT CYCLE 1
1	12/17/2025	PERMIT CYCLE 2

PROJECT NUMBER
79650191


PROJECT MANAGER
A. HENGSTEBECK

PROFESSIONAL
D. WURL


DRAWN BY
G. CAMARILLO

CHECKED BY
A. HENGSTEBECK

SYMBOLS LEGEND

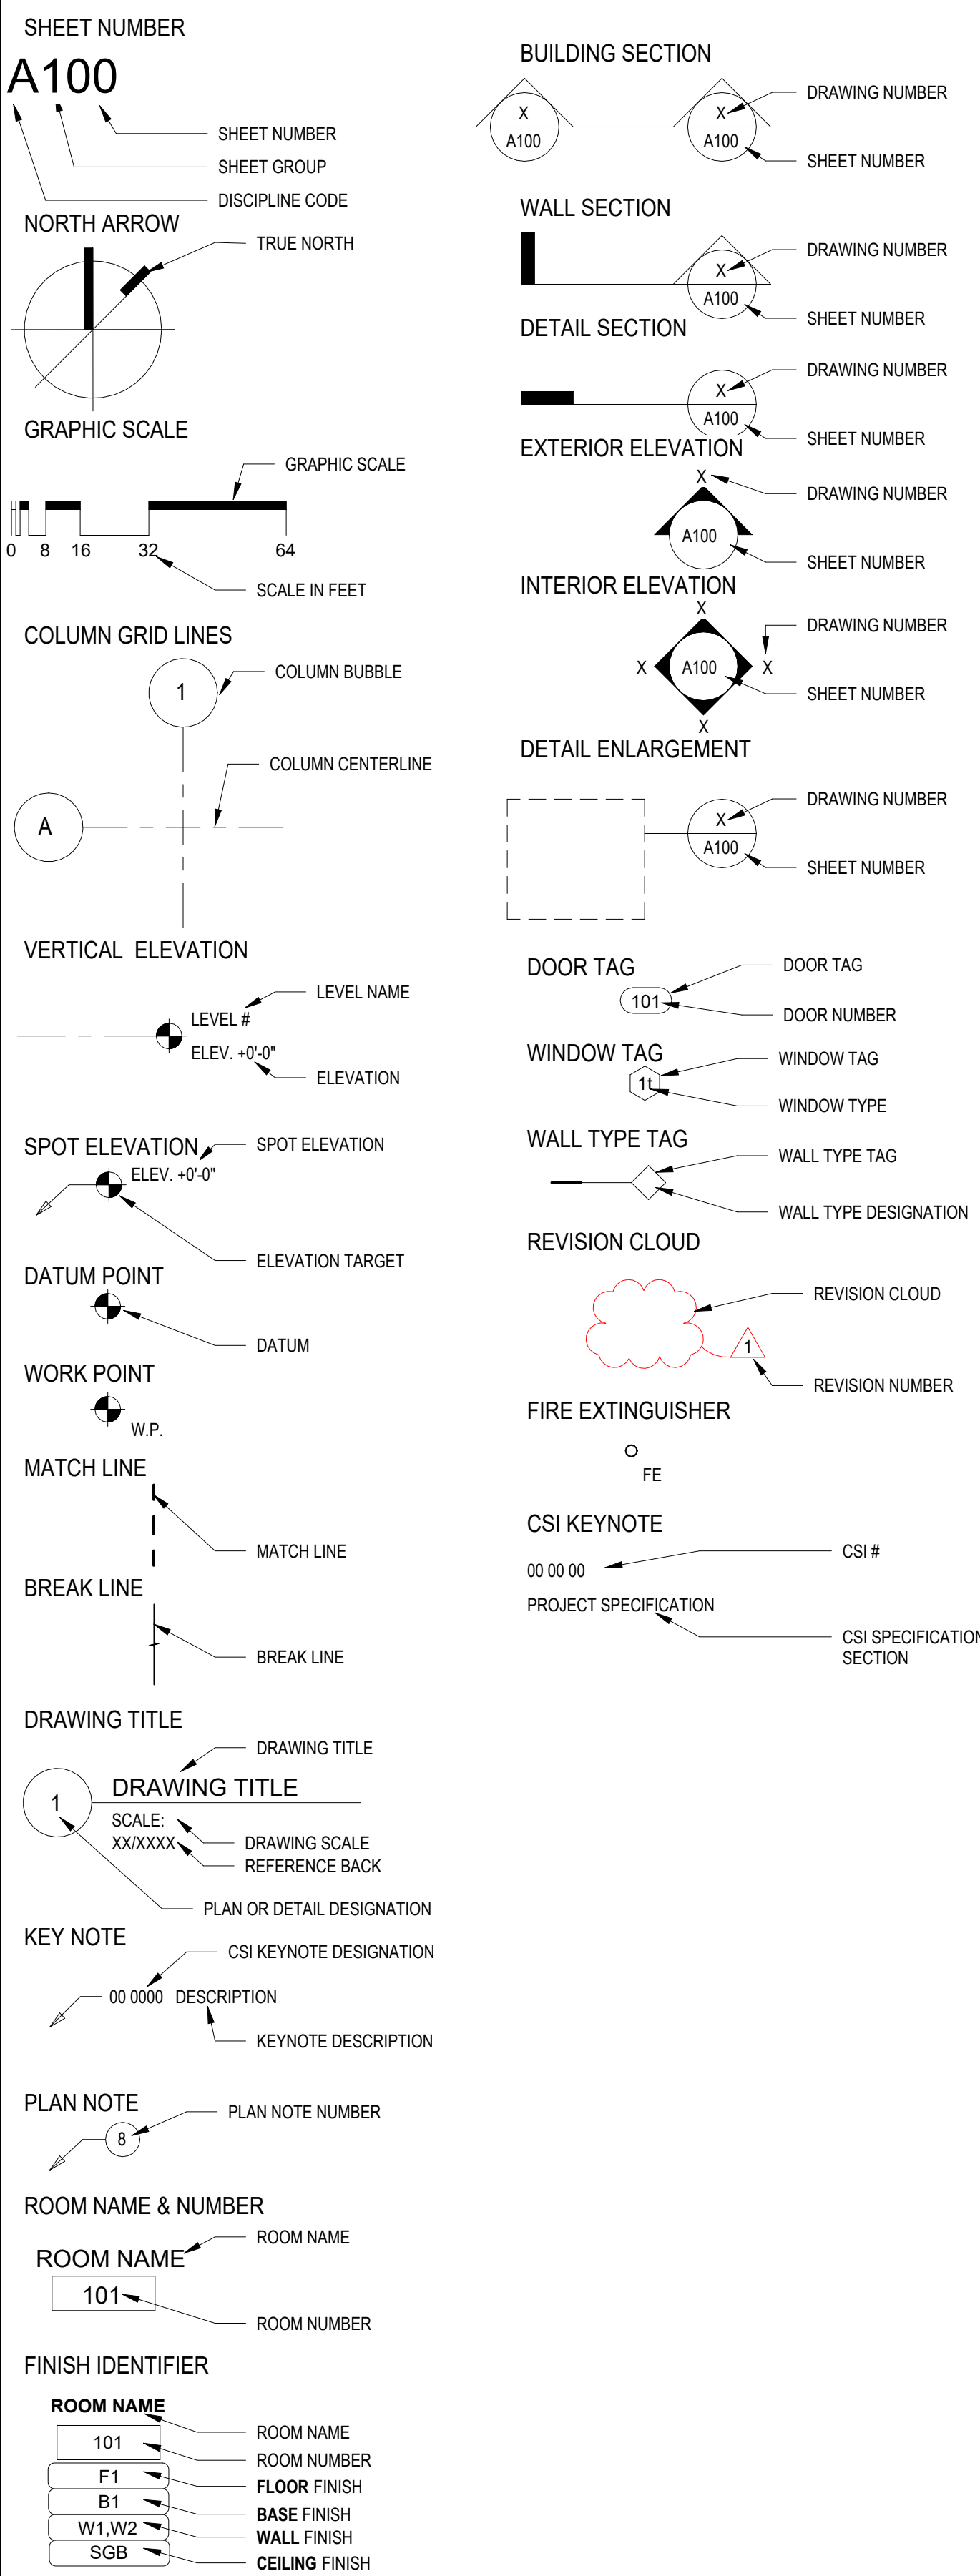

MATERIALS LEGEND

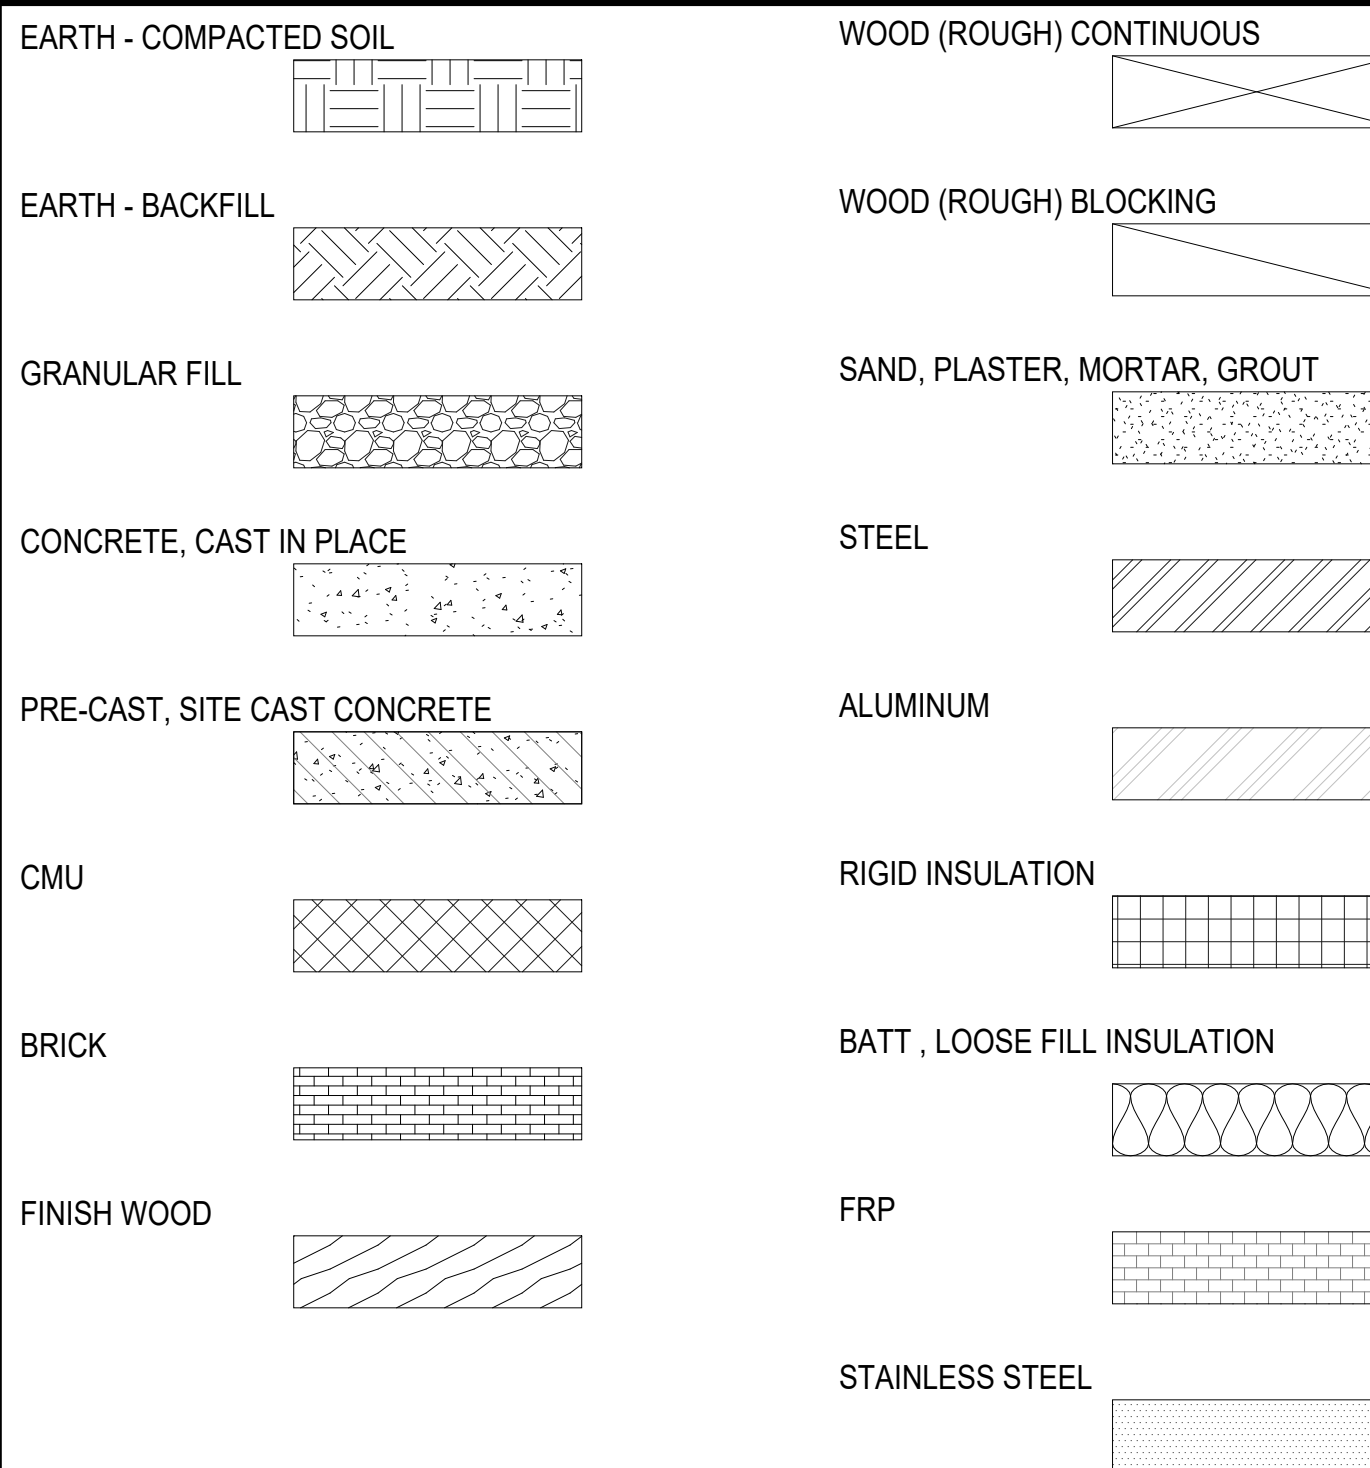

ARCHITECTURAL ABBREVIATIONS

ACT	ACOUSTIC CEILING TILE	TPO	THERMOPLASTIC POLYOLEFIN
ADJ	ADJUSTABLE	TYP	TYPICAL
AFF	ABOVE FINISHED FLOOR	UTO	TOP OF UNDERWRITERS LABORATORY UTILITY
ALT	ALTERNATE	UL	UNDERWRITERS LABORATORY
AN	ANGLE	UNO	UNLESS NOTED OTHERWISE
ARCH	ARCHITECT OR ARCHITECTURAL	VAR	VARIABLE OR VARIES
BD	BOARD	VF	VERIFY IN FIELD
BLDG	BUILDING	VERT	VERTICAL
BLKG	BLOCKING	W	WITH
BOT	BOTTOM	WAP	WALKWAY ACCESS POINT
CL	CENTER LINE	WD	WOOD
CLG	CEILING	W/O	WITHOUT
CLR	CLEAR	WP	WORKING POINT
CON	CONCRETE	WT	WEIGHT
CONN	CONNECTION	X	TIMES
CONST	CONSTRUCTION		
CONT	CONTINUOUS		
CORR	CORRIDOR		
CMU	CONCRETE MASONRY UNIT		
CFIC	CONTRACTOR FURNISHED / CONTRACTOR INSTALLED		
DEPT	DEPARTMENT		
DIA	DIAMETER		
DIM	DIMENSION		
DISP	DISPENSER		
DIV	DIVISION		
DS	DOWNSPOUT		
DWG	DRAWING		
DL	DEADLOAD		
E	EAST		
EACH	EACH		
ELEC	ELECTRIC		
ELEV	ELEVATION		
EMER	EMERGENCY		
ENCL	ENCLOSURE		
ENG	ENGINEER		
EQ	EQUAL		
EQUIP	EQUIPMENT		
EXIST	EXISTING		
EXT	EXTERIOR		
FA	FIRE ALARM		
FABR	FABRICATE		
FDC	FIRE DEPARTMENT CONNECTION		
FDN	FOUNDATION		
FEN	FIRE EXTINGUISHER		
FF	FINISH FLOOR		
FIN	FINISH		
FL	FLUSH OR FLOOR		
FOIC	FURNISHED BY OWNER, INSTALLED BY CONTRACTOR		
F/F	FACE OF FINISH		
FIMP	FACE OF INSULATED METAL PANEL		
FM	FACE OF MASONRY		
F/S	FACE OF STUD		
FT	FIRE PROTECTION		
FTG	FOOTING		
GA	GAUGE		
GALV	GALVANIZED		
GWB	GYPSPUM WALL BOARD		
GYP	GYPSPUM		
HC	ACCESSIBLE		
HD	HEAD		
HT	HEIGHT		
HNI	HOLLOW METAL		
HP	HIGH POINT		
HDWR	HARDWARE		
HW	HARDWOOD		
HOWD	HOLLOW CORE WOOD DOOR		
HORIZ	HORIZONTAL		
HR	HOUR		
HVAC	HEATING, VENTILATION & AIR CONDITIONING		
HW	HARDWARE		
ID	INSIDE DIAMETER		
INCL	INCLUDE		
INSUL	INSULATION		
INT	INTERIOR		
LAM	LAMINATE		
LAV	LAVATORY		
LB	LOAD		
LL	LIVE LOAD		
LT	LIGHT		
MATL	MATERIAL		
MAX	MAXIMUM		
MED	MEDIUM		
MECH	MECHANICAL		
MTL	METAL		
MEZZ	MEZZANINE		
MFR	MANUFACTURER		
MGR	MANAGER		
MIN	MINIMUM		
MISC	MISCELLANEOUS		
MTD	MOUNTED		
N	NORTH		
NAT	NATURAL		
NEG	NEGATIVE		
NIC	NOT IN CONTRACT		
NO (#)	NUMBER		
NOM	NOMINAL		
NRC	NOISE REDUCTION COEFFICIENT		
NTS	NOT TO SCALE		
OC	ON CENTER		
OD	OUTSIDE DIAMETER		
OH	OPPOSITE HAND		
OPNG	OPENING		
OPP	OPPOSITE		
ORIG	ORIGINAL		
OVHD	OVERHEAD		
OZ	OUNCE		
OFICI	OWNER FURNISHED / OWNER INSTALLED		
OFICI	OWNER FURNISHED / CONTRACTOR INSTALLED		
P	PART		
PART BD	PARTICLE BOARD		
PL	PLASTIC LAMINATE		
PLUMB	PLUMBING		
PLYWD	PLYWOOD		
PREFAB	PREFABRICATED		
PROJ	PROJECT		
PT	PRESSURE TREATED OR PORCELAIN TILE		
PVC	POLY(VINYL) CHLORIDE		
RAD	RADIUS		
RB	RESILIENT BASE		
RD	ROOF DRAIN		
REBAR	REINFORCING BAR		
REF	REFERENCE		
REFL	REFLECTED		
REINF	REINFORCED		
RESIL	RESILIENT		
REQD	REQUIRED		
REV	REVISION		
RH	RIGHT HAND		
RM	ROOM		
RO	ROUGH OPENING		
RTU	ROOFTOP UNIT		
S	SOUTH		
SAN	SANITARY		
SC	SOLID CORE		
SCHED	SCHEDULE		
SPEC	SPECIFICATIONS		
SPKR	SPEAKER		
SF	SQUARE FEET		
SOLS	SOLID SURFACE		
SS	STAINLESS STEEL		
STC	SOUND TRANSMISSION CLASS		
STD	STANDARD		
STL	STEEL		
STRUCT	STRUCTURAL		
SUSP	SUSPENDED		
SM	SIMILAR		
TAN	TANGENT		
TECH	TECHNICAL		
TEL	TELEPHONE		
TEMP	TEMPORARY		
TPO	THERMOPLASTIC POLYOLEFIN		
TYP	TYPICAL		
UTO	TOP OF UNDERWRITERS LABORATORY UTILITY		
UL	UNDERWRITERS LABORATORY		
UNO	UNLESS NOTED OTHERWISE		
VAR	VARIABLE OR VARIES		
VF	VERIFY IN FIELD		
VERT	VERTICAL		
W	WITH		
WAP	WALKWAY ACCESS POINT		
WD	WOOD		
W/O	WITHOUT		
WP	WORKING POINT		
WT	WEIGHT		
X	TIMES		

DEFERRED SUBMITTALS

- REFRIGERATION
- BDA SYSTEM (IF REQUIRED)
- SPRINKLER

GENERAL NOTES

- THE DRAWINGS WHICH COMPREHEND THIS SET OF CONSTRUCTION DOCUMENTS ARE ADDRESSED TO THE GENERAL CONTRACTOR AND ARE CONSIDERED TO BE ONE WHOLE. INFORMATION INCLUDED ON ONE SHEET SHALL BE AS BINDING AS IF INCLUDED ON ALL, REGARDLESS OF TRADE ASSIGNMENTS. WHERE A CONFLICT OCCURS WITHIN THESE CONSTRUCTION DOCUMENTS, THE MORE EXPENSIVE OR TIME CONSUMING REQUIREMENT SHALL GOVERN. ANY DOUBT AS TO WHETHER ANY WORK IS WITHIN THE SCOPE OF THE CONTRACT SHALL BE RESOLVED IN FAVOR OF AN INTERPRETATION THAT THE WORK IS WITHIN THE SCOPE OF THE CONTRACT. IMMEDIATELY UPON DISCOVERY OF ANY CONFLICT OF DOCUMENTS IN WRITING, THE ARCHITECT SHALL BE NOTIFIED BY THE CONTRACTOR. UNLESS SPECIFICALLY NOTED OTHERWISE HEREIN, INSTALL MATERIALS, EQUIPMENT, PRODUCTS, AND SYSTEMS FOR THIS PROJECT IN STRICT ACCORDANCE WITH THE MANUFACTURER'S LATEST PUBLISHED SPECIFICATIONS / RECOMMENDATIONS.
- WHERE A DIMENSION IS SPECIFICALLY NOTED WITH A "V" DESIGNATION, THE DIMENSION IS TO BE CONTROLLED BY FIELD VERIFIED CONDITIONS. NOTIFY THE ARCHITECT IMMEDIATELY UPON CONSTRUCTION OF THE ACTUAL DIMENSION. NO REFERENCE OR DESIGNATION WITHIN THESE DOCUMENTS SHALL BE CONSIDERED TO ESTABLISH A CONSTRUCTION TOLERANCE. THE DIMENSIONS ARE PRECISE AS STATED.
- PERFORM WORK IN STRICT ACCORDANCE WITH FEDERAL, STATE AND LOCAL CODES, ORDINANCES, AND OSHA REQUIREMENTS. WHERE REFERENCE IS MADE TO "BUILDING SYSTEMS", THIS SHALL INCLUDE MECHANICAL, ELECTRICAL, PLUMBING, HVAC, FIRE PROTECTION, TELEPHONE, SECURITY, INTERCOM, AND FIRE ALARM / LIFE SAFETY COMPONENTS.
- COORDINATE MOUNTING / INSTALLATION OF LIGHTING FIXTURES, SMOKE DETECTORS, SPRINKLER HEADS AND OTHER DEVICES WITH TYPE OF CEILING TO BE PROVIDED. PROVIDE HANGERS, SUPPORTS, SEISMIC STRUTS AND CLIPS, CUT-OUTS, TRIM RINGS, AND EDGE TRIM REQUIRED FOR A COMPLETE INSTALLATION. CONTRACTOR SHALL PROVIDE ALL MATERIAL AND LABOR REQUIRED TO PRODUCE A COMPLETED FINISHED PROJECT. FAILURE TO INCLUDE ITEMS INDICATED TO BE PROVIDED, THOUGH NOT DETAILED, SHALL NOT CONSTITUTE THE BASIS FOR A CHANGE ORDER.
- ALL CONSTRUCTION PENETRATIONS THROUGH FIRE RATED PARTITIONS SHALL BE FIRE STOPPED PER U.L. LISTED DETAILS COMPLYING WITH APPLICABLE CODES AND COUNTY FIRE MARSHAL REQUIREMENTS. CONTRACTOR SHALL SELECT, PROVIDE AND INSTALL SUCH FIRE STOPPING SYSTEMS / DETAILS AND SHALL BE RESPONSIBLE FOR SOLICITING AND OBTAINING THE NECESSARY APPROVAL(S) FROM THE AUTHORITIES HAVING JURISDICTION.
- WHERE DISSIMILAR METALS WOULD COME IN CONTACT WITH ONE ANOTHER, G.C. SHALL UTILIZE NEOPRENE GASKETS AND / OR WASHERS AS APPROPRIATE TO ENSURE GALVANIC CORROSION OF THE METALS OR FASTENERS IS AVOIDED. SUCH DISSIMILAR METALS INCLUDE BUT ARE NOT LIMITED TO COATED COPPER, STEEL, GALVANIZED STEEL, AND ALUMINUM. AT SUCH CONNECTIONS REQUIRING FASTENERS, STAINLESS STEEL FASTENERS WITH NEOPRENE WASHERS TO ISOLATE THE METALS SHALL BE UTILIZED.
- DIMENSIONS INDICATED ARE TO FINISHED WALL SURFACES, OR COLUMN CENTER LINES, UNLESS NOTED OTHERWISE.
- WORK SHALL INCLUDE ALL LABOR, ASSEMBLIES, AND FINISH WORK INCLUDING ALL PARTS AND MATERIALS NECESSARY TO MAKE A COMPLETE, IN-PLACE, PROPERLY WORKING AND FINISHED INSTALLATION.
- ALL CONTRACTORS SHALL VISIT THE PROJECT TO FAMILIARIZE THEMSELVES WITH SITE CONDITIONS PRIOR TO BIDDING OR CONSTRUCTION. BY SUBMITTING A BID, THE CONTRACTOR AND HIS SUBCONTRACTORS ARE CONFIRMING THAT THEY HAVE VISITED THE SITE AND HAVE INCLUDED IN THEIR BID ANY ADDITIONAL ITEMS OF CONSTRUCTION THAT MAY BE REQUIRED DUE TO EXISTING SITE CONDITIONS.
- PRIOR TO PROCEEDING WITH ANY WORK THAT MAY RESULT IN ADDITIONAL COST OR ADDITIONAL TIME TO THE PROJECT, THE CONTRACTOR SHALL DETERMINE THE ADDITIONAL COST OR TIME OR THE EXACT COSTS OR TIME CANNOT BE DETERMINED, THE CONTRACTOR SHALL MAKE HIS MOST REASONABLE ESTIMATE (AN ESTIMATE OF THE WORST CASE) AND SUBMIT THE INFORMATION TO THE OWNERS REPRESENTATIVE FOR APPROVAL. SHOULD THE CONTRACTOR FAIL TO ADVISE THE OWNERS REPRESENTATIVE PRIOR TO PROCEEDING WITH THE WORK, ADDITIONAL COST OR TIME SHALL NOT BE APPROVED.
- BUILDING SPRINKLER SYSTEMS SHALL COMPLY WITH ALL APPLICABLE CODES, NFPA 13, AND THE WFO FIRE PROTECTION ENGINEER. EXACT LAYOUT OF SPRINKLER HEADS IN AREAS WITH GYPSPUM BOARD CEILINGS AND SOFFITS, ETC., SHALL BE APPROVED BY THE ARCHITECT PRIOR TO PROCEEDING WITH WORK.
- REMOVE ALL CONSTRUCTION DEBRIS AS REQUIRED TO MAINTAIN A CLEAN ENVIRONMENT AND TO PREVENT THE POSSIBILITY OF ACCIDENT OR FIRE. COORDINATE REMOVAL WORK WITH OWNER IN DEBRIS REMOVAL. MAINTAIN WORKING FIRE EXTINGUISHERS IN THE PROJECT AREA DURING CONSTRUCTION WHEN SPRINKLER SYSTEM IS UNDERGOING MODIFICATIONS.
- HEIGHTS OF ELECTRICAL, DATA, AND COMMUNICATION OUTLETS WHEN SURROUNDED BY OR ABUTTING MILLWORK SHALL BE CONFIRMED WITH THE ARCHITECT PRIOR TO ROUGH-IN AND FABRICATION.
- DOWN LIGHTS, SPRINKLER HEADS, SMOKE DETECTORS AND EXIT SIGNS SHALL BE LOCATED IN THE CENTER OF THE CEILING TILE, UNLESS OTHERWISE NOTED.
- GC TO SEAL AROUND ALL VISIBLE PIPES AND AROUND ALL FURNITURE LIKE REFRIGERATE CASES ON THE WALLS.

GENERAL ACOUSTICAL NOTES

- ELECTRICAL AND SERVICE OUTLETS FOR ADJACENT ROOMS ARE TO BE POSITIONED A MINIMUM OF 2 FEET APART AND IN SEPARATE STUD CAVITIES.
- PARTITIONS ARE TO BE BUILT FULL HEIGHT FROM BUILDING FLOOR TO BUILDING STRUCTURE ABOVE, UNLESS OTHERWISE DETAILED IN SPECIFIC PARTITION TYPE.
- PROVIDE CONTINUOUS ACOUSTICAL (NON-HARDENING) CAULKING BEADS ON EACH SIDE OF THE BOTTOM STUD RUNNER AT THE THREE WAY INTERSECTION BETWEEN THE RUNNER, FLOOR AND DRYWALL.
- PROVIDE ACOUSTICAL CAULKING TO CLOSE GAPS BETWEEN SERVICE OUTLETS (ELECTRICAL, TELEPHONE, DATA, ETC) AND DRYWALL. PROVIDE ACOUSTICAL SEALANT AT THE CONNECTION TO THE STRUCTURE ABOVE.
- MULTIPLE LAYERS OF DRYWALL ARE TO BE APPLIED WITH STAGGERED JOINTS.
- PARTITIONS SHALL BE CUT AND SEALED AROUND ALL STRUCTURAL ELEMENTS WITH ACOUSTICAL SEALANT.
- ALL PENETRATIONS LESS THAN 1.5 FT VIDE ARE TO BE BETWEEN FULL HEIGHT STUDS, OTHERWISE STUDS ARE TO BE FULLY FRAMED AROUND PENETRATION MAINTAINING A MINIMUM 1" GAP AROUND THE PENETRATING ELEMENT.
- ALL GAPS AROUND PENETRATIONS (PIPES, DUCTS, CONDUIT, ETC) SHALL BE SEALED AS FOLLOWS. NOTE THAT ANY FIRE RATED ASSEMBLY CONSTRUCTION REQUIREMENTS SHALL TAKE PRECEDENCE OVER ACOUSTICAL CONSIDERATIONS. 1" OR LESS GAP FILLED TIGHTLY WITH BATT INSULATION AND/OR FIRE SAFING. GAPS LARGER THAN 1" FILLED WITH HIGH DENSITY PUTTY SUCH AS NELSON FSP OR CLK SEALANT, 1" M. CLIPPER "DUKALAC", 3M "MODULAIR PUTTY". PROVIDE AND INSTALL ALL DETAILS AND MATERIALS AS REQUIRED BY DRYWALL MANUFACTURER TO ACHIEVE LABORATORY SOUND TRANSMISSION CLASS (STC) RATINGS INDICATED.

GENERAL CEILING NOTES

- CONTRACTOR TO COORDINATE MOUNTING FLANGES OF ALL FIXTURES WITH CEILING TYPE TO RECEIVE FIXTURES.
- CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF ALL MEP AND SPRINKLER WORK WITH HEIGHT AND TYPE OF CEILING FINISHES.
- REFER TO FINISH PLANS FOR CEILING FINISH DESIGNATIONS.
- COORDINATE W/MEP (ELECTRICAL, PLUMBING, DRAINAGE) FOR ACCESS PANEL LOCATIONS. NOT ALL ARE SHOWN ON A.C.P.
- FOR CURVED WALLS AND BULKHEADS, FOLLOW G.D. MANUFACTURER'S WRITTEN GUIDELINES FOR BULKHEAD APPLICATIONS

GENERAL PARTITION NOTES

- RATED WALL ASSEMBLIES AND "SOUND" WALL ASSEMBLIES SHALL RUN CONTINUOUS AROUND ROOMS INDICATED AND SHALL TAKE PRECEDENCE OVER ADJACENT AND/OR PERPENDICULAR WALLS. RATED WALL ASSEMBLIES SHALL BE CONSTRUCTED PER THE REQUIREMENTS OF THE U.L. ASSEMBLY INDICATED.
- THE CONTRACTOR SHALL BEAR THE RESPONSIBILITY OF ALIGNING THE FACE OF GYPSPUM BOARD AND/OR GYPSPUM SHEATHING WHERE THE WALL THICKNESS VARIES DUE TO DIFFERENT PARTITION TYPES. TRANSITIONS ON THE OPPOSITE SIDE OF THESE WALLS SHALL BE HIDDEN AT INTERSECTIONS OF OTHER PARTITIONS OR CORNERS SUCH THAT NO IRREGULARITY EXISTS IN THE SURFACE OF THE WALL.
- PROVIDE 5/8" G.M.W.R. BOARD IN LIEU OF GYPSPUM BOARD ON WALL SURFACES TO RECEIVE CERAMIC OR PORCELAIN TILE.
- ALL FIRE & OR SMOKE BARRIER WALLS SHALL BE SEALED SMOKE-TIGHT (VIA PLASTER/FIRE STOP SEALANT OVER CONT. BACKING ROD) AT THE ENTIRE PERIMETER (FLOOR, ROOF & WALLS). PROVIDE MINERAL WOOL INSULATION IN INTERSTITIAL SPACE BEHIND SEALANT AND BACKING ROD, INCLUDING FLOOR AND ROOF DECK FLUTES ABOVE MET. WALL CHANNELS AT TOP OF WALL.
- ALL FIRE & OR SMOKE BARRIER WALLS SHALL BE CONSTRUCTED CONT. THROUGH BLDG. SOFFITS, OVERHANGS AND ANY MISC. INTERSTITIAL SPACES (INCLUDING OTHER PARTITIONS). PROVIDE SEALING OF UTILITY PENETRATIONS OF SMOKE BARRIER WALLS.
- THE GYPSPUM BOARD GAP AT THE FLOOR SHALL NOT EXCEED 1/4" AND SHALL NOT BE IN CONTACT WITH THE SLAB.
- NO GYP. BD. SHALL SPAN OVER 16" W/O FRAMING SUPPORT. ADDITIONAL SUPPORT WILL BE NECESSARY AT ALL OPENINGS AND FL. & CLG. JTS.
- ALL GYPSPUM WALL BOARD SHALL BE INSTALLED VERTICALLY IN SINGULAR CONT. PIECES WITH NO BUTTED END JOINTS.
- PARTITION DESIGNATION TAG SHALL ALWAYS TAKE PRECEDENCE OVER GRAPHIC REPRESENTATION.
- UNLESS NOTED OTHERWISE, PARTITION DESIGNATION TAGS REPRESENT THE ENTIRE LENGTH OF THE PARTITION IN WHICH IT IS LOCATED.
- ALL PARTITIONS SHALL BE CONSTRUCTED PER THE GUIDELINES INDICATED IN THE ACOUSTICAL CONSTRUCTION NOTES.
- ALL PARTITIONS SHALL BE PARTITION TYPE "1" UNLESS NOTED OTHERWISE.
- ALL METAL STUDS INDICATED IN DETAILS SHALL BE 3-5/8" METAL STUDS AT 16" ON CENTER, UNLESS NOTED OTHERWISE (SEE PARTITION TYPES).
- METAL STUD CONTRACTOR SHALL BE, OR SHALL CONSULT WITH, A PROFESSIONAL STRUCTURAL ENGINEER REGISTERED IN THE STATE. METAL STUD CONTRACTOR SHALL BEAR THE RESPONSIBILITY TO ENGINEER THE STUD GAUGES AND ATTACHMENT METHODS NECESSARY TO PROVIDE THE FRAMING IN THE CONFIGURATIONS INDICATED. MINIMUM STUD GAUGE IS 22 GA. HOWEVER, ALL STUD GAUGES SHALL BE DETERMINED BY THE METAL STUD CONTRACTOR AND SHALL BE APPROPRIATE FOR THE APPLICATION. SUBMIT SIGNED AND SEALED FRAMING SHOP DRAWINGS FOR THE VARIOUS CONDITIONS INDICATING THE STUD SIZE, GAUGE AND CALCULATIONS TO SUPPORT THE DESIGN.
- SEE TYPICAL DETAILS FOR FRAMING AROUND OBSTRUCTIONS.

GENERAL FINISH NOTES

- PROVIDE 24" X 24" WALL SAMPLE OF ALL PAINT COLORS FOR OWNER REVIEW AND APPROVAL. PRIOR TO PURCHASE/INSTALLATION.
- PROVIDE 24" SAMPLE OF ALL WOOD CEILING, WALL, FLOOR, AND BASE PROFILES FOR OWNER APPROVAL PRIOR TO PURCHASE/INSTALLATION.
- PROVIDE ALL FINISH ACCESSORY PIECES REQUIRED FOR FULL AND COMPLETE INSTALLATION OF FINISH MATERIALS.
- ALL PAINTED GYP. BD. CEILINGS TO HAVE A FLAT FINISH, U.N.O.
- ALL PAINTED WALLS TO HAVE AN EGGSHELL FINISH, U.N.O.
- INTERIOR FINISHES SHALL BE AT LEAST EQUAL TO (OR BETTER THAN) CLASS B WHERE INSTALLED IN CORRIDORS AND EXIT PASSAGEWAYS, AND CLASS C WHERE INSTALLED IN ROOMS / ENCLOSED SPACES.
- PROVIDE 3 PERCENT OVERAGE ON FINISH MATERIAL QUANTITIES AS ATTIC STOCK. COORDINATE STORAGE WITH OWNER PRIOR TO PROJECT COMPLETION.
- REFER TO SPECIFICATIONS AND FINISH SCHEDULE FOR ADDITIONAL FINISH INFORMATION.
- G.C. TO PROVIDE TRANSITION STRIPS AND THRESHOLDS AS REQUIRED. ARCHITECT TO APPROVE.
- ALL FINISH LOCATIONS AND START/STOP POINTS TO BE REVIEWED BY ARCHITECT PRIOR TO INSTALLATION.
- USE LOW VOC ADHESIVE, FOLLOWING MANUFACTURERS RECOMMENDED PRODUCTS, FOR ALL CARPET AND LAMINATE FLOORING.
- USE LOW VOC PAINTS, AS SPECIFIED, THROUGHOUT, U.N.O.
- ADD CAULKING JOINT TO ALL DISSIMILAR MATERIALS.

GENERAL ACCESSIBILITY NOTES

- IN ALL CASES THE GENERAL CONTRACTOR SHALL BEAR RESPONSIBILITY FOR COMPLIANCE WITH THE CLEARANCES AND DIMENSIONS INDICATED ON THE ACCESSIBILITY STANDARDS DRAWING AND WITHIN THE BALANCE OF THE CONTRACT DOCUMENTS.
- THE SPECIFIC DIMENSIONS AND / OR RANGES INDICATED IN THE ACCESSIBILITY STANDARDS DRAWING ARE A REGULATORY REQUIREMENT; NO ADDITIONAL TOLERANCES EITHER PLUS OR MINUS WILL BE ACCEPTED.
- THE FULL TEXT OF ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES MAY BE FOUND ON THE ICC WEBSITE.

DRAWING INDEX

LIST OF SHEETS

GENERAL	COVER SHEET
G101	GENERAL NOTES
G102	ARCHITECTURAL SITE PLAN
G103	ARCHITECTURAL SITE DETAILS
G104	LIFE SAFETY PLAN
G105	TYPICAL ACCESSIBILITY STANDARDS
G106	WALL AND PARTITION TYPES
G107	RATED ASSEMBLIES
G108	COMCHECK
G109	NATIONAL ACCOUNT LIST AND RESPONSIBILITY MATRIX

ARCHITECTURE

A101	FLOOR PLAN
A102	REFLECTED CEILING PLAN
A103	ROOF PLAN
A104	BUILDING OUTLINE PLAN
A105	FINISH AND RAM PROTECTION PLAN
A200	EXTERIOR ELEVATIONS
A300	BUILDING SECTIONS
A301	BUILDING SECTIONS
A302	WALL SECTIONS
A303	WALL SECTIONS
A304	WALL SECTIONS
A305	WALL SECTIONS
A306	WALL SECTIONS
A400	ENLARGED PLANS & INTERIOR ELEVATIONS
A401	ENLARGED PLANS & INTERIOR ELEVATIONS
A402	INTERIOR ELEVATIONS
A403	INTERIOR ELEVATIONS
A404	INTERIOR ELEVATIONS
A405	INTERIOR ELEVATIONS
A501	INTERIOR DETAILS
A502	CASEWORK DETAILS
A600	VERTICAL CIRCULATION
A601	PLAN DETAILS
A602	PLAN DETAILS
A603	PLAN DETAILS
A604	PLAN DETAILS
A605	FOUNDATION DETAILS
A606	FOUNDATION AND SILL DETAILS
A607	ROOF SECTION DETAILS
A608	ROOF SECTION DETAILS
A609	CORP DETAIL
A610	ROOF PENETRATIONS
A611	EXTERIOR DETAILS
A700	WINDOW ELEVATIONS & DETAILS
A701	STOREFRONT DETAILS
A702	DOOR SCHEDULE AND ELEVATIONS
A703	DOOR DETAILS
A801	FIXTURE PLAN
A802	POWER POLE AND FLOOR DRAIN PLAN
A803	POWER POLE DETAILS

STRUCTURAL


S001	GENERAL NOTES
S002	ISOMETRICS
S101	GROUND FLOOR AND FOUNDATION PLAN
S102	ROOF FRAMING PLAN
S200	STRUCTURAL ELEVATIONS
S300	FOUNDATION AND CONCRETE DETAILS
S301	FOUNDATION AND CONCRETE DETAILS
S400	MASONRY DETAILS
S500	STEEL DETAILS
S501	STEEL DETAILS
S502	STEEL DETAILS
S503	STEEL DETAILS

MECHANICAL

M000	SYMBOLS LIST AND GENERAL NOTES - MECHANICAL
M101	MECHANICAL PLAN
M102	ENLARGED MECHANICAL PLAN
M103	ROOF MECHANICAL PLAN
M500	MECHANICAL SCHEDULES
M600	MECHANICAL DETAILS
M601	MECHANICAL DETAILS
M602	MECHANICAL - BAKERY HOOD DETAILS
M603	COMCHECK - MECHANICAL
M604	COMCHECK - MECHANICAL

LIST OF SHEETS


PLUMBING	SYMBOLS LIST AND GENERAL NOTES - PLUMBING
P000	UNDERGROUND - PLUMBING PLAN
P101	PLUMBING PLAN
P102	ENLARGED PLUMBING PLAN
P500	PLUMBING SCHEDULES
P501	PLUMBING DETAILS
ELECTRICAL	SYMBOLS LIST AND GENERAL NOTES - ELECTRICAL
E000	ELECTRICAL SITE PLAN
E101	GROUND FLOOR - ELECTRICAL POWER PLAN
E102	GROUND FLOOR - CABLE WIREWAY PLAN
E103	ROOF - ELECTRICAL PLAN
E200	COMCHECK - ELECTRICAL
E201	GROUND FLOOR - LIGHTING PLAN
E202	LIGHTING CONTROL S & SCHEDULES
E203	ELECTRICAL - LIGHTING CONTRACTOR DETAIL
E300	ENLARGED ELECTRICAL DRAWINGS
E301	ENLARGED ELECTRICAL DRAWINGS
E400	ELECTRICAL RISER DIAGRAMS
E401	ELECTRICAL - INTERFERING DETAIL
E500	ELECTRICAL SCHEDULES - POWERED EQUIPMENT
E501	ELECTRICAL SCHEDULES
E502	ELECTRICAL SCHEDULES
E600	ELECTRICAL DETAILS
E601	ELECTRICAL DETAILS
E602	ELECTRICAL - PATHWAY DETAILS
E603	ELECTRICAL - PATHWAY DETAILS
E604	ELECTRICAL - PATHWAY DETAILS
E605	ELECTRICAL - PATHWAY DETAILS
E606	ELECTRICAL - BAKERY HOOD DETAILS
E607	DOOR DETAILS - ELECTRICAL
FIRE ALARM	
FA101	GROUND FLOOR - FIRE ALARM PLAN - FOR REFERENCE ONLY
FA102	FIRE ALARM - GRAPHIC PANEL - FOR REFERENCE ONLY
FIRE PROTECTION	
FP000	GENERAL FIRE PROTECTION INFORMATION - FOR REFERENCE ONLY
FP101	FIRE PROTECTION PLAN - FOR REFERENCE ONLY
FP500	FIRE PROTECTION DETAILS - FOR REFERENCE ONLY
BMS	
BMS-000	BMS SYMBOLS, NOTES & ABBREVIATIONS
BMS-101	BMS FLOOR PLAN
BMS-102	BMS ROOF PLAN
BMS-401	BMS NETWORK LAYOUT
BMS-402	RTU-1 CONTROL DETAILS
BMS-403	RTU-2,3,4 CONTROL DETAILS
BMS-404	EXHAUST FANS & AC UNIT CONTROLS
BMS-405	INPUT-OUT POINT CONTROLS
BMS-406	CONTROL DETAILS
TECHNOLOGY	
T000	SYMBOLS LIST AND GENERAL NOTES - TECHNOLOGY
T101	GROUND FLOOR - TECHNOLOGY PLAN
T201	GROUND FLOOR - SECURITY PLAN
T300	ENLARGED TECHNOLOGY PLANS
T600	TECHNOLOGY DETAILS
T601	TECHNOLOGY DETAILS
T602	TECHNOLOGY DETAILS

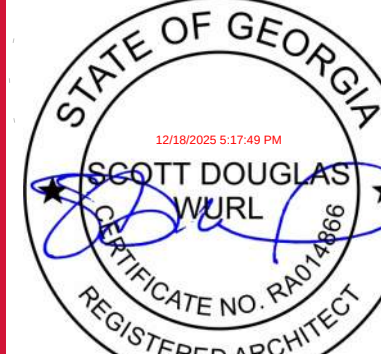


This item has been electronically signed and sealed by Scott Douglas Wurl using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.





B2 SITE LOCATION MAP
1/4" = 1'-0"

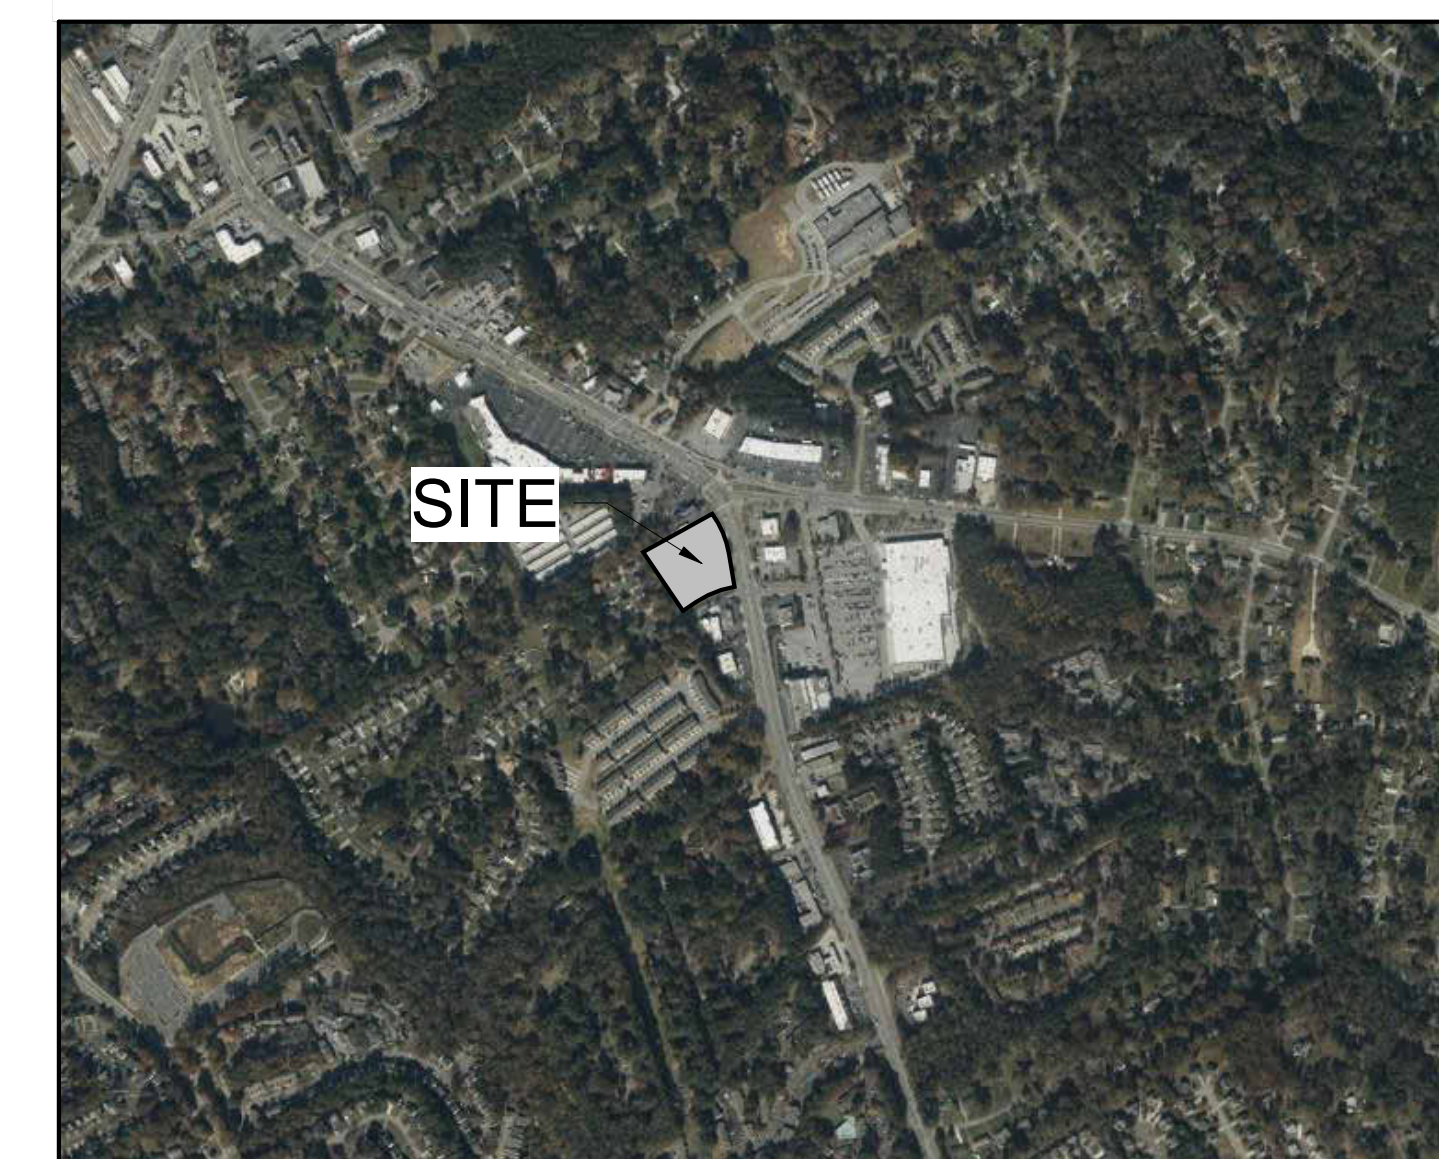


C2 SITE VICINITY MAP
1/4" = 1'-0"

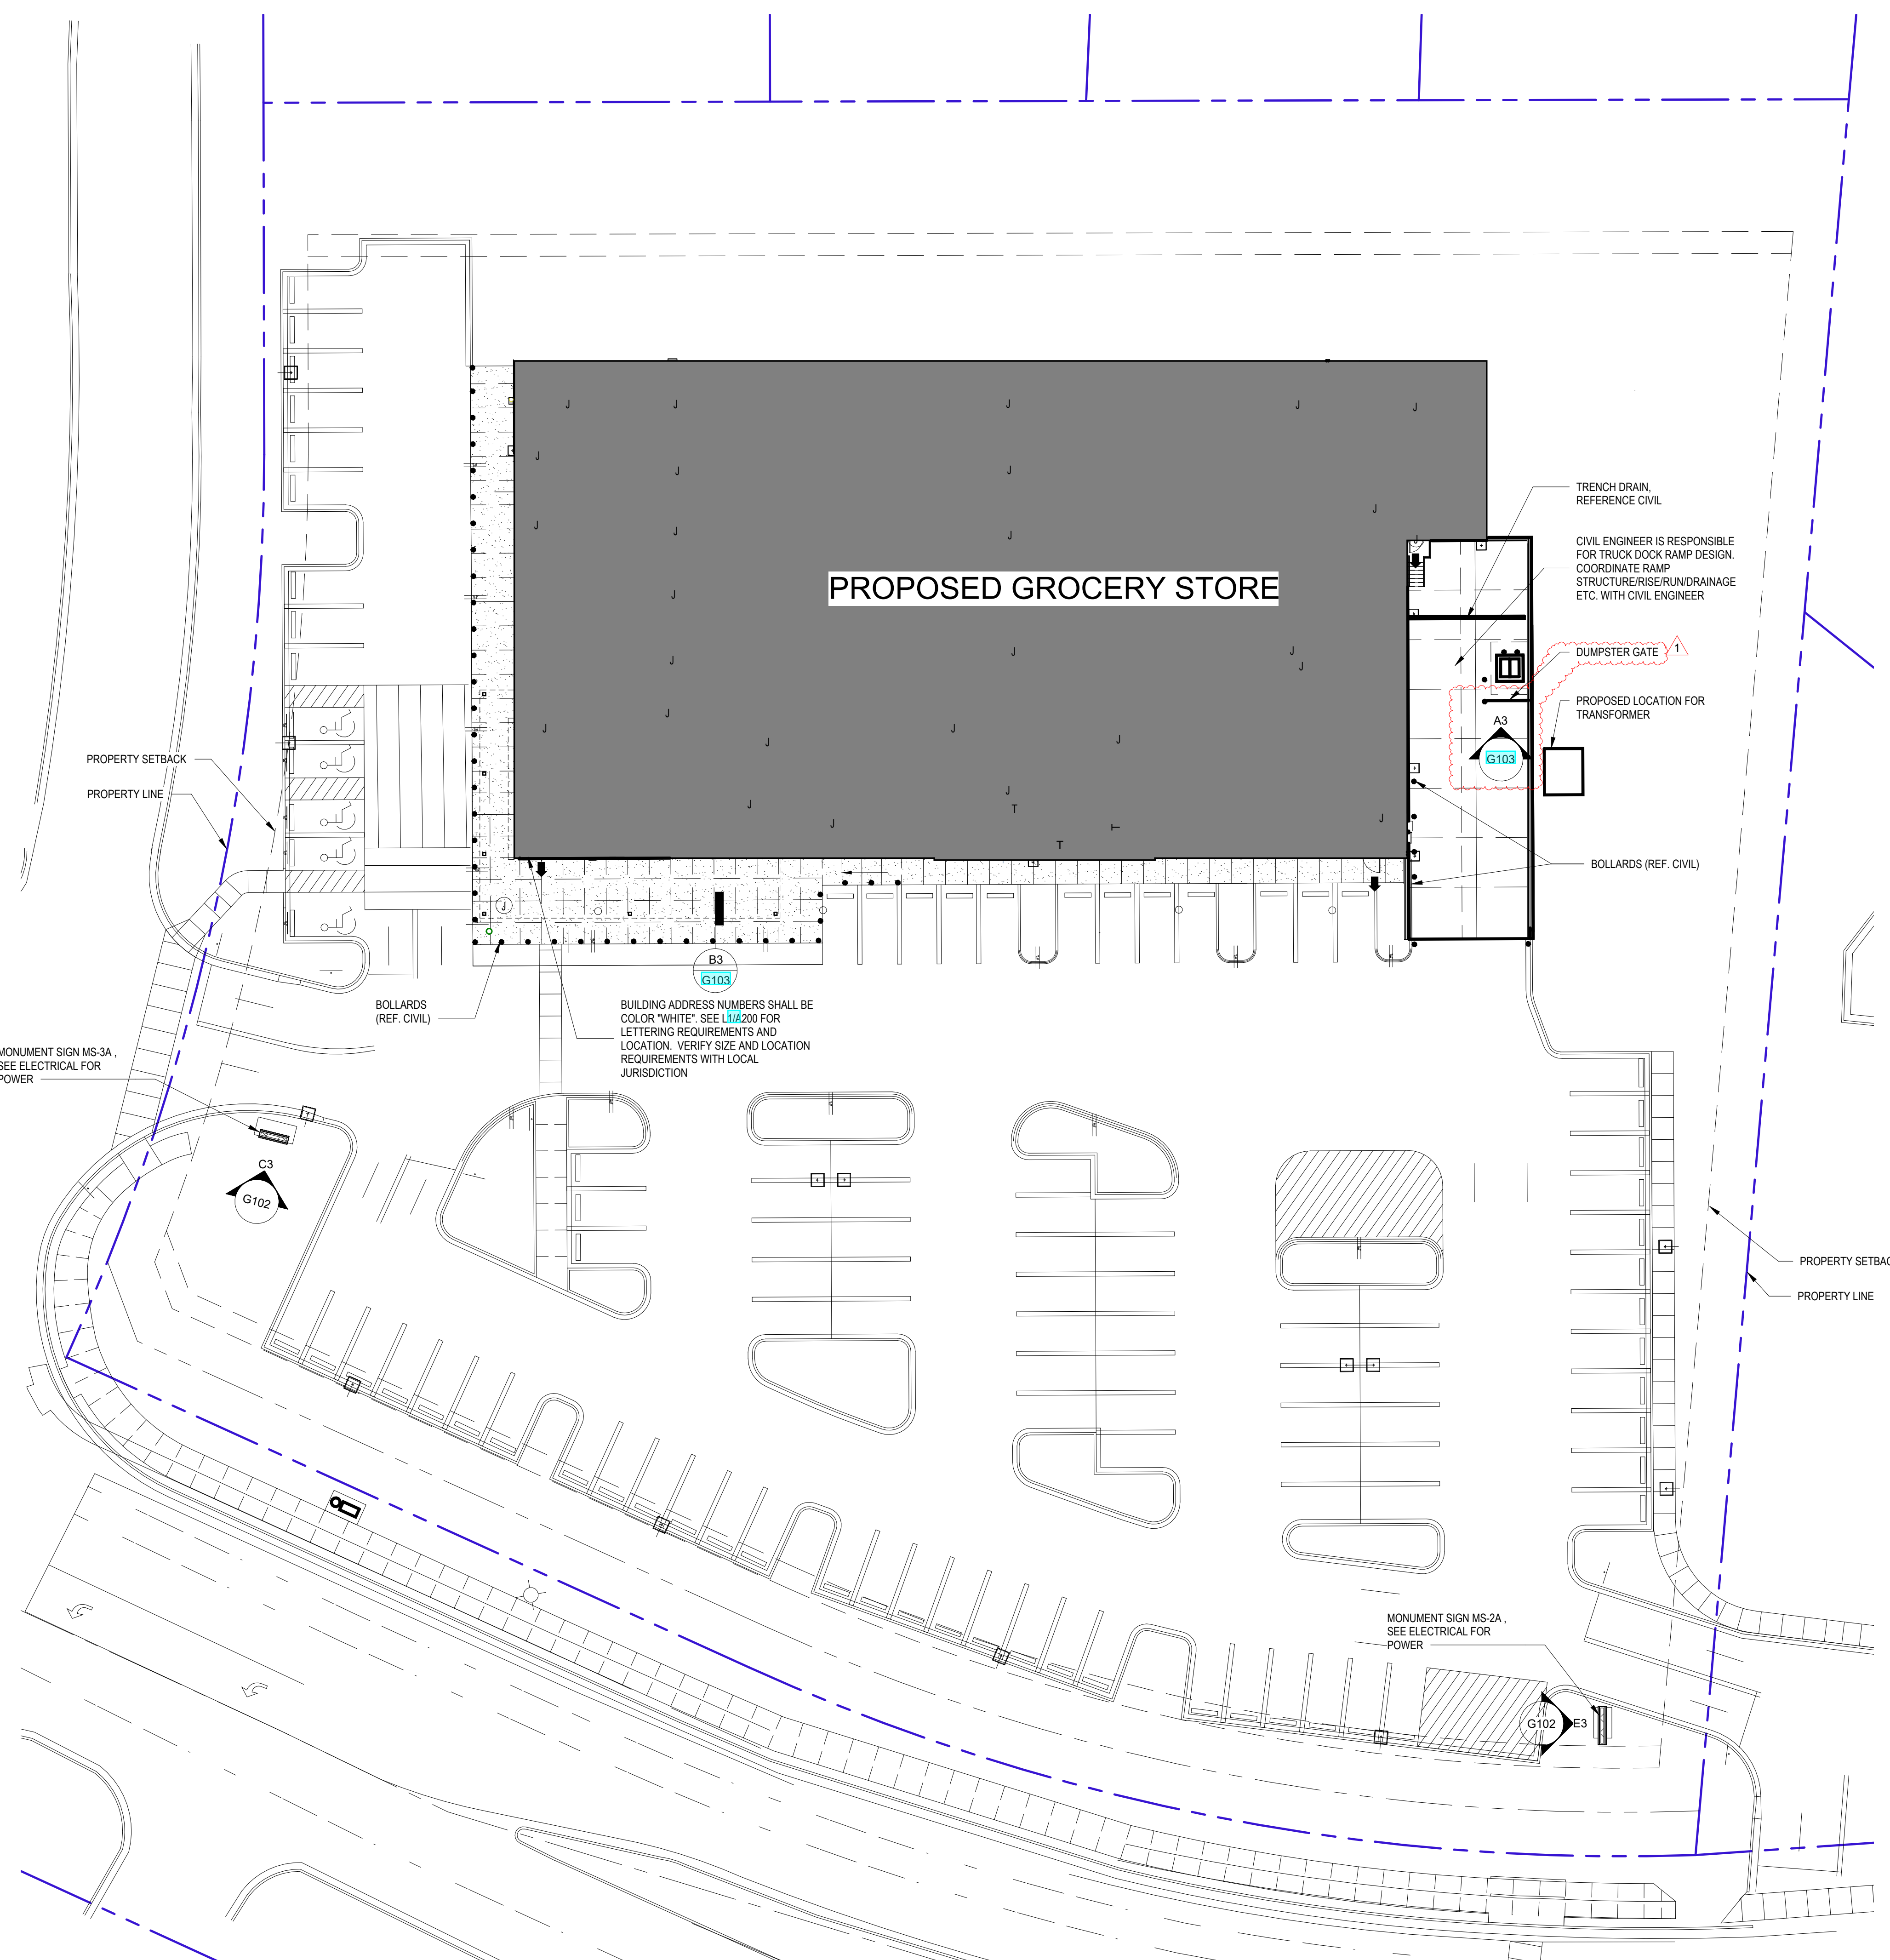


 ARCHITECTURAL SITE PLAN (FOR REFERENCE ONLY)
1" = 20'-0"

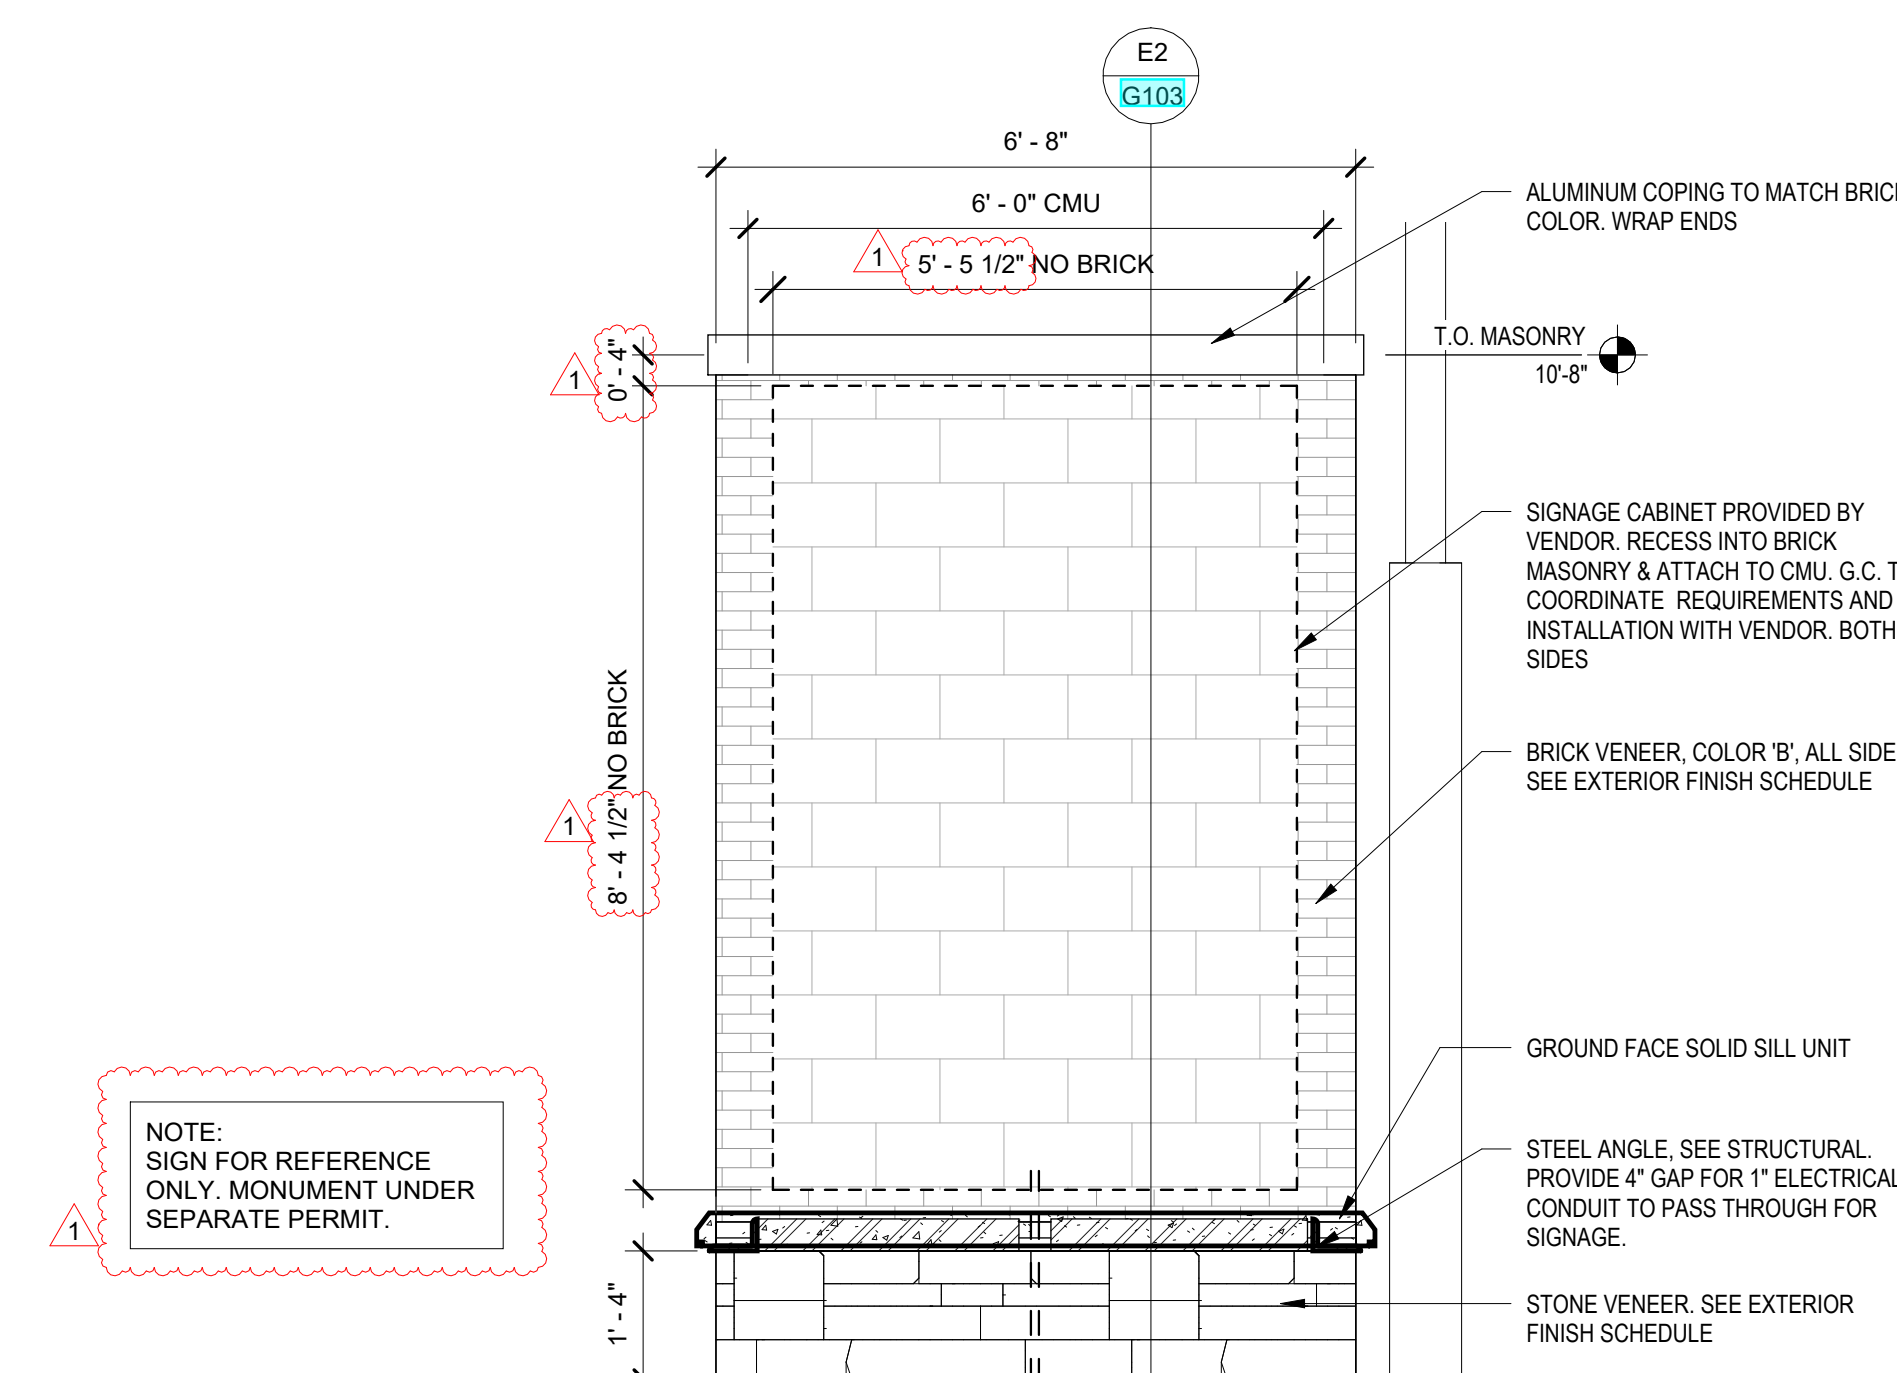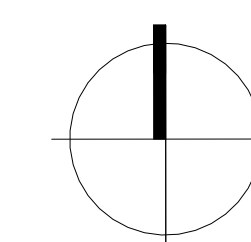


C3 MONUMENT MS-3A ELEVATION
1/2" = 1'-0"

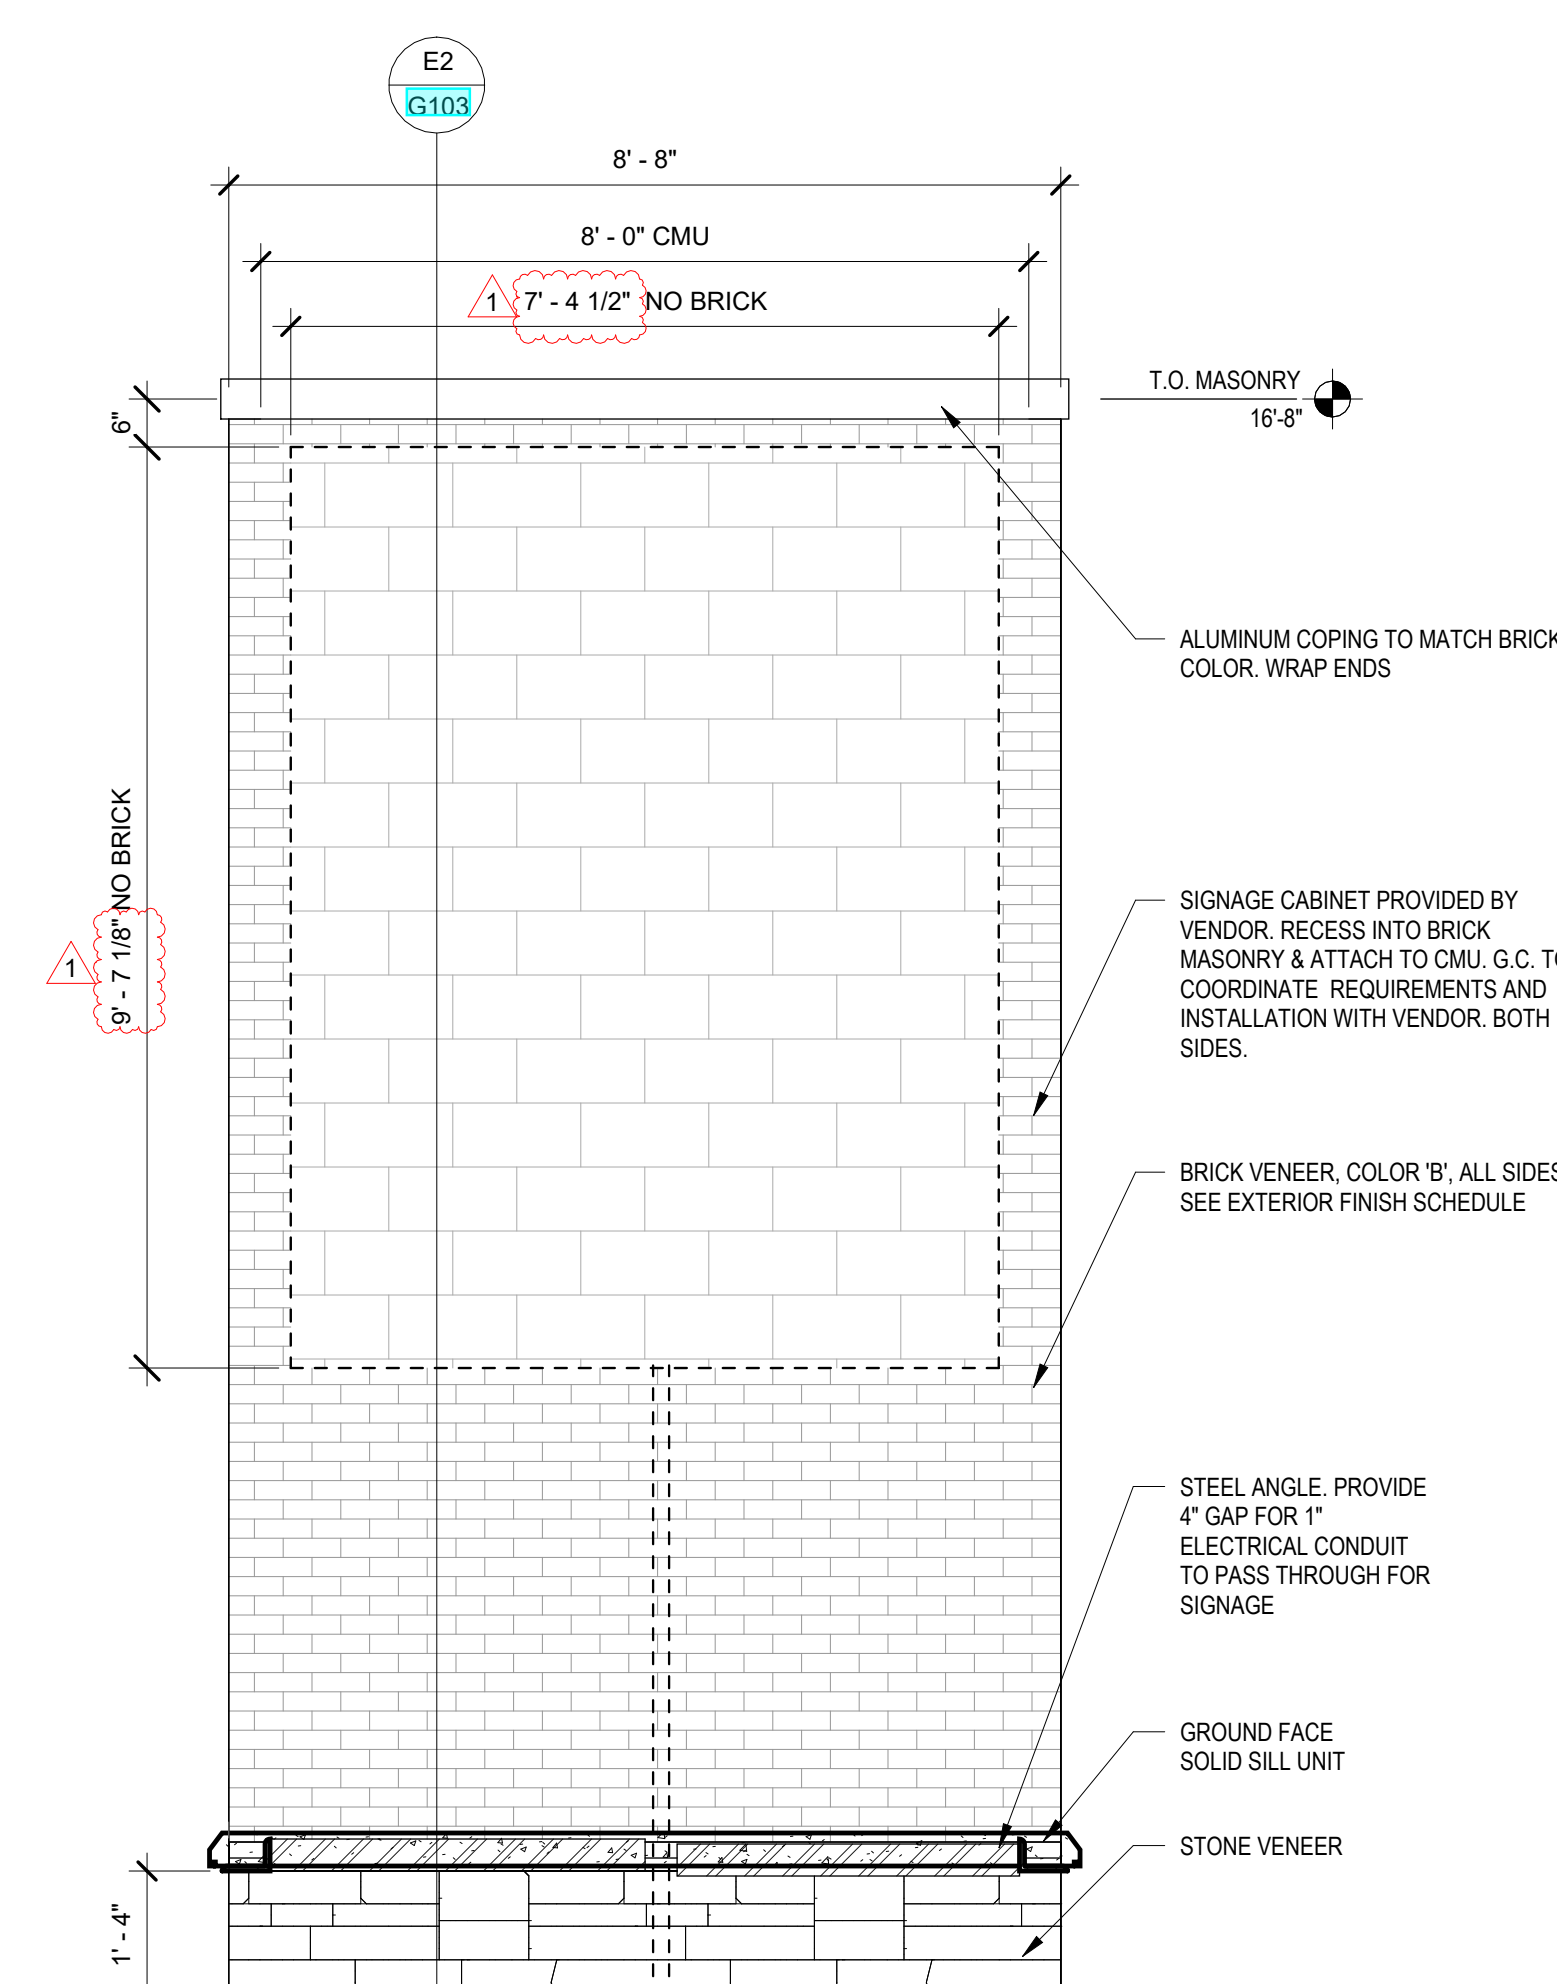

E3 MONUMENT MS-2A ELEVATION
1/2" = 1'-0"

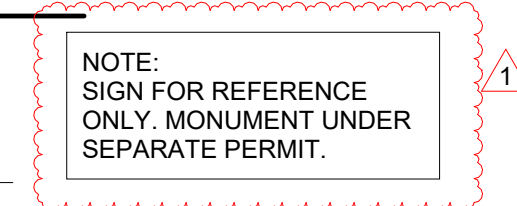

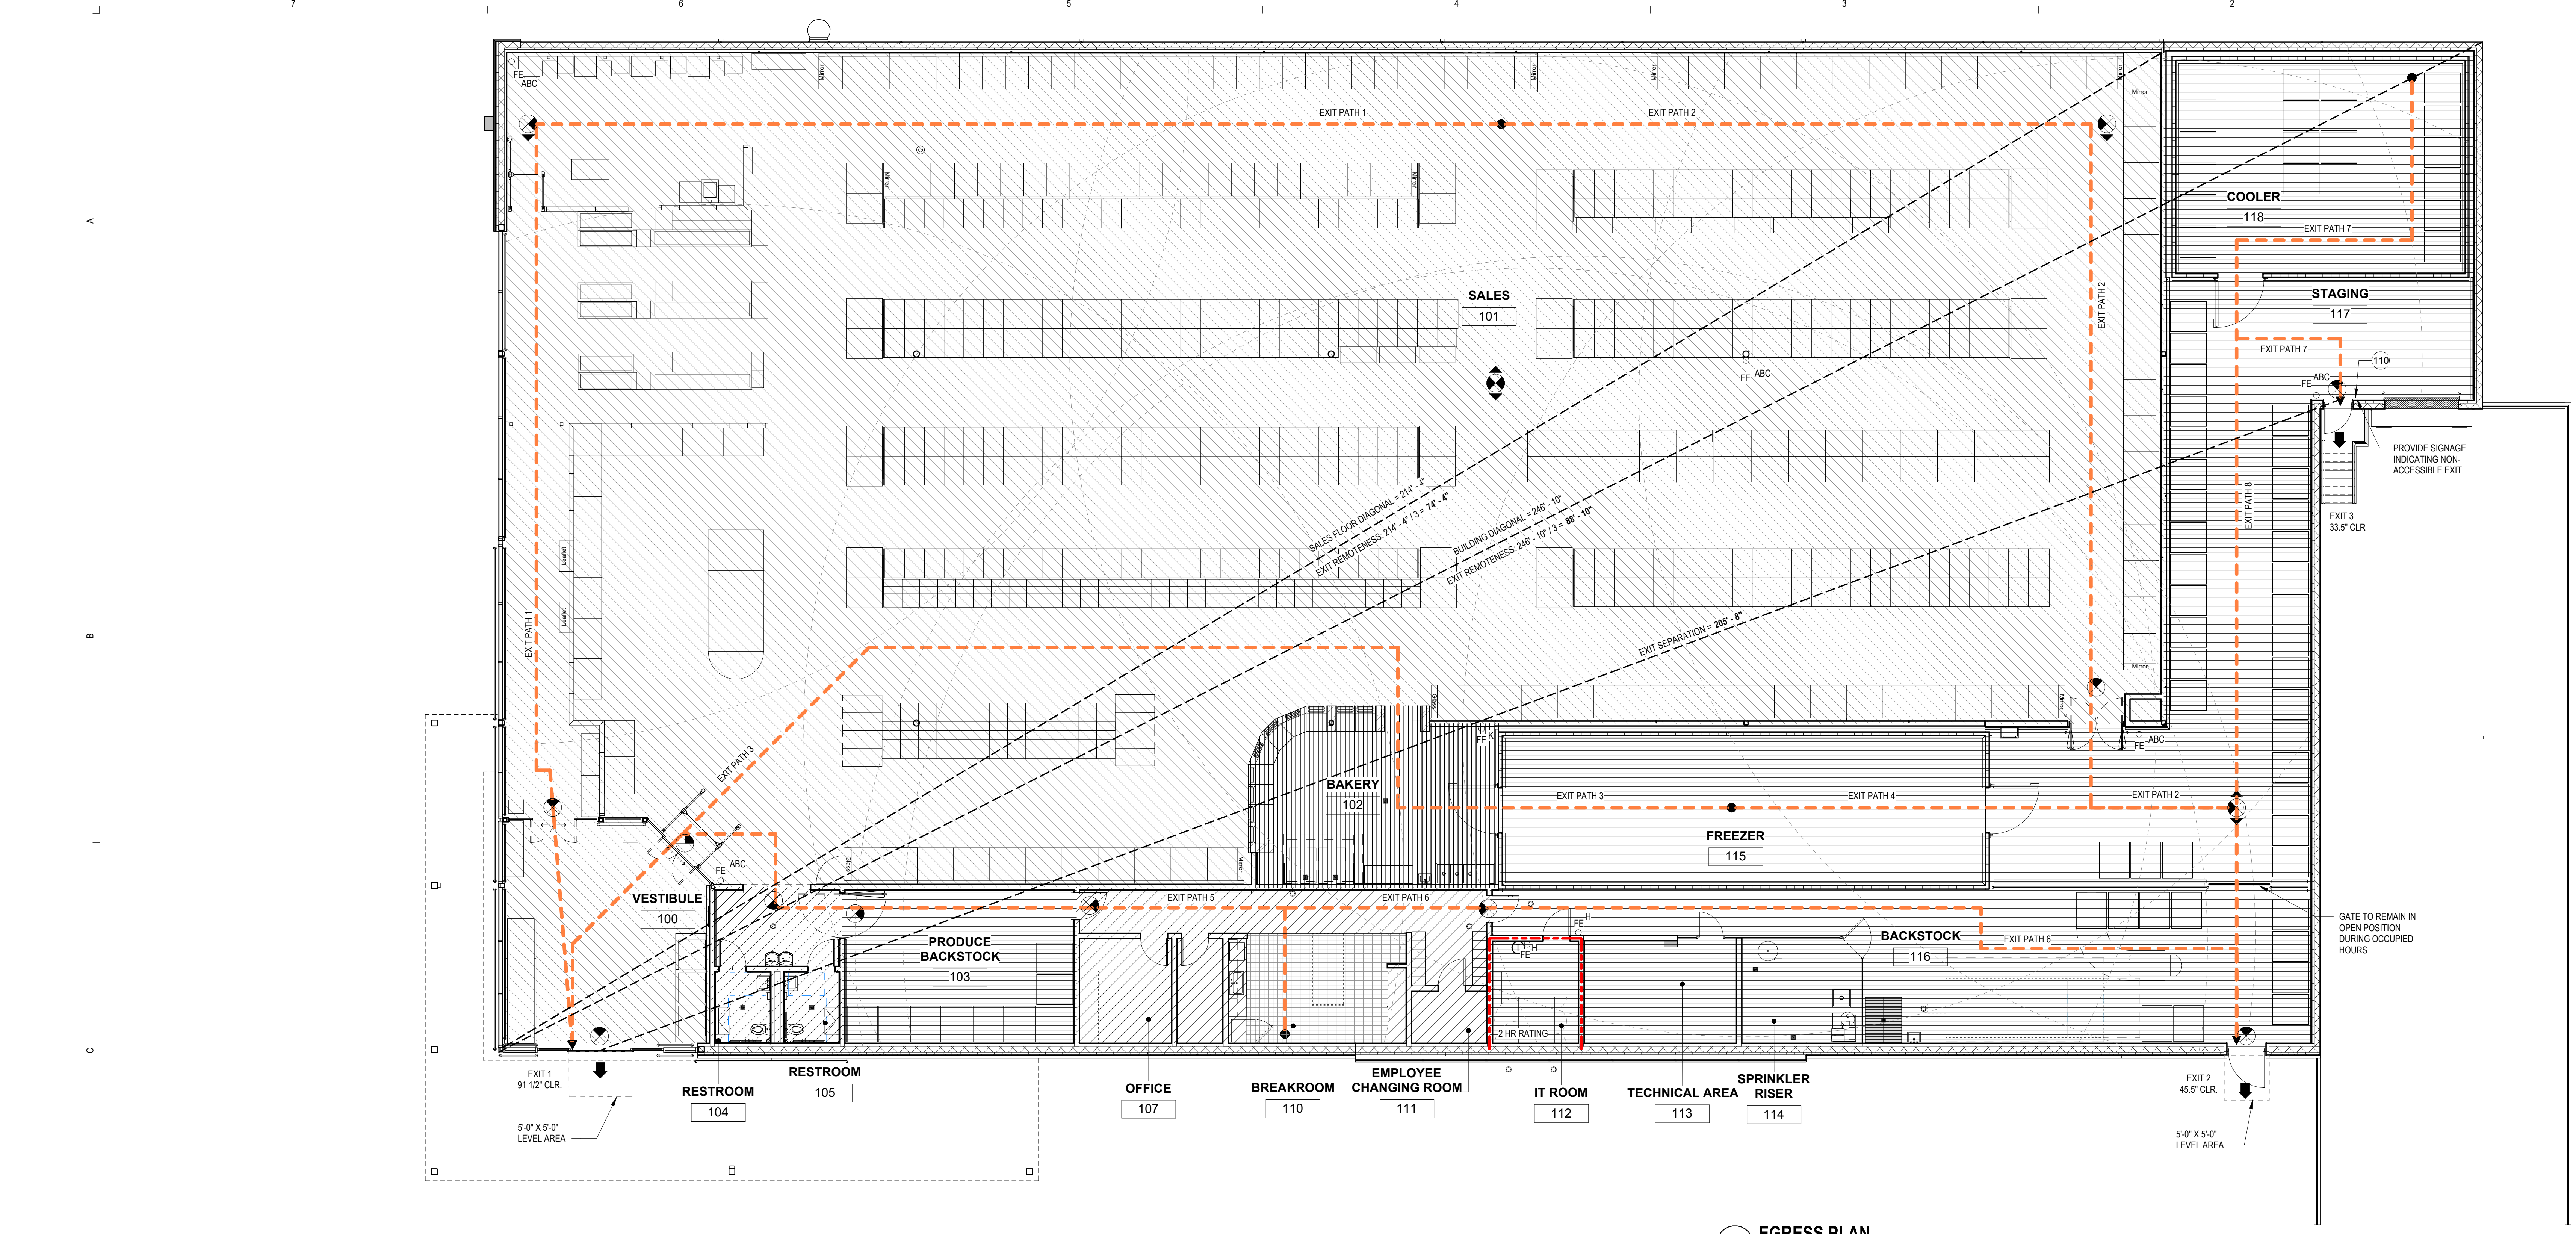

EGRESS PLAN
1/8" = 1'-0"

BUILDING CODE SUMMARY

AHJ: GWINNETT COUNTY, GA

PREVAILING CODES

BUILDING	2018 INTERNATIONAL BUILDING CODE (IBC) WITH GEORGIA AMENDMENTS
FIRE	2018 INTERNATIONAL FIRE CODE (IFC) WITH GEORGIA AMENDMENTS
ENERGY	2015 INTERNATIONAL ENERGY CONSERVATION CODE (IECC) WITH GEORGIA AMENDMENTS
MECHANICAL	2018 INTERNATIONAL MECHANICAL CODE (IMC) WITH GEORGIA AMENDMENTS
PLUMBING	2018 INTERNATIONAL PLUMBING CODE (IPC) WITH GEORGIA AMENDMENTS
ELECTRICAL	2023 NATIONAL ELECTRICAL CODE (NFPA 70)
ACCESSIBILITY	ICC/ANSI A117.1-2009 AND 2010 ADA

BUILDING CODE ANALYSIS

IBC 508	MIXED USE AND OCCUPANCY
TABLE 508.4	NO SEPARATION REQUIREMENT BETWEEN MERCANTILE AND STORAGE
IBC 302	NON-SEPARATED MIXED USE (M (MERCANTILE) AND S-1 (STORAGE) WITH ACCESSORY F-1 (FACTORY) AND B (BUSINESS))
IBC 509	INCIDENTAL USES
	BUILDING SQUARE FOOTAGE
	23,392 SF (GROSS)
CHAPTER 6	CONSTRUCTION TYPE
	V-B (FULLY SPRINKLERED)
IBC 507	UNLIMITED AREA BUILDINGS
	FULLY SPRINKLERED ONE-STORY 60 FOOT OR GREATER SEPARATION GROUPS B, F, M AND/OR S ONLY
	YES YES YES YES
IBC TABLE 1004.5	BUILDING OCCUPANT LOAD CALCULATION
	MERCANTILE GRADE FLOOR AREAS 15,340 SF (GROSS) / 60 = 255 OCCUPANTS
	WAREHOUSE/STAGING 5,578 SF (GROSS) / 200 = 27.89 OCCUPANTS
	ACCESSORY BUSINESS AREAS 842 SF (GROSS) / 150 = 5.61 OCCUPANTS
	ACCESSORY FACTORY AREAS (BAKERY) 532 SF (GROSS) / 200 = 2.66 OCCUPANTS
	ACCESSORY ASSEMBLY AREA (BREAK ROOM) 198 SF (NET) / 15 = 13.2 OCCUPANTS
	TOTAL 301 OCCUPANTS

	REQUIRED?	PROVIDED?
IBC TABLE 601		
FIRE RESISTANCE RATING REQUIREMENTS FOR BUILDING ELEMENTS (HOURS)		
PRIMARY STRUCTURAL FRAME	0	0
EXTERIOR BEARING WALLS	0	0
INTERIOR BEARING WALLS	0	0
EXTERIOR NONBEARING WALLS (X-30)	0	0
INTERIOR NONBEARING PARTITIONS	0	0
FLOOR CONSTRUCTION	0	0
ROOF CONSTRUCTION	0	0

	FIRE SEPARATION ASSEMBLIES	REQUIRED?	PROVIDED?
IBC TABLE 706.4	FIRE WALLS	N/A	NONE
IBC TABLE 707.3.10	FIRE BARRIERS/HORIZONTAL ASSEMBLIES	NONE	NONE
IBC 713	SHAFT ENCLOSURES	N/A	NONE
IBC 708	FIRE PARTITIONS	N/A	2 HR AT IT ROOM (OWNER REQUIRED)
IBC 709	SMOKE BARRIERS	N/A	NONE
IBC 710	SMOKE PARTITIONS	N/A	NONE
IBC TABLE 1020	EXIT ACCESS CORRIDOR	N/A	NONE
		REQUIRED?	PROVIDED?
IBC TABLE 705.8	EXTERIOR WALL OPENING PROTECTION	NOT REQUIRED	N/A
IBC 903	AUTOMATIC SPRINKLER SYSTEM	REQUIRED	PROVIDED
IBC 905	STANDPIPE SYSTEM	NOT REQUIRED	N/A
IFC 906.1	PORTABLE FIRE EXTINGUISHERS	A-B-C	PROVIDED
	IN ACCORDANCE WITH NFPA 10 - REQUIRED AT THE FOLLOWING LOCATIONS:		
	- COMMERCIAL KITCHEN EXHAUST HOOD		
	- AREAS WHERE FUEL IS DISPENSED		
	- WHERE FLAMMABLE OR COMBUSTIBLE LIQUID IS USED		
	- EACH COMPLETED FLOOR OF BUILDING UNDER CONSTRUCTION		
	- LABORATORIES, SHOP OR OTHER SIMILAR PURPOSE		
	- WHERE REQUIRED BY CHAPTER 35		
IFC 907.2	FIRE ALARM AND DETECTION SYSTEM		
	AUTOMATIC SMOKE DETECTION	NOT REQUIRED	N/A
	MANUAL FIRE ALARM	REQUIRED	PROVIDED
IFC 910.2	SMOKE AND HEAT VENTS	NOT REQUIRED	N/A
IBC 1008	MEANS OF EGRESS ILLUMINATION	REQUIRED	PROVIDED
IBC 1013	ILLUMINATED EXIT SIGNS	REQUIRED	PROVIDED
IBC TABLE 1006.2.1	COMMON PATH OF TRAVEL	M, A-2: 75 FEET; S-1, B, F-1: 100 FEET	
	GROUND FLOOR ACTUAL PROVIDED	NOT TO EXCEED 75 FEET - SEE EGRESS PLAN	
IBC TABLE 1006.2.1	SPACES WITH ONE MEANS OF EGRESS		
	OCCUPANCY A, B, E, F, M, U	MAX 49 OCCUPANTS	2 EXITS PROVIDED
	OCCUPANCY S	MAX 29 OCCUPANTS	3 EXITS PROVIDED
IBC 1006.2.1.1	THREE OR MORE EXITS	REQ'D FOR SPACE WITH 501-1000 OCCUPANTS	
IBC TABLE 1017.2	EXIT ACCESS TRAVEL DISTANCE	M, S-1, F-1, A-2: 250 FEET; B: 300 FEET	
IBC 1007.1	EXIT CONFIGURATION		
	MIN EXIT SEPARATION (SPRINKLERED)	1/3 LENGTH OF MAX DIAG BUILDING DISTANCE	
	REQUIRED: 85 FT	PROVIDED: 241 FT	
IBC 1005	EGRESS WIDTHS		
	GROUND FLOOR	OTHER EGRESS COMPONENTS: 348 OCCUPANTS x 0.2' = 69.6' REQUIRED	
	EXIT 1 = 66'-7", EXIT 2 = 33", EXIT 3 = 33", EXIT 4 = 45", EXIT 5 = 33"	TOTAL = 210.75' PROVIDED	
	210.75' x 69.6'		

	AREA OF REFUGE	NOT REQUIRED
IBC 1020.4	MAX DEAD END	50 FT
IBC 718	DRAFT STOPPING	N/A
IBC TABLE 803.11	INTERIOR WALL AND CEILING FINISHES	
	VERTICAL EXITS AND EXIT PASSAGEWAYS	B
	EXIT ACCESS CORR & OTHER EXIT WAYS	C
	ROOMS AND ENCLOSED SPACES	C
		A, B OR C PROVIDED
IFC TABLE 803.1.1	FLAME AND SMOKE INDEX	
	CLASS A	CLASS B
	CLASS C	CLASS C
	FLAME SPREAD INDEX	0-25
	SMOKE DEVELOPED INDEX	0-450
IFC 804	INTERIOR FLOOR FINISHES	
	M, B, S-2, A-2	CARPET AND CARPET LIKE FINISHES SHALL COMPLY WITH ASTM D 2895. FLOOR COVERINGS OTHER THAN CARPET SHALL HAVE A MINIMUM CRITICAL RADIANT FLUX OF 0.22 W/GM²
	F-1	NOT REQUIRED PER IFC 804
IFC 804	INTERIOR FLOOR FINISH CLASSIFICATION	
	CRITICAL RADIANT FLUX	CLASS 1
	CLASS 2	NOT LESS THAN 0.45 W/GM²
IFC TABLE 403.1	PLUMBING FIXTURE REQUIREMENTS	SEE PLUMBING CODE SUMMARY TABLE
IBC 906.1	PORTABLE FIRE EXTINGUISHERS	IN ACCORDANCE WITH NFPA 10
	MAX FLOOR AREA FOR EXTINGUISHER	11,250 SF
	MAX TRAVEL DISTANCE TO EXTINGUISHER	75 FEET
IBC 1111	SIGNAGE	SEE CODE REQUIRED SIGNAGE TABLE

Egress Travel Distances

Mark	Path of Egress	Primary/Secondary
EXIT PATH 1	211' - 3"	Primary
EXIT PATH 2	183' - 8"	Secondary
EXIT PATH 3	171' - 8"	Secondary
EXIT PATH 4	82' - 4"	Primary
EXIT PATH 5	117' - 11"	Primary
EXIT PATH 6	134' - 9"	Secondary
EXIT PATH 7	67' - 4"	Primary
EXIT PATH 8	128' - 8"	Secondary

KEY NOTES

NUMBER	NOTE
110	ACCESSIBLE SIGNAGE, REFER TO SHEET G105

OCCUPANT LOAD ANALYSIS				
ROOM NUMBER	ROOM NAME	AREA	OCCUPANT LOAD FACTOR	OCCUPANCY TYPE
110	BREAKROOM	237 SF	15	ASSEMBLY
ASSEMBLY		237 SF	16 OCCUPANTS	
107	OFFICE	118 SF	150	BUSINESS
108	MEETING ROOM	58 SF	150	BUSINESS
109	BREAKROOM HALL	265 SF	150	BUSINESS
111	EMPLOYEE CHANGING ROOM	48 SF	150	BUSINESS
BUSINESS		480 SF	4 OCCUPANTS	
102	BAKERY	515 SF	200	FACTORY (COMMERCIAL KITCHEN, BAKERY)
FACTORY (COMMERCIAL KITCHEN, BAKERY)		515 SF	3 OCCUPANTS	
100	VESTIBULE	500 SF	60	MERCANTILE
101	SALES	14961 SF	60	MERCANTILE
104	RESTROOM	48 SF	60	MERCANTILE
105	RESTROOM	48 SF	60	MERCANTILE
106	HALLWAY	117 SF	60	MERCANTILE
MERCANTILE		15734 SF	263 OCCUPANTS	
103	PRODUCE BACKSTOCK	432 SF	300	WAREHOUSE / STAGING
112	IT ROOM	107 SF	300	WAREHOUSE / STAGING
113	TECHNICAL AREA	193 SF	300	WAREHOUSE / STAGING
114	SPRINKLER RISER	154 SF	300	WAREHOUSE / STAGING
115	FREEZER	889 SF	300	WAREHOUSE / STAGING
116	BACKSTOCK	1076 SF	300	WAREHOUSE / STAGING
117	STAGING	1683 SF	300	WAREHOUSE / STAGING
118	COOLER	759 SF	300	WAREHOUSE / STAGING
WAREHOUSE / STAGING		5293 SF	18 OCCUPANTS	
TOTAL			304 OCCUPANTS	

2018 IPC, TABLE 403.1.1 - MINIMUM PLUMBING FIXTURES							
OCCUPANCY	WATER CLOSETS		LAVATORIES		DRINKING FOUNTAINS		OTHER
PROFESSIONAL	MALE	FEMALE	MALE	FEMALE	1 per 1,000	1 service sink	
	1 per 500	1 per 500	1 per 750	1 per 750			
S-1	MALE	FEMALE	MALE	FEMALE	1 per 1,000	1 service sink	
	1 per 100	1 per 100	1 per 100	1 per 100			
TOTAL OCCUPANT LOAD = 301 / 2 (PER TABLE 403.1.1) = 151 MALE AND 151 FEMALE							
OCC.	OCC. LOAD	W.C.	LAVATORIES	DRINKING FOUNTAINS	SERVICE SINK		
"M"	282	17,112	0.282	0.188	0.282	1	
"S-1"	19	5,578	0.10	0.10	0.019		
TOTAL REQUIRED	1	1	1	1	1	1	
PROVIDED	1	1	1	1	2	1	

LEGEND

- SALES FLOOR (M)
- BAKERY (F-1)
- OFFICE (B)
- STORAGE (S-1)
- ASSEMBLY (A-3)

- EXIT SIGN WITH LIGHTS AND CHEVRONS
- EGRESS PATH
- EXIT DOOR LOAD
- FE^{ABC} 10LB A, B, C, FIRE EXTINGUISHER
- FE^H 11 LB HALOTRON FIRE EXTINGUISHER
- FE^K 6L CLASS K FIRE EXTINGUISHER
- FIRE EXTINGUISHER 75' RADIUS
- 2 HR FIRE SEPARATION

BUILDING AREAS

FOOTPRINT / IMPERVIOUS SF • INCLUDES CANOPY	24,731 SF
GROSS SF / CONDITIONED SF • EXCLUDES CANOPY	23,492 SF
NET SF • EXCLUDES CANOPY AND EXTERIOR WALLS	22,741 SF



LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTEE BLVD. NORCROSS, GA 30093




This item has been electronically signed and sealed by Scott Douglas Wurl using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
1 12/17/2025 PERMIT CYCLE 1
1 12/17/2025 PERMIT CYCLE 2

PROJECT NUMBER
79850191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. WURL
DRAWN BY
G. CAMARILLO
CHECKED BY
A. HENGSTEBECK



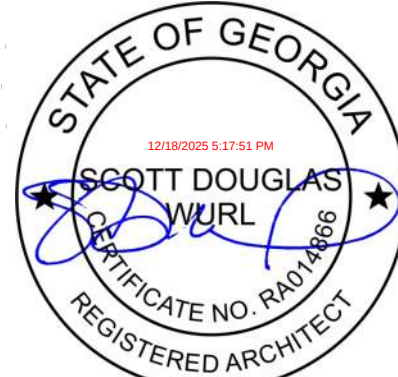

This item has been electronically signed and sealed by Scott Douglas Wurl using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
11/07/2025 PERMIT CYCLE 1
11/17/2025 PERMIT CYCLE 2

PROJECT NUMBER
79650191
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
D. WURL
DRAWN BY
G. CAMARILLO
CHECKED BY
A. HENGSTEBECK



COMcheck Software Version COMcheckWeb Envelope Compliance Certificate

Project Information

Energy Code: 2015 IECC
Project Title: LIDL Norcross GA
Location: Atlanta, Georgia
Climate Zone: 3a
Project Type: New Construction
Vertical Glazing / Wall Area: 0%

Construction Site: 4990 JIMMY CARTER BLVD.
NORCROSS, Georgia 30093

Owner/Agent: LIDL US Operations LLC
3500 S. Clark St.
Arlington, Virginia 22202

Designer/Contractor: Progressive Architecture
Engineering & Planning, LLC
1801 N. Graham Street
Charlotte, North Carolina 28206
704-771-8000

Additional Efficiency Package(s)

Credits: 1.0 Required 1.0 Proposed
Reduced Lighting Power: 1.0 credit

Building Area	Floor Area
1-Retail: Nonresidential	23352

Envelope Assemblies

Assembly	Gross Area or Perimeter	Cavity R-Value	Cont. R-Value	Proposed U-Factor	Budget U- Factor _u
Roof: Insulation Entirety Above Deck, 3-Year-Aged Solar Reflectance Index = 75.00, Thermal Emittance = 0.90 (ie), (Bldg. Use 1 - Retail)	23005	—	30.0	0.032	0.039
Floor: Unheated Slab-On-Grade, Horizontal with vertical 2 R., (Bldg. Use 1 - Retail) (0)	665	—	0.0	0.730	0.730
NORTH Ext. Wall: Concrete Block, Bin, Partially Grouded, Cells Empty, Normal Density, Furring: Metal, (Bldg. Use 1 - Retail)	449	0.0	15.0	0.055	0.123
Door: Other U-Factor option), Garage door L&H glazing (Bldg. Use 1 - Retail)	75	—	—	0.057	0.610
Door: Insulated Metal, Swinging, (Bldg. Use 1 - Retail)	21	—	—	0.380	0.610
Ext. Wall: Concrete Block, Bin, Partially Grouded, Cells Empty, Normal Density, Furring: Metal, (Bldg. Use 1 - Retail)	4197	0.0	15.0	0.055	0.123
Door: Insulated Metal, Swinging, (Bldg. Use 1 - Retail)	28	—	—	0.380	0.610
Ext. Wall: Steel-Framed, 16in. o.c., (Bldg. Use 1 - Retail)	754	19.0	15.0	0.041	0.064
Door: Glass (lower 50% glazing): Metal Frame, Entrance Door, Perf. Specs., Product ID NA, SHGC 0.27, PF 0.67, (Bldg. Use 1 - Retail) (c)	112	—	—	0.340	0.770
EAST Ext. Wall: Steel-Framed, 16in. o.c., (Bldg. Use 1 - Retail)	2024	19.0	15.0	0.041	0.064
Window: Metal Frame with Thermal Break: Fixed, Perf. Specs.: Product ID THIRAB 6013, SHGC 0.27, PF 1.16, (Bldg. Use 1 - Retail) (c)	1092	—	—	0.240	0.460
Ext. Wall: Concrete Block, Bin, Partially Grouded, Cells Ins., Normal Density, Furring: Metal, (Bldg. Use 1 - Retail)	396	0.0	15.0	0.054	0.123

Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 1 of 8

Section & Req. ID	Mechanical Rough-In Inspection	Complies?	Comments/Assumptions
C402.3.1 (F161) ¹	Stair and elevator shaft vents have C402.3.1, motorized dampers that automatically close.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)
Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 6 of 8

Assembly	Gross Area or Perimeter	Cavity R-Value	Cont. R-Value	Proposed U-Factor	Budget U- Factor _u
SOUTH Ext. Wall: Concrete Block, Bin, Partially Grouded, Cells Empty, Normal Density, Furring: Metal, (Bldg. Use 1 - Retail)	3860	0.0	15.0	0.055	0.123
WEST Ext. Wall: Concrete Block, Bin, Partially Grouded, Cells Empty, Normal Density, Furring: Metal, (Bldg. Use 1 - Retail)	2652	0.0	15.0	0.055	0.123

(a) Budget U-Factors are used for software baseline calculations ONLY, and are not code requirements.
(b) Other components require supporting documentation for proposed U-factors.
(c) Fenestration product performance must be certified in accordance with NFRC and requires supporting documentation.
(d) Slab-On-Grade proposed and budget U-factors shown in table are F-factors.
(e) High-albedo roof requirement options: 1) 3-year aged solar reflectance $\geq$ 0.55 thermal emittance $\geq$ 0.75, 2) 3-year aged solar reflectance index $\geq$ 64.0, 3) Initial year aged solar reflectance $\geq$ 0.70 thermal emittance $\geq$ 0.75, 4) Initial year aged solar reflectance index $\geq$ 82.0.

Envelope PASSSES: Design 37% better than code

Envelope Compliance Statement

Compliance Statement: The proposed envelope design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed envelope systems have been designed to meet the 2015 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Gabriela Camarillo Signature Date: 12/12/2025

Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 2 of 8

Section & Req. ID	Insulation Inspection	Complies?	Comments/Assumptions
C303.1 (IN5) ¹	Roof insulation installed per manufacturer's instructions. Blown or poured loose-fill insulation is installed only where the roof slope is $\leq$ 3 in 12.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C303.1 (IN10) ¹	Building envelope insulation is labeled with R-value or insulation certificate providing R-value and other relevant data.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C303.2 (IN17) ¹	Above-grade wall insulation installed per manufacturer's instructions.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C303.2.1 (IN14) ¹	Exterior insulation is protected from damage with a protective material. Verification for exposed foundation insulation may need to occur during Foundation Inspection.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.3.1 (IN17) ¹	Insulation intended to meet the roof insulation requirements cannot be installed on top of a suspended ceiling. Mark this requirement compliant if insulation is installed accordingly.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C104 (IN6) ¹	Installed above-grade wall insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C104 (IN8) ¹	Installed floor insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C402.2.6 (IN18) ¹	Radiant panels and associated components, designed for heat transfer from the panel surfaces to the occupants or indoor space are insulated with a minimum of R-3.5.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.3 (IN5) ¹	High-albedo roofs satisfy one of the following: 3-year-aged solar reflectance $\geq$ 0.55 and thermal emittance $\geq$ 0.75 or 3-year-aged solar reflectance index $\geq$ 64.0.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C104 (IN2) ¹	Installed roof insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports. For some existing systems, verification may need to occur during Framing Inspection.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C402.5.1 (IN1) ¹	All sources of air leakage in the building thermal envelope are sealed, caulked, gasketed, weather striped or wrapped with moisture vapor-permeable wrapping material to minimize air leakage.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)
Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 7 of 8

COMcheck Software Version COMcheckWeb Inspection Checklist

Energy Code: 2015 IECC

Requirements: 11.0% were addressed directly in the COMcheck software
Text in the "Comments/Assumptions" column is provided by the user in the COMcheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is itemized in a separate table, a reference to that table is provided.

Section & Req. ID	Plan Review	Complies?	Comments/Assumptions
C103.2 (PR1) ¹	Plans and/or specifications provide all information with which compliance can be determined for the building envelope and document where exceptions to the standard are claimed.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	Requirement will be met.
C402.4.1 (PR10) ¹	The vertical fenestration area $\leq$ 30 percent of the gross above-grade wall area.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.4.1 (PR11) ¹	The skylight area $\leq$ 3 percent of the gross roof area.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.4.2 (PR14) ¹	In enclosed spaces $>$ 2,500 sq ft directly under a roof with ceiling heights $>$ 15 ft and used as an office, lobby, auditorium, conference room, storage, gymnasium/leisure center, convention center, automotive service, manufacturing, non-refrigerated warehouse, retail store, and/or manufacturing area, transportation, or workshop, the following requirements apply: (a) the skylight zone under skylights is $\geq$ half the floor area, (b) the skylight area to daylight zone is $\geq$ 3 percent with a skylight $>$ 6.40, or a minimum skylight effective aperture $\geq$ 1 percent.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C406 (PR8) ¹	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the additional energy efficiency package options.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 3 of 8

Section & Req. ID	Final Inspection	Complies?	Comments/Assumptions
C402.3.3 (F15) ¹	Where open combustion air ducts provide combustion air to open combustion fuel burning appliances, the appliances and combustion air opening are located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope. Such rooms are sealed and insulated.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.5.6 (F13) ¹	Weatherstrips installed on all loading dock cargo doors.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.5.8 (F124) ¹	Accessed luminaires in thermal envelope to limit infiltration and be IC rated and labeled. Seal between interior finish and luminaire housing.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)
Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 8 of 8

Section & Req. ID	Footing / Foundation Inspection	Complies?	Comments/Assumptions
C303.2 (FO4) ¹	Slab edge insulation installed per manufacturer's instructions.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C303.2.1 (FO6) ¹	Exterior insulation protected against damage, sunlight, moisture, wind, landscaping and equipment maintenance activities.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C104 (FO3) ¹	Installed slab-on-grade insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C402.2.6 (FO12) ¹	Radiant heating systems panels insulated to $\geq$ R-3.5 on face opposite space being heated.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.

Additional Comments/Assumptions:

Section & Req. ID	Framing / Rough-In Inspection	Complies?	Comments/Assumptions
C303.1.3 (FR12) ¹	Fenestration products rated in accordance with NFRC.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C303.1.3 (FR13) ¹	Fenestration products are certified as to performance labels or certificates provided.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.4.3 (FR10) ¹	Vertical fenestration SHGC value.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C402.4.3 (FR11) ¹	Vertical fenestration U-Factor.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C402.4.4 (FR14) ¹	U-factor of opaque doors associated with the building thermal envelope meets requirements.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values.
C402.5.1 (FR16) ¹	The building envelope contains a continuous air barrier that is sealed in an approved manner and either constructed or tested in an approved manner. Air barrier penetrations are sealed in an approved manner.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.5.2 (FR16) ¹	Factory-built fenestration and doors are sealed at meeting air leakage requirements.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	
C402.5.7 (FR17) ¹	Weatherstrips are installed on all building entrances. Doors have self-closing devices.	☐ Complies ☐ Does Not ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: LIDL Norcross GA Report date: 12/12/25
Data filename: Page 5 of 8

