

ABBREVIATIONS - PLUMBING

AC	ARCHITECTURAL CONTRACTOR	NG	NATURAL GAS
ADA	AMERICANS WITH DISABILITIES ACT	OH	OVERHEAD DOOR
BV	BALL VALVE	ORD	OVERFLOW ROOF DRAIN
CB	CATCH BASIN	PP	PUMP - PLUMBING
CBS	COMBINATION BALANCE & SHUTOFF VALVE	PSI	POUNDS PER SQUARE INCH
CIP	CAST IRON PIPE	PSIG	POUNDS PER SQUARE INCH GAUGE
CO	CLEANOUT	RD	ROOF DRAIN, ROAD
COMP	COMPARTMENT	RO	ROUGH-IN ONLY
CV	CHECK VALVE	RBP	REDUCED PRESSURE BACKFLOW PREVENTER
CW	COLD WATER	RPM	REVOLUTIONS PER MINUTE
DN	DISCHARGE NOZZLE	RR	REST ROOM
DSN	DOWNSPOUT NOZZLE	RV	RELIEF VENT
DW	DISHWASHER	S	SINK
DWH	DOMESTIC WATER HEATER	SAN	SANITARY
EWT	ENTER WATER TEMPERATURE	SD	STORM DRAIN
FC	FLEXIBLE CONNECTION	SG	SPECIFIC GRAVITY
FCO	FLOOR CLEAN OUT	SK	SINK
FD	FLOOR DRAIN	SNS	SANITARY SEWER
FS	FLOOR SINK	SPHD	SPRINKLER HEAD
G	GAS	SPKR	SPRINKLER
HB	HOSE BIBB	SS	SERVICE SINK
HO	HUB OUTLET	SSK	SERVICE SINK
HW	HOT WATER	ST	STORM
HWR	HOT WATER RETURN (DOMESTIC)	TD	TRENCH DRAIN
HYD	HYDRANT	THERM	100 CUBIC FEET OF NATURAL GAS
IE	INVERT ELEVATION	TOW	TOP OF WALL
IW	INDIRECT WASTE	V	VENT
KVAR	KILOVOLT-AMPERES REACTIVE	VTR	VENT THROUGH ROOF
L	LAVATORY	W	WASTE
LAV	LAVATORY	WCO	WALL CLEANOUT
LWT	LEAVING WATER TEMPERATURE	WH	WALL HYDRANT
MB	MOP BASIN	WTHR	WATER HEATER
MCA	MINIMUM CIRCUIT AMPS		
MH	MANHOLE		
MOP	MAXIMUM OVERCURRENT PROTECTION		

PLUMBING GENERAL NOTES

- COORDINATE ROUTING OF PIPING WITH ALL OTHER TRADES PRIOR TO INSTALLATION TO AVOID CONFLICTS.
- COMPLY WITH ALL APPLICABLE LOCAL AND STATE CODES.
- PROVIDE ROUGH-INS AND FINAL CONNECTIONS TO FIXTURES AND EQUIPMENT FURNISHED BY LAB EQUIPMENT CONTRACTOR. USE ONLY APPROVED EQUIPMENT AND FIXTURE SHOP DRAWINGS, FROM FSEC, FOR ROUGH-IN SIZES AND LOCATIONS.
- PROVIDE TRAP SEAL PROTECTION ON ALL FLOOR DRAINS, FLOOR SINKS AND HUB DRAINS SUBJECT TO EVAPORATION. INSTALL PER MANUFACTURERS RECOMMENDATIONS.
- PROVIDE ASSE 1070 MIXING VALVE AT ALL BARRIER FREE SINKS AND ALL HAND WASHING SINKS TO PROVIDE TEMPERED WATER TO HOT WATER SIDE OF FAUCET.
- PIPING INSTALLED IN THE WAY OF ACCESS OR MAINTENANCE TO EQUIPMENT SHALL BE RELOCATED AT THE EXPENSE OF THE INSTALLING CONTRACTOR.
- PROVIDE SHUTOFF VALVES AT ALL FIXTURES AND EQUIPMENT.
- COORDINATE LOCATIONS OF FLOOR DRAINS AND FLOOR SINKS WITH LOCATIONS OF EQUIPMENT AND EQUIPMENT HOUSEKEEPING PADS. COORDINATE WITH SLOPING OF FLOOR SO THAT RIM OF DRAIN IS FLUSH WITH FINISH FLOOR.
- COORDINATE HANGING AND SUPPORT OF PIPING WITH STRUCTURAL.
- PROVIDE PIPE SLEEVES WHERE PIPES PENETRATE WALLS.
- PROVIDE PIPE SLEEVES WHERE PIPES RUN BELOW FOOTING.
- INSTALL EXTERIOR CLEAN OUTS FLUSH WITH SURFACE.
- INSTALL PIPING IN AN ORGANIZED MANNER. DO NOT ROUTE IN FRONT OF WINDOWS.
- THE INSTALLATION OF ALL PIPING SHALL BE CLOSELY COORDINATED WITH NEW SHEET METAL. HVAC PIPING, ELECTRICAL, AND STRUCTURAL CONDITIONS. NOT ALL REQUIRED OFFSETS AND FITTINGS ARE INDICATED, BUT SHALL BE PROVIDED. REFER TO ARCHITECTURAL AND STRUCTURAL PLANS FOR CLEARANCES. THE LOCATION OF SANITARY, STORM AND VENT LINES SHALL TAKE PRECEDENCE OVER HVAC AND FIRE PROTECTION PIPING AND ELECTRICAL CONDUIT AND CABLE TRAY.
- PROVIDE WATER HAMMER ARRESTORS PER PDH-WH-201 AND UP STREAM OF ALL AUTOMATIC AND FAST CLOSING VALVES INCLUDING BUT NOT LIMITED TO SOLENOID VALVES.
- ALL EMERGENCY EYEWASH UNITS AND EMERGENCY SHOWERS SHALL BE PROVIDED WITH TEMPERED WATER AND SHALL BE IN COMPLIANCE WITH ANSI Z358.1.

PLUMBING SYMBOLS


	ANGLE RELIEF VALVE
	ANGLED STOP CHECK VALVE
	BALANCING VALVE
	BUTTERFLY VALVE
	BALL VALVE
	CHECK VALVE W/ARROW INDICATING FLOW
	GATE VALVE
	GLOBE VALVE
	LINEAR STOP CHECK VALVE
	GAS VALVE
	PLUG VALVE
	PRESSURE REDUCING VALVE
	PRESSURE RELIEF VALVE
	SOLENOID VALVE
	PRESSURE REGULATING VALVE - TWO WAY
	PRESSURE REGULATING VALVE - THREE WAY
	FLOW MEASURING DEVICE
	HOSE BIBB
	MANUAL AIR VENT
	PRESSURE INDICATOR
	TEMPERATURE INDICATOR
	THERMOMETER
	ANCHOR
	CAP
	END OF LINE, CLEANOUT
	FLOOR, CLEANOUT
	WALL, CLEANOUT
	EXPANSION COMPENSATOR OR EXPANSION JOINT
	FLEXIBLE PIPE CONNECTOR
	FLOOR DRAINS
	PIPE GUIDE
	MANHOLE
	PRESSURE REDUCING STATION
	REDUCED PRESSURE BACKFLOW PREVENTER
	STRAINER
	UNION

PLUMBING SYMBOLOGY

	POTABLE DOMESTIC COLD WATER
	NON-POTABLE DOMESTIC COLD WATER
	HOT WATER
	HOT WATER RETURN
	SANITARY WASTE
	SANITARY GREASE LADEN WASTE
	STORM
	STORM (OVERFLOW DRAINAGE)
	VENT
	COIL CONDENSATE TO DRAIN
	NATURAL GAS



This item has been electronically signed and sealed by Michael Grose using a Digital Signature and Seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

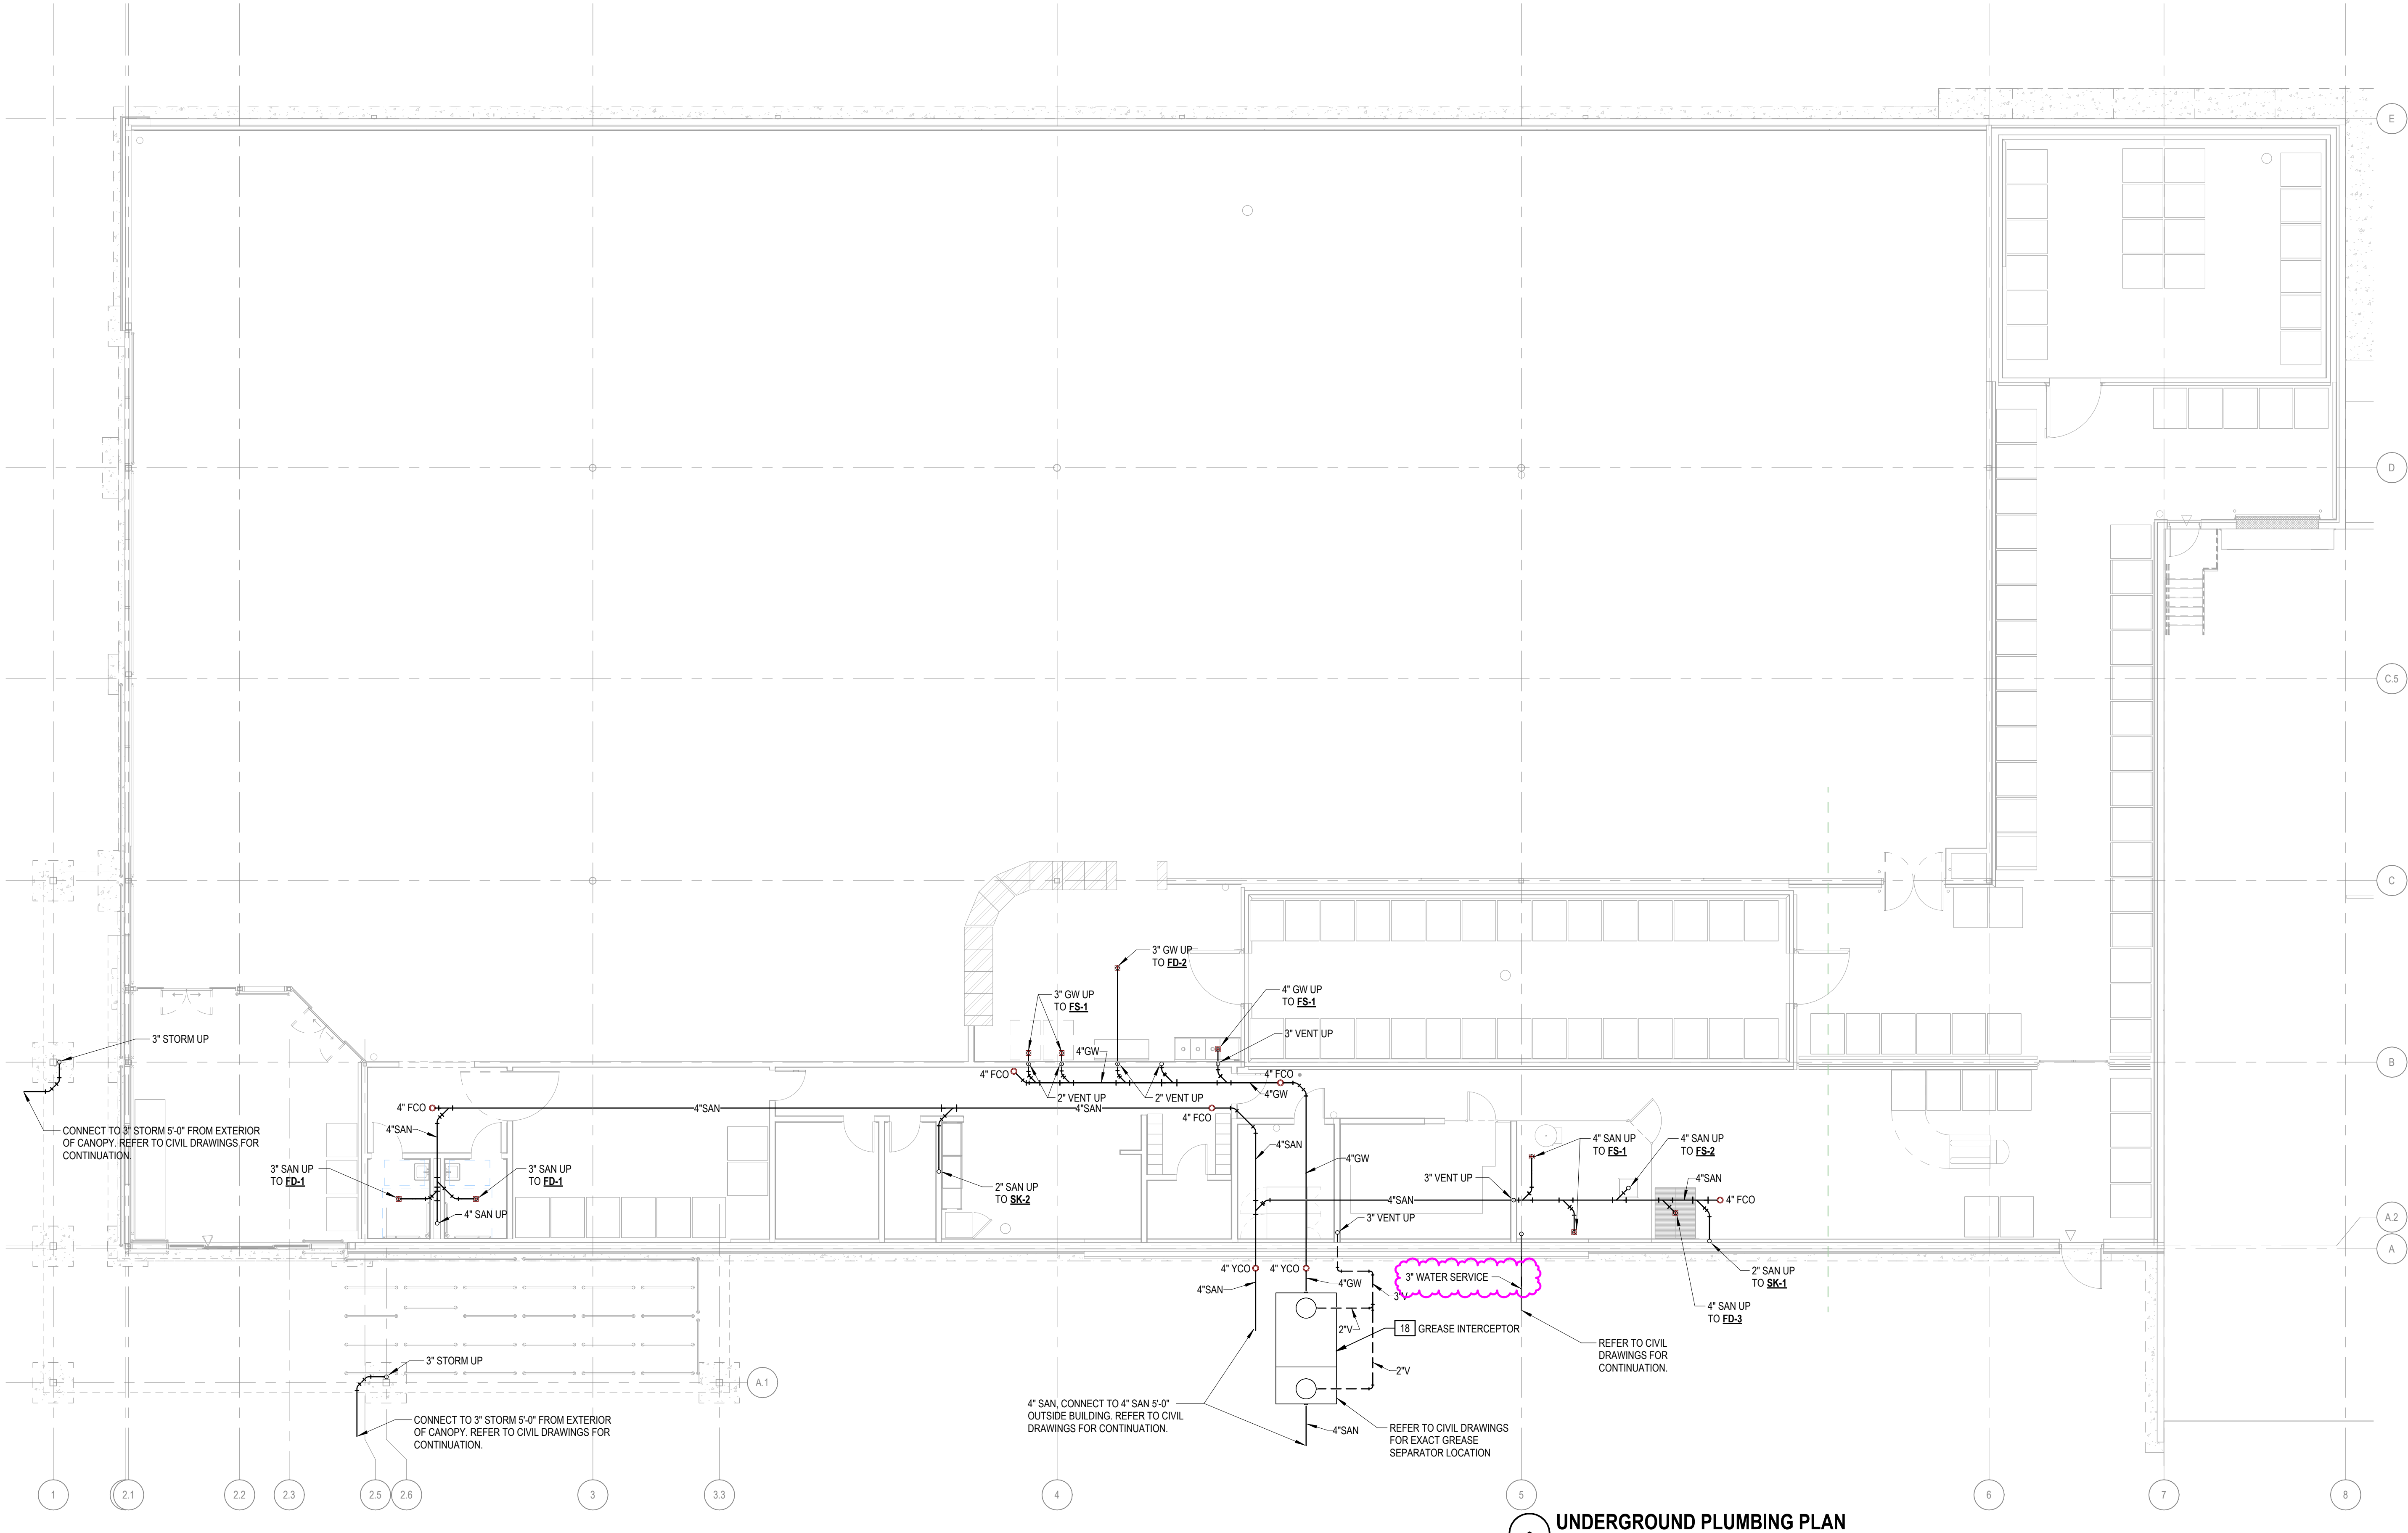

GWINNET WSR-02 GREASE TRAP REQUIREMENTS CALCULATION

CALCULATION TEMPLATE USED:
HOSPITALS, NURSING HOMES, OTHER TYPE COMMERCIAL KITCHENS WITH VARIED SEATING CAPACITY:
(M) X (GM) X (LF) X (SC) = GREASE INTERCEPTOR CAPACITY IN GALLONS, WHERE:
M = MEALS PER DAY
GM = GALLONS OF WASTEWATER PER MEAL (USE 5 GALLONS PER MEAL)
LF = LOADING FACTOR - 1.0 WITH DISHWASHING
0.5 WITHOUT DISHWASHING
SC = STORAGE CAPACITY FACTOR - 1.0 FOR PUBLIC SEWER
2.5 FOR ON-SITE DISPOSAL

SITE SPECIFIC CALCULATION:
(0) X (5) X (0.5) X (1.0) = 0 - A SINGLE 1,500 GALLON INTERCEPTOR WILL BE USED FOR THE BAKERY.

- NOTES:**
1. THIS BAKERY'S PRODUCTION WILL BE LIMITED TO IN-STORE SALES ONLY. NO BAKERY PRODUCTS WILL BE SENT TO ANY OTHER STORES, WAREHOUSES, OR OTHER VENUES
 2. THE 1,500 GALLON GREASE TRAP SHALL ONLY SERVE THE BAKERY. NO OTHER ROOMS, SPACES, OR AREAS ARE TO BE CONNECTED TO THE TRAP.

PLUMBING KEYNOTES

1. WATER SERVICE ENTRANCE LOCATION. REFER TO [P600](#) FOR DETAIL. THE BUILDING DOMESTIC WATER DEMAND IS 47 GPM. THE DOMESTIC WATER METER AND BACKFLOW PREVENTION ASSEMBLY ARE LOCATED ON SITE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE AND INSTALL 4\"/>

LIDL US, LLC

LIDL 1517 NORCROSS, GA




This item has been electronically signed and sealed by Michael Grose using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
11/07/2025 PERMIT CYCLE 1
12/18/2025 PERMIT CYCLE 02

PROJECT NUMBER
79650130
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN

UNDERGROUND -
PLUMBING PLAN
P100



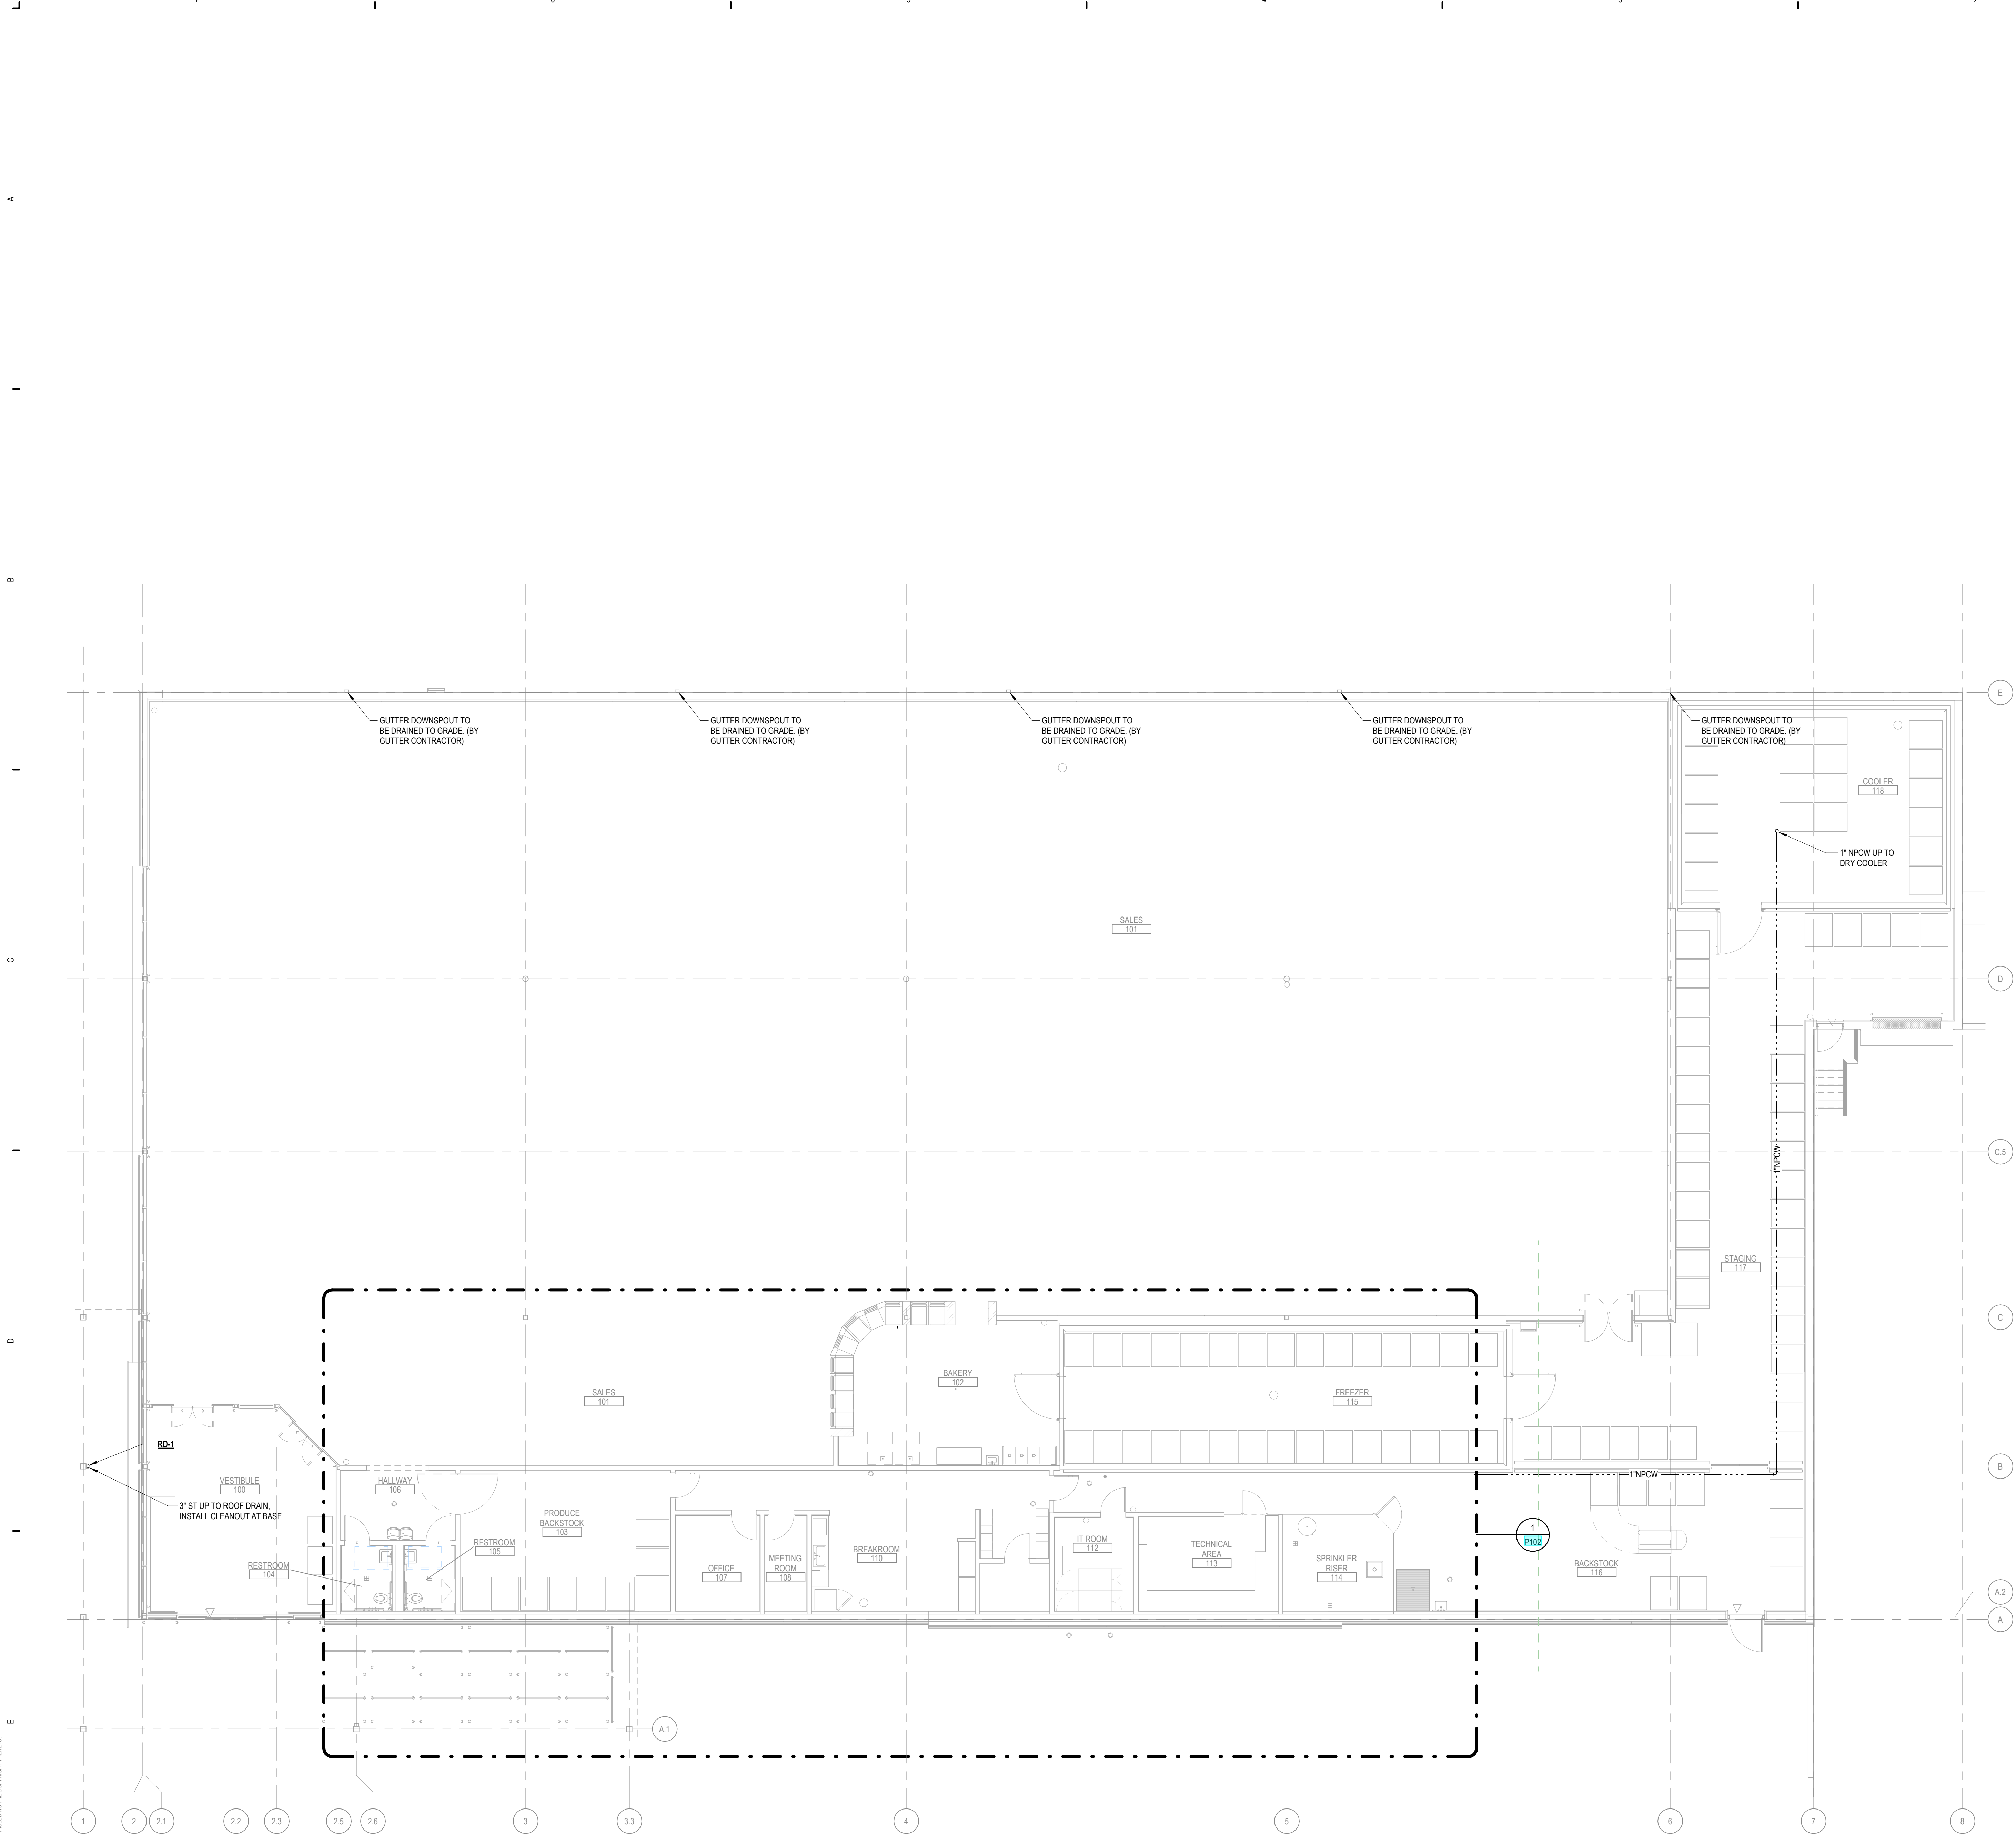


PLUMBING PLAN
1/8" = 1'-0"

PLUMBING KEYNOTES

1. WATER SERVICE ENTRANCE LOCATION. REFER TO **P500** FOR DETAIL. THE BUILDING DOMESTIC WATER DEMAND IS 47 GPM. THE DOMESTIC WATER METER AND BACKFLOW PREVENTION ASSEMBLY ARE LOCATED ON SITE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE AND INSTALL 4" SANITARY WASTE AND 2" VENT CONNECTION TO EACH WALL-MOUNT WATER CLOSET WALL CARRIER. PROVIDE 1" CW TO EACH FLUSH VALVE. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
3. PROVIDE AND INSTALL 1-1/4" WASTE PIPE WITH P-TRAP TO DRAIN OF LAVATORY. CONNECT TO 2" WASTE PIPE IN WALL. CONTINUE UP IN WALL WITH 2" VENT PIPE. PROVIDE 1/2" H&CW DOWN IN WALL TO ANGLE VALVES AT APPROXIMATELY 1'-0" AFF. ROUTE H&CW TO ASSE 1070 MIXING VALVE EQUAL TO POWERS MODEL LFE480. ROUTE OUTLET TO FAUCET CONNECTION. PROVIDE WALL CLEANOUT IN 2" IN STACK. MOUNT 18" A.F.F. AND INSTALL STAINLESS STEEL COVER. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
4. EACH FLOOR DRAIN AND FLOOR SINK SHALL BE PROTECTED WITH A TRAP SEAL INSERT, AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
5. PROVIDE AND INSTALL 1-1/4" WASTE CONNECTION TO HIGH/LOW WATER COOLER. PROVIDE 1/2" CW TO CONNECTION OF UNIT. INSTALL PER MFG INSTALLATION INSTRUCTIONS.
6. FLOOR SINK MOP BASIN. PROVIDE TRAPPED 3" WASTE LINE TO FIXTURE. THIS IS A DRAIN RECEPTACLE ONLY AND DOMESTIC WATER IS NOT REQUIRED. THIS RECEPTACLE IS USED TO DRAIN THE CONDENSATE VACUUM SYSTEM. THIS FIXTURE SHALL BE PROTECTED WITH A TRAP SEAL INSERT, AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
7. PROVIDE AND INSTALL 1-1/2" WASTE TO SINK BOWL P-TRAP. CONNECT TO 2" WASTE LINES IN THE WALL. CONTINUE UP IN WALL WITH MINIMUM 2" VENT LINES. PROVIDE 1/2" H&CW DOWN TO ANGLE STOP VALVE UNDER THE SINK COUNTERTOPS. ROUTE H&CW TO ASSE 1070 MIXING VALVE EQUAL TO POWERS MODEL LFE480. ROUTE OUTLET TO FAUCET HW CONNECTION. ROUTE CW TO FAUCET CW CONNECTION. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
8. INSTALL GARBAGE DISPOSAL BELOW SINK IN CABINET. INSTALL SANITARY AND VENT PIPING PER THE GARBAGE DISPOSAL'S WRITTEN INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
9. CONNECT 1/2" HW TO UNDER CABINET DISHWASHER. CONNECT DISHWASHER DRAIN TO SINK SANITARY PIPING. INSTALL DOMESTIC WATER AND SANITARY PIPING PER DISHWASHER INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
10. PROVIDE AND INSTALL 2" WASTE FOR EACH BOWL OF 3 COMPARTMENT SINK. ROUTE EACH WASTE DRAIN INDIVIDUALLY TO FLOOR SINK WITH INDIRECT CONNECTION. PROVIDE 1" AIR GAP AT FLOOR SINK AND CUT DRAIN PIPE TERMINATIONS AT 45° ANGLE. ROUTE 3/4" C&HW DOWN TO SINK FAUCET. REFER TO **P600** FOR SINK DETAIL.
11. 1/2" CW LINE DOWN TO REFRIGERATOR UTILITY BOX. PROVIDE WATER CONNECTION PER REFRIGERATOR MANUFACTURER'S INSTRUCTIONS.
12. EXTERIOR NON FREEZE WALL HYDRANT. ROUTE 3/4" CW DOWN INTERIOR WALL FACE AND INSTALL HYDRANT AT 18" A.F.F. PROVIDE AND INSTALL SHUTOFF VALVE IN 3/4" CW DROP APPROXIMATELY 48" A.F.F. PROVIDE AND INSTALL WATER HAMMER ARRESTOR IN DROP.
13. ROUTE 3/4" CW UP TO ROOF HYDRANT. COORDINATE WITH ALL TRADES. PROVIDE AND INSTALL WATER HAMMER ARRESTOR NEAR ROOF HYDRANT BELOW ROOF.
14. 3/4" CW LINE DOWN TO STEAM OVEN UTILITY BOX. PROVIDE WATER CONNECTION PER STEAM OVEN MANUFACTURER'S INSTRUCTIONS. PROVIDE ASSE 1012 BFP. EQUAL TO WATTS 80 DISCHARGE ATMOSPHERIC VENT TO FLOOR SINK WITH CODE APPROVED AIR GAP.
15. ELECTRIC WATER HEATER. MOUNT IN SAFE DRAIN PAN. PROVIDE 1" CW, 1" HW, AND 1" HWV TO UNIT. PROVIDE HEAT TRAPS AND ISOLATION BALL VALVE. ROUTE 3/4" COPPER DRAIN LINES FROM P&T VALVE AND FROM TANK DRAIN TO NEAREST FLOOR RECEPTOR (DRAIN AND DISCHARGE INDIRECTLY WITH AIR GAP). REFER TO **P500** FOR WATER HEATER DETAIL. COORDINATE WATER HEATER LOCATION WITH REFRIGERANT VACUUM SYSTEM EQUIPMENT.
16. ROUTE 3/4" H&CW DOWN TO MIXING VALVE FOR CHEMICAL CLEANER SYSTEM. INSTALL FLOOR SINK CENTERED BELOW SCRUBBER GRATE.
17. ROUTE 3/4" CW TO VACUUM SYSTEM. PROVIDE AND INSTALL 3/4" REDUCED PRESSURE ZONE BACKFLOW PREVENTER. EQUAL TO WATTS MODEL LFD09. ROUTE BFP DISCHARGE TO FLOOR SINK FS-1. REFER TO DETAIL ON SHEET **P600**. COORDINATE EXACT CONNECTION LOCATION WITH THE VACUUM SYSTEM CONTRACTOR.
18. GREASE INTERCEPTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE GWINNETT COUNTY DEPARTMENT OF WATER RESOURCES AND HWJ. REFER TO **P100** FOR GREASE INTERCEPTOR DETAILS. GREASE INTERCEPTOR SHALL BE OF CONCRETE CONSTRUCTION PER THE COUNTY REQUIREMENTS. REFER TO CIVIL DRAWINGS FOR EXACT GREASE INTERCEPTOR LOCATION ON SITE.

LIDL US, LLC

LIDL 1517 NORCROSS, GA

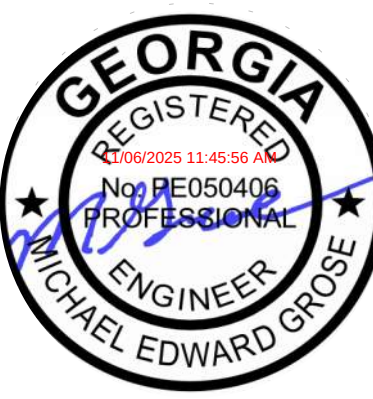

This item has been electronically signed and sealed by Michael Grose using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
11/07/2025 PERMIT CYCLE 1

PROJECT NUMBER
7960130
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN

PLUMBING PLAN
P101


PROGRESSIVE
COMPANIES
Charlotte, NC | Detroit, MI | Grand Rapids, MI
wearprogressive.com



499 JIMMY CARTER BLVD. NORCROSS, GA 30093

12/17/2025 14:27 PM Autodesk Docs/17055191-1 Ldl 1517 Norcross GA/1517 NORCROSS GA- MECH-104

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF PROGRESSIVE ARCHITECTURE & PLANNING, LLC. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PROGRESSIVE ARCHITECTURE & PLANNING, LLC. ALL RIGHTS ARE RESERVED, INCLUDING THE COPYRIGHT THEREIN.

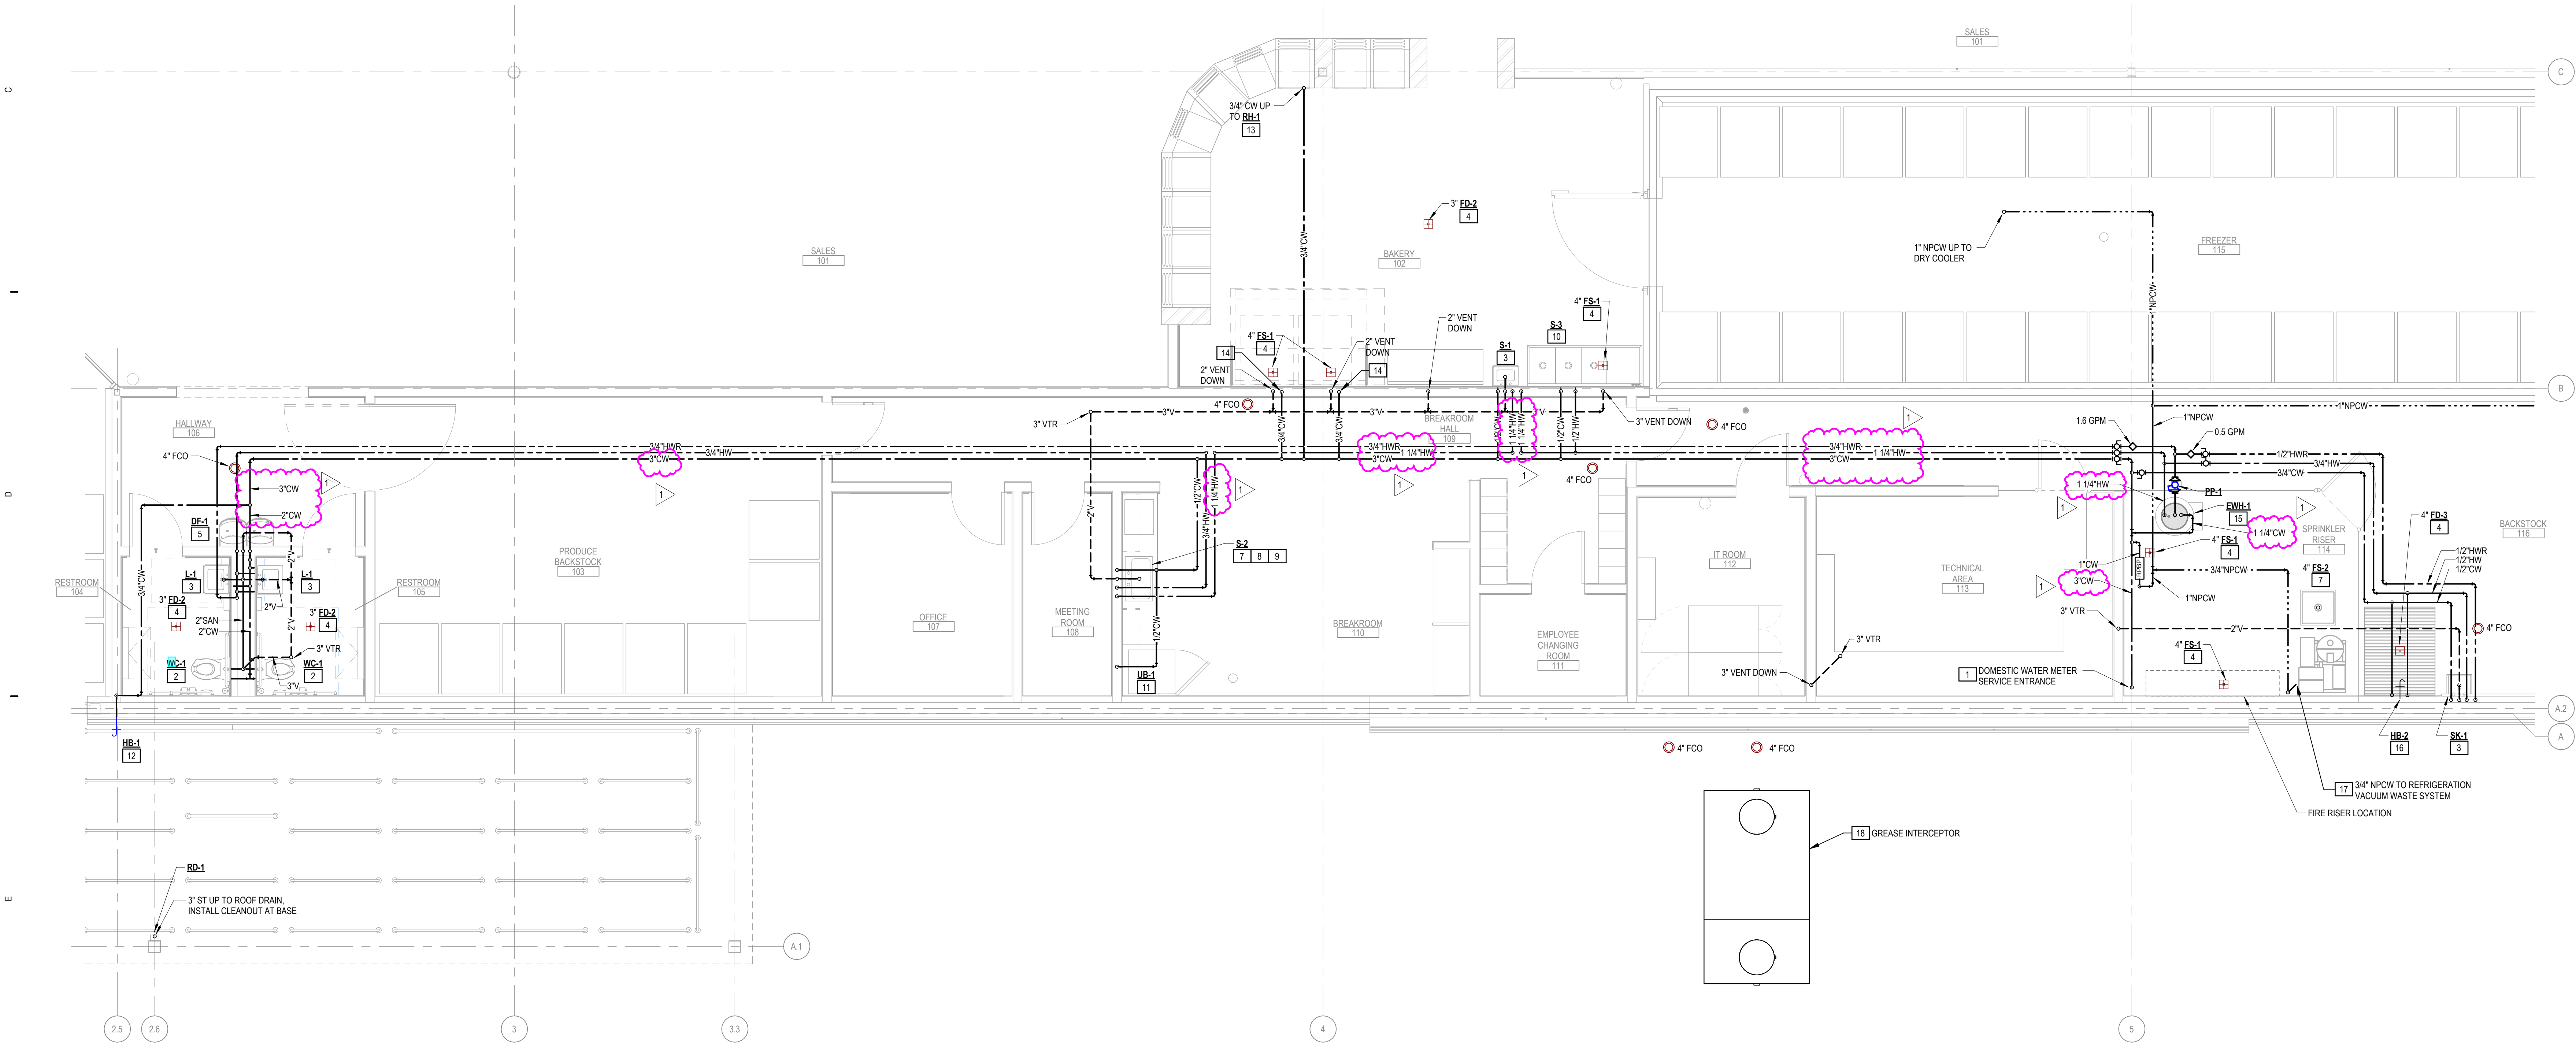


PLUMBING KEYNOTES

1. WATER SERVICE ENTRANCE LOCATION. REFER TO **P500** FOR DETAIL. THE BUILDING DOMESTIC WATER DEMAND IS 47 GPM. THE DOMESTIC WATER METER AND BACKFLOW PREVENTION ASSEMBLY ARE LOCATED ON SITE. REFER TO CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE AND INSTALL 4" SANITARY WASTE AND 2" VENT CONNECTION TO EACH WALL-MOUNT WATER CLOSET WALL CARRIER. PROVIDE 1" CW TO EACH FLUSH VALVE. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
3. PROVIDE AND INSTALL 1-1/4" WASTE PIPE WITH P-TRAP TO DRAIN OF LAVATORY. CONNECT TO 2" WASTE PIPE IN WALL. CONTINUE UP IN WALL WITH 2" VENT PIPE. PROVIDE 1/2" H&CW DOWN IN WALL TO ANGLE VALVES AT APPROXIMATELY 1'-0" AFF. ROUTE H&CW TO ASSE 1070 MIXING VALVE EQUAL TO POWERS MODEL LFE480. ROUTE OUTLET TO FAUCET CONNECTION. PROVIDE WALL CLEANOUT IN 2" W/ STACK. MOUNT 18" A.F.F. AND INSTALL STAINLESS STEEL COVER. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
4. EACH FLOOR DRAIN AND FLOOR SINK SHALL BE PROTECTED WITH A TRAP SEAL INSERT, AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
5. PROVIDE AND INSTALL 1-1/4" WASTE CONNECTION TO HIGH-LOW WATER COOLER. PROVIDE 1/2" CW TO CONNECTION OF UNIT. INSTALL PER MFG INSTALLATION INSTRUCTIONS.
6. FLOOR SINK W/OP BASIN. PROVIDE TRAPPED 3" WASTE LINE TO FIXTURE. THIS IS A DRAIN RECEPTACLE ONLY AND DOMESTIC WATER IS NOT REQUIRED. THIS RECEPTACLE IS USED TO DRAIN THE CONDENSATE VACUUM SYSTEM. THIS FIXTURE SHALL BE PROTECTED WITH A TRAP SEAL INSERT, AS NOTED IN SPECIFICATIONS. WHERE NOT ALLOWED BY LOCAL PLUMBING OFFICIAL, PROVIDE TRAP PRIMER.
7. PROVIDE AND INSTALL 1-1/2" WASTE TO SINK BOWL P-TRAP. CONNECT TO 2" WASTE LINES IN THE WALL. CONTINUE UP IN WALL WITH MINIMUM 2" VENT LINES. PROVIDE 1/2" H&CW DOWN TO ANGLE STOP VALVE UNDER THE SINK COUNTERTOPS. ROUTE H&CW TO ASSE 1070 MIXING VALVE EQUAL TO POWERS MODEL LFE480. ROUTE OUTLET TO FAUCET HW CONNECTION. ROUTE CW TO FAUCET CW CONNECTION. PROVIDE AND INSTALL WATER HAMMER ARRESTOR FOR EACH DROP.
8. INSTALL GARBAGE DISPOSAL BELOW SINK IN CABINET. INSTALL SANITARY AND VENT PIPING PER THE GARBAGE DISPOSAL'S WRITTEN INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
9. CONNECT 1/2" HW TO UNDER CABINET DISHWASHER. CONNECT DISHWASHER DRAIN TO SINK SANITARY PIPING. INSTALL DOMESTIC WATER AND SANITARY PIPING PER DISHWASHER INSTRUCTIONS. COORDINATE INSTALLATION WITH ELECTRICAL CONTRACTOR.
10. PROVIDE AND INSTALL 2" WASTE FOR EACH BOWL OF 3 COMPARTMENT SINK. ROUTE EACH WASTE DRAIN INDIVIDUALLY TO FLOOR SINK WITH INDIRECT CONNECTION. PROVIDE 1" AIR GAP AT FLOOR SINK AND CUT DRAIN PIPE TERMINATIONS AT 45° ANGLE. ROUTE 3/4" C&HW DOWN TO SINK FAUCET. REFER TO **P600** FOR SINK DETAIL.
11. 1/2" CW LINE DOWN TO REFRIGERATOR UTILITY BOX. PROVIDE WATER CONNECTION PER REFRIGERATOR MANUFACTURER'S INSTRUCTIONS.
12. EXTERIOR NON FREEZE WALL HYDRANT. ROUTE 3/4" CW DOWN INTERIOR WALL FACE AND INSTALL HYDRANT AT 18" A.F.F. PROVIDE AND INSTALL SHUTOFF VALVE IN 3/4" CW DROP APPROXIMATELY 48" A.F.F. PROVIDE AND INSTALL WATER HAMMER ARRESTOR IN DROP.
13. ROUTE 3/4" CW UP TO ROOF HYDRANT. COORDINATE WITH ALL TRADES. PROVIDE AND INSTALL WATER HAMMER ARRESTOR NEAR ROOF HYDRANT BELOW ROOF.
14. 3/4" CW LINE DOWN TO STEAM OVEN UTILITY BOX. PROVIDE WATER CONNECTION PER STEAM OVEN MANUFACTURER'S INSTRUCTIONS. PROVIDE ASSE 1012 BPP. EQUAL TO WATTS 90. DISCHARGE ATMOSPHERIC VENT TO FLOOR SINK WITH CODE APPROVED AIR GAP.
15. ELECTRIC WATER HEATER. MOUNT IN SAFE DRAIN PAN. PROVIDE 1" CW, 1" HW, AND 1" HWR TO UNIT. PROVIDE HEAT TRAPS AND ISOLATION BALL VALVE. ROUTE 3/4" COPPER DRAIN LINES FROM P&T VALVE AND FROM TANK DRAIN TO NEAREST FLOOR RECEPTOR (DRAIN AND DISCHARGE INDIRECTLY WITH AIR GAP. REFER TO **P600** FOR WATER HEATER DETAIL. COORDINATE WATER HEATER LOCATION WITH REFRIGERANT VACUUM SYSTEM EQUIPMENT.
16. ROUTE 3/4" H&CW DOWN TO MIXING VALVE FOR CHEMICAL CLEANER SYSTEM. INSTALL FLOOR SINK CENTERED BELOW SCRUBBER GRATE.
17. ROUTE 3/4" CW TO VACUUM SYSTEM. PROVIDE AND INSTALL 3/4" REDUCED PRESSURE ZONE BACKFLOW PREVENTER. EQUAL TO WATTS MODEL LP009. ROUTE BPP DISCHARGE TO FLOOR SINK FS-1. REFER TO DETAIL ON SHEET P101. COORDINATE EXACT CONNECTION LOCATION WITH THE VACUUM SYSTEM CONTRACTOR.
18. GREASE INTERCEPTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE GWINNETT COUNTY DEPARTMENT OF WATER RESOURCES AND A&J. REFER TO **P100** FOR GREASE INTERCEPTOR DETAILS. GREASE INTERCEPTOR SHALL BE OF CONCRETE CONSTRUCTION PER THE COUNTY REQUIREMENTS. REFER TO CIVIL DRAWINGS FOR EXACT GREASE INTERCEPTOR LOCATION ON SITE.

1 ENLARGED PLUMBING PLAN
1/4" = 1'-0"

LIDL US, LLC

LIDL 1517 NORCROSS, GA

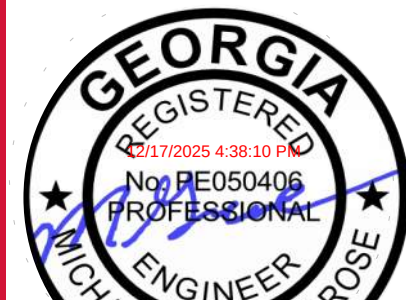

This item has been electronically signed and sealed by Michael Grose using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.


ISSUANCE
1 11/07/2025 PERMIT CYCLE 1
1 12/18/2025 PERMIT CYCLE 02

PROJECT NUMBER
79650130
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN

ENLARGED
PLUMBING PLAN
P102

PROGRESSIVE
ARCHITECTURE ENGINEERING & PLANNING, LLC
PROGRESSIVE
COMPANIES
Charlotte, NC | Detroit, MI | Grand Rapids, MI
weareprogressive.com

PLUMBING FIXTURE SCHEDULE													
MARK	FIXTURE TYPE	DESCRIPTION	BASIS OF DESIGN			OPTION 2			CONNECTIONS				NOTES
			MANUFACTURER	MODEL	ACCESSORIES	MANUFACTURER	MODEL	ACCESSORIES	WASTE	VENT	CW	HW	
DF-1	DRINKING FOUNTAIN	BI-LEVEL NON REFRIGERATED	ELKAY	VRCTLD0SC					1-1/2"	1-1/2"	1/2"		NO BOTTLE FILL STATION
HB-1	HOSE BIBB	NON-FREEZE WALL HYDRANT	WOODFORD	B65							3/4"		PROVIDE DOUBLE CHECK FALVE AND INTEGRAL ASSE 1011 ANTI-SIPHON VACUUM BREAKER FOR HOSE BIBBS
HB-2	HOSE BIBB	HOSE BIB	T&S BRASS	MV-0771-12N-BVT							3/4"	3/4"	3/4" INLET CONNECTIONS AND 3/4" HOSE OUTLET CONNECTION WITH SWIVEL. 3/4" CHECK VALVES ON BOTH HOT AND COLD SIDES, STAINLESS STEEL THERMOMETER.
L-1	LAVATORY	WALL MOUNTED, AUTOMATIC	KOHLER	K-2084	FAUCET: KOHLER K-13460	AM STD	9024.001EC.020	FAUCET: AM STD 775B.215.002	1-1/2"	1-1/2"	1/2"	1/2"	PROVIDE STANDARD LAVATORY KIT, LEAD FREE, BARRIER FREE. CARRIER: ZURN Z1231-E2-F/K-2053 REFER TO PLANS FOR SIZES
RD-1	ROOF DRAIN	DEPOXY COATED CAST IRON ROOF DRAIN WITH FLASHING CLAMP AND INTEGRAL GRAVEL STOP, THREADED ADJUSTABLE EXTENSION ASSEMBLY, POLYETHYLENE DOME	JAY R SMITH	1015									
RH-1	ROOF HYDRANT	NON-FREEZE ROOF HYDRANT	WOODFORD	SRH-MS	DUAL CHECK BACKFLOW PREVENTER AND DRAIN							3/4"	
SK-1	SINK	HAND SINK, WITH SIDE SPLASHES	KROWNE	HS-5		COMPONENT HARDWARE	S20-101405KSF	FAUCET: TOP-LINE TLL-4000SE1	2"	2"	1/2"	1/2"	
SK-2	SINK	BREAK SINK	ELKAY	ELUHAD281655	FAUCET: ELKAY LKAV4032, GARBAGE DISPOSAL: INSINKERATOR BADGER 5				2"	2"	1/2"	1/2"	SELECT WITH FACTORY INSTALLED POWER CORD, COORDINATE ELECTRICAL REQUIREMENTS WITH ELECTRICAL CONTRACTOR
SK-3	SINK	THREE COMPARTMENT SINK	ELKAY	SS835LR4	FAUCET: KROWNE 17-109WL	IMC/TEDDY	SCS-34-2424-24RL		2"	2"	1/2"	1/2"	PROVIDE AND INSTALL TWO (2) IDENTICAL FAUCETS FOR SINK
UB-1	WATER SUPPLY	UTILITY BOX	GUY GREY	88533	WHITE POWERED COATED COLD ROLLED STEEL WASHING MACHINE OUTLET BOX WITH 1/4 TURN BALL VALVES						1/2"		
WC-1	WATER CLOSET	WALL MOUNTED (ADA ACCESSABLE), BATTERY POWERED FLUSH VALVE	KOHLER	K-84325-0	FLUSH VALVE: ZURN ZTR6200-WS1	AM STD	3351.528.020		4"	2"	1"		CARRIER: ZURN SERIES 1200



WATER HEATER SCHEDULE												
SYMBOL	EQUIPMENT TYPE	LOCATION	BASIS OF DESIGN		OPTION 2		TANK CAPACITY (GALLONS)	ELECTRICAL				NOTES
			MANUFACTURER	MODEL	MANUFACTURER	MODEL		VOLTS	PH	AMPS	WATTS	

PUMP SCHEDULE											
Mark	EQUIPMENT TYPE	BASIS OF DESIGN		FLOW RATE (GPM)	HEAD (FT H2O)	Rated Speed (RPM)	ELECTRICAL				NOTES
		MFRS	Model				VOLTAGE	Phase	AMPS	WATTS	
PP-1	CIRCULATION PUMP	BELL & GOSSETT	NBF-36	2.1 GPM	20	3300	120 V	1	2.3	270W	PUMP SHALL BE SUITABLE FOR DOMESTIC HOT WATER USAGE

PIPING MATERIALS		
PIPING SYSTEM	PIPE TYPE	MATERIAL STANDARD
SANITARY WASTE AND VENT UNDERGROUND	SCHEDULE 40 PVC	ASTM D 2665; ASTM F 891; ASTM F 1488; CSA B 181.2
SANITARY WASTE AND VENT ABOVE	SCHEDULE 40 PVC	ASTM D 2665; ASTM F 891; ASTM F 1488; CSA B 181.2
DOMESTIC WATER UNDERGROUND 2" OR LARGER	PEX (WHERE PERMITTED BY AHJ) / COPPER	ASTM B 42; ASTM B 302; ASTM F 876; ASTM F 877; ASTM F 1281
DOMESTIC WATER ABOVEGROUND 3" OR SMALLER	PEX (WHERE PERMITTED BY AHJ) / COPPER	ASTM B 42; ASTM B 302; ASTM F 876; ASTM F 877; ASTM F 1281
CONDENSATE DISCHARGE FROM BAKERY OVEN	CAST IRON	ASTM A 74; ASTM A 888; CISPI 301
KITCHEN UNDERGROUND WASTE	GAST IRON	ASTM A 74; ASTM A 888; CISPI 301

FLOOR DRAIN SCHEDULE						
SYMBOL	FIXTURE TYPE	BASIS OF DESIGN		BASIS OF DESIGN		NOTES
		MFR	MODEL	MFR	MODEL	
FD-1	FLOOR DRAIN	SIoux CHIEF	832-4HHDD	ZURN	ZN415-3NH-SB	4" FLOOR DRAIN WITH STRAINER FOR TOILET ROOMS AND OTHER FINISHED AREAS. NICKEL FINISH. SEE PLANS FOR SIZES
FD-2	FLOOR DRAIN	SIoux CHIEF	832-25PSRV	ZURN	FD1-3NH-S6	SQUARE DRAIN FOR KITCHEN AREAS. PROVIDE STAINLESS STEEL. SEE PLANS FOR SIZES
FD-3	FLOOR DRAIN	MIFAB	FS1950-S	ZURN	ZN511-3NL-S-Y	DRAIN WITH REMOVABLE STRAINER AND SEDIMENT BUCKET
FS-1	FLOOR SINK	ZURN	Z1900 SERIES	ZURN	Z1751-3NH-2	HALF GRATE. SEE PLANS FOR SIZES
FS-2	FLOOR SINK	E.L. MUSTEE	MUSTEE63M			PROVIDE ACRYLIC COVER, NO FAUCET, FOR VACUUM SYSTEM DRAINAGE ONLY.





This item has been electronically signed and sealed by Michael Grose using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.



ISSUANCE		
1	11/07/2025	PERMIT CYCLE 1
1	12/18/2025	PERMIT CYCLE 02

PROJECT NUMBER
7650130
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN




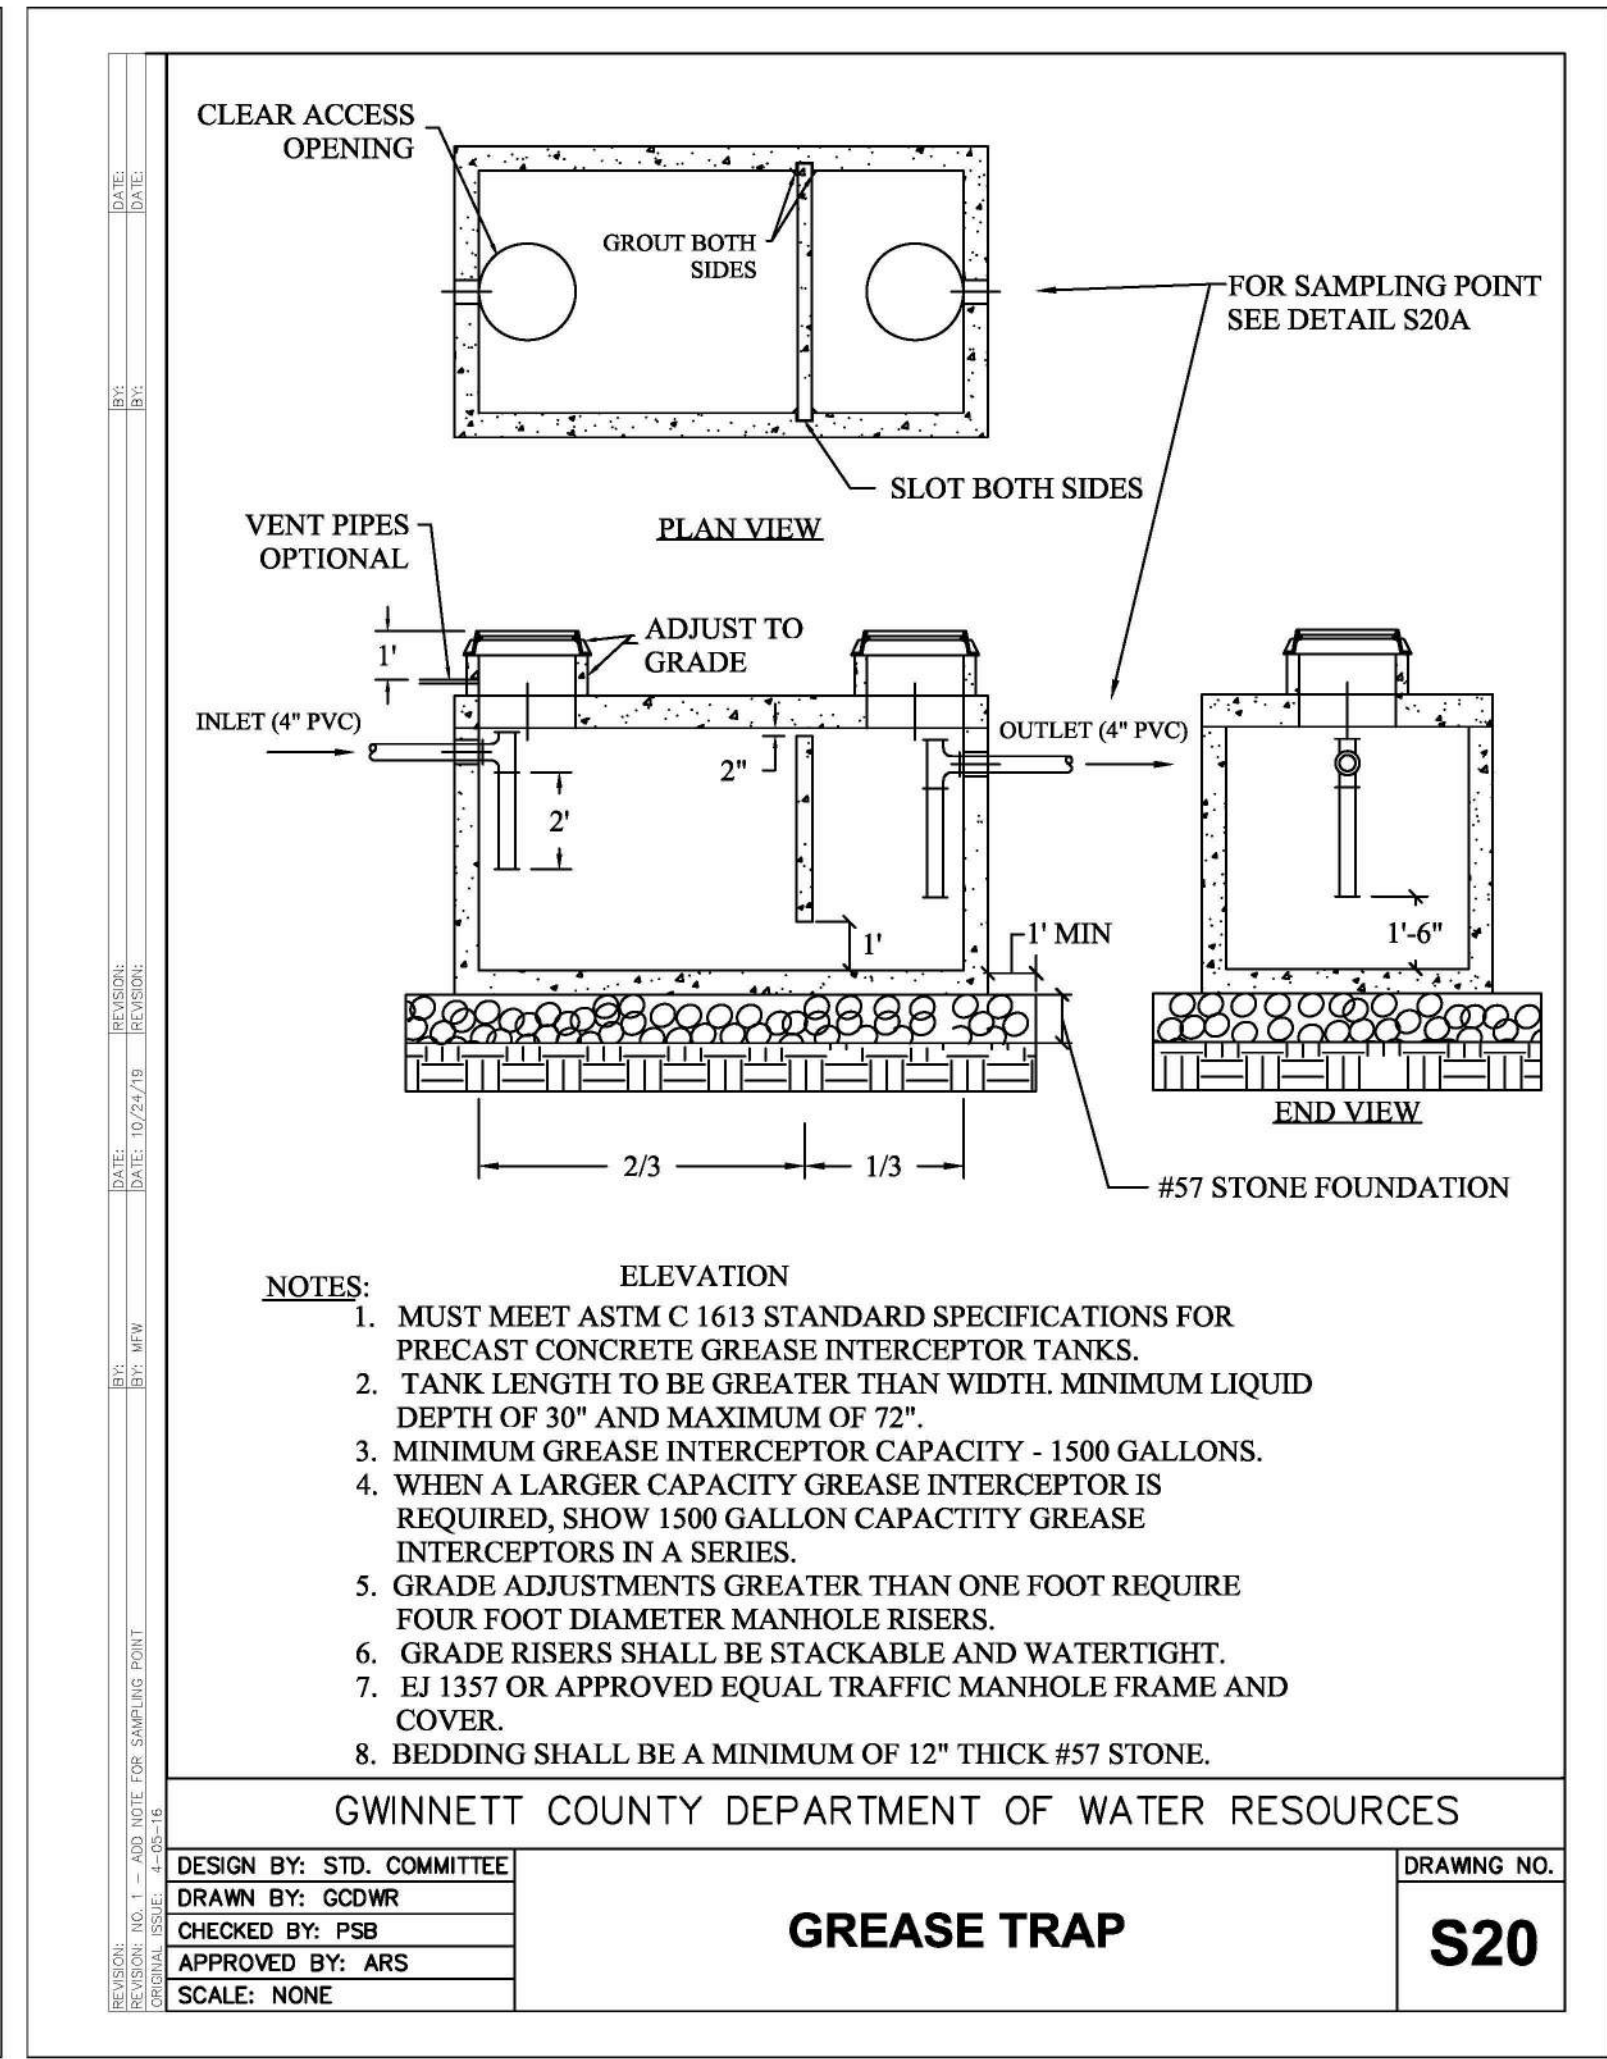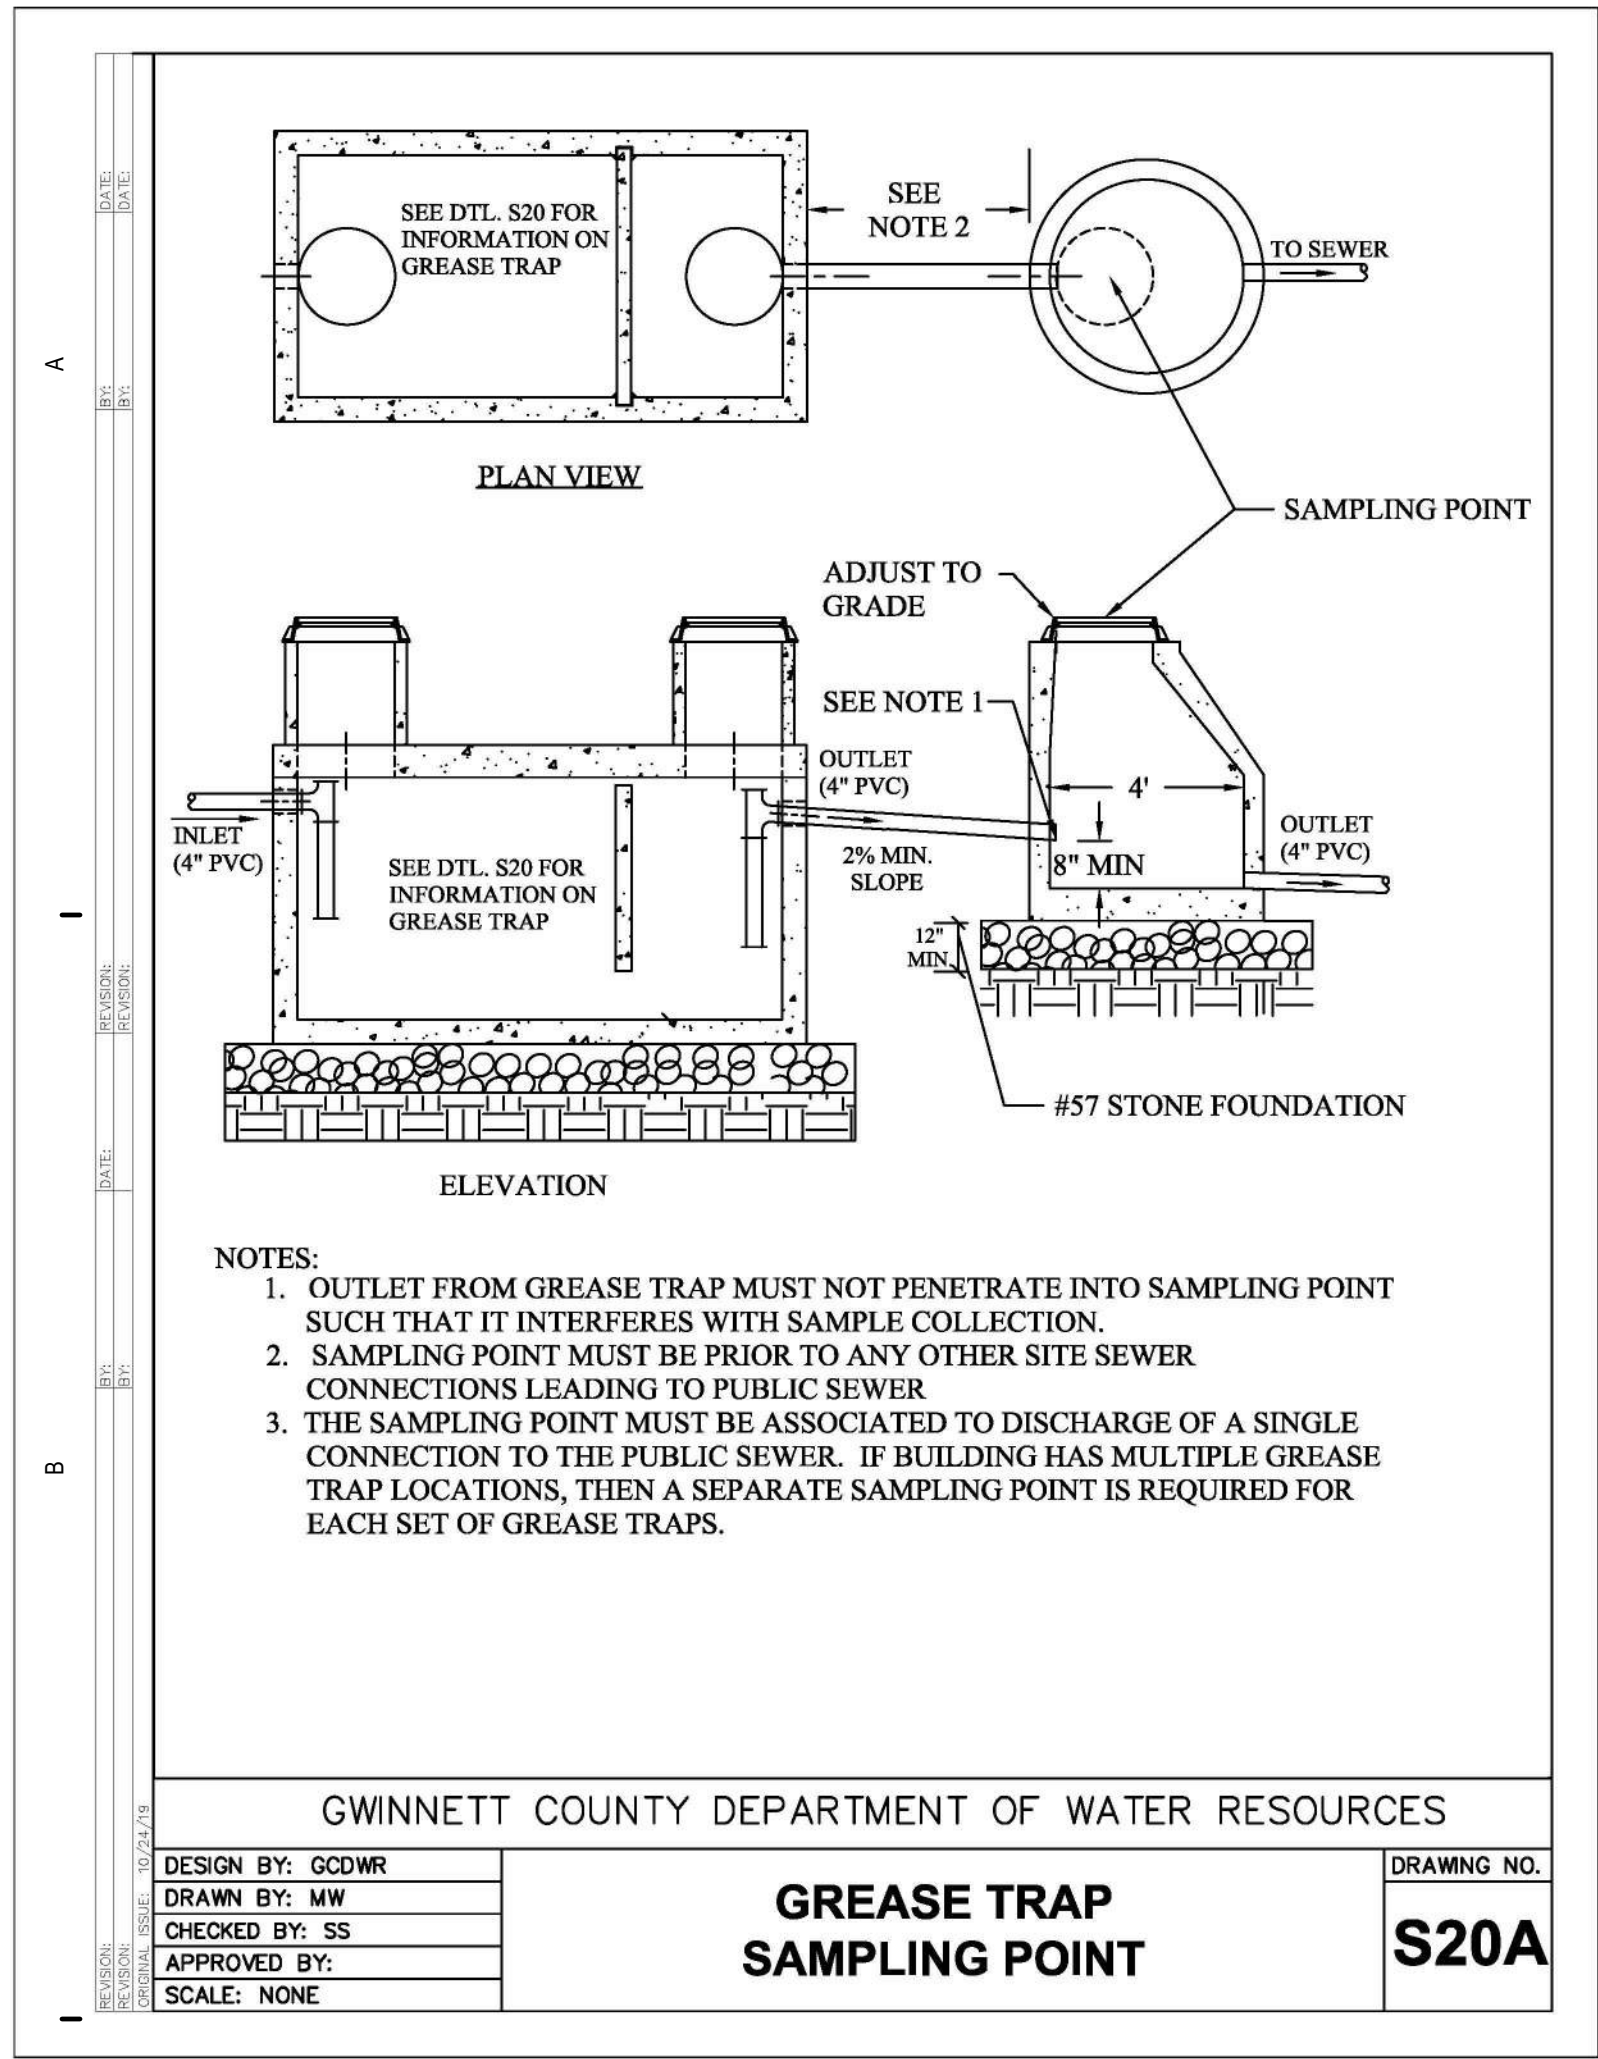


A2 DOMESTIC WATER METER DETAIL
NOT TO SCALE

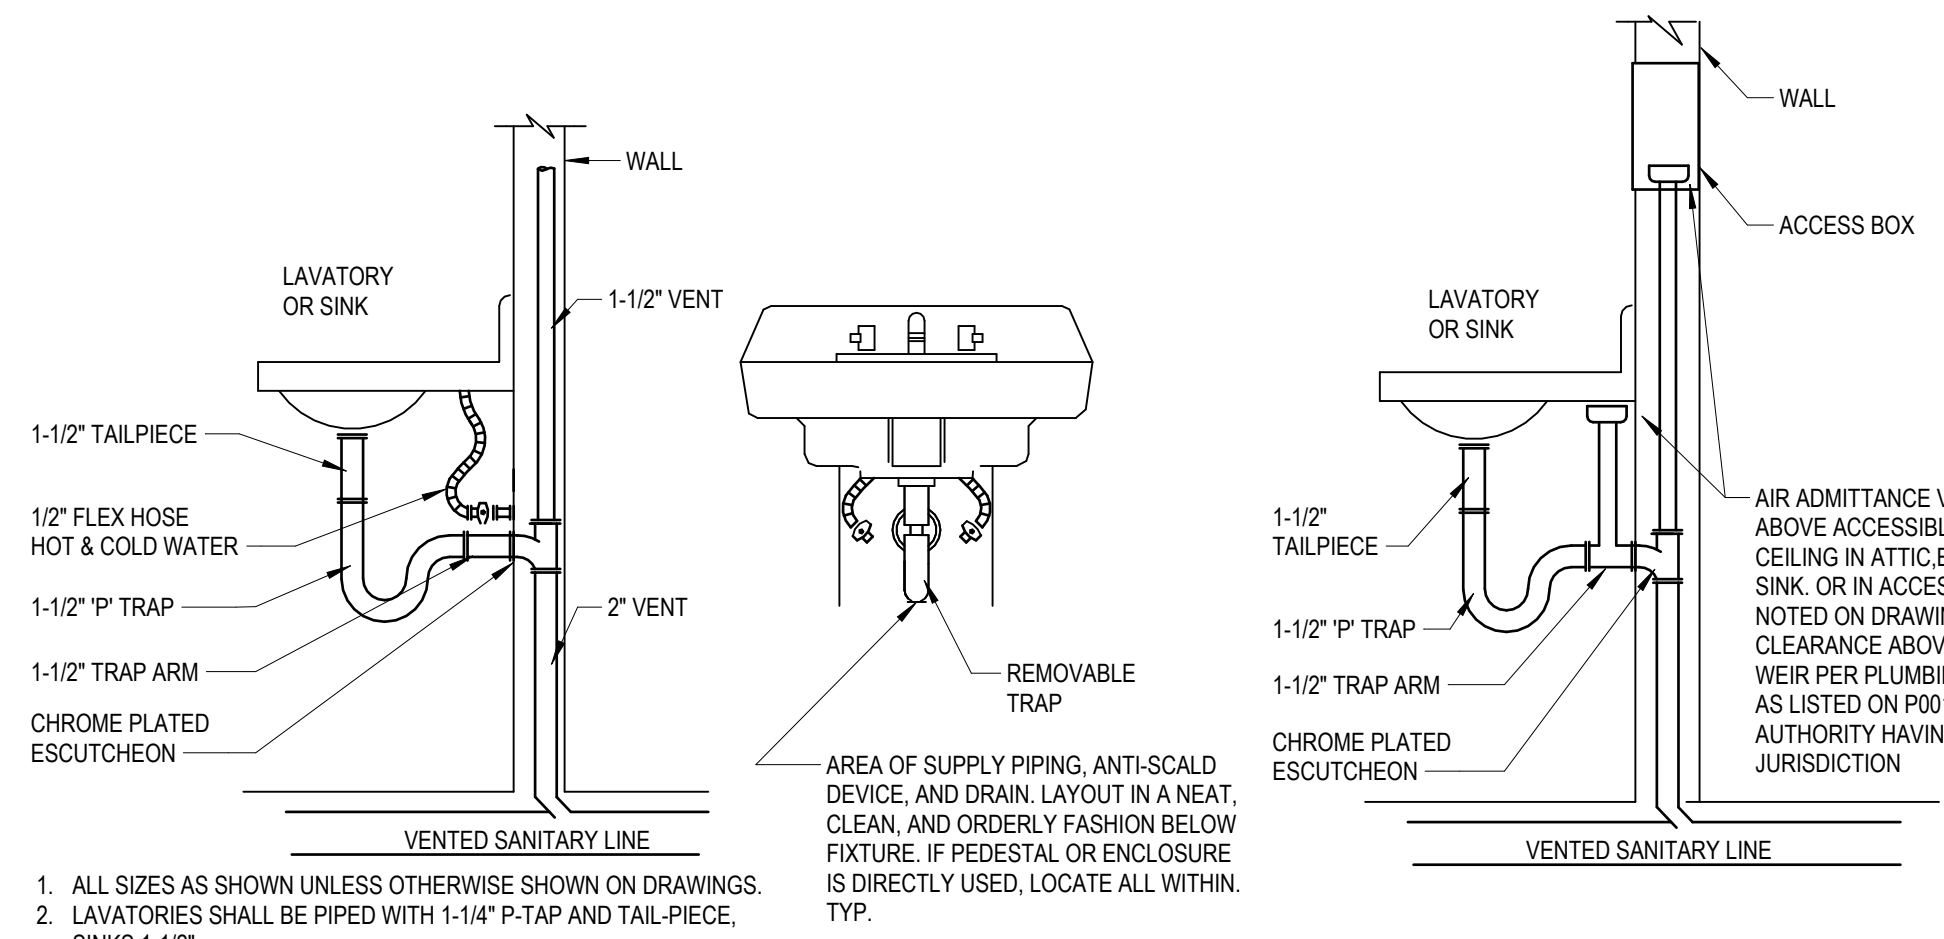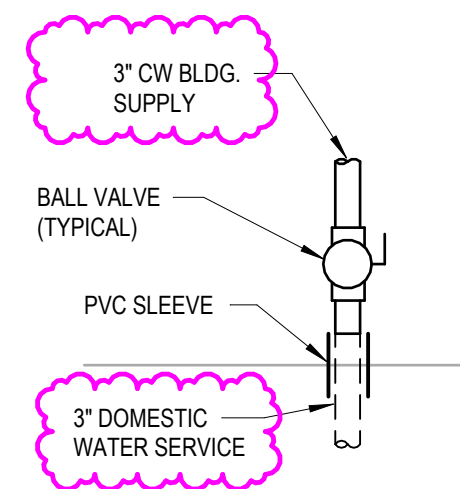


A1 TYPICAL SINK/LAVATORY DETAIL
NOT TO SCALE

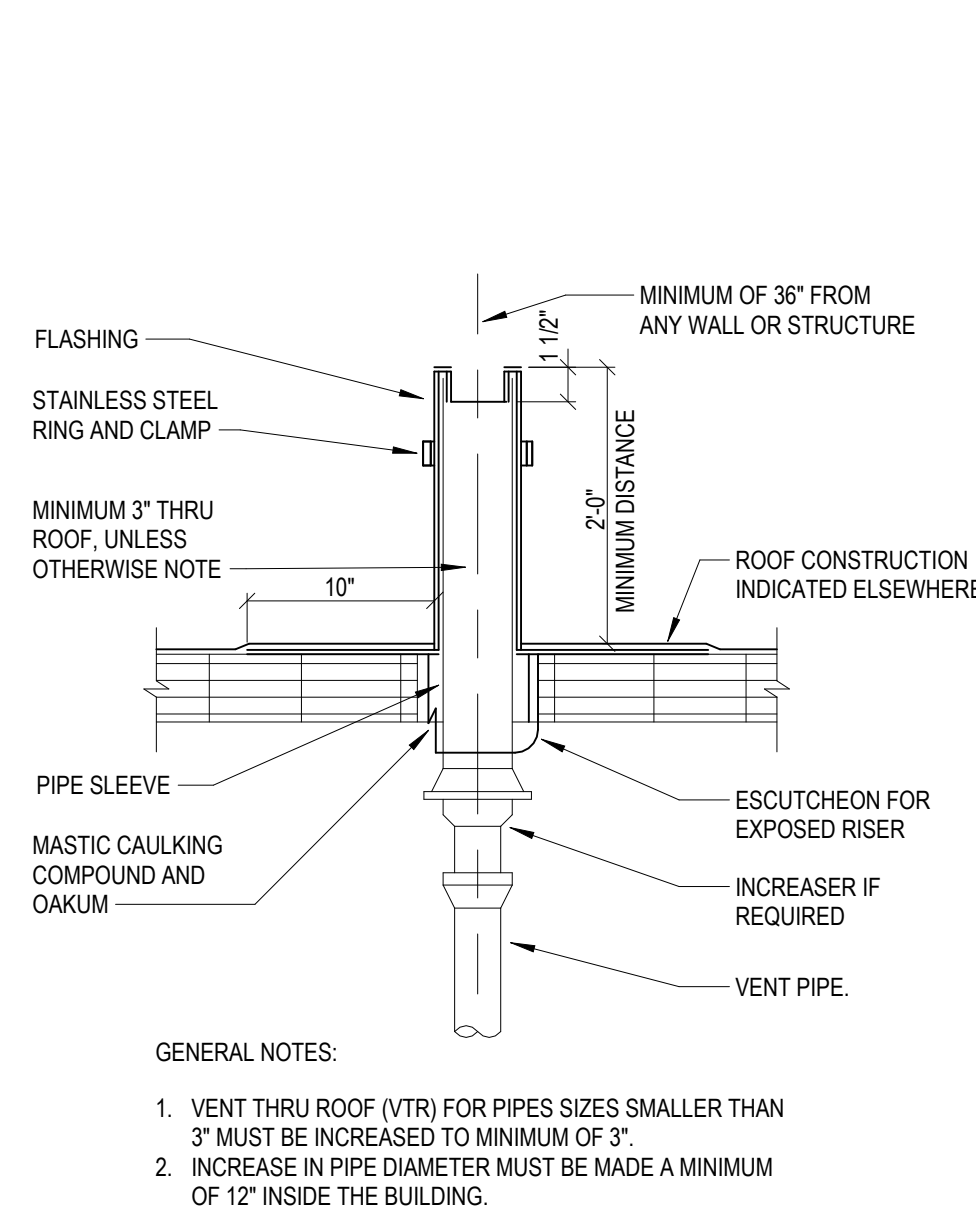


C4 PLUMBING VENT THROUGH ROOF DETAIL
NOT TO SCALE

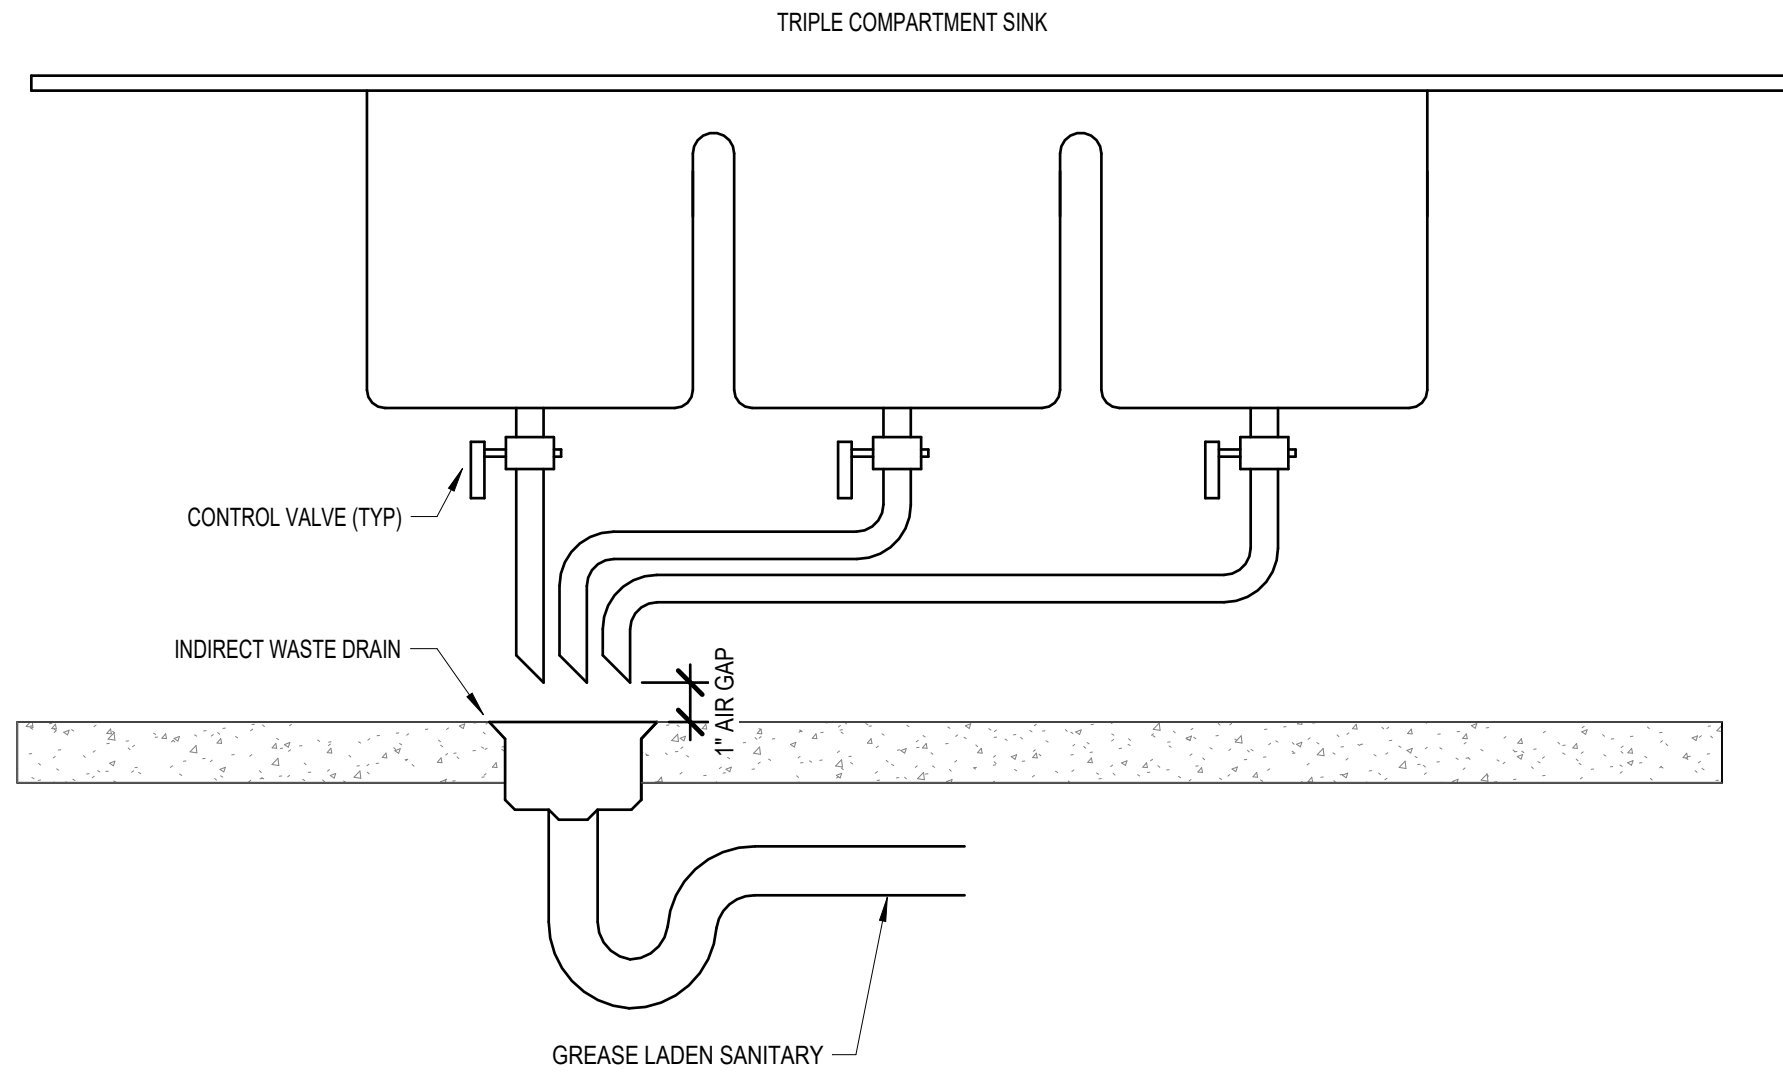


C3 TRIPLE SINK WITH INDIRECT DRAINAGE
NOT TO SCALE

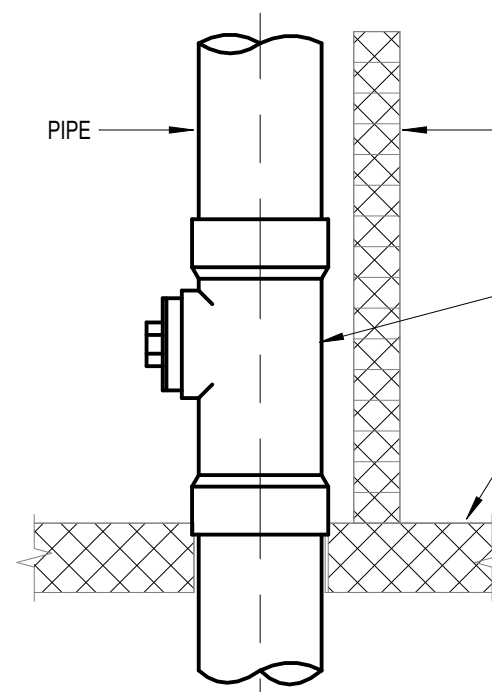

C2 RISER CLEANOUT
NOT TO SCALE

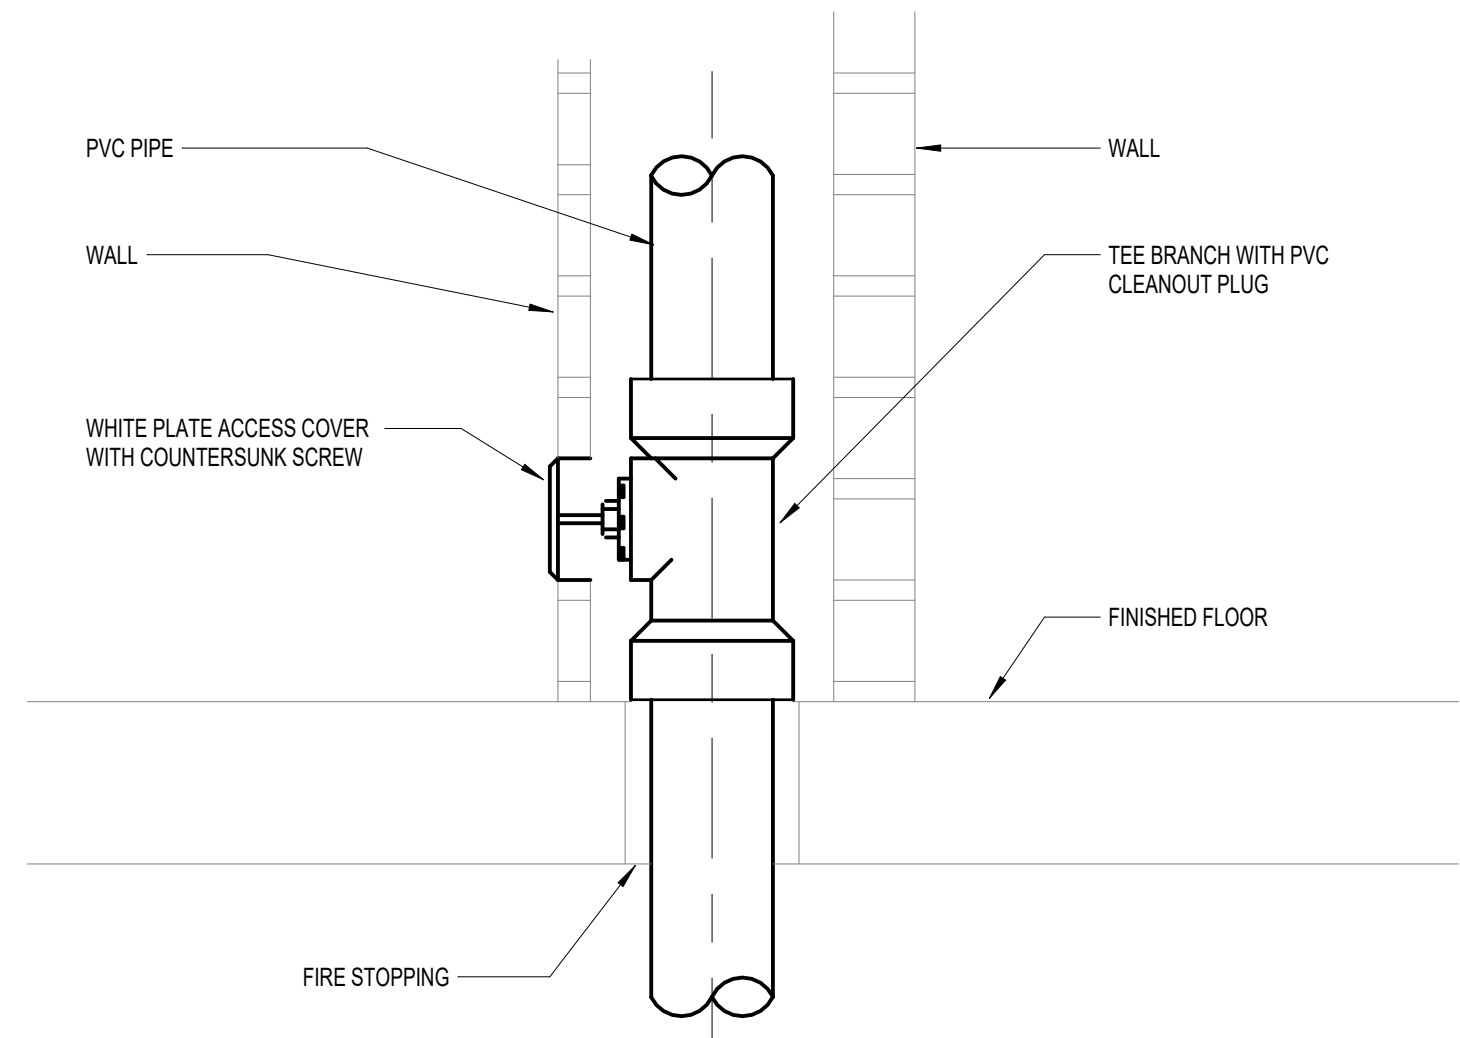


C1 WALL CLEANOUT
NOT TO SCALE

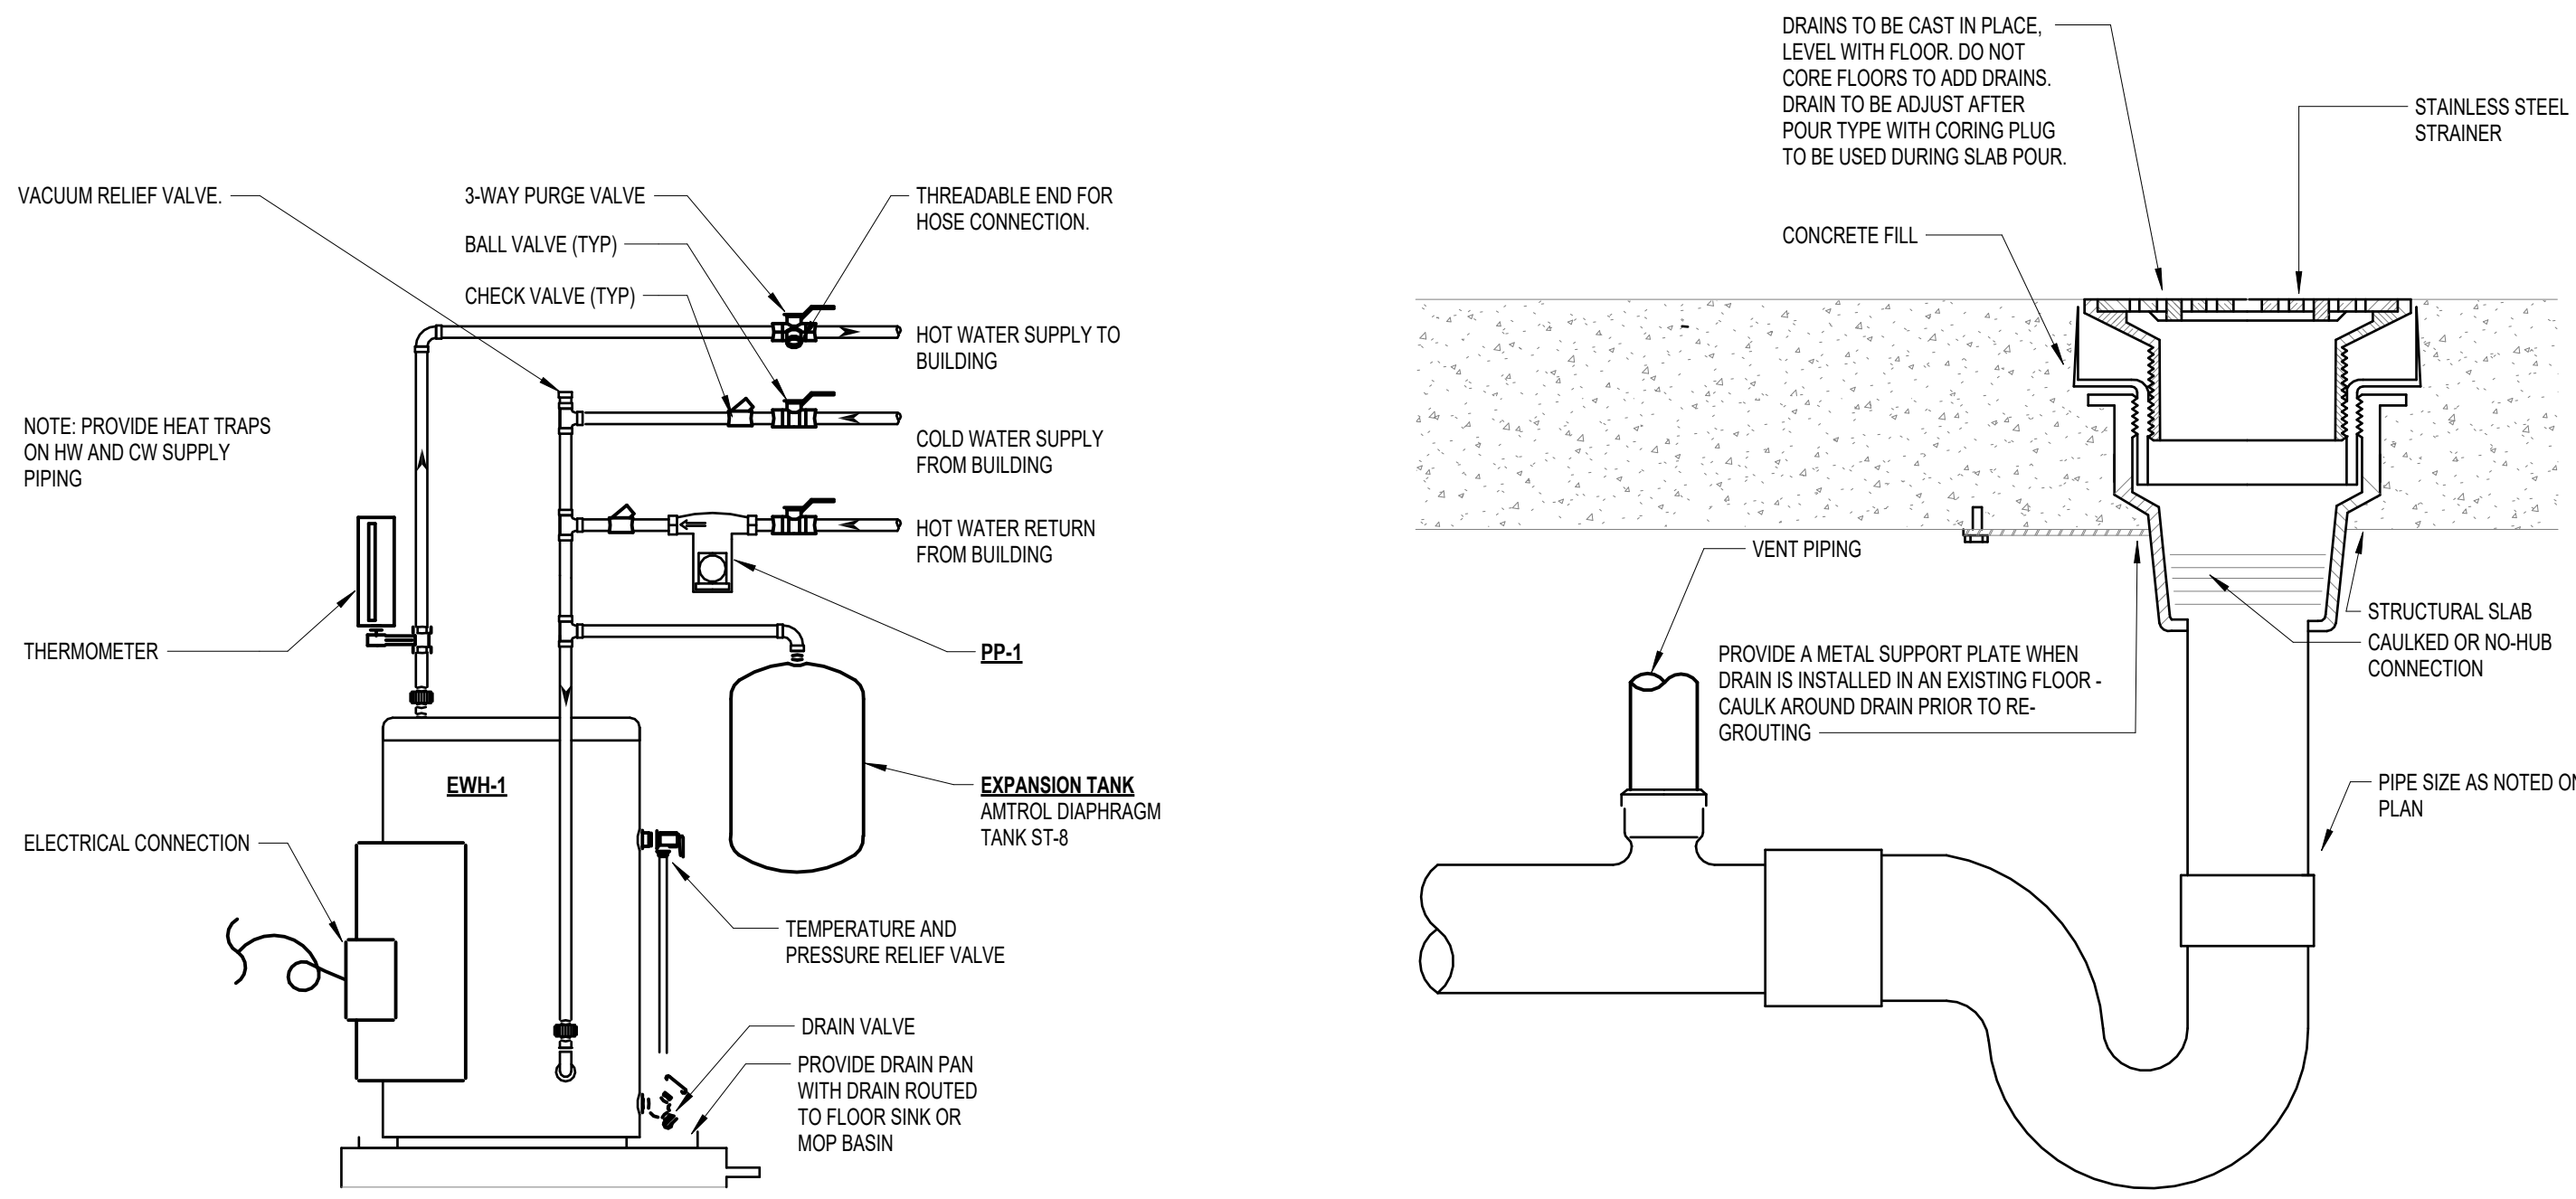


E4 WATER HEATER
NOT TO SCALE

E3 TYPICAL FLOOR DRAIN
NOT TO SCALE

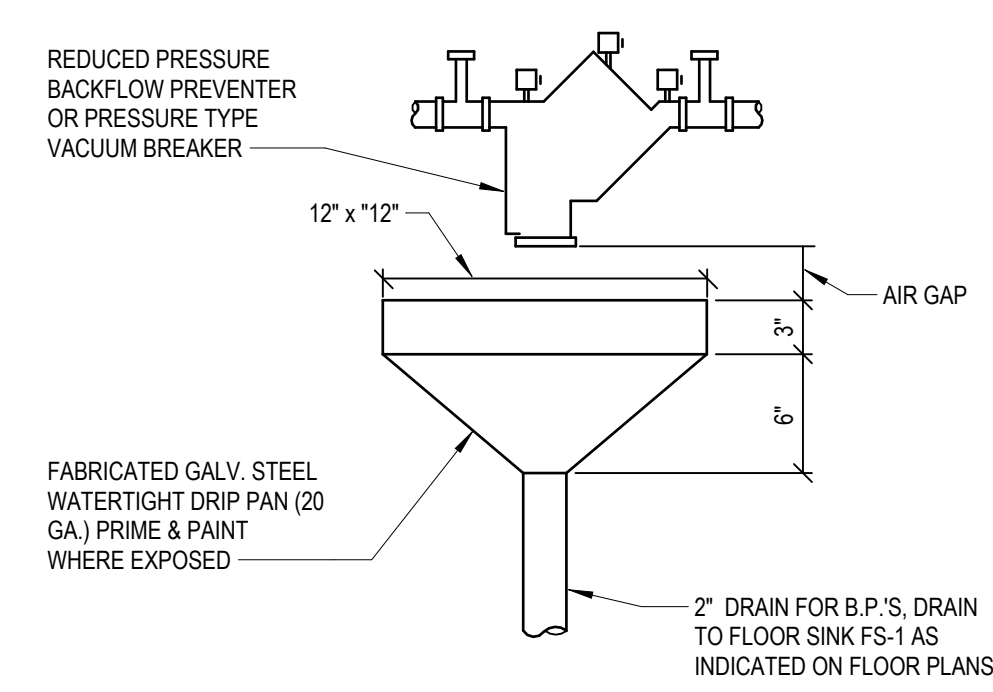

E2 BACKFLOW PREVENTER DRIP PAN DETAIL
NOT TO SCALE

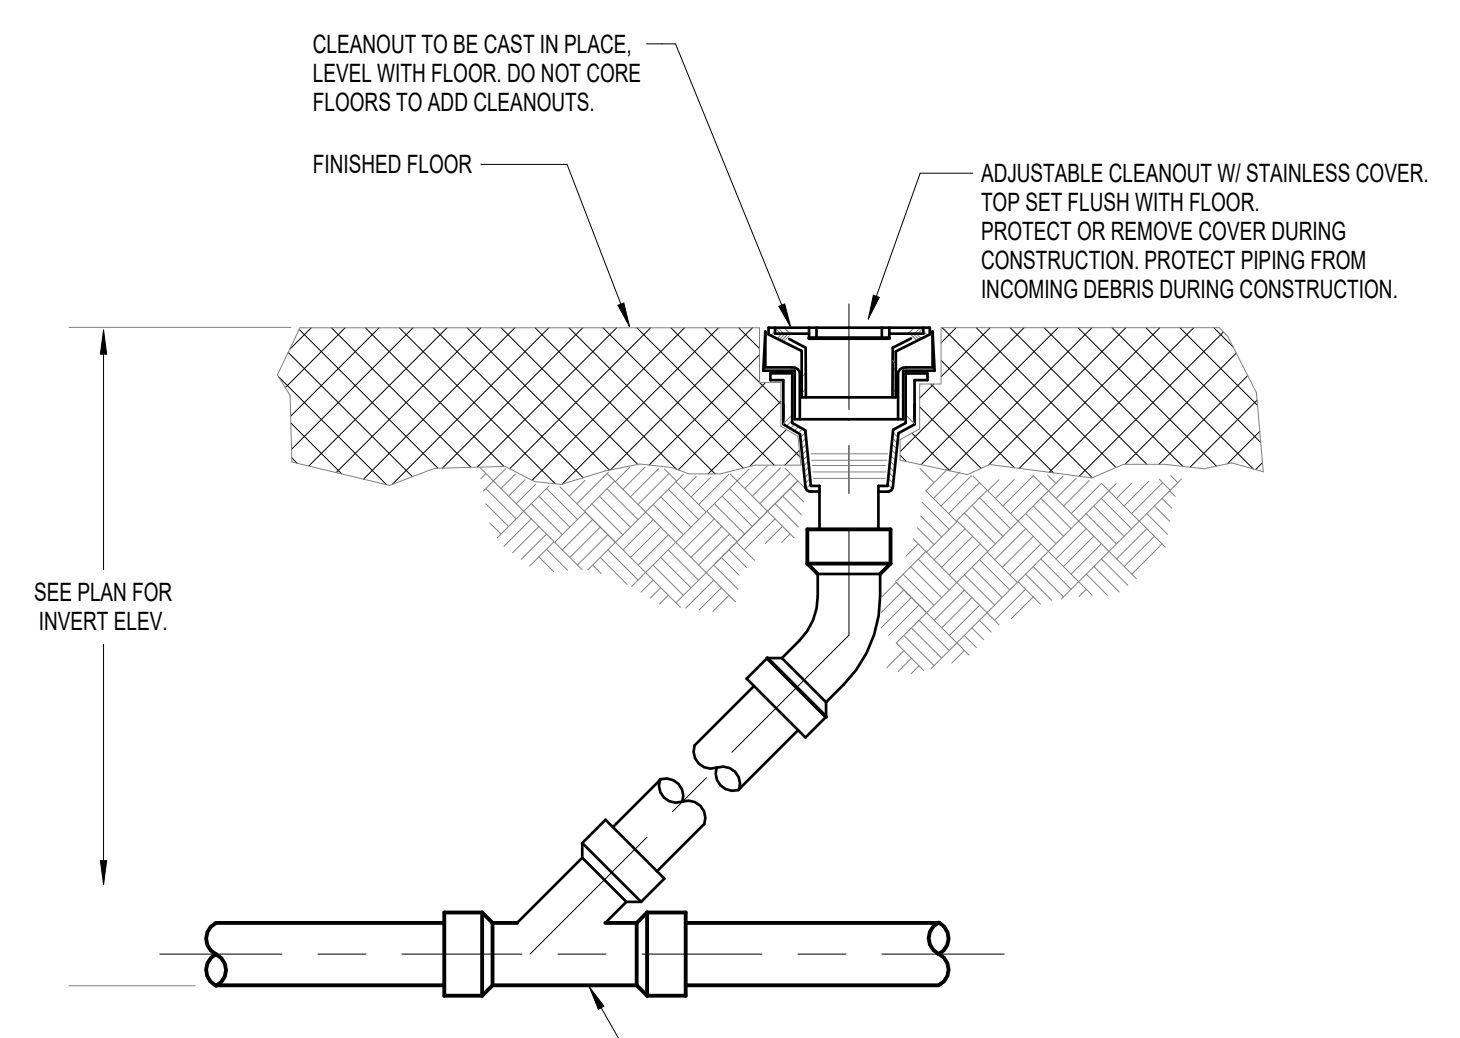

E1 CLEANOUT TO FINISHED FLOOR
NOT TO SCALE

12/17/2025 14:25:39 PM AutoCAD 2025/10/25/1911 - Ldl 1517 Norcross, GA 30093
PLUMBING DETAILS

PROGRESSIVE ARCHITECTURE ENGINEERING & PLANNING, INC. is a registered professional engineering and architectural firm. It is not responsible for the design or construction of any system or equipment not specifically designed and manufactured by it or its affiliates. It is not responsible for the design or construction of any system or equipment not specifically designed and manufactured by it or its affiliates.



This item has been electronically signed and sealed by Michael Grose using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ISSUANCE
11/07/2025 PERMIT CYCLE 1
12/18/2025 PERMIT CYCLE 02

PROJECT NUMBER
79650130
PROJECT MANAGER
A. HENGSTEBECK
PROFESSIONAL
M. GROSE
DRAWN BY
T. SMITH
CHECKED BY
B. KOOMAN

PLUMBING
DETAILS
P600

LIDL US, LLC
LIDL 1517 NORCROSS, GA

499 JIMMY CARTER BLVD. NORCROSS, GA 30093