

REFRIGERATION DRAWINGS AND SCHEDULES

GENERAL REFRIGERATION EQUIPMENT AND INSTALLATION SPECIFICATIONS

THESE SPECIFICATIONS ARE PROVIDED AS SUGGESTIONS ONLY. LOCAL CODE AND CUSTOMER SPECIFICATIONS SUPERSEDES ALL SUGGESTIONS. ALL ITEMS THIS PAGE SHOULD BE VIEWED AS 'UNLESS OTHERWISE SPECIFIED.'

GENERAL SHEET NOTES

- DO NOT SCALE THESE DRAWINGS.
- THESE DRAWINGS ARE PICTORIALLY DRAWN FOR CLARIFICATION PURPOSES ONLY. SITE CONDITIONS MAY CHANGE PIPE ROUTING AND LENGTH FROM WHAT THEY ARE SHOWN ON THE PRINT. AN ONSITE REVIEW OF THE PROJECT MAY BE REQUIRED BEFORE ESTIMATING THE PROJECT.
- PIPING MAY BE SHOWN AWAY FROM FIXTURE FOR CLARITY. EACH LINE ACTUALLY REPRESENTS A GLYCOL SUPPLY AND RETURN LINE PAIR PER CIRCUIT. UNLESS OTHERWISE SPECIFIED, EACH CASE SHALL BE PIPED WITH INDIVIDUAL SUPPLY AND RETURN FROM MAIN. REFER TO DETAIL DRAWING(S) FOR MORE INFORMATION.
- REFRIGERATION PIPING SHALL BE LOCATED SO THAT THE ACCESS TO THE SYSTEM COMPONENTS IS NOT HINDERED AND THAT ALL COMPONENTS THAT COULD POSSIBLY REQUIRE FIXTURE MAINTENANCE ARE EASILY ACCESSIBLE.
- THE REFRIGERATION CONTRACTOR SHALL REVIEW AND STRATEGICALLY LOCATE ALL CONTROL VALVES PRIOR TO THE INSTALLATION OF ANY REFRIGERANT PIPE. LOCATION SHALL INCLUDE ACCESSIBLE LOCATIONS AND ADEQUATE SPACE FOR INSTALLATION AND ADJUSTMENT OF VALVES.
- THE COORDINATION OF THE REFRIGERANT PIPING INSTALLATION SHALL BE IN AGREEMENT WITH THE OVERALL CONSTRUCTION SCHEDULE AND SHALL HAVE ALL PIPING PATHS AND ACCESSORY LOCATIONS CONFIRMED BY THE REFRIGERATION CONTRACTOR PRIOR TO CLOSING OF ANY WALL, FLOOR OR CEILING WHERE REFRIGERANT PIPING MAY BE PASSING THROUGH OR INSTALLED IN.
- UNLESS OTHERWISE NOTED, ALL ESTIMATED LENGTH PIPING RUNS INDICATED IN THIS DRAWING ARE ACTUAL LENGTHS FOR EACH PAIR OF SUPPLY AND RETURN LINES.
- PRIOR TO INSTALLATION OF ANY REFRIGERATION PIPING, THE REFRIGERATION CONTRACTOR SHALL COORDINATE ALL PIPING PATHS WITH THE STRUCTURAL STEEL IN CONJUNCTION WITH THE GENERAL CONTRACTOR.
- THE REFRIGERATION CONTRACTOR SHALL COORDINATE ALL PIPING PATHS TO AVOID CONFLICTS WITH ALL ELECTRICAL PANELS, STARWELLS AND CORRIDORS. ABSOLUTELY NO PIPING SHALL PASS ABOVE ELECTRICAL PANELS AND TRANSFORMERS, OR THROUGH STARWELLS AND CORRIDORS.
- THE REFRIGERATION CONTRACTOR SHALL COORDINATE ALL PIPING PATHS TO AVOID CONFLICTS WITH ALL OTHER TRADES (i.e. HVAC EQUIPMENT, HVAC DIFFUSERS, DUCT WORK, FLUES, LIGHTING FIXTURES, PLUMBING LINES, DECOR, SKYLIGHTS, etc.).
- GENERAL CONTRACTOR TO FURR AROUND REFRIGERATION LINES FROM FLOOR TO CEILING WHERE EXPOSED ON A WALL.
- ALL REQUIRED FLOOR AND WALL PENETRATIONS AND EQUIPMENT MATERIALS NECESSARY FOR REFRIGERATION PIPING CHASSES THROUGH ROOF, FLOOR AND WALLS SHALL BE CUT, PATCHED AND SEALED BY THE GENERAL CONTRACTOR. NO PENETRATION SHALL INTERFERE WITH ANY BUILDING STRUCTURAL COMPONENT. THE GENERAL CONTRACTOR SHALL PROVIDE AND INSTALL ALL FIRE STOPPING AND/OR PROOFING AS PER ALL CODE REQUIREMENTS AND MAINTAIN THE SAME REQUIREMENTS AS SPECIFIED BY THE ARCHITECT.
- ALL PIPING, CONTROLS, EQUIPMENT AND INSTALLATION TO CONFORM TO ALL LOCAL CODES.
- ALL DIMENSIONS GIVEN ARE FROM EITHER:
 - INSIDE FINISHED FACE OF WALL
 - OUTSIDE FINISHED FACE OF WALL
 - CENTERLINE OF COLUMN

EVAC NOTES

- MACHINE TO BE ANCHORED TO FLOOR PER SEISMIC/GEOLOGICAL AREA REQUIREMENTS OR CODES. MINIMUM REQUIREMENTS ARE (4) 1/2" X 4" ANCHOR BOLTS, ONE ON EACH LEG.
- INSTALL ISOLATION BALL VALVES BETWEEN ALL PINCH VALVES AND MAIN OR BRANCH TRUNK LINES FOR FUTURE SERVICE AND REPAIR.
- ALL PINCH VALVES AND BUFFER BOXES TO BE INSTALLED WITH NO-HUB RUBBER COUPLINGS ON BOTH ENDS FOR FUTURE SERVICE AND REPAIR.
- DROPS TO SUFFER BOXES WILL BE CLAMPED OR STRAPPED TO A WALL OR SOLID ITEM TO PREVENT MOVEMENT.
- PINCH VALVES WILL BE CLAMPED ON BOTH SIDES TO PREVENT MOVEMENT PER MANUFACTURER SPECIFICATIONS.
- ACTIVATOR VALVES WILL BE MOUNTED TO A WALL OR TOP OF A CASE/COOLER UTILIZING THE SUPPLIED MOUNTING BRACKET.
- SENSOR TUBES FROM THE ACTIVATOR TO THE BUFFER BOX MUST NOT LAY ON THE FLOOR OR BE LOWER THAN THE BUFFER BOX TO PREVENT WATER ENTRY. ENSURE THAT TUBE IS ROUTED AND STRAPPED TO PREVENT WATER ENTERING THE TUBE.
- REFERENCE EVAC DETAILS AND NOTES FOR ADDITIONAL DETAILED INSTALLATION INSTRUCTIONS AND SIZES NOT SHOWN ON THE PLANS.
- ALL PIPING RAN OVER THE SALES FLOOR WILL BE INSTALLED AT THE HIGHEST POINT AND RAN THROUGH THE BAR JOIST WEBING. PIPING WILL BE ALLOWED TO RUN UNDER AND TIGHT TO THE BAR JOIST IF PIPING WILL HAVE TO PASS THROUGH A SOLID BEAM.
- EVAC HEADERS ON THE SALES FLOOR ABOVE THE CASE LINEUPS TO BE RAN UNDER THE PLUGS ON THE WALLS. DO NOT COVER UP ANY WALL RECEPTACLES.
- FLOOR SINK SIZE REQUIREMENTS FOR MAIN DRAIN ARE AS FOLLOWS AND WILL BE TIED TO A 2" MINIMUM SIZE MAIN LINE:
 - EVAC HORIZON: 24" X 24" X 24"D
 - EVAC VJ: 20" X 20" X 20"D

CASE NOTES

- SITE CONDITIONS AND DOCK HEIGHT/AVAILABILITY MAY NOT BE ADEQUATE TO UNLOAD CASES DIRECTLY FROM THE TRUCK. A SITE REVIEW MAY BE REQUIRED TO REVIEW THESE CONDITIONS BEFORE ESTIMATING THE PROJECT AS CASES MAY NEED TO BE UNLOADED IN THE PARKING LOT.
- INSTALLING CONTRACTOR WILL UTILIZE A LASER LEVEL TO IDENTIFY HIGH/LOW SPOTS IN THE FLOOR TO ENSURE CASES ARE SET LEVEL WITH THE LEAST AMOUNT OF SHIMS.
- PAN HEAD PHILLIPS SCREWS WILL BE USED TO INSTALL ALL CASE SPLASH GUARDS AND SCREW HEADS PAINTED TO MATCH SPLASH GUARD COLOR. SCREW HEADS TO BE PAINTED BEFORE INSTALLED.
- ALL CASES TO BE SHIMMED PER MANUFACTURER SPECIFICATIONS AND INSTRUCTIONS.
- ALL CASES TO BE INSTALLED PER MANUFACTURERS SPECIFICATIONS AND INSTRUCTIONS.
- AFTER INSTALLATION, ALL TRASH AND CONSTRUCTION DEBRIS TO BE REMOVED FROM THE TOP/SURFACE OF CASES AND CASE BOTTOMS VACUUMED CLEAN BEFORE PANS ARE INSTALLED.
- CASES TO BE SHIMMED AND LEVELED SO THAT ALL SHELF STANDARDS ARE LEVEL AND LINE UP FROM CASE TO CASE.
- ALL ELECTRICAL COVERS TO BE REINSTALLED AND SCREWED DOWN.
- CONNECTION HOSES TO BE INSULATED WITH 1/2" WALL INSULATION FROM CONNECTION POINT ON CASE/COIL TO BALL VALVES AT HEADERS. SLIDE INSULATION ON HOSES, DO NOT SPLIT.
- INSULATE ALL EXPOSED SUCTION LINE PIPING ON AIR COOLED CONDENSING UNITS TO PREVENT SWEATING AND WATER DRIPPING. THE APPLIES TO CASES USING AIR COOLED CONDENSING UNITS.
- ISOLATION BALL VALVES INSTALLED FOR SALES FLOOR CASE HEADERS TO BE INSTALLED IN THE BACKROOM UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- CONTRACTOR TO MARK CASES AND COILS PER LIDL'S NAMING STANDARD:
 - CASE LABELS TO BE INSTALLED ON CANOPIES OF EACH CASE AND WILL HAVE CASE NAME AND NUMBER.
 - LABELS ARE TO BE YELLOW. CUT AND REMOVE EXCESS LABEL MATERIAL FROM EACH END OF THE LABELS.
 - ON THE INSIDE OF EACH CASE, INSTALL A LABEL BY THE NAMEPLATE TO INCLUDE THE IP/MODBUS ADDRESS OF EACH CASE WHERE APPLICABLE.

WALK-IN NOTES

- INSTALL GASKET SEAL AROUND HOLE IN WALK-IN ROOF BEFORE INSTALLING UNITS.
- UNITS AND WALK-IN ROOF WILL BE INSULATED WITH 3/4"X9" STRIPS OF SHEET INSULATION. INSULATE 8" UP THE SIDES OF THE UNITS AND 6" OUT ON ROOF OF WALK-IN TO PREVENT SWEATING AROUND UNIT. DO NOT INSULATE OVER AIR VENTS OR ON THE REMOVABLE COVER ON THE COMPRESSOR COMPARTMENT. DO NOT INSULATE OVER NAMEPLATE.
 - FOAM SEAL AROUND THE UNIT ON THE INSIDE. INSTALL FACTORY PROVIDED CLOSE-OFFS AND SEAL GAPS WITH WHITE SILICONE.
 - INSTALL A PLYWOOD BACKER BOARD TO WALL ABOVE WALK-INS AND MOUNT XB BOXES TO PLYWOOD BACKER. DO NOT MOUNT BOXES TO TOP OF WALK-INS.
 - INSTALL A BAG CB-3/4 NPT BALANCING VALVE AT EACH COIL RETURN LINE BETWEEN ISOLATION VALVE AND THE COIL.
 - CONNECTION HOSES TO BE INSULATED WITH 1/2" WALL INSULATION FROM CONNECTION POINT ON CASE/COIL TO BALL VALVES AT HEADERS. SLIDE INSULATION ON HOSES. DO NOT SPLIT.
 - CONDENSING UNITS:
 - THE UNITS WILL BE SUPPORTED FROM THE BAR JOIST UTILIZING UNISTRUT AND ALL THREAD ROD FROM THE FOUR CORNERS OF THE UNIT TO MINIMIZE THE WEIGHT PLACED ON THE WALK-IN ROOF.
 - INSULATE ALL EXPOSED FACTORY PIPING AND SUCTION FILTERS TO PREVENT SWEATING AND WATER DRIPPING.
 - CONNECTION HOSES TO BE INSULATED WITH 1/2" WALL INSULATION FROM CONNECTION POINT ON CASE/COIL TO BALL VALVES AT HEADERS. SLIDE INSULATION ON HOSES. DO NOT SPLIT.
 - INSTALL A BAG CB-3/4 NPT BALANCING VALVE AT EACH COIL RETURN LINE BETWEEN ISOLATION VALVE AND THE COIL.
 - CONTRACTOR TO INSTALL ALL SHIPPED LOOSE COMPONENTS (i.e. ROOM SENSORS, DEFROST TERMINATION SENSORS, DISPLAYS) AND WILL PROVIDE ALL NECESSARY CONDUITS, SEALTIGHT, BOXES, CONNECTORS, ETC. TO PROPERLY INSTALL AND/OR ROUTE ALL COMMUNICATION CABLES FROM DEVICES TO UNITS.

REFRIGERATION NOTES

- ALL GLYCOL PIPING SHALL BE TYPE "M" COPPER.
- ONLY COMMERCIAL GRADE COPPER PIPING TO BE USED WITH HUSSMANN EQUIPMENT.
- NO STAB-IN'S. TEES, TEE DRILL OR PRESSURE CONNECTION STUBS ONLY.
- ALL GLYCOL (SUPPLY & RETURN) PIPING SHALL BE INSTALLED WITH 1/2" THICK ARMAFLEX AP ELASTOMERIC INSULATION (OR EQUIVALENT) AND INSTALLED PER MANUFACTURER SPECIFICATIONS. VERIFY LOCAL MUNICIPALITY REQUIREMENTS AND ENERGY CODES.
- CONNECTION HOSES TO BE INSULATED WITH 1/2" WALL INSULATION FROM CONNECTION POINT ON CASE/COIL TO BALL VALVES AT HEADERS. SLIDE INSULATION ON HOSES, DO NOT SPLIT.
- PIPING ON SALES FLOOR WILL BE INSTALLED WITH WHITE INSULATION AND WHITE SADDLES.
- PIPING IN BACKROOM WILL BE INSTALLED WITH BLACK INSULATION AND BLACK SADDLES.
- WHERE CLAMPS MUST BE USED ON VERTICAL PIPING, USE STANDARD CUSHION CLAMPS, NOT KLOSURE CLAMPS.
- ALL PIPING RAN OVER THE SALES FLOOR WILL BE INSTALLED AT THE HIGHEST POINT AND RAN THROUGH THE BAR JOIST WEBING. PIPING WILL BE ALLOWED TO RUN UNDER AND TIGHT TO THE BAR JOIST IF PIPING WILL HAVE TO PASS THROUGH A SOLID BEAM.
- THE REFRIGERATION INSTALLATION CONTRACTOR SHALL PROVIDE AND INSTALL FULL PORT BALL VALVES ON ALL BRANCHES AND CIRCUITS. INSTALL ISOLATION VALVES IN ACCESSIBLE LOCATIONS TO ISOLATE EACH INDIVIDUAL REFRIGERATION CIRCUIT (SUPPLY & RETURN).
- ISOLATION BALL VALVES INSTALLED FOR SALES FLOOR CASE HEADERS TO BE INSTALLED IN THE BACKROOM UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- INSTALL A 3/4" MALE ADAPTER, FM X FM THREADED BALL VALVE AND A HOFFMAN 76 AIR VENT IN EACH SUPPLY AND RETURN LINE IN THE BACK ROOM BEFORE THE PIPING ENTERS THE ROOF TO THE DRY COOLERS. UTILIZE A TEE AND A REDUCER TO CREATE AN AIR POCKET TO REMOVE AIR PROPERLY AND EFFICIENTLY FROM THE SYSTEM. CLOSE BALL VALVES AFTER START UP.
- INSTALL AIR VENTS IN SYSTEM PIPING ANYWHERE PIPING RISES UP OR CREATES A POINT WHERE AIR COULD BE TRAPPED IN THE SYSTEM.
- END OF LOOP BALL VALVES AND DRAIN VALVE TO BE INSTALLED AT THE END OF EACH HEADER SERVING ALL CASE AND WALK IN RUNS PER DETAIL ON PIPING DETAILS SHEET.
- ANY SYSTEM THAT HAS BRAZED JOINTS MUST BE FLUSHED AND DRAINED TO REMOVE OXIDATION BEFORE GLYCOL IS INTRODUCED INTO THE SYSTEM. DO NOT OPEN BALL VALVES TO EQUIPMENT UNTIL FLUSH HAS BEEN COMPLETED. CLEAN STRAINERS IN DRY COOLERS AFTER FLUSH.
- ANY SYSTEM THAT HAS BEEN TEE DRILLED MUST BE FLUSHED AND DRAINED TO REMOVE COPPER SHAVINGS FROM SYSTEM BEFORE GLYCOL IS INTRODUCED INTO THE SYSTEM. DO NOT OPEN BALL VALVES TO EQUIPMENT UNTIL FLUSH HAS BEEN COMPLETED. CLEAN STRAINERS IN DRY COOLERS AFTER FLUSH.
- ALL FIELD INSTALLED VALVES SUPPLIED AND INSTALLED BY REFRIGERATION CONTRACTOR.
- GLYCOL COOLANT SHALL BE PRE-MIXED DOWFROST INHIBITED PROPYLENE GLYCOL, 35% BY VOLUME.
- GLYCOL LINES SHOULD SLOPE FROM HIGHEST TO LOWEST POINT TO AID IN AIR ELIMINATION FROM SYSTEM.
- ALL REFRIGERATION PIPING SHALL BE MOUNTED TO THE WALL UNLESS OTHERWISE NOTED.
- NO REFRIGERATION LINES ARE TO BE DROPPED ON THE FACE OF SALES FLOOR WALLS. IF LINES SHOULD NEED TO BE DROPPED ON SALES FLOOR WALL, APPROVAL MUST BE REQUESTED.
- REFRIGERATION CONTRACTOR TO PROVIDE AND INSTALL WHITE METAL COLUMNS AROUND GLYCOLEVAC LINES WHERE THEY DROP DOWN TO CENTER SALES FLOOR CASES.
- REFRIGERATION CONTRACTOR TO VERIFY ALL FINAL LOCATIONS OF OVER-HEAD LINES AND FALSE COLUMNS WITH HUSSMANN PM AND/OR GENERAL CONTRACTOR AND CUSTOMER.
- ROOF TOP PIPING TO BE INSULATED AND COVERED WITH ALUMINUM JACKETS.
- SLOPE ALL GLYCOL AND HYDRAULIC PIPING FROM ROOF (OR HIGHEST POINT) TO CASES AND COILS.
- ALL PIPING SHOULD BE CAPPED AT THE END OF EACH WORKDAY TO PREVENT CONTAMINATION FROM DEBRIS AND TRASH.
- REFRIGERATION CONTRACTOR TO COORDINATE REFRIGERATION LINE RUNS WITH FIRE SPRINKLER CONTRACTOR, PLUMBING CONTRACTOR AND ALL OTHER TRADES THAT MAY BE INVOLVED.
- ALL PIPING (REFRIGERANT, WATER OR OTHER) REQUIRED PER THE REFRIGERATION SCHEDULE TO BE PROVIDED AND CONNECTED TO EQUIPMENT BY THE INSTALLING CONTRACTOR UNLESS NOTED OTHERWISE. ALL INVOLVED CONTRACTORS TO COORDINATE.
- SALES FLOOR CASE PIPING CANNOT BE HIGHER THAN 106" AFF AND MUST BE MOUNTED ON WALL PER DETAIL R-104 (A). OVERALL HEIGHT OF CASE PIPING IS CONDITIONAL BASED ON THE MODEL OF THE CASE. REFER TO INTERIOR ELEVATIONS DRAWING OR DETAIL FOR HEIGHT OF PIPING BY CASE LINEUP OR TYPE. GLYCOL PIPING TO BE MOUNTED ABOVE THE WALL RECEPTACLES FOR THE CASES. DO NOT BLOCK CASE POWER RECEPTACLES. THE MAX HEIGHT TO THE TOP OF THE GLYCOL LINES ARE AS FOLLOWS:
 - 86" AFF TO TOP OF HIGHEST LINE - RLW, D05XSF9W
 - 106" AFF TO TOP OF HIGHEST LINE - ID6SU
- REFRIGERATION CONTRACTOR TO VERIFY REFRIGERATION LINE LOCATIONS WITH PROJECT MANAGER PRIOR TO INSTALL OF NEW LINE SETS.
- REFRIGERATION CONTRACTOR RESPONSIBLE FOR DISPOSAL OF ALL SHIPPING, PACKAGING AND INSTALLATION DEBRIS ASSOCIATED WITH THE PROJECT INSTALLATION. IN THE EVENT THAT THE ONSITE DUMPSTER PROVIDED BY THE GENERAL CONTRACTOR CANNOT BE USED, THE REFRIGERATION CONTRACTOR WILL BE REQUIRED TO SUPPLY THEIR OWN DUMPSTER.
- SEISMIC BRACING AND RESTRAINTS TO BE INSTALLED AS REQUIRED BY LOCAL CODES/GEOLOGICAL LOCATION.

ELECTRICAL NOTES

- IF VOLTAGE FOR STORE FACILITY IS OTHER THAN WHAT IS SHOWN, NOTIFY HUSSMANN IMMEDIATELY.
- ALL WIRING AND CONNECTIONS BY ELECTRICAL CONTRACTOR UNLESS OTHERWISE NOTED. WIRING AND CONNECTIONS TO BE DONE PER STATE AND LOCAL CODES.
- NO ALUMINUM WIRE TO BE CONNECTED TO ANY HUSSMANN EQUIPMENT.
- ALL STARTERS, FUSED DISCONNECTS, BREAKERS, FUSES, CONTACTORS, SWITCHES, J-BOXES, CONDUITS, CONDULETS, THREADED CONDUITS AND WIRES THAT ARE NOT SUPPLIED BY HUSSMANN IN A PREVIEWED PANEL ARE BY THE ELECTRICAL CONTRACTOR UNLESS OTHERWISE NOTED.
- ELECTRICAL CONTRACTOR TO SEAL AROUND CONDUIT PENETRATIONS ON BOTH SIDES (INTERIOR AND EXTERIOR) AS WELL AS CONDUIT FILL AT THE BOXES OF THE COOLER/FREEZER WALLS. THIS WILL PREVENT AIR MIGRATION AND CONDENSATION.
- NEW ELECTRICAL STUBS TO BE USED UNLESS EXISTING ELECTRICAL STUBS CAN BE RE-USED. FIELD VERIFY LOCATION OF EXISTING ELECTRICAL STUBS.
- ACTUAL LOCATION OF CONVENIENCE OUTLETS MAY VARY FROM LOCATION SHOWN ON PLAN. FIELD VERIFY LOCATIONS.
- NEW CONTROLS AS SHOWN ON THE REFRIGERATION LEGEND TO BE WIRED BY ELECTRICAL CONTRACTOR. SEE REFRIGERATION LEGEND FOR MORE INFORMATION.
- ALL WALL CASE RECEPTACLES TO BE MOUNTED PER EQUIPMENT TYPE AND HEIGHT REQUIREMENTS AND WILL BE INSTALLED FROM CENTER OF PLUG TO FINISHED FLOOR:
 - D05X 86"
 - SL FROZEN FOOD 86"
 - ID6SU 86"

DRY COOLER NOTES

- GENERAL CONTRACTOR TO PROVIDE AND SEAL PENETRATIONS INTO/THROUGH THE ROOF FOR GLYCOL PIPING.
- ROOF MOUNTED DRY COOLERS, GLYCOL PIPING FROM DRY COOLERS TO REFRIGERATION EQUIPMENT TO BE PROVIDED AND INSTALLED BY THE REFRIGERATION CONTRACTOR.
- GLYCOL SUPPLY & RETURN PIPING BETWEEN SALES FLOOR AND ROOF EQUIPMENT THROUGH ELEVATED WALLS IN APPROXIMATE LOCATION. PENETRATIONS SHALL BE DONE BY GENERAL CONTRACTOR AND PROVIDED WITH GALVANIZED STEEL PIPE SLEEVES. GENERAL CONTRACTOR SHALL PATCH AND SEAL PENETRATIONS AS REQUIRED. REFER TO ARCHITECTURAL DRAWINGS FOR ADDITIONAL DETAILS.
- EQUIPMENT LIFTING BRACKETS AND BOLTS TO BE REMOVED AND SECURED INSIDE PUMP COMPARTMENT OF EACH DRY COOLER.
- REFRIGERATION CONTRACTOR TO SUPPLY AND INSTALL RUBBER ISOLATION PADS BETWEEN DRY COOLER AND STEEL DUNAGE. ISOLATION PADS TO BE INSTALLED AT ALL POINTS WHERE A CROSS RUNNER AND MAIN RUNNER INTERSECT OR CROSS.
- REFRIGERATION CONTRACTOR TO DRILL AND BOLT DOWN EACH DRY COOLER ON ENDS AND MIDDLE SIX POINTS MINIMUM OR MORE ON LONGER DRY COOLERS.
- ALL OUTDOOR EXPOSED GLYCOL PIPING TO BE INSULATED AND ALUMINUM JACKETING INSTALLED.

EMS NOTES

- REFRIGERATION/EMS CONTRACTOR TO PROVIDE ALL NECESSARY PROGRAMMING AND VERIFICATION OF EQUIPMENT CONTROLS AND XWEB/SITE SUPERVISOR MONITORING SYSTEM.
- ALL ETHERNET AND RS485 NETWORK CABLES SHOWN ARE CAT5 OR CAT6 SHIELDED CONDUCTORS.
- ALL BELDEN 22-2 CABLES TO BE TYPE BELDEN 8451 OR EQUIVALENT.
- ALL CABLES, RACEWAYS, BOXES, POWER POLLS AND WALL JACKS ARE PROVIDED AND INSTALLED BY THE ELECTRICAL CONTRACTOR UNLESS NOTED HERE OR ON THE PLANS.
- MODBUS COMMUNICATION CABLES WILL BE PULLED AND TERMINATED IN THE XWEB CONTRACTOR.
- ETHERNET CABLES WILL BE PULLED TO THE XWEB LOCATION AND TERMINATED ON A 16-PORT NETWORK SWITCH PROVIDED AND INSTALLED BY THE EMS/RC CONTRACTOR.
- RS485 CABLES WILL BE TERMINATED ON THE TOP JACK OF THE WALL PLATES AND LABELED "RS485" AND THE CABLE NUMBER.
- ETHERNET CABLES WILL BE TERMINATED ON THE BOTTOM JACK OF THE WALL PLATE AND LABELED "ETHERNET" AND THE CABLE NUMBER.
- JUMPERS SHOWN ON THE DRAWINGS AS RS485 WILL BE TERMINATED ON THE TOP JACK OF THE WALL PLATE AND LABELED "RS485" AND THE CABLE NUMBER.
- REFRIGERATION/EMS CONTRACTOR TO PROVIDE AND INSTALL ALL NETWORK SWITCHES NOTED/REQUIRED FOR THE PROJECT.
- REFRIGERATION/EMS CONTRACTOR TO PROVIDE A SUITABLE SIZED BOX WITH A HINGED OR SCREW COVER TO HOUSE EACH NETWORK SWITCH.
- REFRIGERATION/EMS CONTRACTOR TO PROVIDE AND INSTALL ALL PATCH CABLES BETWEEN NETWORK SWITCHES AND CASE/COILS.
- ALL PATCH CABLES TO BE FACTORY MADE. EXCESS CABLE WILL BE ROLLED UP AND THE STRAPPED AND SECURED INSIDE THE SWITCH BOX.
- ALL CABLES ON TOP OF CASES AND WALK-INS SHALL BE RAN NEATLY, STRAPPED AND SECURED IN A PROFESSIONAL MANNER AND ROUTED IN SUCH A WAY TO PREVENT POTENTIAL TRIPS OR HANGS THAT MAY CAUSE THE WIRES TO BE PULLED LOOSE FROM THEIR CONNECTION POINTS.
- WHEN WALK-INS UTILIZE RIVACOLD MONOBLOCK COILS, THE CONTRACTOR WILL PROVIDE AND INSTALL A PLYWOOD BACKER ON THE WALL AND THE XB BOXES WILL BE SECURED TO THE PLYWOOD BACKER. CABLES TO BE ROUTED BETWEEN UNITS AND THE WALL, BUNDLED AND SECURELY STRAPPED.
- ALL MODBUS CABLES WILL BE MARKED WITH MACHINE PRINTED LABELS ON BOTH ENDS FROM THE XWEB TO ITS CONNECTION POINT AT THE FIRST PIECE OF EQUIPMENT FOR SERVICE AND IDENTIFICATION PURPOSES BASED ON THE FOLLOWING FORMAT TO INCLUDE CABLE NUMBER AND EQUIPMENT TYPE AND MODBUS RANGE:
 - #1 ROOM SENSOR POWER
 - #2 ROOM SENSOR (1)
 - #3 DRY COOLERS (122-123)
 - #4 WALK-IN (80-81)
 - #5 WALL CASES (2-28)
 - #6 MEAT CASES (40-47)
 - #7 FISH ISLAND (135-143)
 - #8 PRODUCE CASES (80-83)
 - #9 FROZEN ISLAND (144-165)
 - #10 EVAC (200)

NEW STORE INSTALLATION

REFRIGERATED SYSTEMS FOR CALIFORNIA BEGINNING 11/1/2022 MUST NOT EXCEED 50LBS. OF CHARGE AND USE A REFRIGERANT BELOW 2.250 GWP. SYSTEMS GREATER THAN 50LBS. CHARGE REQUIRE REFRIGERANTS BELOW 150 GWP. EXISTING STORE COMPLIANCE FOR CA REQUIRES A REDUCED WEIGHTED AVERAGE GWP OF REFRIGERANTS USED TO LESS THAN 1,400 GWP FOR THE FLEET BY 2030 OR A 50% REDUCTION OF OVERALL GHGP (CHARGE NOT RELEVANT).

TYPICAL ABBREVIATIONS

AFF	ABOVE FINISHED FLOOR
AHU	AIR HANDLING UNIT
BTU	BRITISH THERMAL UNIT
BV	BALL VALVE
COMP	COMPRESSOR
CND	CONDENSER
COND	CONDENSATE
CONTR	CONTRACTOR
DEF	DEFROST
DH	DEFROST HEATER
DISC	DISCHARGE
DPR	DIFFERENTIAL PRESSURE REGULATOR
FLA	FULL LOAD AMPS
EC	ELECTRICAL CONTRACTOR
ELECT	ELECTRICAL
EMS	ENERGY MANAGEMENT SYSTEM
EPR	EVAPORATOR PRESSURE REGULATOR
ETR	EXISTING TO REMAIN
GC	GENERAL CONTRACTOR
GEN	GENERAL
GR	GLYCOL RETURN
GRP	GROUP
GS	GLYCOL SUPPLY
HP	HORSE POWER
ICU	INDOOR CONDENSING UNIT
IPR	INLET PRESSURE REGULATOR
LF	LINEAR FEET
LL	LIQUID LINE
LT	LOW TEMP REFRIGERATION SYSTEM
MAX	MAXIMUM
MBH	UNIT OF ENERGY (1000 BTU/S PER HOUR)
MCA	MINIMUM CIRCUIT AMPACITY
MDS	MICRO DISTRIBUTED SYSTEM
MIN	MINIMUM
MODP	MAXIMUM OVERCURRENT PROTECTIVE DEVICE
MT	MEDIUM TEMP REFRIGERATION SYSTEM
N/A	NOT APPLICABLE
OCU	OUTDOOR CONDENSING UNIT
OC	ON CENTER
OPR	OUTLET PRESSURE REGULATOR
PC	PLUMBING CONTRACTOR
PLUMB	PLUMBING
PMP	PUMP STATION
PNL	PANEL
PNLBD	PANELBOARD
RC	REFRIGERATION CONTRACTOR
RCU	ROOFTOP CONDENSING UNIT
RDP	REMOTE DEFROST PANEL
REC	RECEPTACLE
REF/REFRIG REFRIGERANT/REFRIGERATION	
RLA	RUNNING LOAD AMPS
RMCS	REFRIGERATION MANAGEMENT CONTROL SYSTEM
RTU	ROOFTOP UNIT
SL	SUCTION MAIN LINE
SR	SUCTION RISER
SYS	SYSTEM
TYP	TYPICAL
V	VOLTAGE/VOLTS

TYPICAL SYMBOLS


	EQUIPMENT SCHEDULE IDENTIFICATION NUMBERS
	HUB DRAIN
	FLOOR SINK
	CONDENSATE PIPING
	GLYCOL SUPPLY & RETURN LINES
	SHUT-OFF /BALL VALVE
	ADJUSTABLE VALVE
	FLOW REGULATOR - CALEFI
	CONVENIENCE RECEPTACLE
	FIELD INSTALL 22/2 BELDEN CABLE
	FIELD INSTALL CAT6 PATCH CABLES
	CAT6 CABLE ROUTED THROUGH WALLS/CONDUITS/POWER POLLS OR CABLE TRAYS.
	RJ45 NETWORK JACK
	ROOM SENSOR
	NETWORK SWITCH
	DEFROST GROUP
	CASE CONTROLLER
	BUFFER BOX
	PINCH VALVE

SHEET INDEX

- R0.0 GENERAL NOTES AND SPECIFICATIONS
- R1.0 FIXTURE FLOOR PLAN
- R1.1 EXISTING FIXTURE FLOOR PLAN
- R2.0 EVAC FLOOR PLAN
- R2.1 EVAC DETAILS
- R2.2 EVAC NOTES
- R3.0 REFRIGERATION MECHANICAL FLOOR PLAN
- R3.1 REFRIGERATION PIPING FLOOR PLAN (DC-1 & DC-2)
- R3.2 REFRIGERATION PIPING FLOOR PLAN (DC-3)
- R4.0 REFRIGERATION ELECTRICAL FLOOR PLAN
- R4.1 EMS RS485 NETWORK
- R4.2 EMS ETHERNET
- R4.3 EMS EQUIPMENT NETWORK ADDRESSES
- R4.4 EMS DETAILS
- R5.0 ROOF PLAN
- R6.0 REFRIGERATION EQUIPMENT SCHEDULE
- R7.0 CASE DETAILS
- R8.0 FREEZER & COOLER BOX EVAPORATOR DETAILS
- R9.0 DRY COOLER DETAILS
- R9.1 DRY COOLER CONTROL PANEL DETAILS
- R9.2 DRY COOLER CONTROL PANEL DETAILS
- R9.3 DRY COOLER CONTROL PANEL DETAILS
- R10.0 REFRIGERATION PIPING DETAILS

HUSSMANN

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-6113 Fax

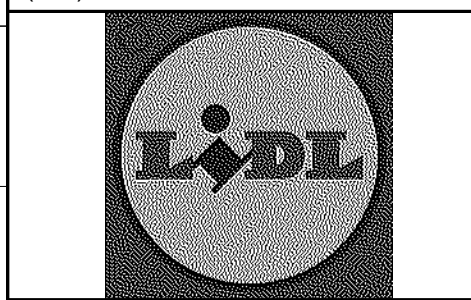

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT IS THE PROPERTY OF HUSSMANN CORPORATION. IT IS TO BE USED FOR THE PURPOSES FOR WHICH IT WAS CREATED. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE PRIOR WRITTEN CONSENT OF HUSSMANN CORPORATION. IT IS THE PROPERTY OF HUSSMANN CORPORATION.

NOTICE OF LIABILITY
Hussmann Corporation and its subsidiaries and affiliates do not warrant, represent or guarantee the accuracy or completeness of the information contained herein. The user of this document is responsible for the accuracy and completeness of the information contained herein. The user of this document is responsible for the accuracy and completeness of the information contained herein. The user of this document is responsible for the accuracy and completeness of the information contained herein.

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS

REVISIONS


REVISIONS

GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

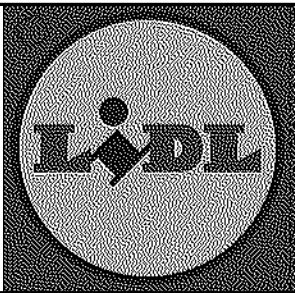

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT IS CONTAINED HEREIN AND INFORMATION SHALL BE USED FOR THE PURPOSE OF REPRODUCTION OR OTHERWISE. NO PART SHALL BE REPRODUCED OR OTHERWISE USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNER TO OBTAIN THE NECESSARY PERMISSIONS FROM HUSSMANN CORPORATION.

DISCLAIMER: HUSSMANN CORPORATION IS NOT RESPONSIBLE FOR ANY ERRORS OR OMISSIONS IN THIS DOCUMENT. THE ARCHITECT OR DESIGNER SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED. HUSSMANN CORPORATION SHALL NOT BE RESPONSIBLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING FROM THE USE OF THIS DOCUMENT. THE ARCHITECT OR DESIGNER SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED.

REVISIONS

REV # DATE DRAWN CHECK REVISIONS

1 10/31/2025

SCALE: As indicated

DRAWN BY: SEAN A.

CHK'D BY: CHRIS G.

APPROV'D BY: CRAIG P.

DESIGNED BY: TYLER R.

PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.


Cushing Terrell

cushingterrell.com
800.757.9522



FIXTURE
FLOOR PLAN

R1.0

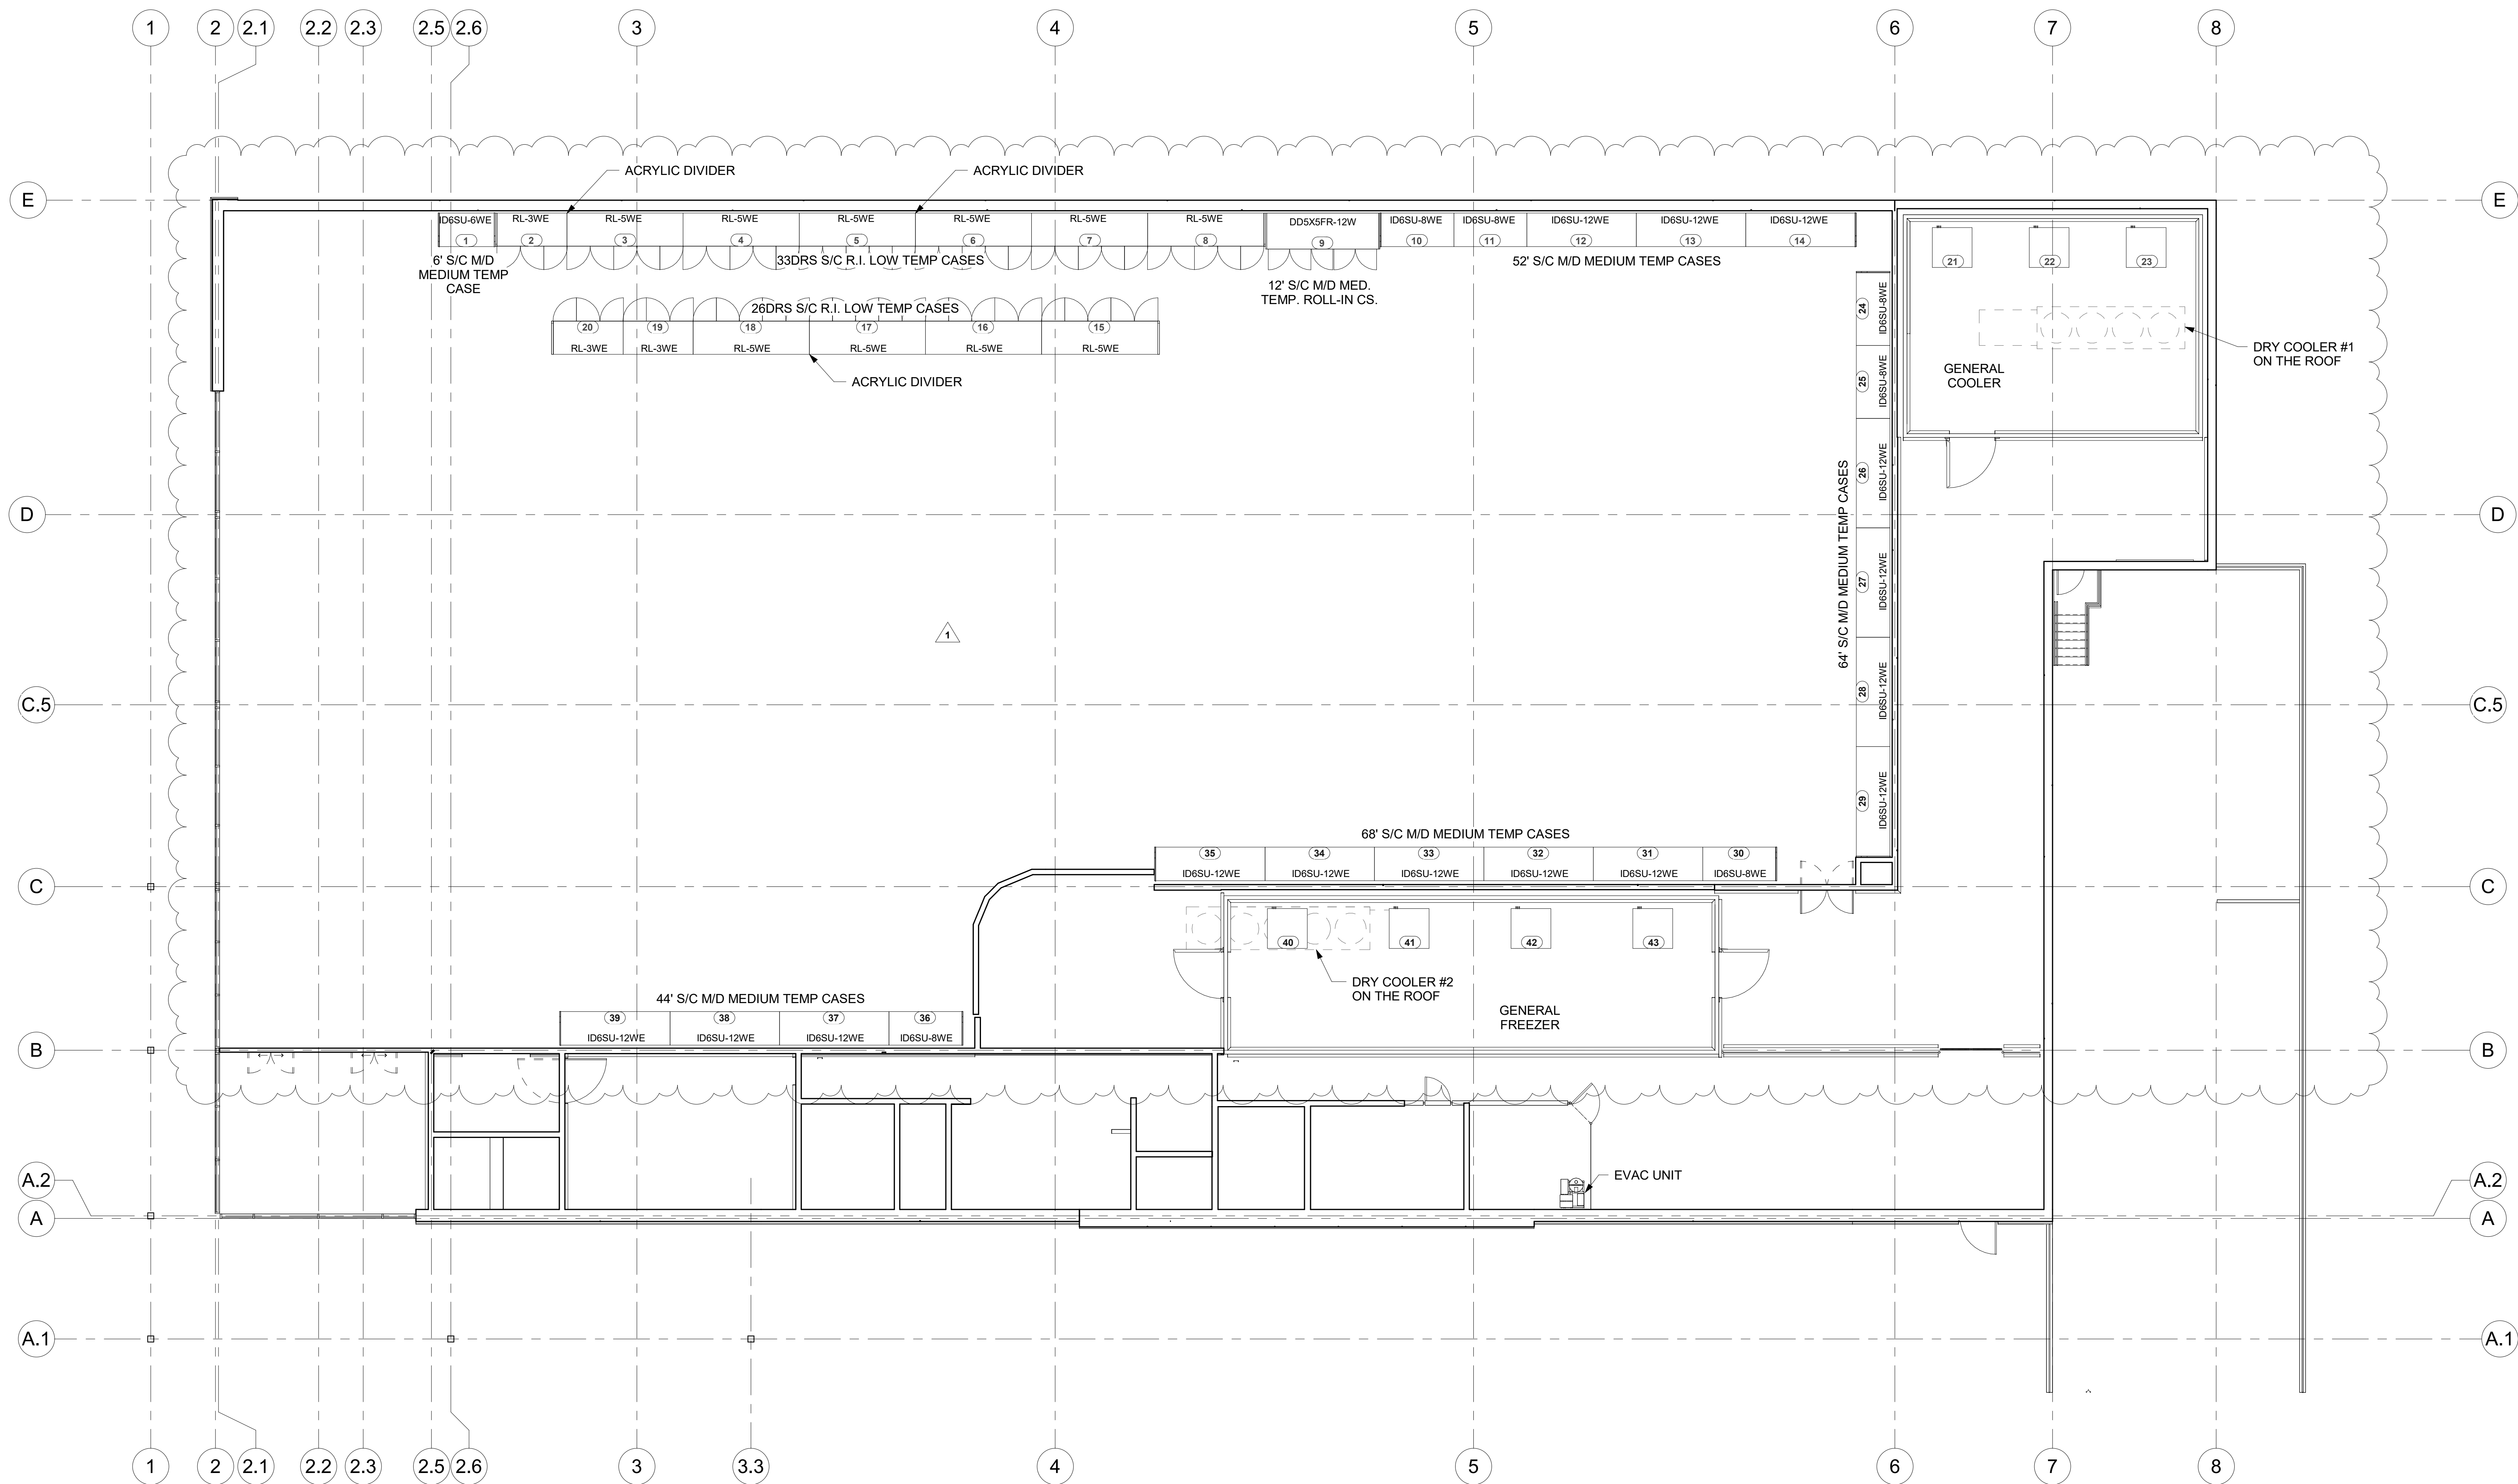

1 R1.0 FIXTURE FLOOR PLAN
1/8" = 1'-0"

GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax



SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. ANY REPRODUCTION OR TRANSMISSION OF THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION IS PROHIBITED.

NOTICE OF LIABILITY: Hussmann Corporation and its employees and agents shall not be held responsible for any damage or injury to persons or property resulting from the use of this document. The user of this document for any purpose other than that intended by Hussmann Corporation shall be held responsible for any damage or injury to persons or property resulting from the use of this document.

REVISIONS

REVISIONS
DATE
BY
DESCRIPTION

DATE: 10/31/2025
SCALE: As indicated
DRAWN BY: SEAN A.
CHK'D BY: CHRIS G.
APP'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.


Cushing Terrell

cushingterrell.com
800.757.9522




EVAC FLOOR PLAN

R2.0

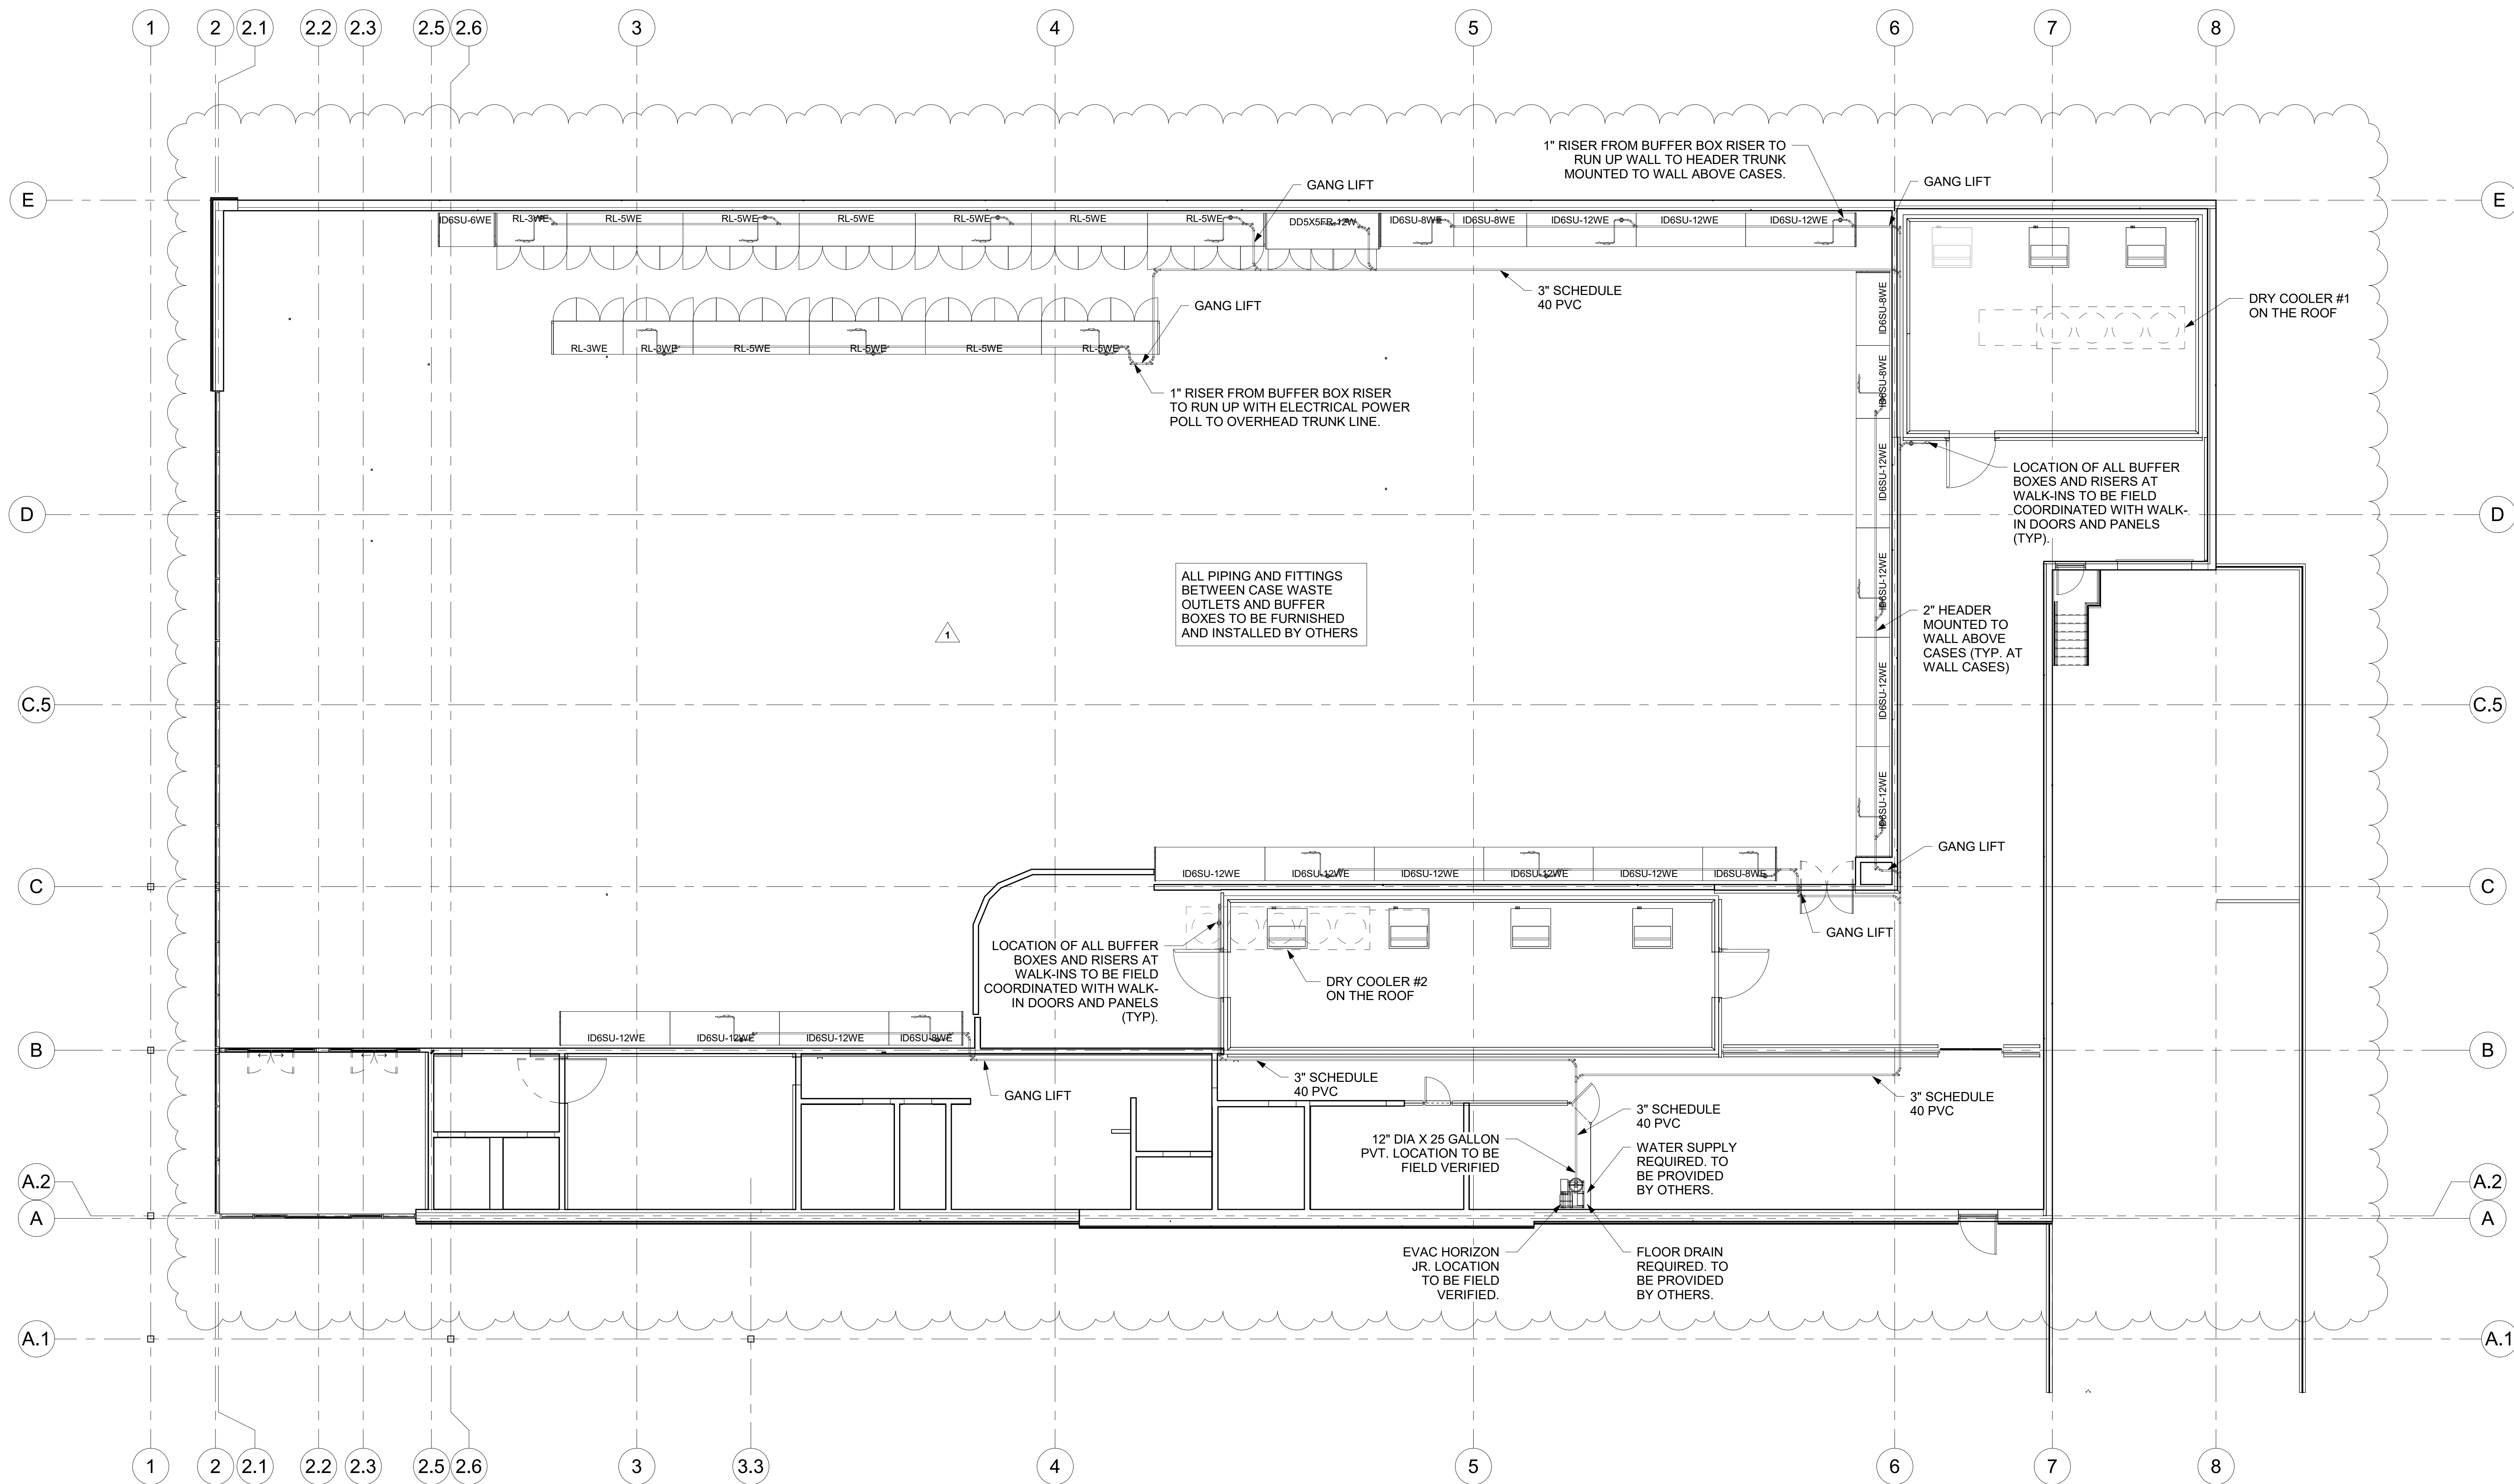

① R2.0 EVAC FLOOR PLAN
1/8" = 1'-0"

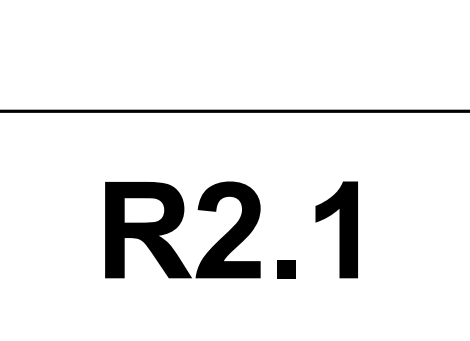


GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

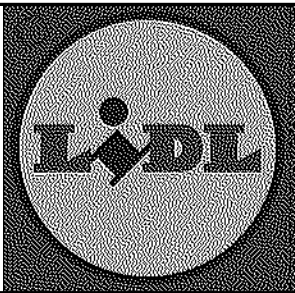

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. ANY REPRODUCTION OR TRANSMISSION OF THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION IS PROHIBITED.

NOTICE OF LIABILITY: Hussmann Corporation and its representatives shall not be held responsible for any damages, claims, or liabilities arising from the use of this document. The user of this document for any purpose other than that intended by Hussmann Corporation shall be held responsible for any damages, claims, or liabilities arising from such use.

REV #	DATE	DESCRIPTION
1	10/31/2025	REVISION FOR UPDATED SUPPLY CHAIN LAYOUT

DATE: 10/31/2025
SCALE: As indicated
DRAWN BY: SEAN A.
CHK'D BY: CHRIS G.
APP'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517


Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell
cushingterrell.com
800.757.9522

REGISTERED
No. PED1291
PROFESSIONAL
ENGINEER
MARK A. BERNHARDT
12/27/2026

REFRIGERATION
MECHANICAL
FLOOR PLAN

R3.0

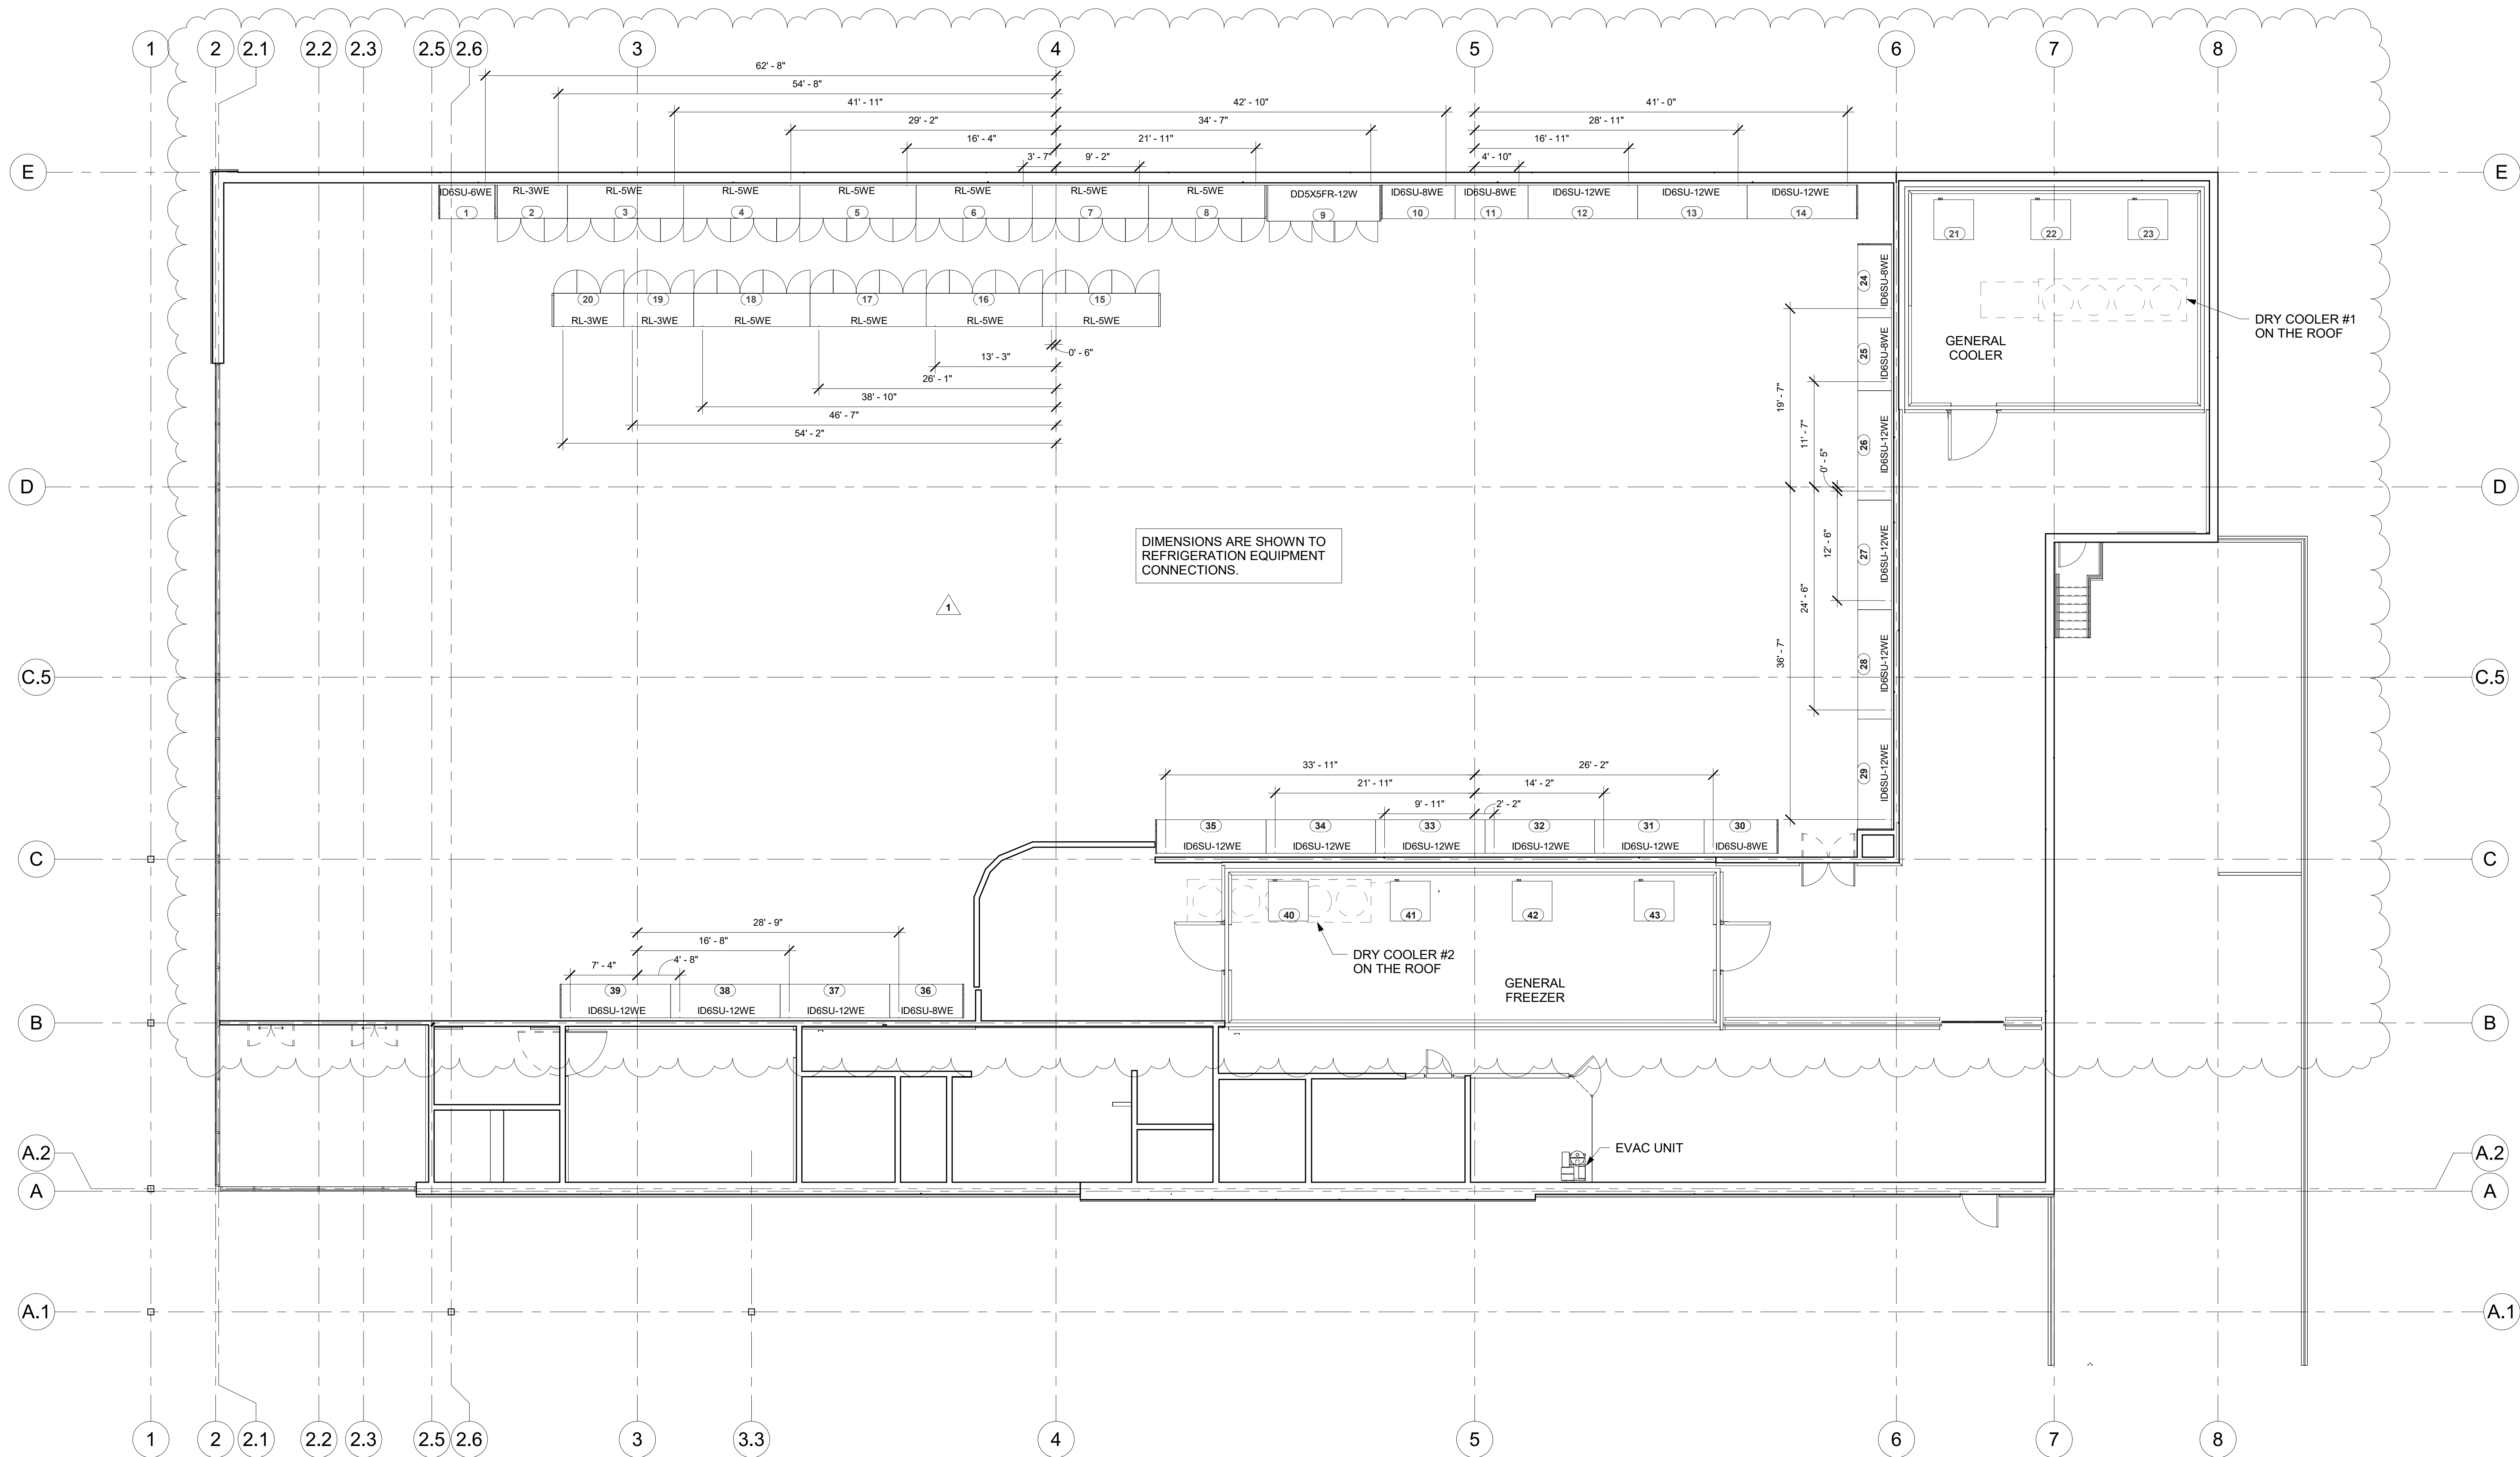


GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN®

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

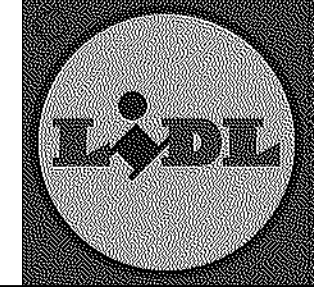

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT IS THE PROPERTY OF HUSSMANN CORPORATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE PROPERTY OF HUSSMANN CORPORATION AND SHALL BE RETURNED UPON REQUEST.

WARRANTY: HUSSMANN CORPORATION warrants that the equipment supplied by it to the Customer will conform to the specifications and standards set forth in the applicable literature and that the equipment will be free from defects in material and workmanship under normal use and service for a period of two (2) years from the date of installation. This warranty does not cover damage caused by misuse, neglect, or accidents, or by unauthorized alterations or repairs.

REVISIONS

DATE: 10/31/2025
SCALE: As Indicated
DRAWN BY: SEAN A.
CHKD BY: CHRIS G.
APPROV BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell
cushingterrell.com
800.757.9522
REGISTERED
No. PED1281
PROFESSIONAL
ENGINEER
MECHANICAL
11/2/2025


REFRIGERATION
PIPING FLOOR
PLAN (DC-1)

R3.1


DC-1 CONDENSER GLYCOL/WATER PIPING

SYS #	REFRIGERATOR / UNIT COOLER			BALANCE VALVE		RUN DIAMETER (INCHES)	BRANCH DIAMETER (INCHES)	SUPPLY DIAMETER (INCHES)	RETURN DIAMETER (INCHES)	MATERIAL	PIPING LENGTH (FT)
	SIZE	MODEL	DESCRIPTION	LOCATION	FLOW GPM						
1	6	ID6SU6WE	REACH-IN		6.0			3/4	3/4	HOSE	5
2	3DR	RL3WE	REACH-IN		2.0			3/4	3/4	HOSE	5
3	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
4	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
5	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
6	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
7	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
8	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
9	12	ID6SU12WE	REACH-IN		4.0			3/4	3/4	HOSE	5
10	8	ID6SU8WE	MULTI-DECK		6.0			3/4	3/4	HOSE	5
11	8	ID6SU8WE	MULTI-DECK		6.0			3/4	3/4	HOSE	5
12	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
13	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
14	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
15	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
16	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
17	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
18	5DR	RL5WE	REACH-IN		3.0			3/4	3/4	HOSE	5
19	3DR	RL3WE	REACH-IN		2.0			3/4	3/4	HOSE	5
20	3DR	RL3WE	REACH-IN		2.0			3/4	3/4	HOSE	5
21	--	RV4B2159-4	GENERAL COOLER		5.99			3/4	3/4	HOSE	5
22	--	RV4B2159-4	GENERAL COOLER		5.99			3/4	3/4	HOSE	5
23	--	RV4B2159-4	GENERAL COOLER		5.99			3/4	3/4	HOSE	5
			DC-1 MAIN RUN		100.0						

*EACH UNIT PROVIDES 3/4" SUPPLY AND RETURN CONNECTOR HOSES

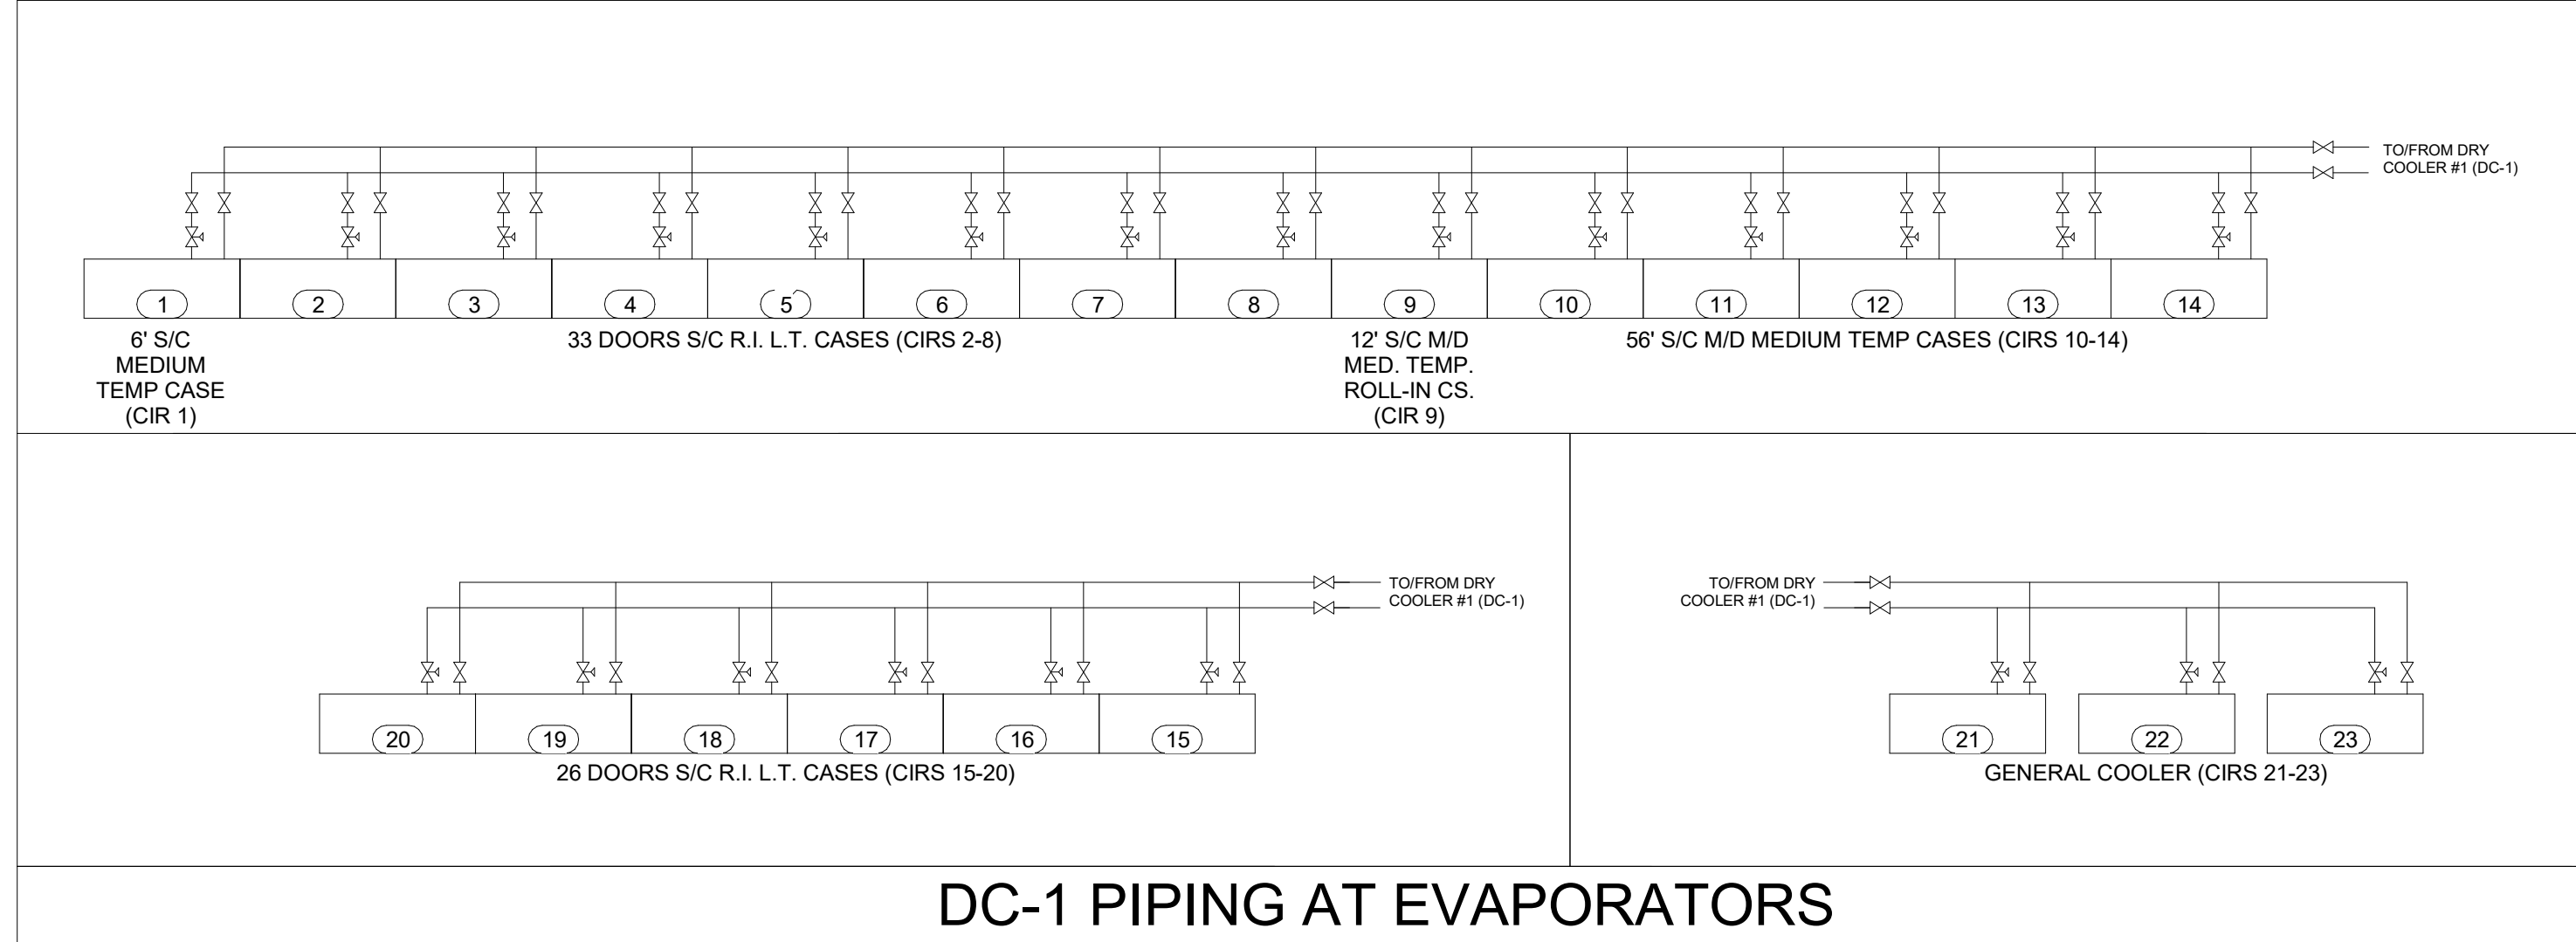

DC-1 PIPING AT EVAPORATORS

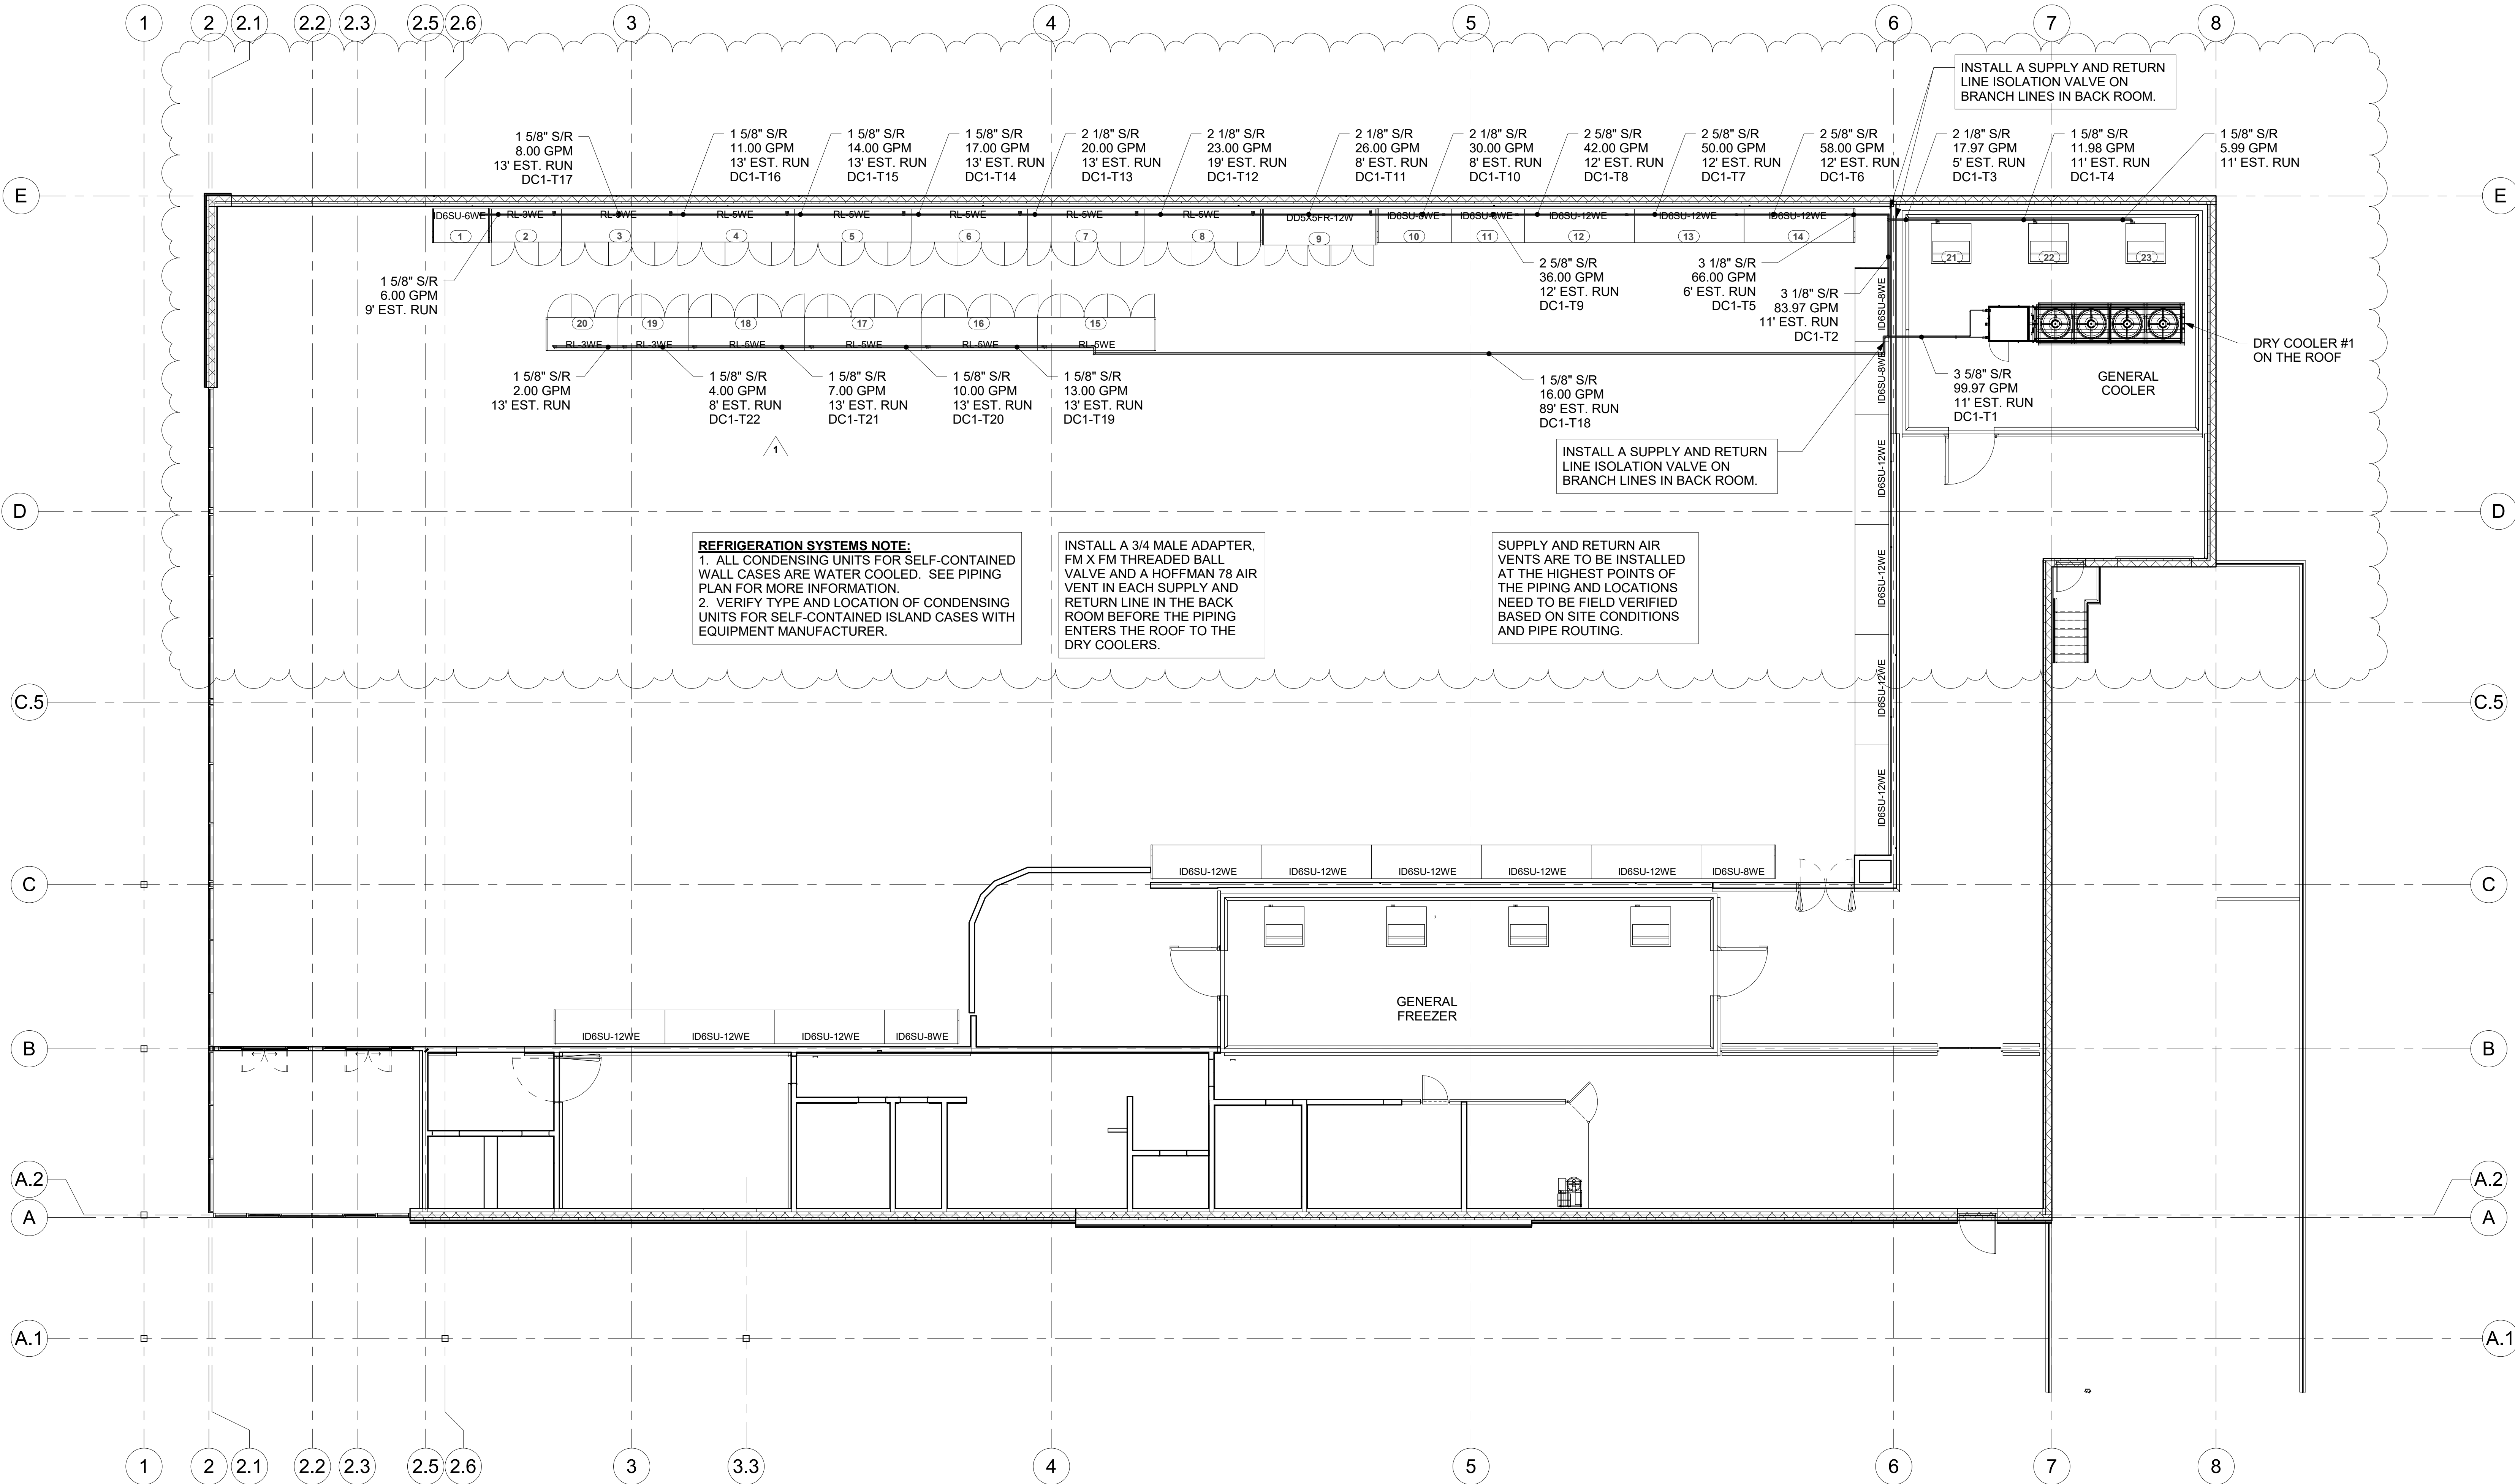


GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN®

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

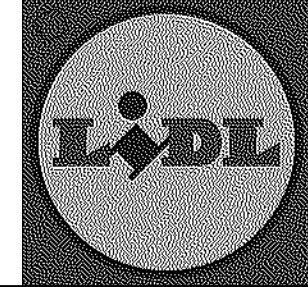

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT IS CONTAINED HEREIN AND ANY REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, WITHOUT THE PRIOR WRITTEN CONSENT OF HUSSMANN CORPORATION, IS PROHIBITED. HUSSMANN CORPORATION SHALL BE NOT LIABLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING FROM THE USE OF THIS DOCUMENT.

NOTICE OF LIABILITY
Hussmann Corporation and its representatives warrant that the information contained herein is true and correct to the best of their knowledge and belief. However, the information is provided for informational purposes only and is not intended to be used as a basis for any warranty or liability. The user of this document is responsible for the accuracy of the information and for the consequences of any use of the information.

REVISIONS


REVISIONS
1. 1/1/2025
2. 1/1/2025
3. 1/1/2025
4. 1/1/2025
5. 1/1/2025
6. 1/1/2025
7. 1/1/2025
8. 1/1/2025
9. 1/1/2025
10. 1/1/2025
11. 1/1/2025
12. 1/1/2025
13. 1/1/2025
14. 1/1/2025
15. 1/1/2025
16. 1/1/2025
17. 1/1/2025
18. 1/1/2025
19. 1/1/2025
20. 1/1/2025
21. 1/1/2025
22. 1/1/2025
23. 1/1/2025
24. 1/1/2025
25. 1/1/2025
26. 1/1/2025
27. 1/1/2025
28. 1/1/2025
29. 1/1/2025
30. 1/1/2025
31. 1/1/2025
32. 1/1/2025
33. 1/1/2025
34. 1/1/2025
35. 1/1/2025
36. 1/1/2025
37. 1/1/2025
38. 1/1/2025
39. 1/1/2025
40. 1/1/2025
41. 1/1/2025
42. 1/1/2025
43. 1/1/2025
44. 1/1/2025
45. 1/1/2025
46. 1/1/2025
47. 1/1/2025
48. 1/1/2025
49. 1/1/2025
50. 1/1/2025
51. 1/1/2025
52. 1/1/2025
53. 1/1/2025
54. 1/1/2025
55. 1/1/2025
56. 1/1/2025
57. 1/1/2025
58. 1/1/2025
59. 1/1/2025
60. 1/1/2025
61. 1/1/2025
62. 1/1/2025
63. 1/1/2025
64. 1/1/2025
65. 1/1/2025
66. 1/1/2025
67. 1/1/2025
68. 1/1/2025
69. 1/1/2025
70. 1/1/2025
71. 1/1/2025
72. 1/1/2025
73. 1/1/2025
74. 1/1/2025
75. 1/1/2025
76. 1/1/2025
77. 1/1/2025
78. 1/1/2025
79. 1/1/2025
80. 1/1/2025
81. 1/1/2025
82. 1/1/2025
83. 1/1/2025
84. 1/1/2025
85. 1/1/2025
86. 1/1/2025
87. 1/1/2025
88. 1/1/2025
89. 1/1/2025
90. 1/1/2025
91. 1/1/2025
92. 1/1/2025
93. 1/1/2025
94. 1/1/2025
95. 1/1/2025
96. 1/1/2025
97. 1/1/2025
98. 1/1/2025
99. 1/1/2025
100. 1/1/2025

DATE: 10/31/2025
SCALE: As Indicated
DRAWN BY: Author
CHK'D BY: Checker
APP'D BY: Approver
DESIGNED BY: Designer
PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell

cushingterrell.com
800.757.9522

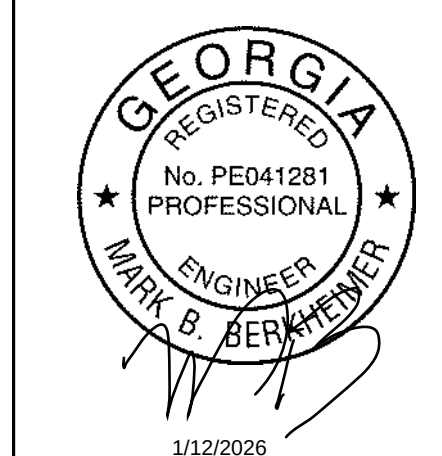


REFRIGERATION
PIPING FLOOR
PLAN (DC-2)

R3.2


DC-2 CONDENSER GLYCOL/WATER PIPING

SYS #	REFRIGERATOR / UNIT COOLER			BALANCE VALVE		RUN DIAMETER (INCHES)	BRANCH DIAMETER (INCHES)	SUPPLY DIAMETER (INCHES)	RETURN DIAMETER (INCHES)	MATERIAL	PIPING LENGTH (FT)
	SIZE	MODEL	DESCRIPTION	LOCATION	FLOW GPM						
24	8	ID6SUBWE	MULTI-DECK		6.0			3/4	3/4	HOSE	5
25	8	ID6SUBWE	MULTI-DECK		6.0			3/4	3/4	HOSE	5
26	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
27	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
28	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
29	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
30	8	ID6SUBWE	MULTI-DECK		6.0			3/4	3/4	HOSE	5
31	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
32	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
33	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
34	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
35	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
36	8	ID6SUBWE	MULTI-DECK		6.0			3/4	3/4	HOSE	5
37	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
38	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
39	12	ID6SU12WE	MULTI-DECK		8.0			3/4	3/4	HOSE	5
40	--	RV482192-4	GENERAL FREEZER		8.5			3/4	3/4	HOSE	5
41	--	RV482192-4	GENERAL FREEZER		8.5			3/4	3/4	HOSE	5
42	--	RV482192-4	GENERAL FREEZER		8.5			3/4	3/4	HOSE	5
43	--	RV482192-4	GENERAL FREEZER		8.5			3/4	3/4	HOSE	5
DC-2 MAIN RUN					154.00						

*EACH UNIT PROVIDES 3/4" SUPPLY AND RETURN CONNECTOR HOSES

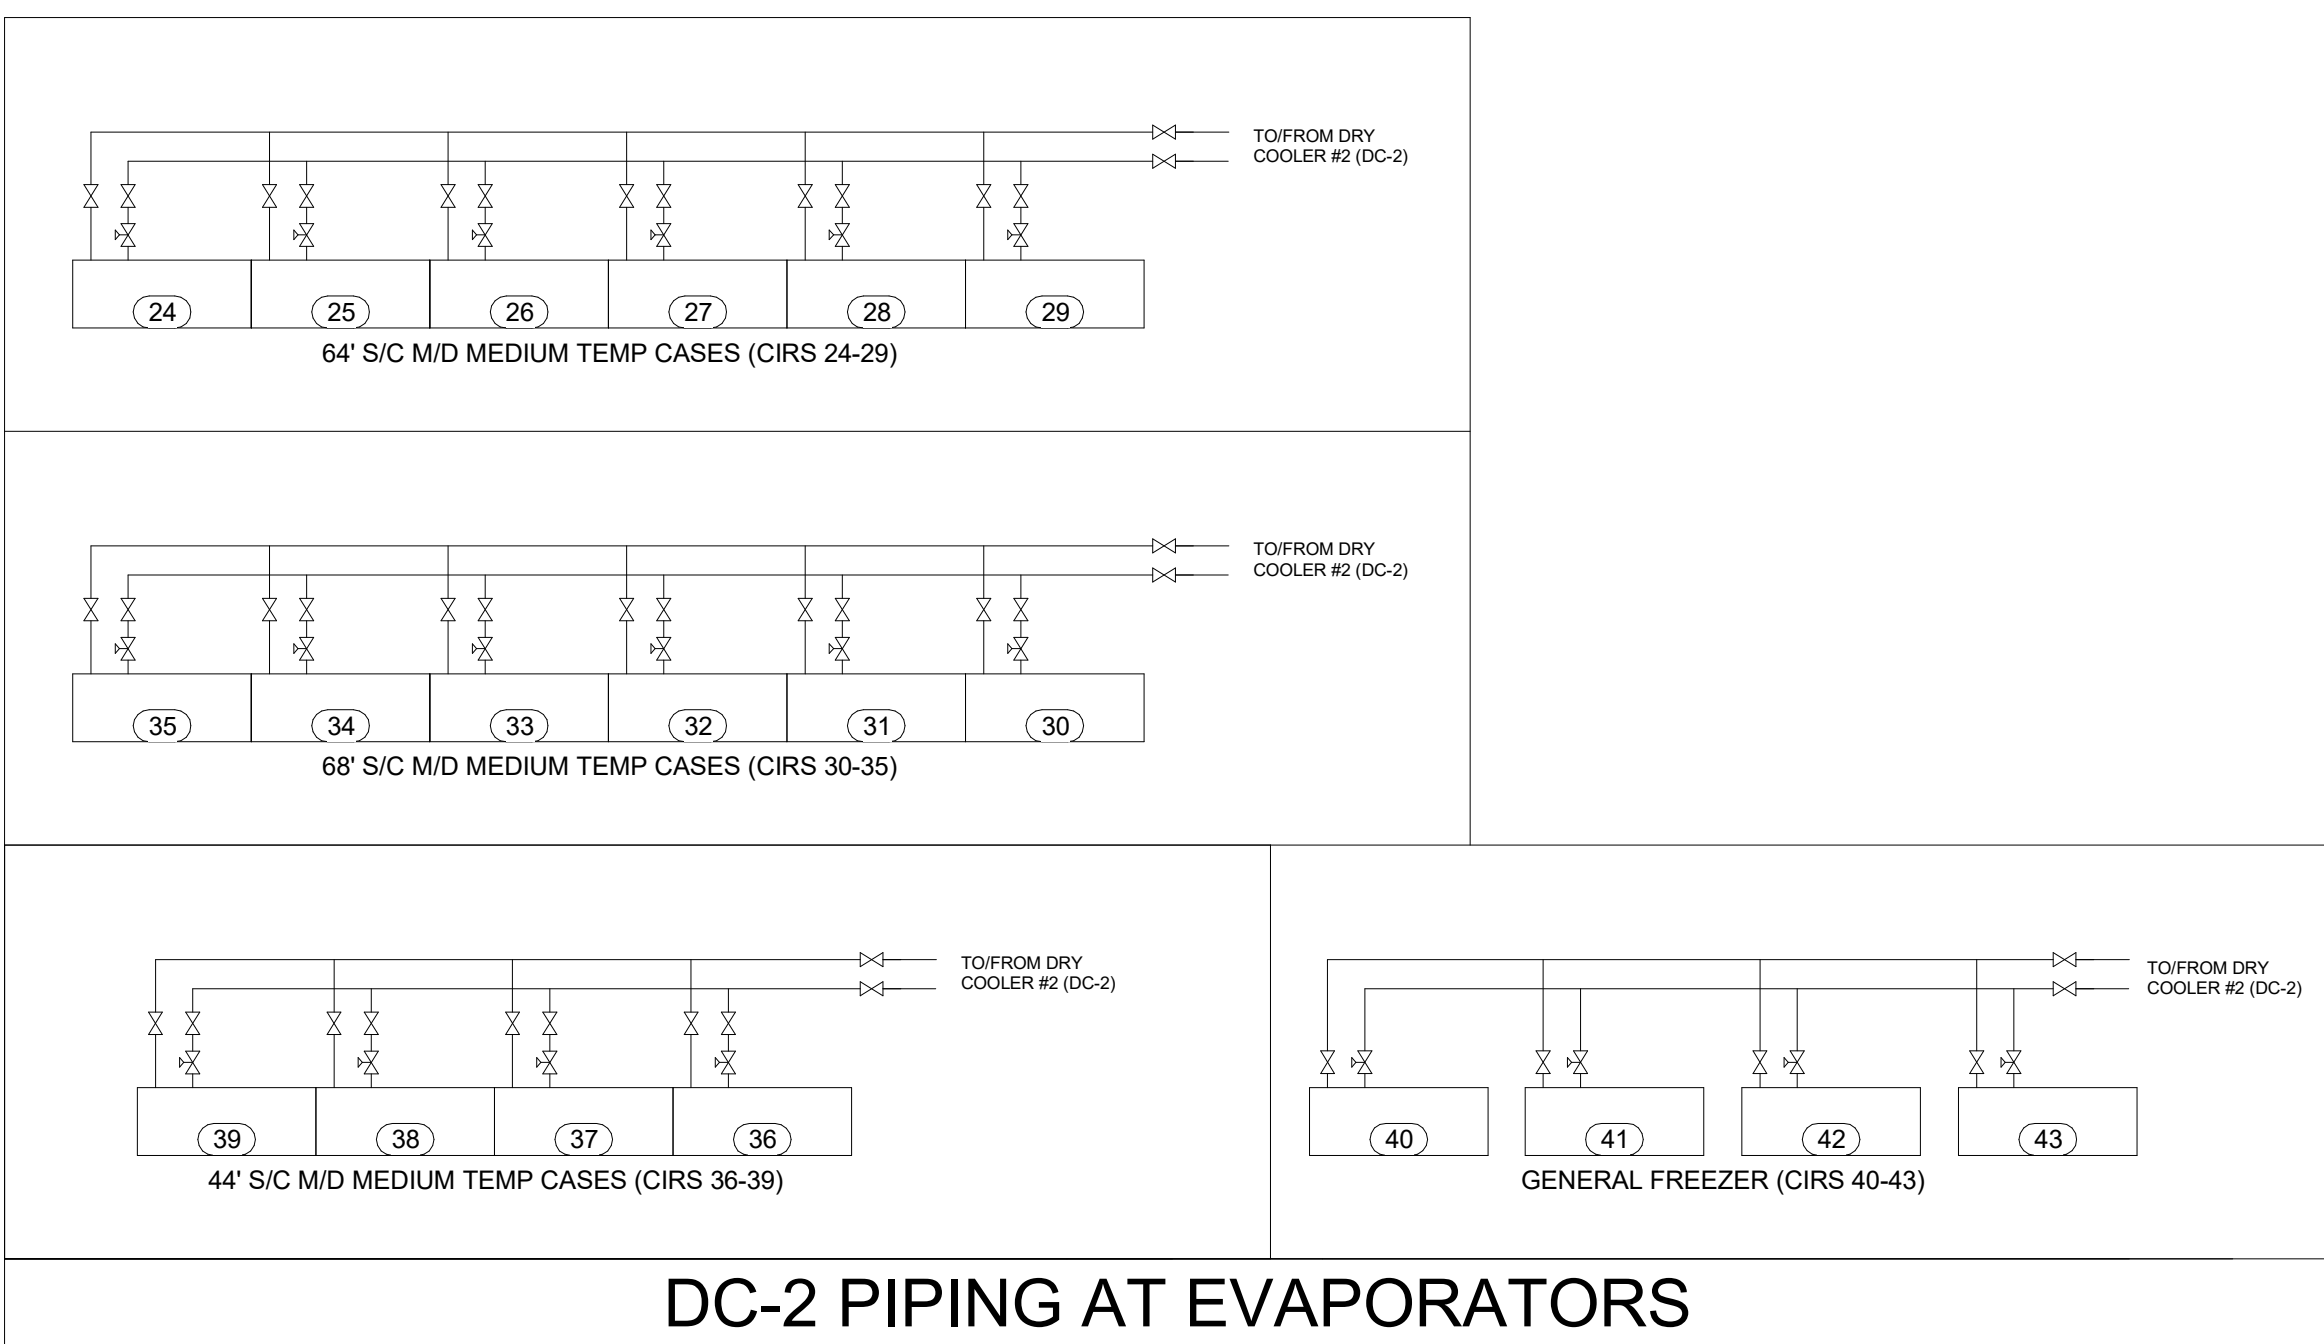

DC-2 PIPING AT EVAPORATORS

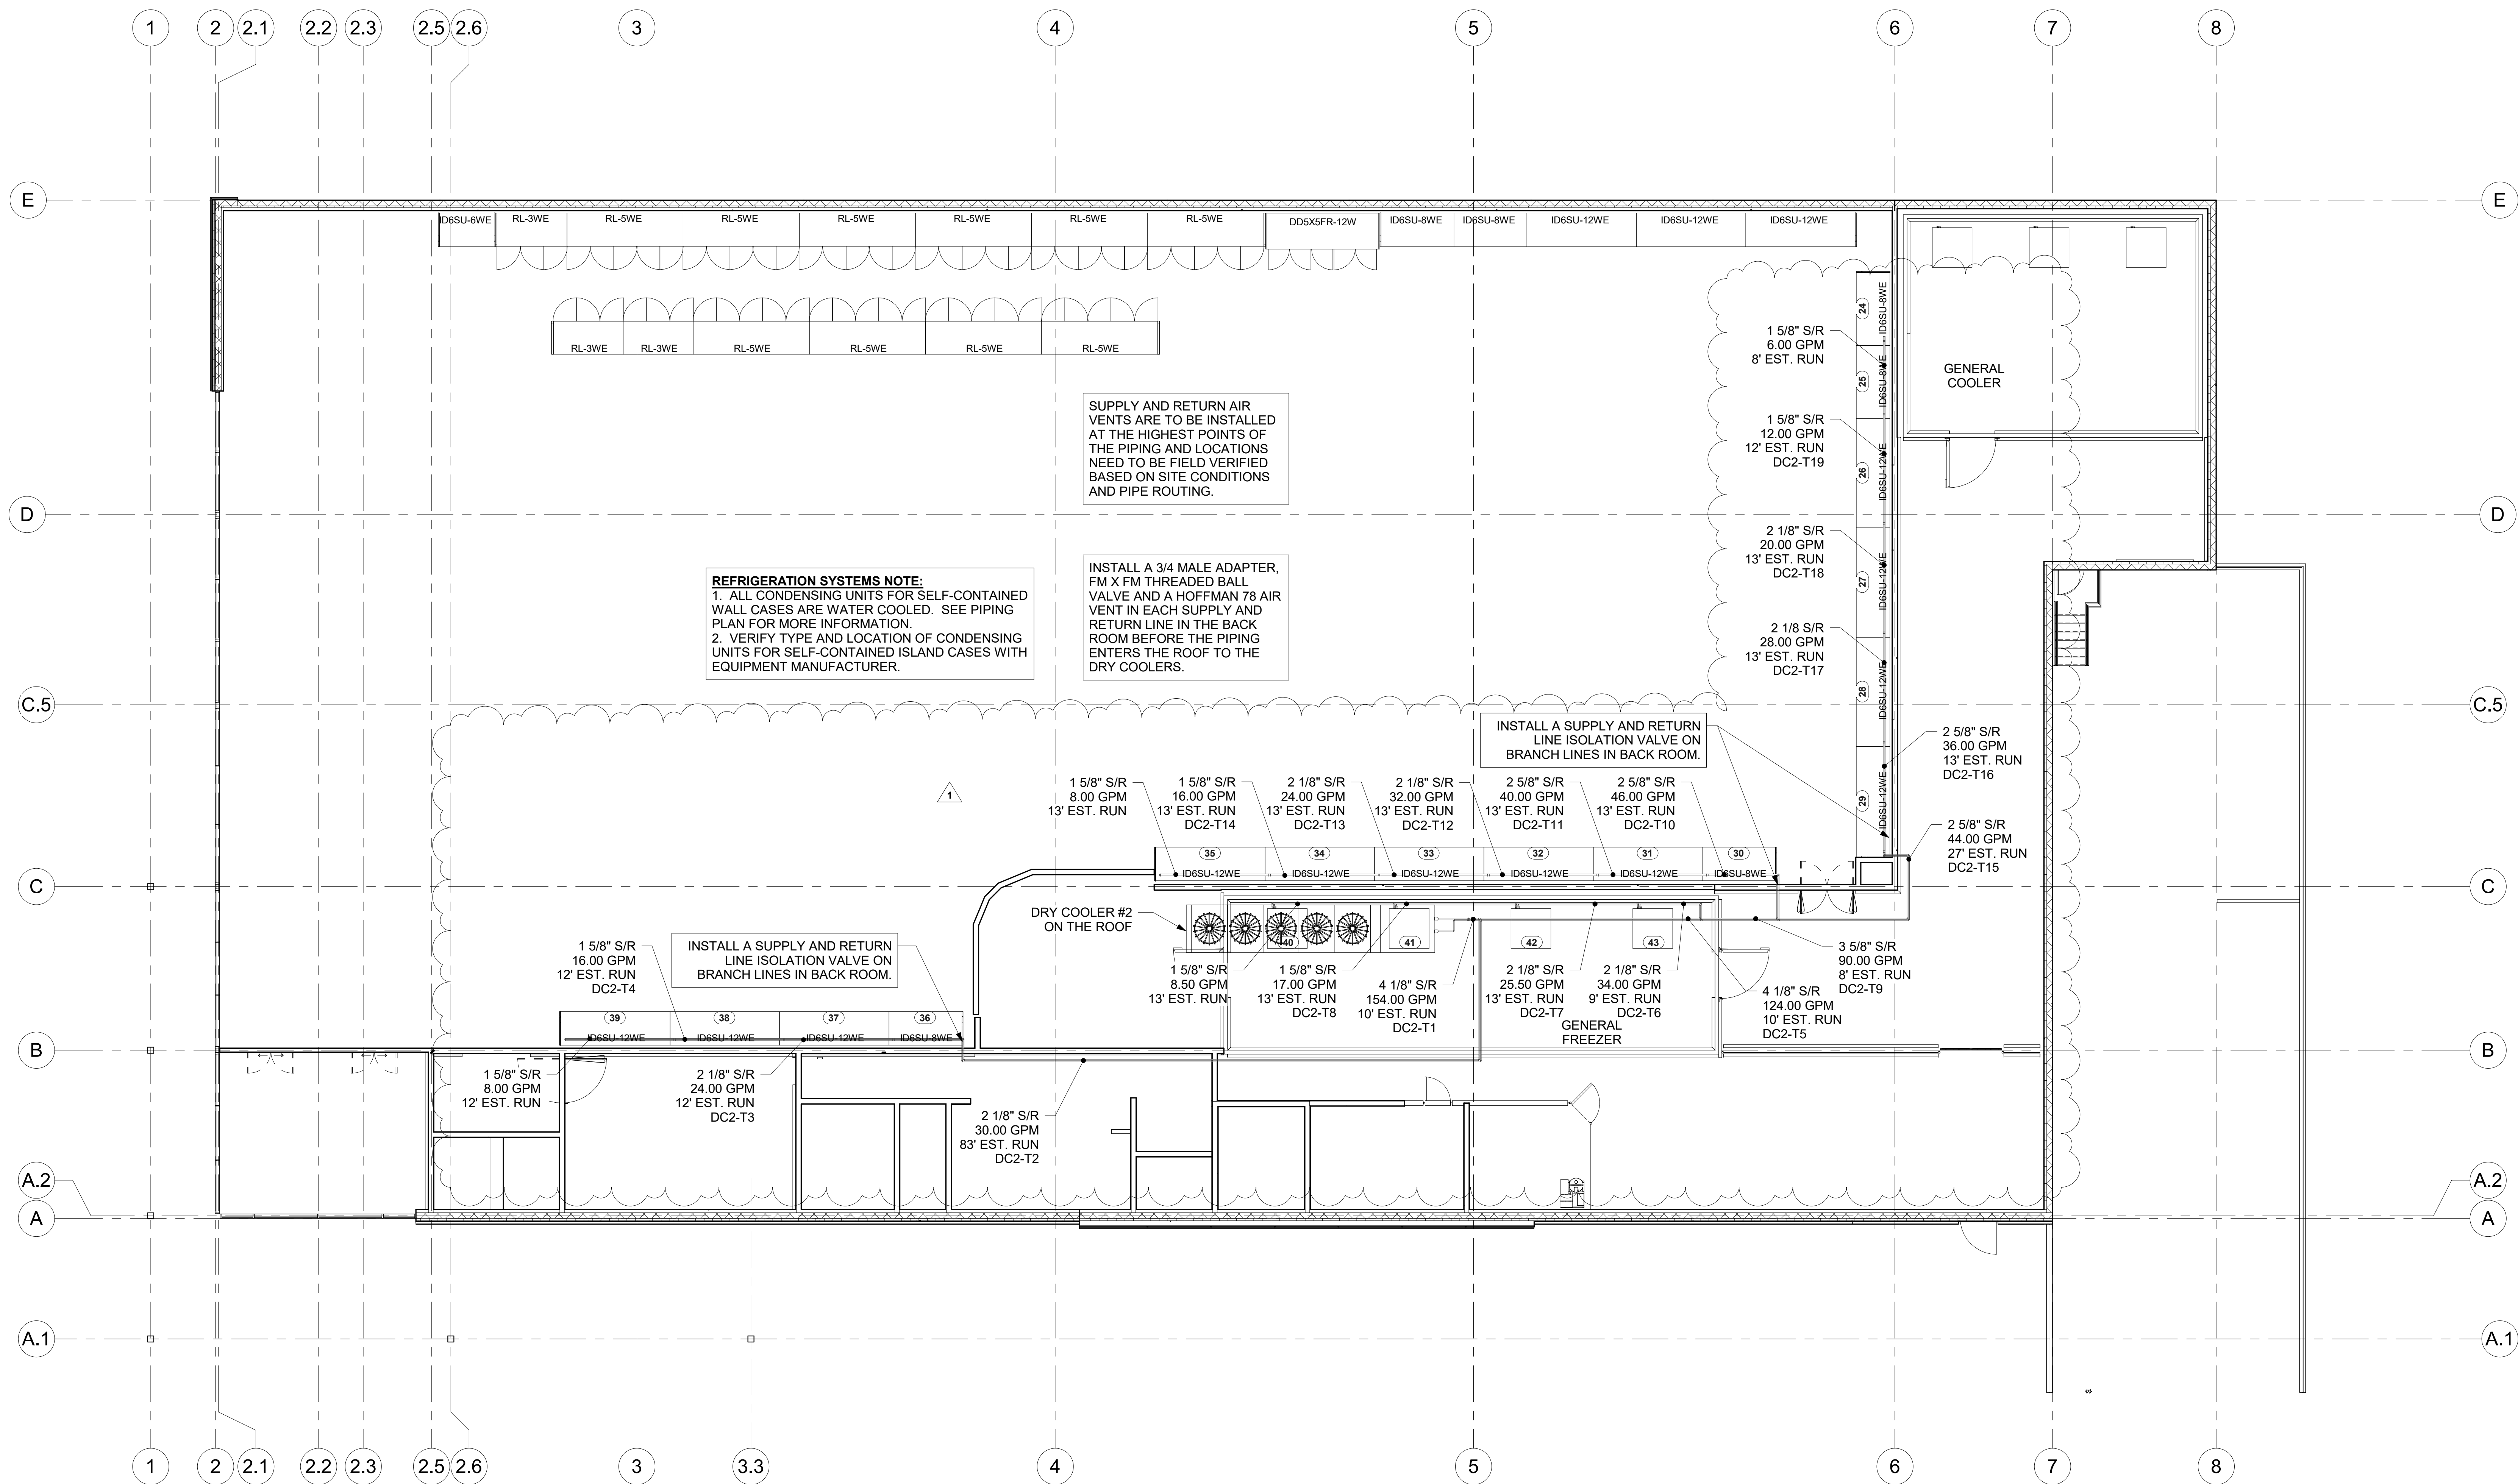


R3.2 PIPING LINE SIZE PLAN (DC-2)
1/8" = 1'-0"

GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

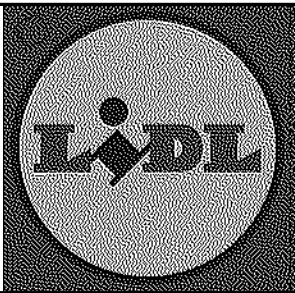

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE PRIOR WRITTEN CONSENT OF HUSSMANN CORPORATION, IT SHALL BE NOT PERMITTED FOR ANY OTHER PARTY TO REPRODUCE OR TRANSMIT THIS DOCUMENT.

NOTICE OF LIABILITY: Hussmann Corporation and its representatives shall not be held responsible for any damages, claims, or liabilities arising from the use of this document. The user of this document for any purpose other than that intended by Hussmann Corporation shall be held responsible for any damages, claims, or liabilities arising from such use.

REVISIONS

REV #	DATE	DESCRIPTION
1	10/31/2025	REVISION PER SUPPLY CHAIN LAYOUT

DATE: 10/31/2025
SCALE: As indicated
DRAWN BY: SEAN A.
CHK'D BY: CHRIS G.
APP'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.


Cushing Terrell


cushingterrell.com
800.757.9522



REFRIGERATION
ELECTRICAL
FLOOR PLAN

R4.0

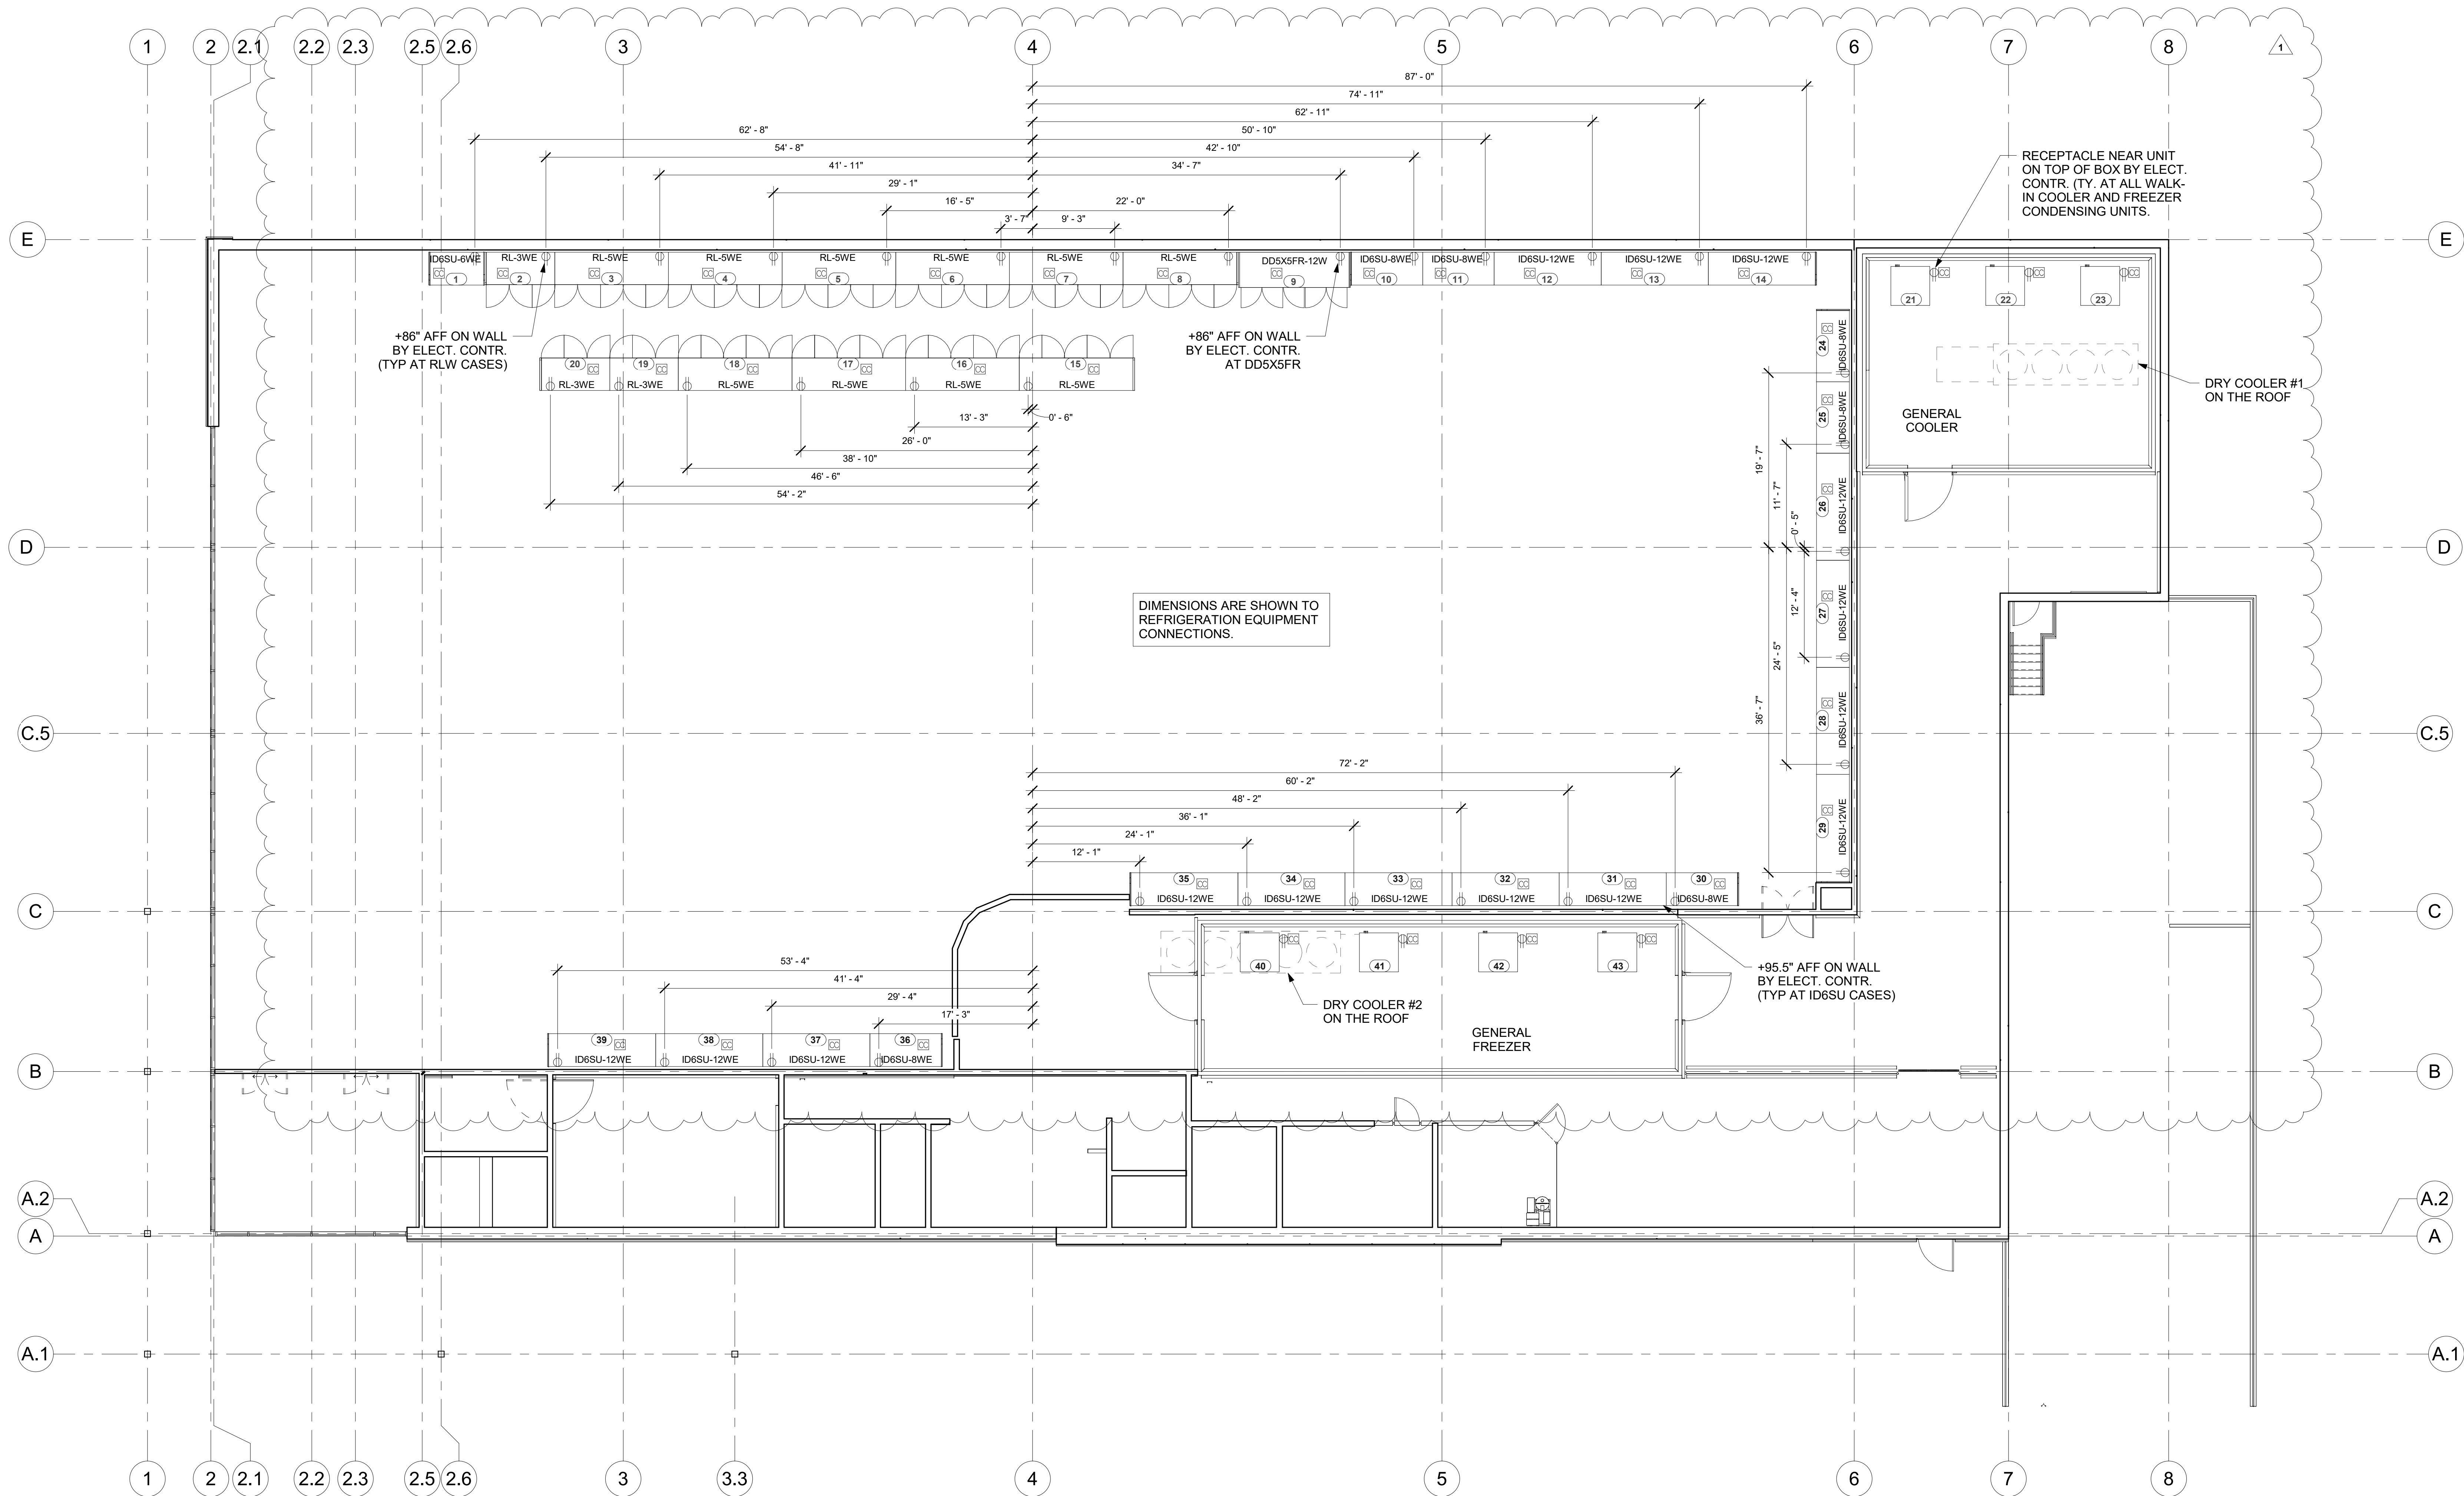

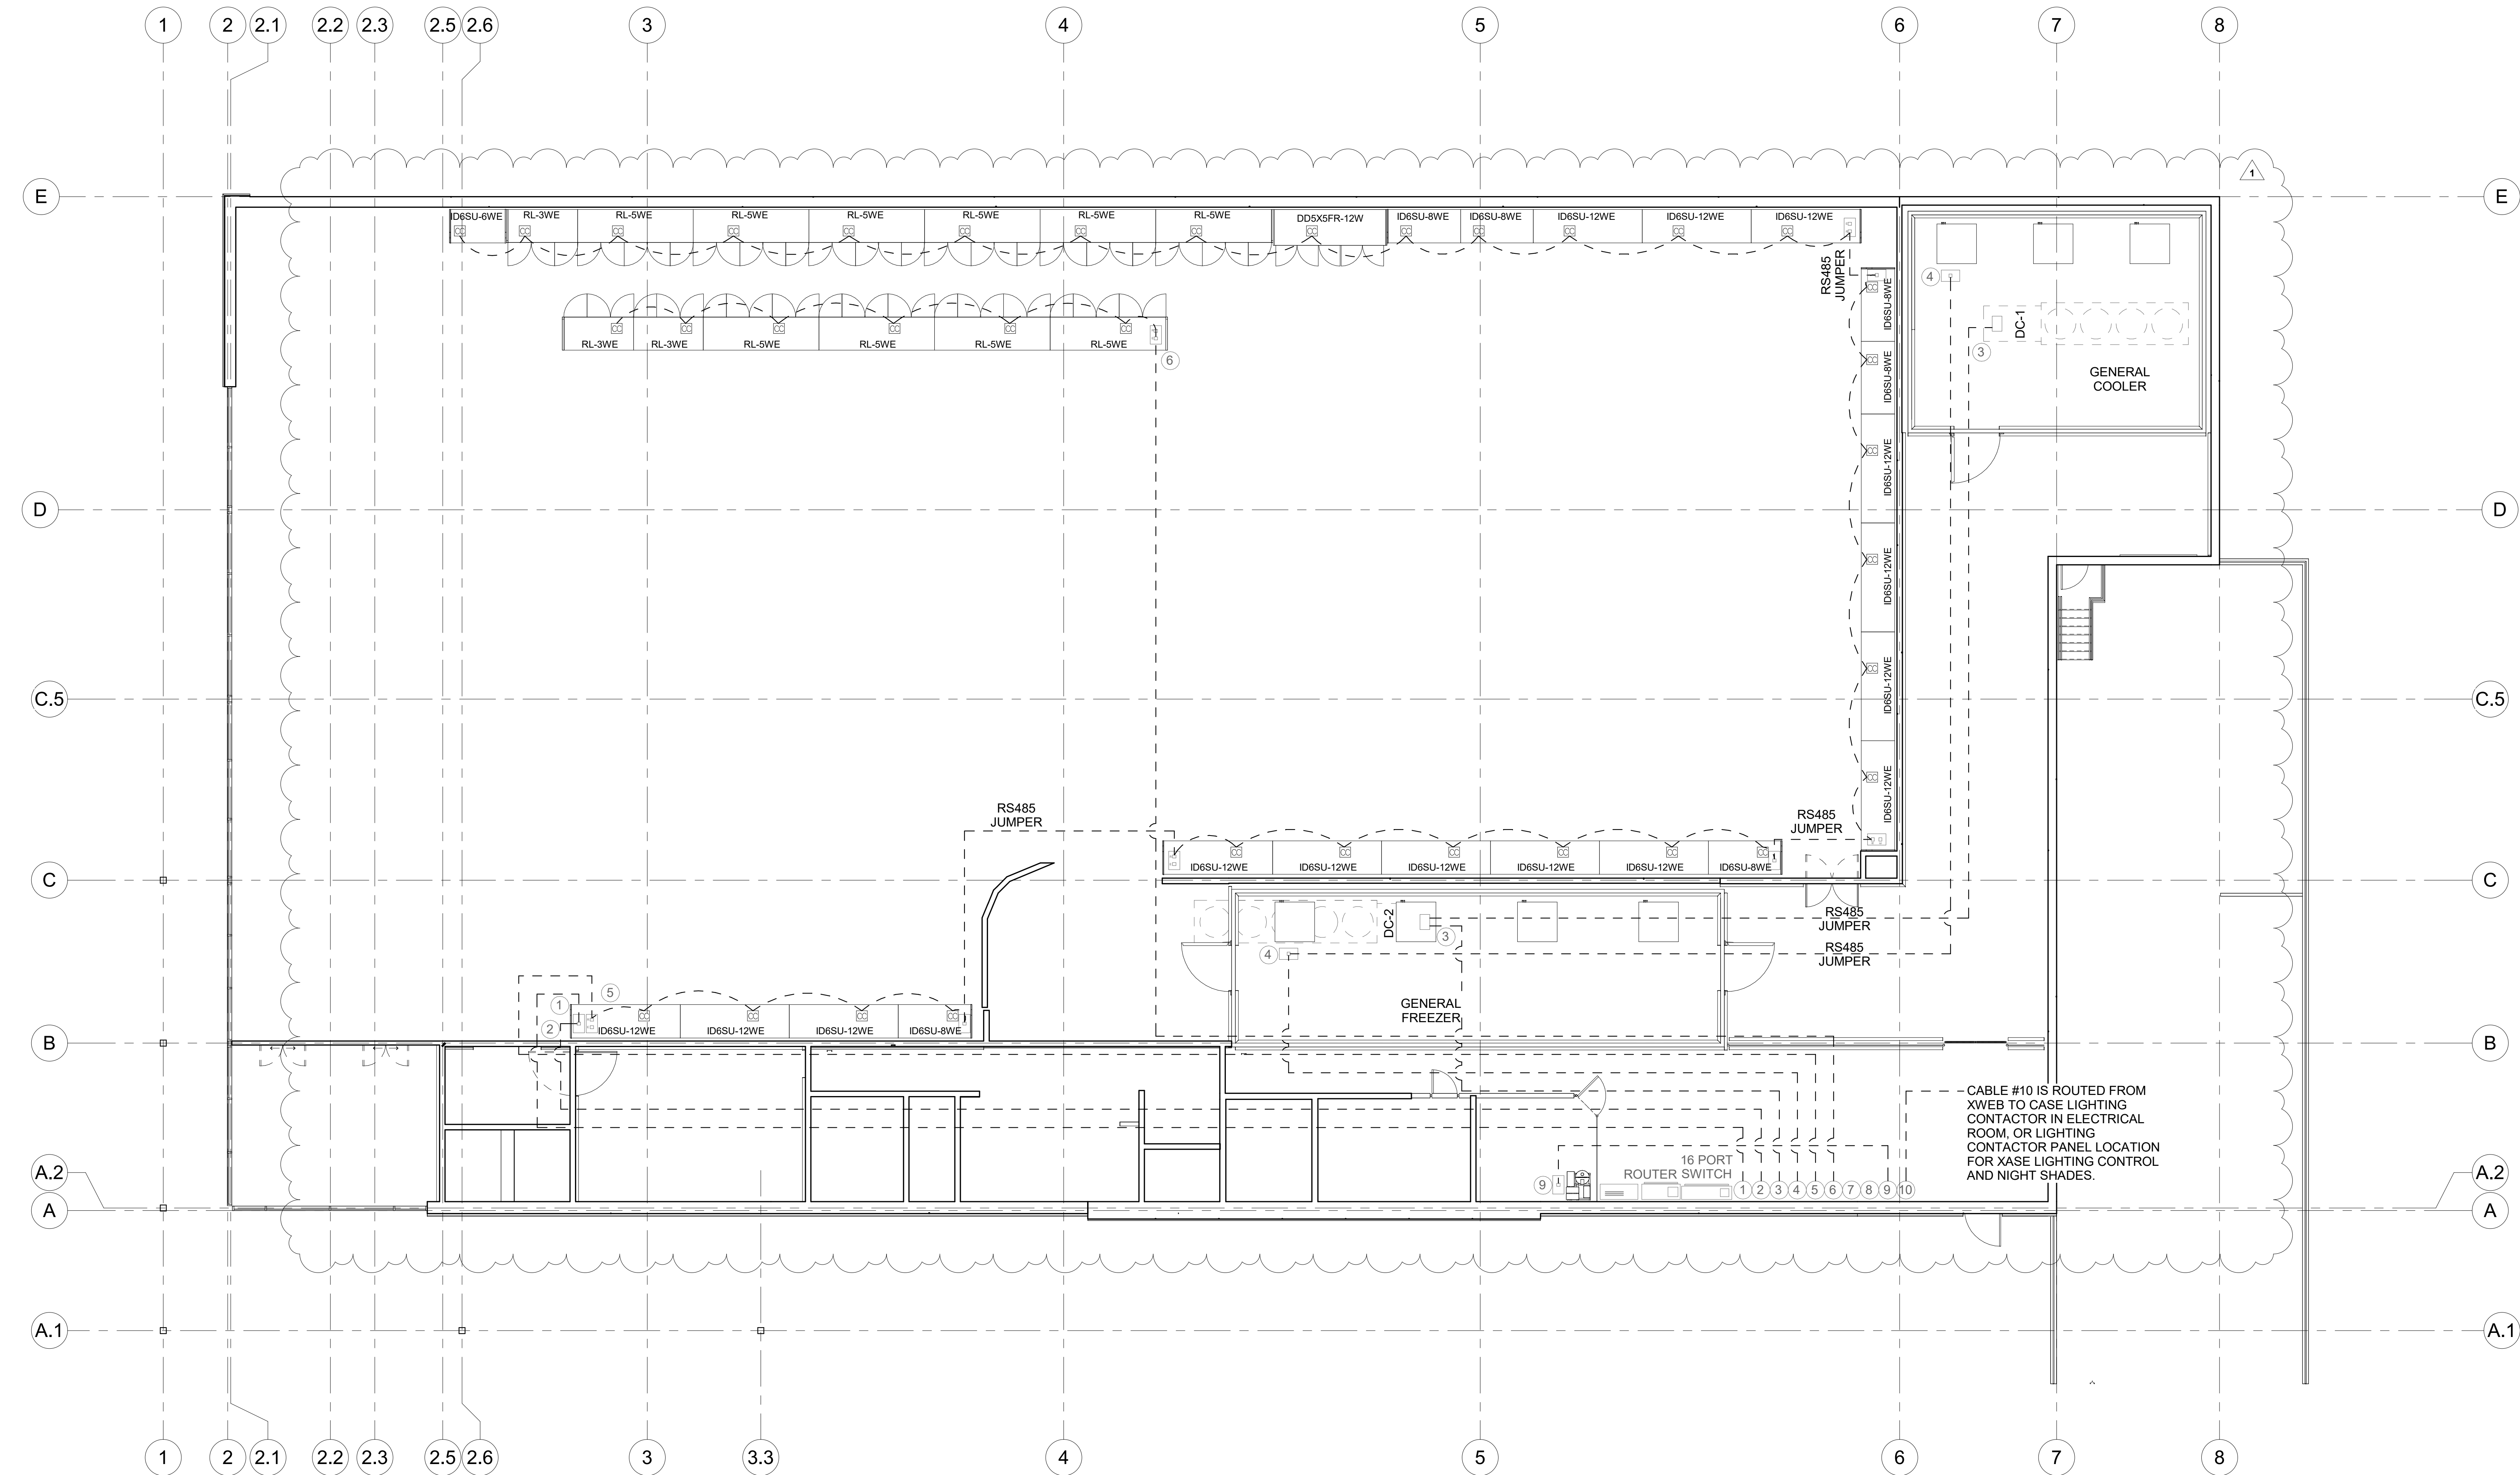


1 R4.1 EM1
1/8" = 1'-0"

CABLE LEGEND			
NO.	CABLES ES FROM XWEB TO EQUIPMENT	WIRE TYPE	XWEB TERMINATION POINT
1	ROOM SENSOR	CAT-5E	MODBUS
2	ROOM SENSOR POWER	BELDEN 222	24V
3	DRY COOLERS	CAT-5E	MODBUS
4	WALK INS	CAT-5E	MODBUS
5	WALL CASES - 48S LOOP	CAT-5E	MODBUS
6	C.O.S. CASES	CAT-5E	MODBUS
7	SPARE	CAT-5E	MODBUS
8	SPARE	CAT-5E	MODBUS
9	EVAC SYSTEMS	CAT-6E	MODBUS
10	BAS LIGHTING INPUT	BELDEN 222	XWEB DIGITAL INPUT
11E	HSM CASES - SWITCH 1	CAT-6E	NETWORK SWITCH
12E	HSM CASES - SWITCH 2	CAT-6E	NETWORK SWITCH
13E	HSM CASES - SWITCH 3	CAT-6E	NETWORK SWITCH
14E	HSM CASES - SWITCH 4	CAT-6E	NETWORK SWITCH
15E	HSM CASES - SWITCH 5	CAT-6E	NETWORK SWITCH
16E	SPARE	CAT-6E	NETWORK SWITCH

CONTRACTOR SUPPLIED EQUIPMENT


QTY	PART	MANUFACTURER	DESCRIPTION
10	TL-SF1016D	TP-LINK	16-PORT SWITCH

ROOM SENSOR

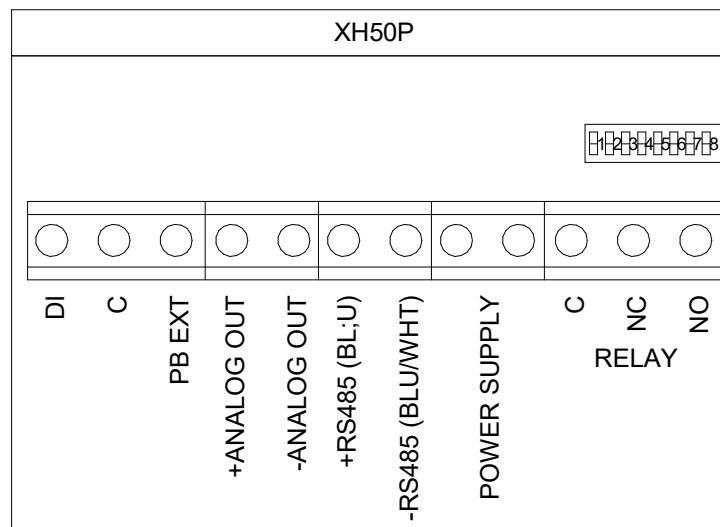

24V POWER FROM XWEB CONTROLLER.
SET DIP SWITCH 1 TO ON FOR ADDRESS "1"
COMMUNICATION WIRES LAND ON "RS485"
BELDON 222 LANDS ON POWER SUPPLY COMING FROM XWEB

RJ45 JACK TERMINATION

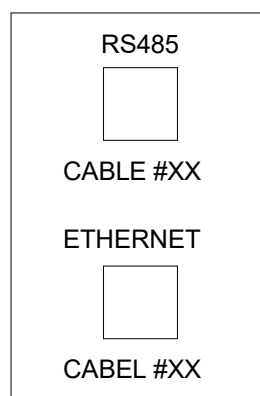

TOP JACK IS FOR RS485 CABLES AND IS TO BE MARKED "RS485".
BOTTOM JACK IS FOR ETHERNET SWITCH CABLES AND IS TO BE MARKED "ETHERNET".
MAIN CABLE NUMBERS FOR RS485 AND/OR ETHERNET TO BE MARKED ON PLATES.
THIS APPLIES TO BOTH WALL MOUNTED AND POWER POLL PLATES.
ALL MALE AND FEMALE RJ45 PLUGS WILL BE TERMINATED AS A "B" PIN OUT.

HUSSMANN CS. CONNECTIONS

AT THE FIRST AND LAST CASE IN EACH LINEUP, AN ETHERNET PATCH CABLE WILL BE CONNECTED TO THE WALL JACK. THE OPPOSITE END WILL BE CUT OFF AND STRIPPED BACK NEATLY, AND THE WIRE COLORS SPECIFIED IN E6.1 XWEB CABLE TERMINATION CONNECTION DETAIL WILL BE TERMINATED ON THE CORELINK CONTROLLER.
BELDEN 222 CABLE WILL THEN BE USED TO DAISY CHAIN EACH CASE WITHIN A LINEUP.
ALL CABLES ON THE COMMUNICATION LOOP SHOULD BE LABELED "RS485".
ALL WALL PLATE JACKS SHOULD BE LABELED "RS485".
WALL JACK TO BE INSTALLED ON SALES FLOOR SIDE OF WALL AT 86" AFF (IC6SU, RL-W, DDSXFRW) AND 95.5" AFF (ID6SU).
ISLAND RJ45 JACKS ARE TO BE INSTALLED AT THE BOTTOM OF THE POWER POLLS.

HUSSMANN®

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. ANY REPRODUCTION OR TRANSMISSION OF THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION IS PROHIBITED. HUSSMANN CORPORATION SHALL BE NOT LIABLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING OUT OF OR FROM THE USE OF THIS DOCUMENT.

WARRANTY OF MERCHANTABILITY
Hussmann Corporation warrants that the equipment and materials supplied by it to its customers will conform to the specifications set forth in the drawings and specifications and will be free from defects in material and workmanship under normal use and service for a period of one year from the date of installation. This warranty does not cover equipment and materials that are damaged by misuse, neglect, or accident, or that are altered or repaired by anyone other than Hussmann Corporation or its authorized service personnel. This warranty is void where prohibited by law.

REVISIONS

REV # DATE DRAWN CHECK

1 10/31/2025 SEAN A. TYLER R.

REUSED PER UPDATED SUPPLY CABLE LAYOUT

Lidl #1517

Norcross, Georgia 30093

New Store


499 JIMMY CARTER BLVD.

Cushing Terrell

cushingterrell.com
800.757.9522

EMS RS485 NETWORK

R4.1

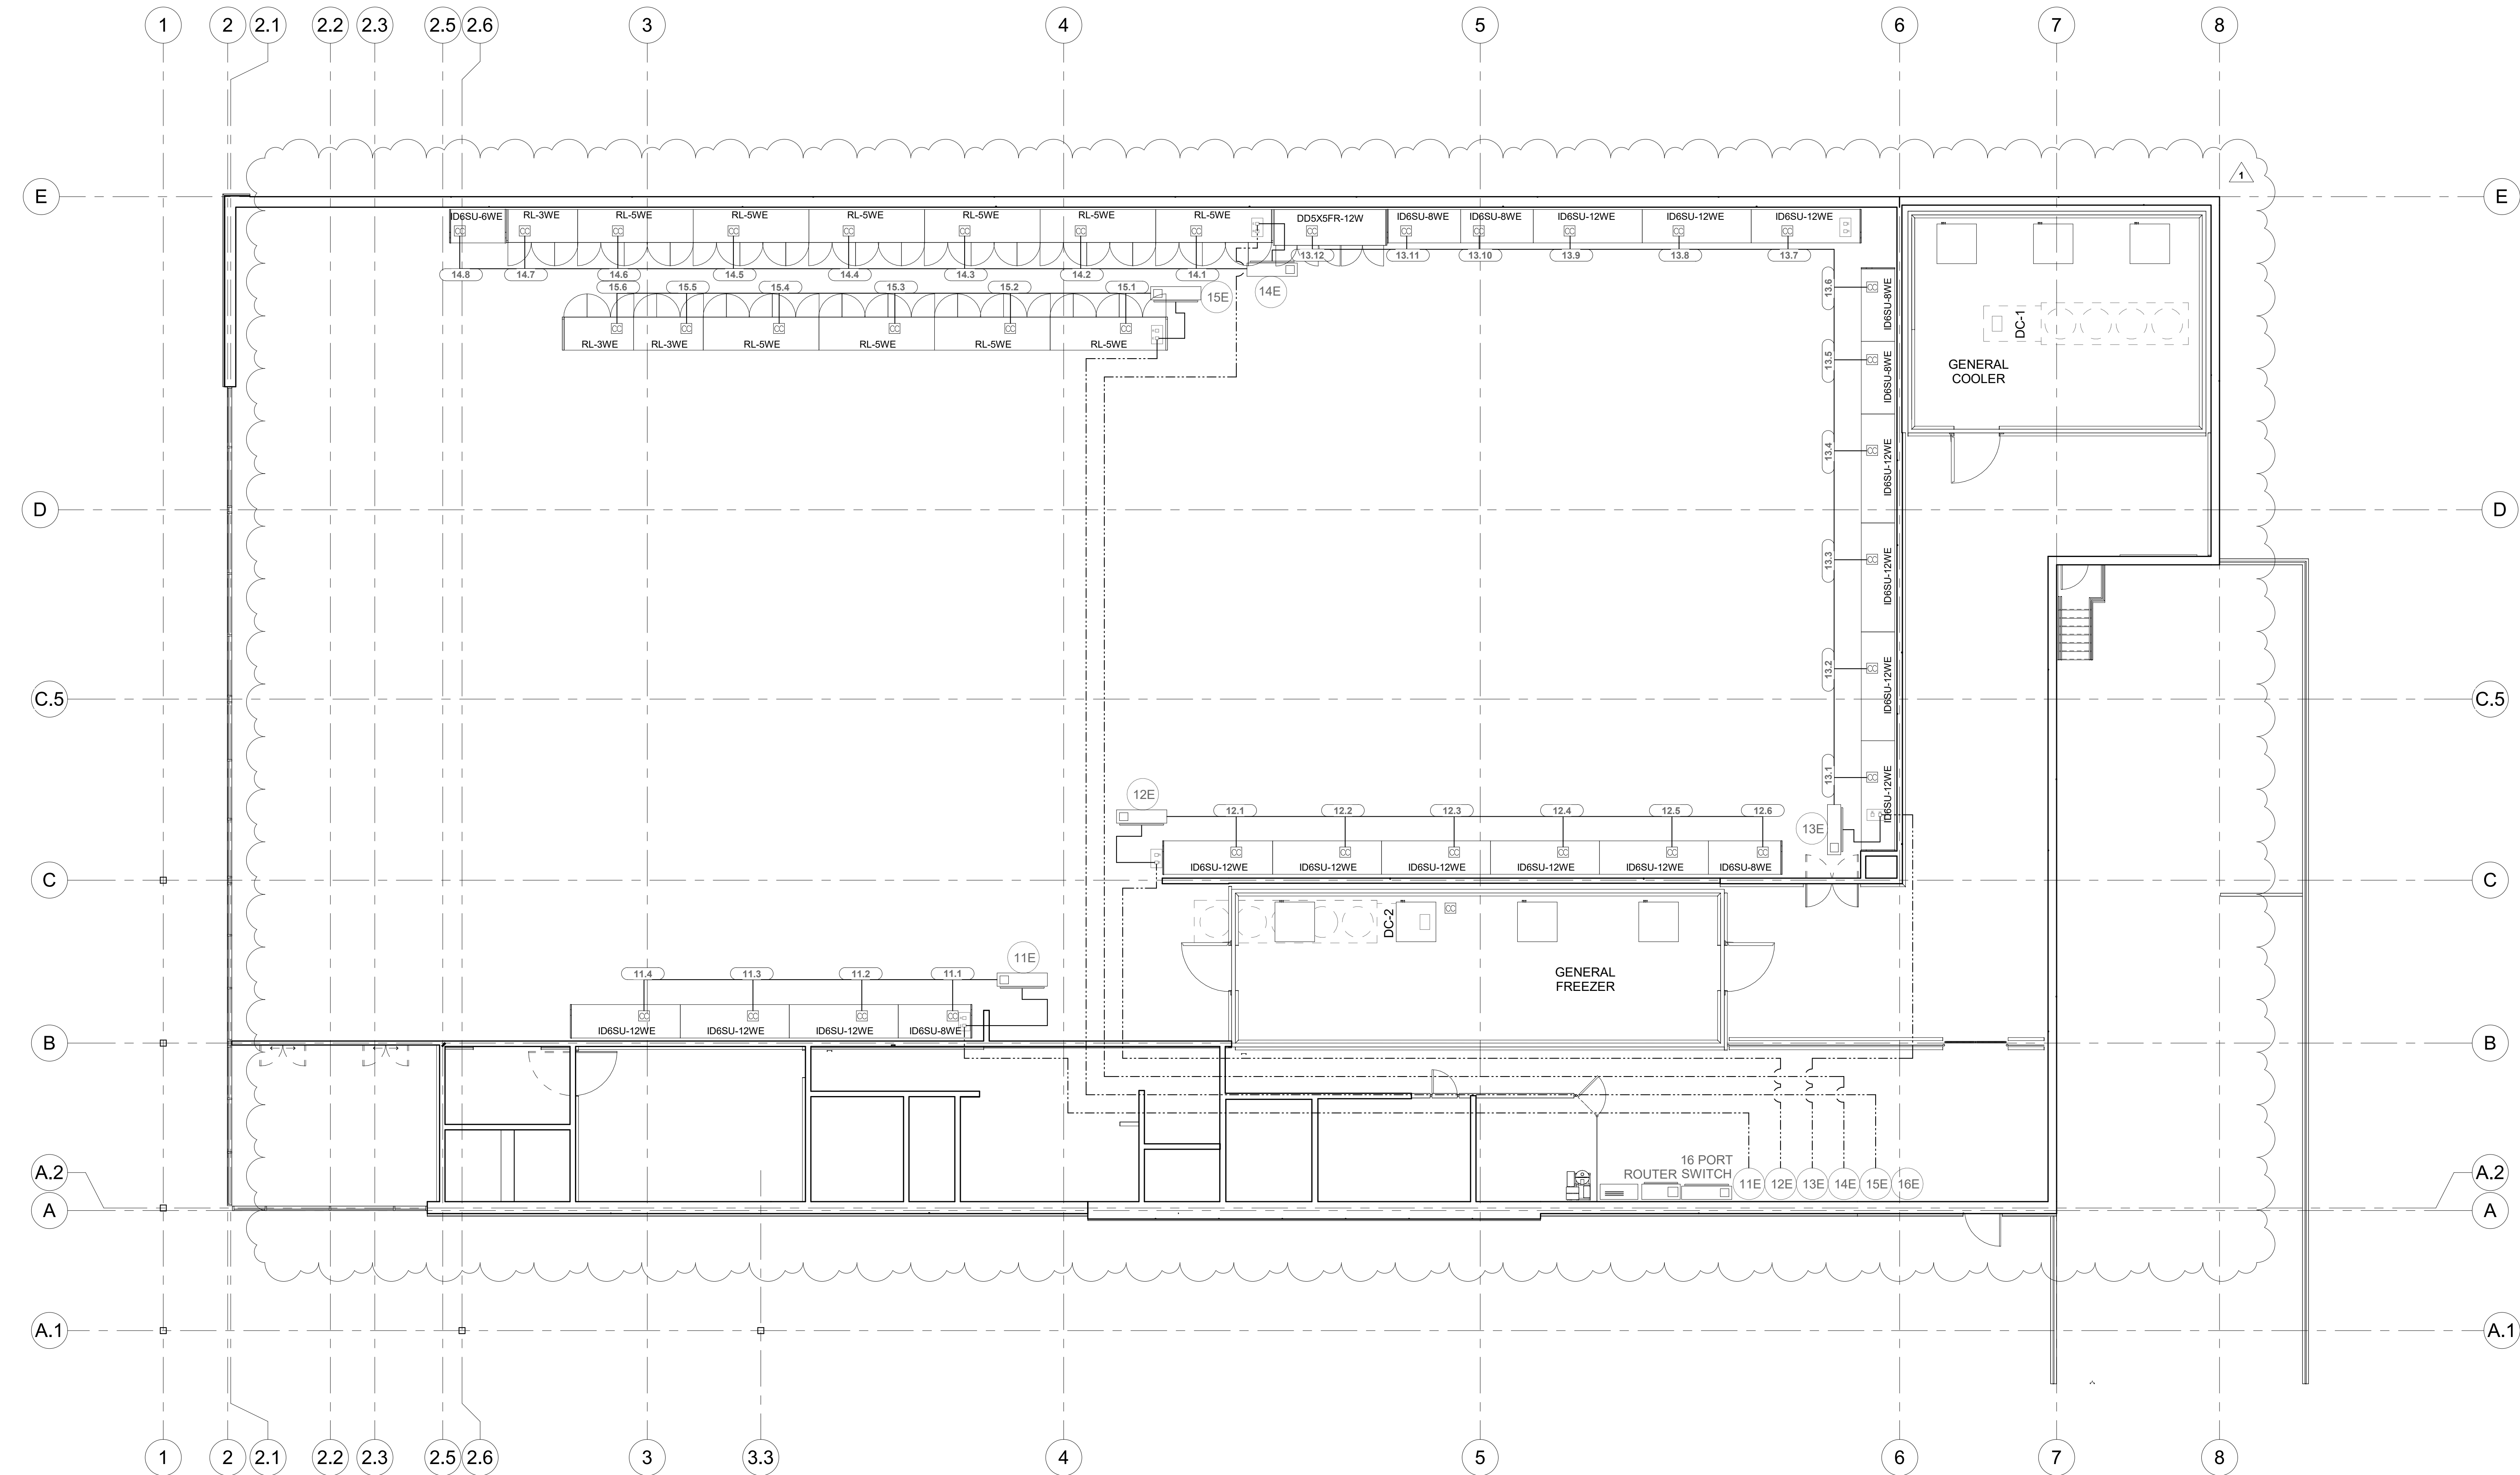

1 R4.2 EM2
1/8" = 1'-0"


CABLE LEGEND

NO.	CABLES ES FROM XWEB TO EQUIPMENT	WIRE TYPE	XWEB TERMINATION POINT
1	ROOM SENSOR	CAT-5E	MODBUS
2	ROOM SENSOR POWER	BELDEN 222	24V
3	DRY COOLERS	CAT-5E	MODBUS
4	WALK INS	CAT-5E	MODBUS
5	WALL CASES - 48S LOOP	CAT-5E	MODBUS
6	C.O.S. CASES	CAT-5E	MODBUS
7	SPARE	CAT-5E	MODBUS
8	SPARE	CAT-5E	MODBUS
9	EVAC SYSTEMS	CAT-6E	MODBUS
10	BAS LIGHTING INPUT	BELDEN 222	XWEB DIGITAL INPUT
11E	HSM CASES - SWITCH 1	CAT-6E	NETWORK SWITCH
12E	HSM CASES - SWITCH 2	CAT-6E	NETWORK SWITCH
13E	HSM CASES - SWITCH 3	CAT-6E	NETWORK SWITCH
14E	HSM CASES - SWITCH 4	CAT-6E	NETWORK SWITCH
15E	HSM CASES - SWITCH 5	CAT-6E	NETWORK SWITCH
16E	SPARE	CAT-6E	NETWORK SWITCH

CONTRACTOR SUPPLIED EQUIPMENT


QTY	PART	MANUFACTURER	DESCRIPTION
10	TL-SF1016D	TP-LINK	16-PORT SWITCH

ROOM SENSOR

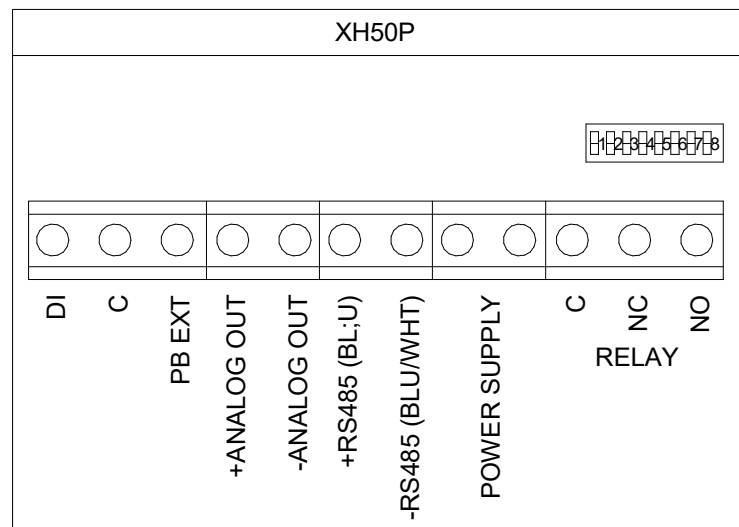

24V POWER FROM XWEB CONTROLLER.
SET DIP SWITCH 1 TO ON FOR ADDRESS "1"
COMMUNICATION WIRES LAND ON "RS485"
BELDEN 222 LANDS ON POWER SUPPLY COMING FROM XWEB

RJ45 JACK TERMINATION

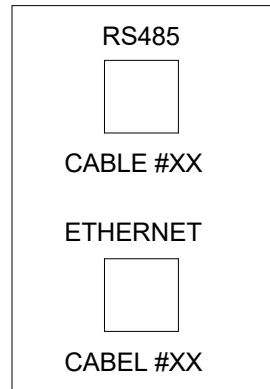

TOP JACK IS FOR RS485 CABLES AND IS TO BE MARKED "RS485".
BOTTOM JACK IS FOR ETHERNET SWITCH CABLES AND IS TO BE MARKED "ETHERNET".
MAIN CABLE NUMBERS FOR RS485 AND/OR ETHERNET TO BE MARKED ON PLATES.
THIS APPLIES TO BOTH WALL MOUNTED AND POWER POLL PLATES.
ALL MALE AND FEMALE RJ45 PLUGS WILL BE TERMINATED AS A "B" PIN OUT.

HUSSMANN CS. CONNECTIONS

AT THE FIRST AND LAST CASE IN EACH LINEUP, AN ETHERNET PATCH CABLE WILL BE CONNECTED TO THE WALL JACK. THE OPPOSITE END WILL BE CUT OFF AND STRIPPED BACK NEATLY, AND THE WIRE COLORS SPECIFIED IN FIG. 1 EVER CABLE TERMINATION CONNECTION DETAIL WILL BE TERMINATED ON THE CORELINK CONTROLLER.
BELDEN 222 CABLE WILL THEN BE USED TO DAISY CHAIN EACH CASE WITHIN A LINEUP.
ALL CABLES ON THE COMMUNICATION LOOP SHOULD BE LABELED "RS485".
ALL WALL PLATE JACKS SHOULD BE LABELED "RS485".
WALL JACK TO BE INSTALLED ON SALES FLOOR SIDE OF WALL AT 86" AFF (IC6SU, RL-W, DD5XFRW) AND 55.5" AFF (ID6SU).
ISLAND RJ45 JACKS ARE TO BE INSTALLED AT THE BOTTOM OF THE POWER POLLS.

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax



SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE PRIOR WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE PROPERTY OF HUSSMANN CORPORATION AND SHALL BE RETURNED UPON REQUEST.

WIRE OF RESPONSIBILITY
The undersigned hereby certifies that the information contained herein was prepared by the undersigned or under the direct supervision of the undersigned and that the undersigned is a duly licensed professional engineer in the State of California. The undersigned hereby certifies that the undersigned is a duly licensed professional engineer in the State of California. The undersigned hereby certifies that the undersigned is a duly licensed professional engineer in the State of California.

REVISIONS
REV # DATE DRAWN CHECK
1 10/31/2025 SEAN A. CRAIG P.

DATE: 10/31/2025
SCALE: As indicated
DRAWN BY: SEAN A.
CHK'D BY: CRAIG P.
APPROV'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.


Cushing Terrell

cushingterrell.com
800.757.9522






EMS
ETHERNET

R4.2



CONTRACTOR SUPPLIED EQUIPMENT

ROOM SENSOR

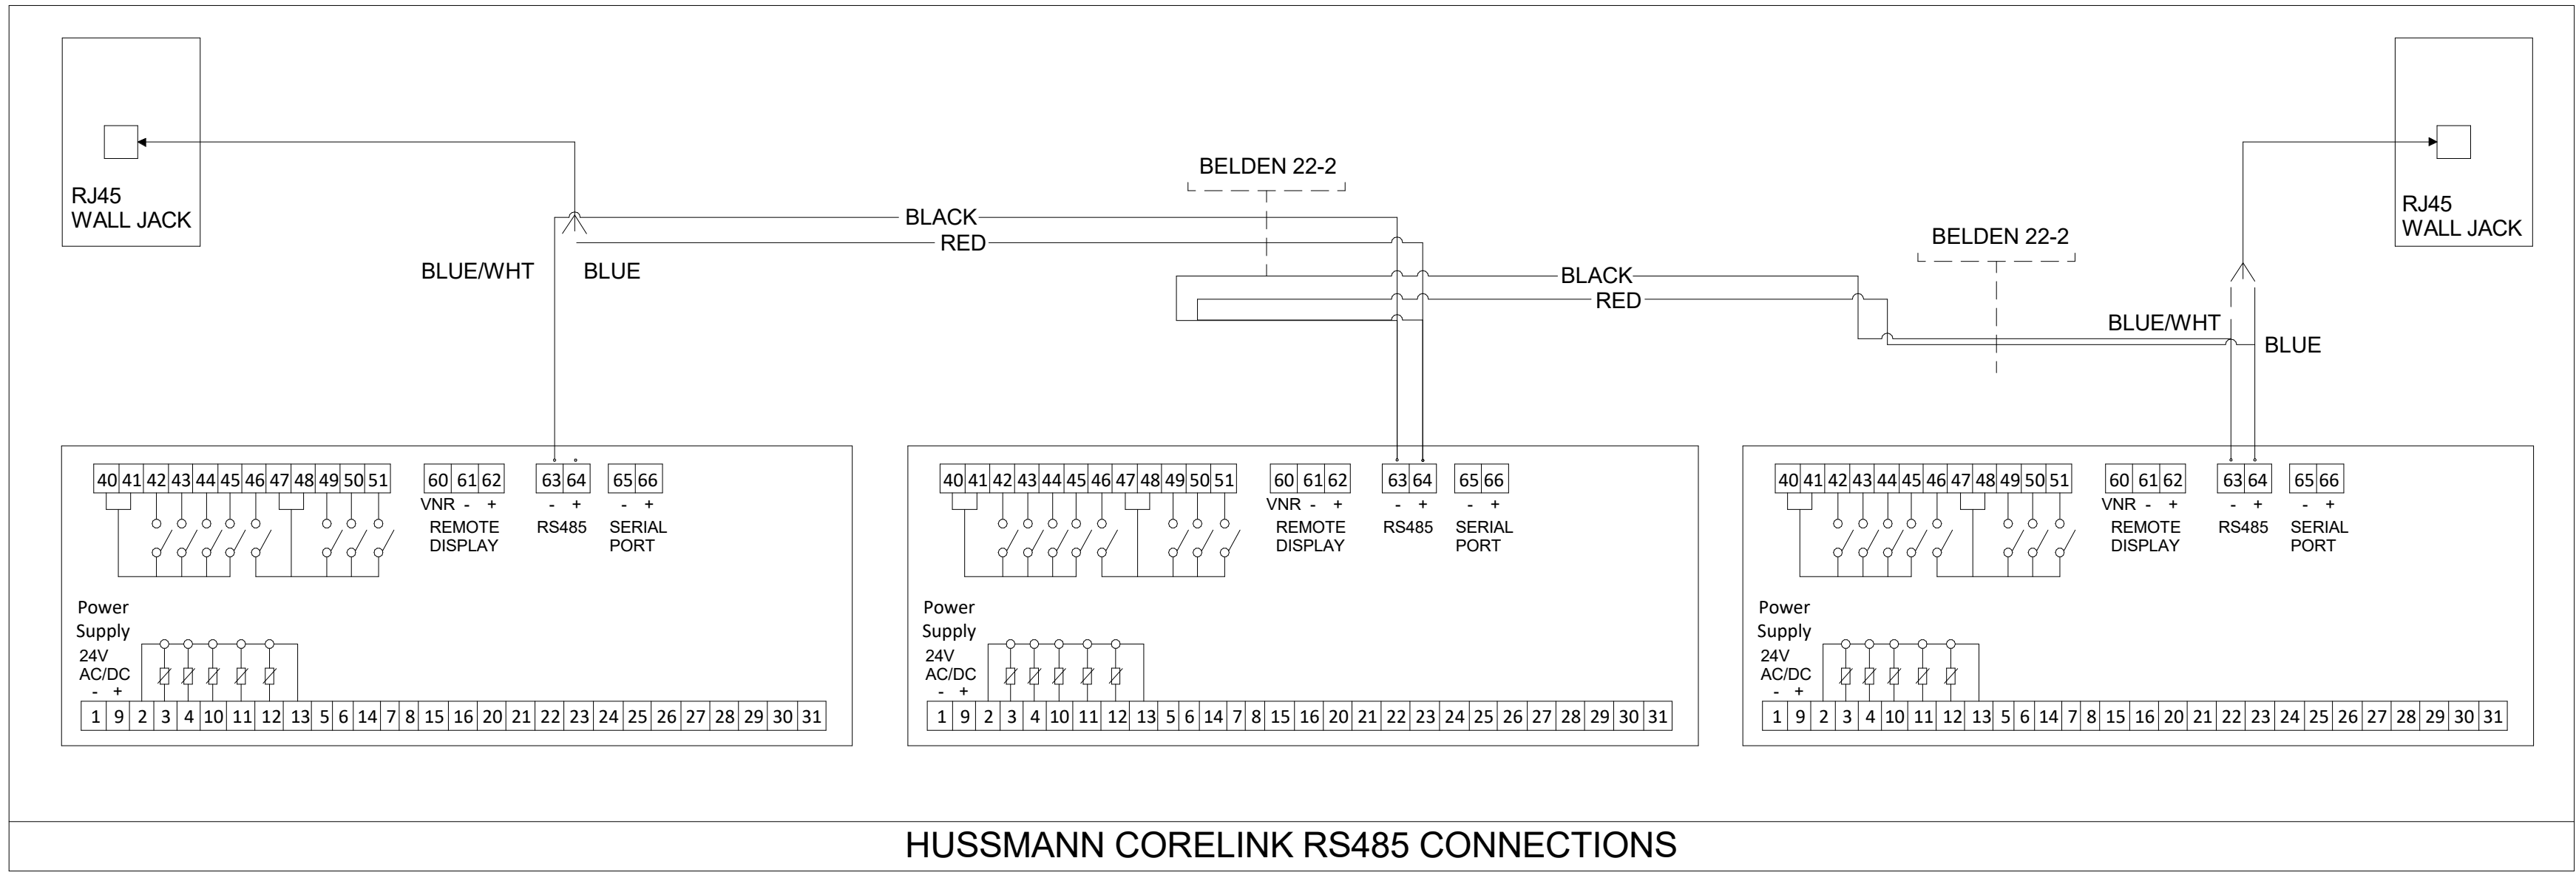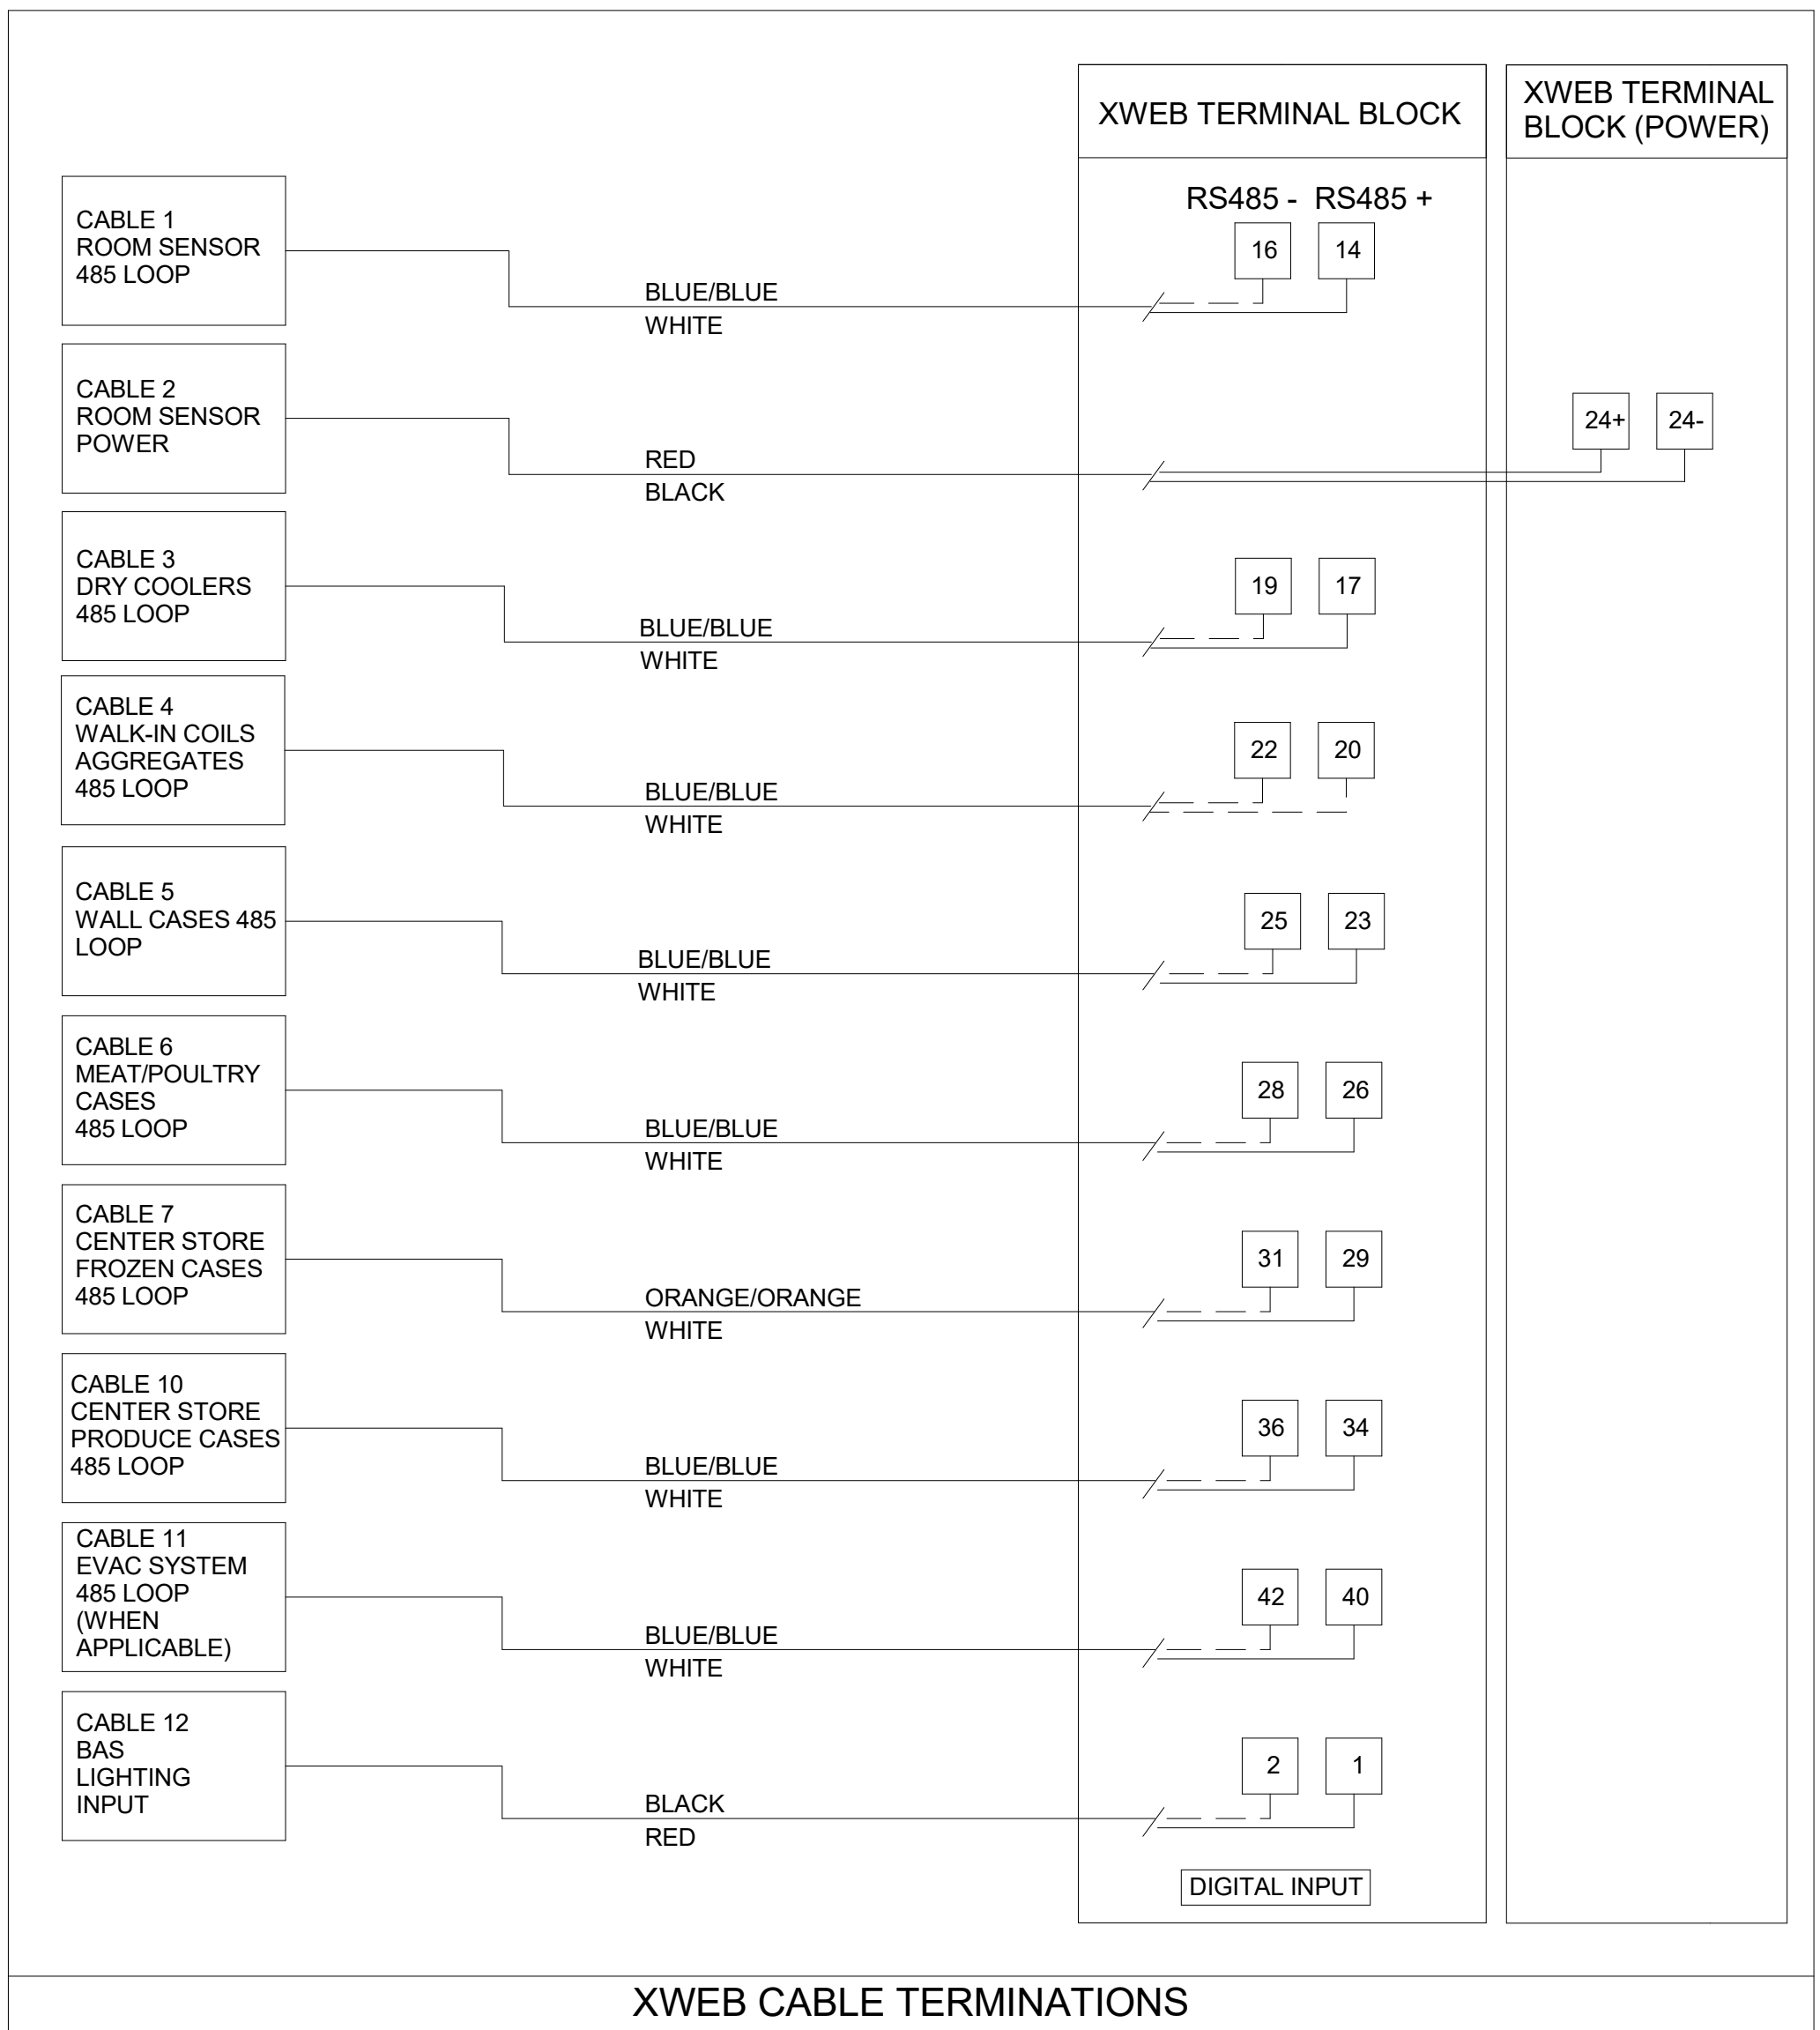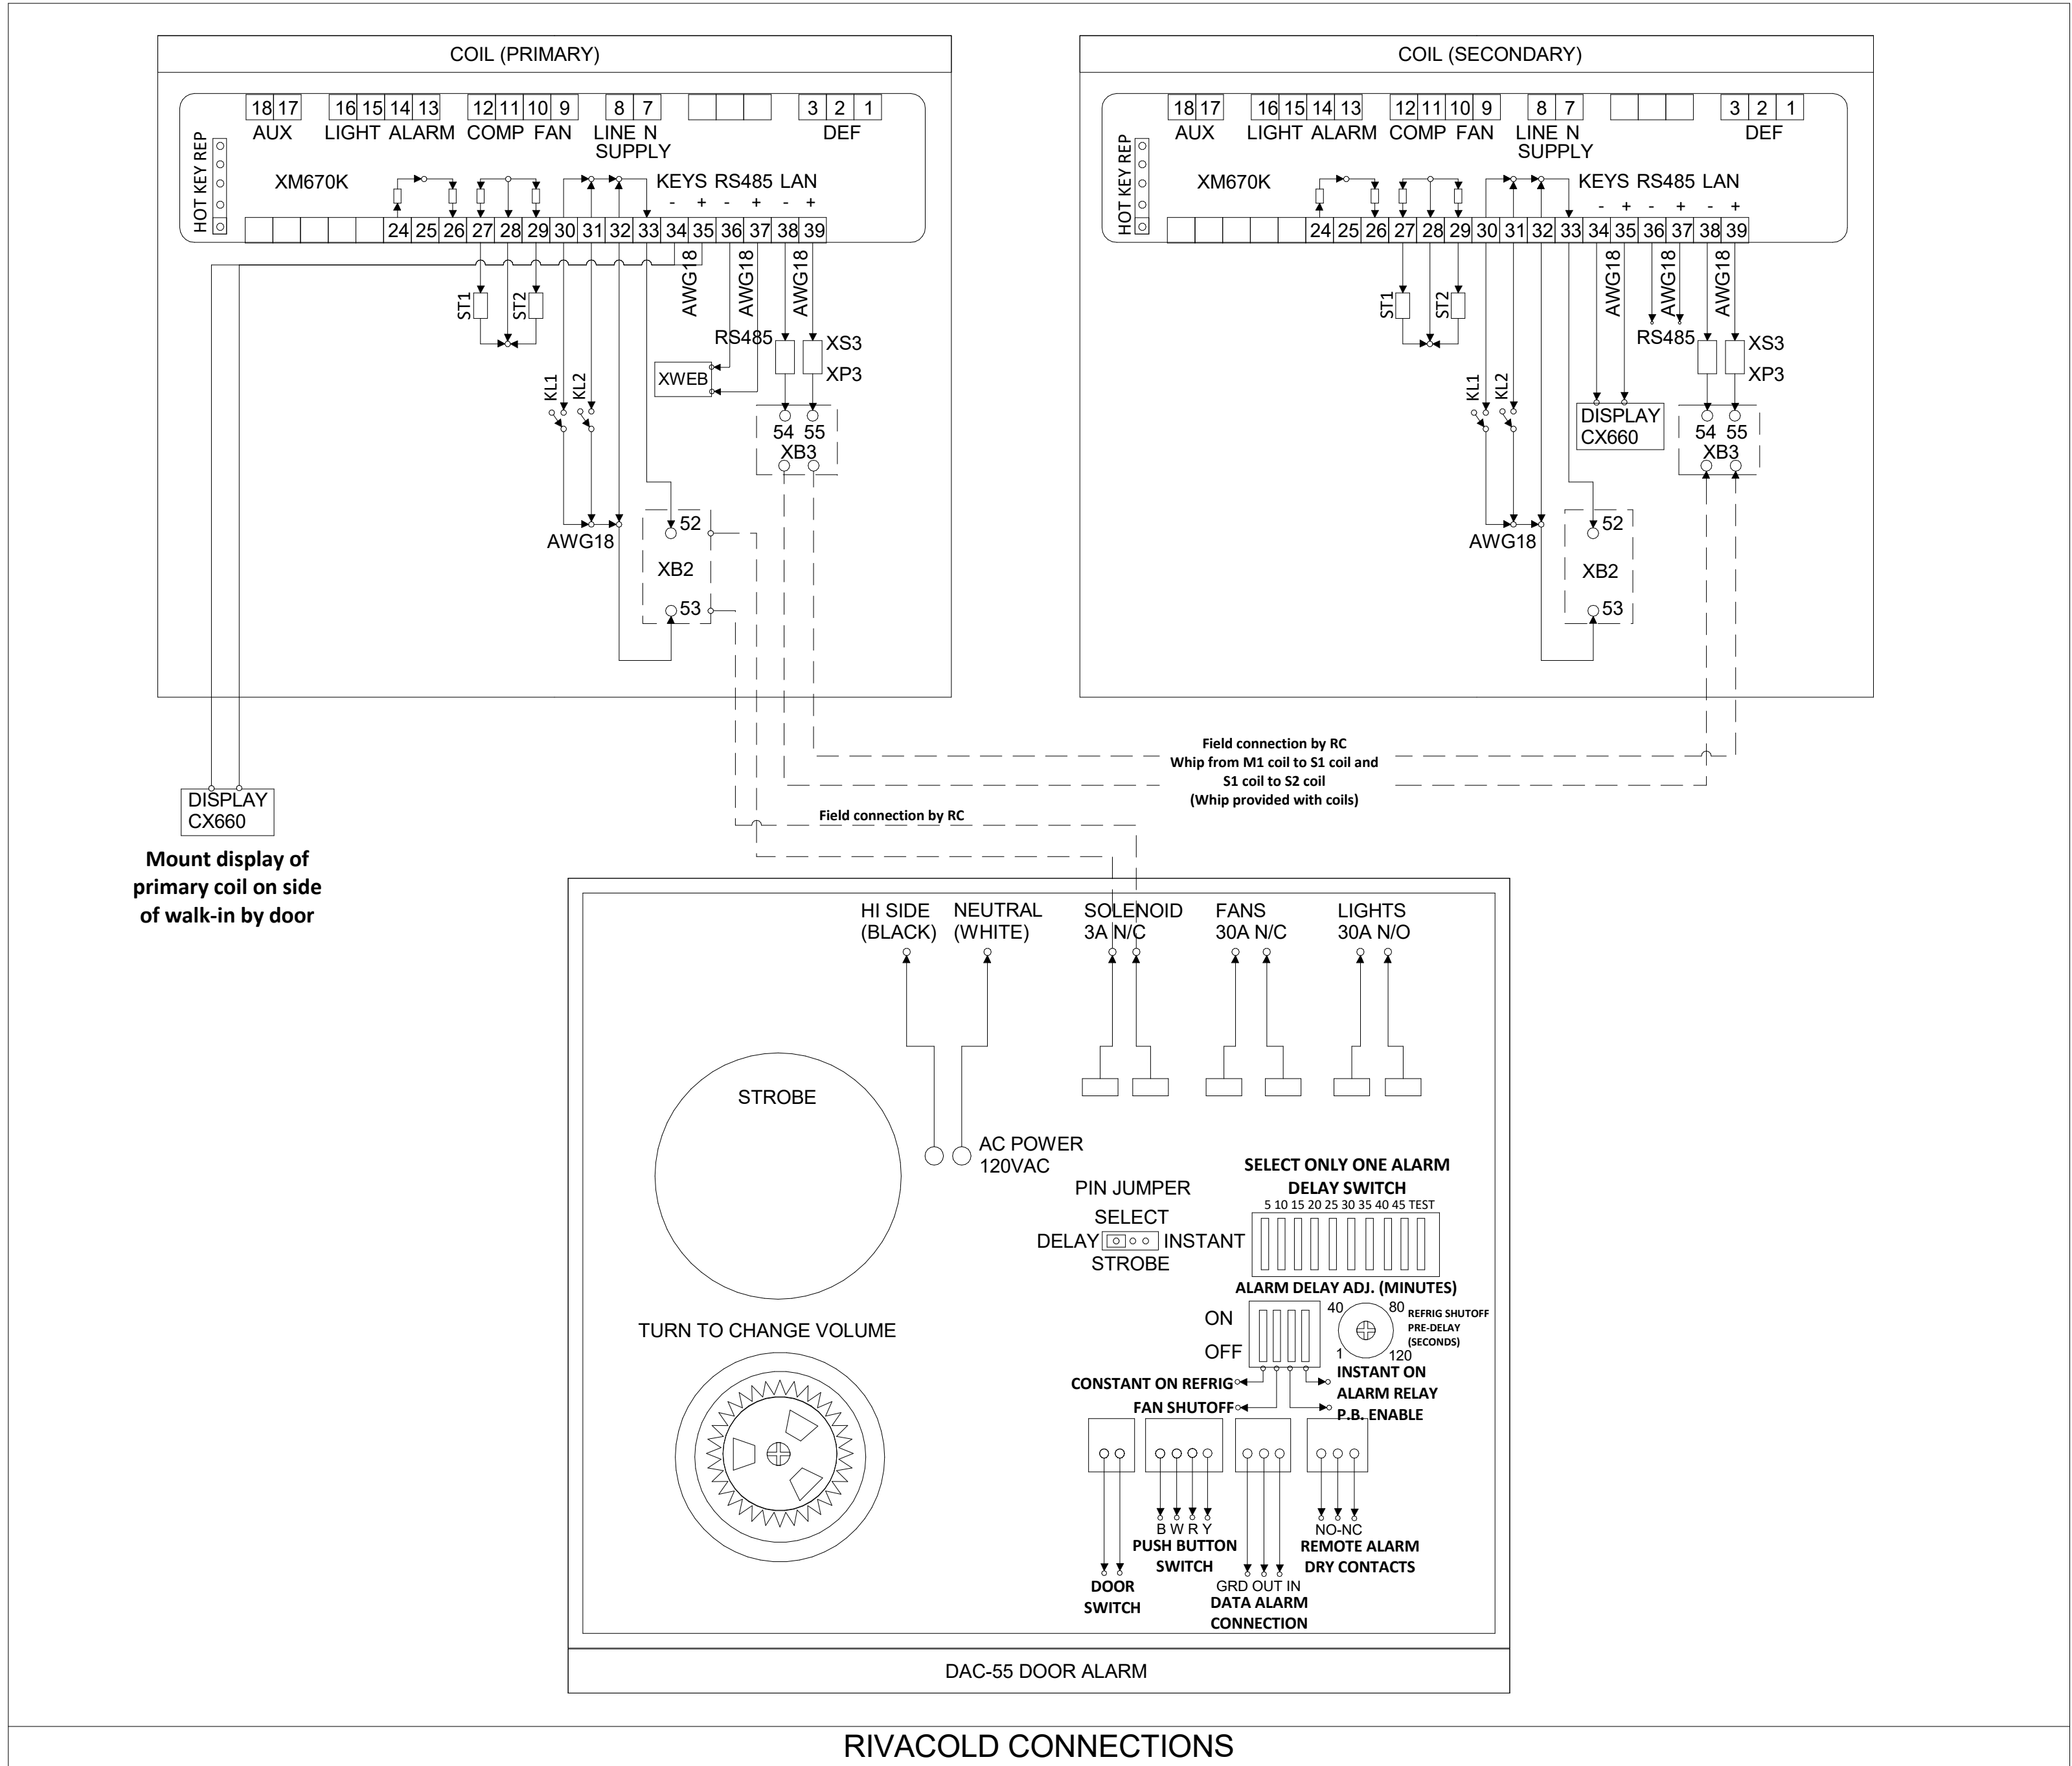

CABLE LEGEND		
NO.	CABLES ES FROM XWEB TO EQUIPMENT	XWEB TERMINATION POINT
1	(E) ROOM SENSOR	CAT-5E MODBUS
2	(E) ROOM SENSOR POWER	BELDEN 222 24V
3	(E) DRY COOLERS	CAT-5E MODBUS
4	(E) WALK-INS	CAT-5E MODBUS
5	(E) WALL CASES - 485 LOOP	CAT-5E MODBUS
6	(N) C.O.S. CASES	CAT-5E MODBUS
7	(E) AHT MIAMI ISLAND	CAT-5E MODBUS
8	(E) SEMIVERTICAL PRODUCE	CAT-5E MODBUS
9	(E) AHT MIAMI ISLAND	CAT-6E MODBUS
10	(E) EVAC SYSTEMS	CAT-6E MODBUS
11	(E) BAS LIGHTING INPUT	BELDEN 222 XWEB DIGITAL INPUT
12E	(E) HSM CASES - SWITCH 1	CAT-6E NETWORK SWITCH
13E	(E) HSM CASES - SWITCH 2	CAT-6E NETWORK SWITCH
14E	(E) HSM CASES - SWITCH 3	CAT-6E NETWORK SWITCH
15E	(N) SPARE	CAT-6E NETWORK SWITCH
16E	(N) HSM CASES - SWITCH 5	CAT-6E NETWORK SWITCH
17E	(E)HSM CASES - SWITCH 6	CAT-6E NETWORK SWITCH

CONTRACTOR SUPPLIED EQUIPMENT			
QTY	PART	MANUFACTURER	DESCRIPTION
10	TL-SF1016D	TP-LINK	16-PORT SWITCH

ROOM SENSOR

XF50P

24V POWER FROM XWEB CONTROLLER.
SET DIP SWITCH 1 TO ON FOR ADDRESS "1"
COMMUNICATION WIRES LAND ON "RS485"
BELDEN 222 LANDS ON POWER SUPPLY COMING FROM XWEB

RJ45 JACK TERMINATION

RS485
CABLE #XX
ETHERNET
CABLE #XX

TOP JACK IS FOR RS485 CABLES AND IS TO BE MARKED "RS485".
BOTTOM JACK IS FOR ETHERNET SWITCH CABLES AND IS TO BE MARKED "ETHERNET".
MAIN CABLE NUMBERS FOR RS485 AND/OR ETHERNET TO BE MARKED ON PLATES.
THIS APPLIES TO BOTH WALL MOUNTED AND POWER POLL PLATES.
ALL MALE AND FEMALE RJ45 PLUGS WILL BE TERMINATED AS A "B" PIN OUT.

HUSSMANN CS. CONNECTIONS

AT THE FIRST AND LAST CASE IN EACH LINEUP, AN ETHERNET PATCH CABLE WILL BE CONNECTED TO THE WALL JACK. THE OPPOSITE END WILL BE CUT OFF AND STRIPPED BACK NEATLY, AND THE WIRE COLORS SPECIFIED IN FIG. 1 XWEB CABLE TERMINATION CONNECTION DETAIL WILL BE TERMINATED ON THE CORELINK CONTROLLER.
BELDEN 222 CABLE WILL THEN BE USED TO DAISY CHAIN EACH CASE WITHIN A LINEUP.
ALL CABLES ON THE COMMUNICATION LOOP SHOULD BE LABELED "RS485".
ALL WALL PLATE JACKS SHOULD BE LABELED "RS485".
WALL JACK TO BE INSTALLED ON SALES FLOOR SIDE OF WALL AT 86" AFF (IC5BU, RL-W, DDXSFRW) AND 95.5" AFF (ID6SU).
ISLAND RJ45 JACKS ARE TO BE INSTALLED AT THE BOTTOM OF THE POWER POLLS.

HUSSMANN

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM HUSSMANN CORPORATION. HUSSMANN CORPORATION SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION CONTAINED HEREIN. HUSSMANN CORPORATION SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION CONTAINED HEREIN.

REVISIONS

REV #	DATE	DESCRIPTION
1	10/31/2025	REVISION FOR UPDATED SUPPLY CABLE LAYOUT

SCALE: As Indicated
DRAWN BY: SEAN A.
CHK'D BY: CHRIS G.
APP'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R LIDL1517

DATE: 10/31/2025
SCALE: As Indicated
DRAWN BY: SEAN A.
CHK'D BY: CHRIS G.
APP'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell

cushingterrell.com
800.757.9522

REGISTERED PROFESSIONAL ENGINEER
No. PED1281
MASSACHUSETTS
1/2/2026

EMS DETAILS


R4.4

GENERAL NOTES

IT IS THE RESPONSIBILITY OF THE ARCHITECT OR DESIGNATED CONTRACTOR TO PROVIDE ALL DIMENSIONS FOR THIS PROJECT PER CUSTOMER SPECIFICATIONS AND GUIDELINES.

HUSSMANN®

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

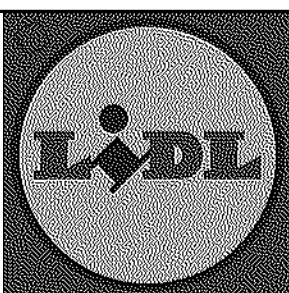

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION. ALL RIGHTS ARE RESERVED. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE PROPERTY OF HUSSMANN CORPORATION AND SHALL BE RETURNED TO HUSSMANN CORPORATION UPON REQUEST.

WARRANTY: HUSSMANN CORPORATION warrants that the equipment and materials supplied by it to its customers are free from defects in material and workmanship under normal use and service for a period of one year from the date of installation. This warranty does not cover equipment or materials that have been damaged by misuse, neglect, accident, or other causes not within the control of HUSSMANN CORPORATION. The warranty is void if the equipment is not installed and maintained in accordance with the instructions provided by HUSSMANN CORPORATION.

REV #	DATE	DESCRIPTION
1	10/31/2025	REVISION PER UPDATED SUPPLY CHAIN LAYOUT
2		
3		
4		
5		
6		
7		
8		

DATE: 10/31/2025
SCALE: As indicated
DRAWN BY: SEAN A.
CHK'D BY: CHRIS G.
APPR'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517


Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell
cushingterrell.com
800.757.9522


REGISTERED
No. PED14281
PROFESSIONAL
ENGINEER
1/12/2008

ROOF PLAN

R5.0

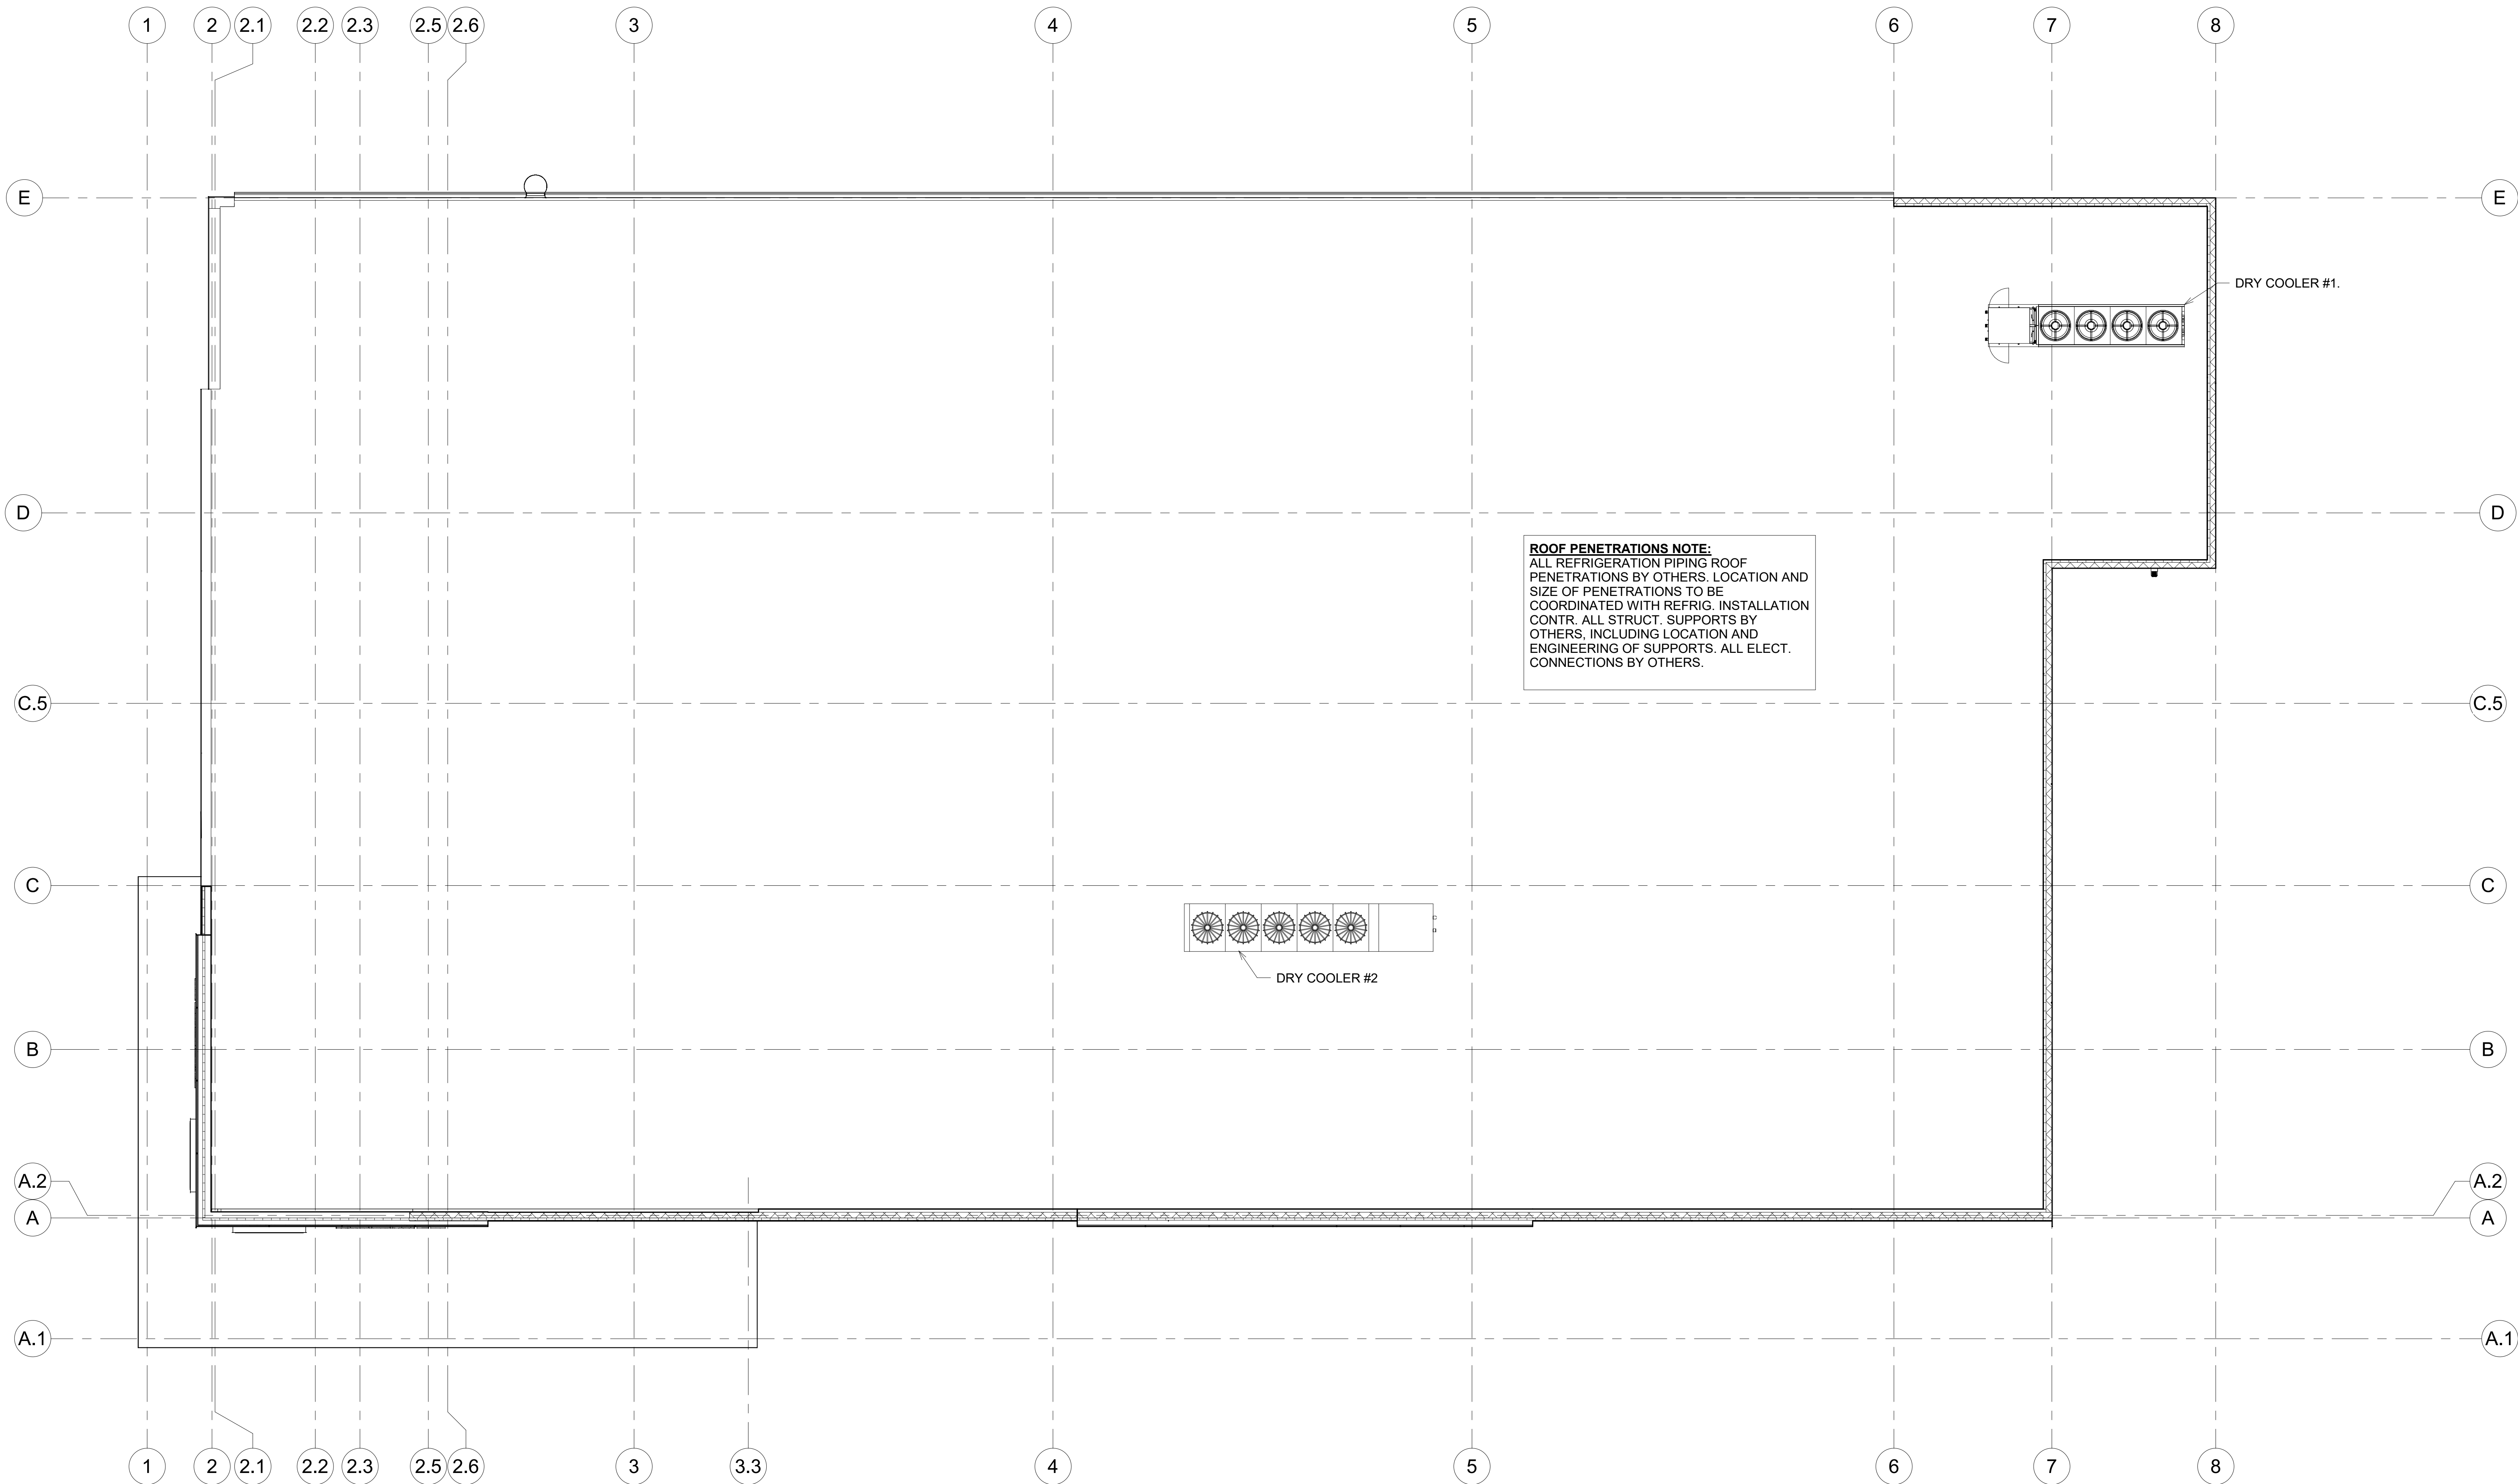

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

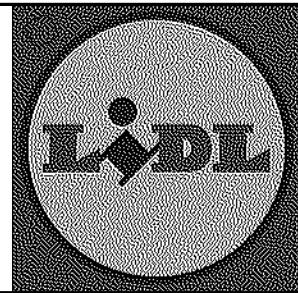

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION. IT IS TO BE USED FOR THE PURPOSES FOR WHICH IT IS SUPPLIED. IT SHALL NOT BE COPIED, REPRODUCED OR OTHERWISE USED, NOR SHALL SUCH INFORMATION BE DISCLOSED, IN WHOLE OR IN PART TO OTHERS, WITHOUT THE PRIOR WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE RETURNED UPON REQUEST.

NOTICE OF LIABILITY
Hussmann Corporation and its employees shall not be held responsible for any damage or injury to property or persons resulting from the use of the equipment or the installation thereof. The user of the equipment shall be responsible for the proper installation, operation and maintenance of the equipment. Hussmann Corporation shall not be held responsible for any damage or injury to property or persons resulting from the use of the equipment or the installation thereof.

REV #	DATE	DESCRIPTION
1	1/10/2025	REVISED PER UPDATED SUPPLY CHAIN LAYOUT

DATE: 10/31/2025
SCALE:
DRAWN BY: SEAN A.
CHKD BY: CHRIS G.
APPR'D BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell
cushingterrell.com
800.757.9522
GEORGIA REGISTERED
No. PED14261
PROFESSIONAL
ENGINEER
MARK E. BERTRAND
1/12/2024


REFRIGERATION
EQUIPMENT
SCHEDULE
R6.0

REFRIGERATION EQUIPMENT SCHEDULE					
	MODEL NO.	LENGTH	TYPE	USAGE DESCRIPTION	ELECTRICAL CONNECTION
DC1-1	ID6SU-8WE	6	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC1-2	RL-3WE	3DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-3	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-4	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-5	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-6	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-7	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-8	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-9	DDXSFRW-12	12	S/C	SELF-CONTAINED REACH-IN MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L5-50P) HUBBLE (CS6361C)
DC1-10	ID6SU-8WE	8	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC1-11	ID6SU-8WE	8	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC1-12	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC1-13	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC1-14	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC1-15	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-16	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-17	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-18	RL-5WE	5DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-19	RL-3WE	3DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-20	RL-3WE	3DR	S/C	SELF-CONTAINED REACH-IN LOW TEMP CASE	PLUG IN (L21-20P)
DC1-21	RV4B2199-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL COOLER	HARD WIRED
DC1-22	RV4B2199-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL COOLER	HARD WIRED
DC1-23	RV4B2199-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL COOLER	HARD WIRED
DC2-24	ID6SU-8WE	8	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-25	ID6SU-8WE	8	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-26	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-27	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-28	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-29	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-30	ID6SU-8WE	8	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-31	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-32	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-33	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-34	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-35	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-36	ID6SU-8WE	8	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-37	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-38	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-39	ID6SU-12WE	12	S/C	SELF-CONTAINED MULTI-DECK MEDIUM TEMP CASE	PLUG IN (L21-20P)
DC2-40	RV4B2192-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL FREEZER	HARD WIRED
DC2-41	RV4B2192-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL FREEZER	HARD WIRED
DC2-42	RV4B2192-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL FREEZER	HARD WIRED
DC2-43	RV4B2192-4		S/C	RIVACOLD SELF-CONTAINED EVAPORATOR - GENERAL FREEZER	HARD WIRED
--				DC-1 GUNTNER 4 FAN DRY COOLER	HARD WIRED
--				DC-2 GUNTNER 5 FAN DRY COOLER	HARD WIRED


RESPONSIBILITY MATRIX							COMMENTS
DESCRIPTION	GC	OWNER	REM	EMC	RIC	EC	
REFRIGERATED CASES			F		F/I/T		MANUFACTURED AND FURNISHED BY REM
DRY COOLERS			F		I/T		MANUFACTURED AND FURNISHED BY REM
COPPER GLYCOL PIPING - REFRIGERATION					F/I/T		PROVIDE ALL ACCESSORIES (FITTINGS, SUPPORT, ETC) AS REQUIRED
CASE CONTROLLERS			F/I		T		FACTORY INSTALLED ON ALL CASES/CONDENSING UNITS
EMS WIRING					F/I/T		PROVIDE CONDUIT AND ACCESSORIES AS REQUIRED
WALK-IN BOXES			F		I/T		PROVIDE AS REQUIRED PER LIDL CRITERIA
WALK-IN EVAPORATORS			F		I/T		PROVIDE AS REQUIRED PER LIDL CRITERIA
WALK-IN CONDENSING UNITS			F		I/T		PROVIDE AS REQUIRED PER LIDL CRITERIA
X-WEB POWER / CONTROL BOX			F		I/T		SHIPPED LOOSE FOR FIELD INSTALLATION PER DRAWINGS
X-WEB MODBUS CABLING	F/I						PROVIDE CONDUIT, CABLING AND WALL PLATE TERMINATIONS PER DRAWINGS
BUILDING CONTROLLER				F/I/T			PROVIDE ALL COMPONENTS AND CONNECTION FROM X-WEB BOX TO BUILDING CONTROLLER
GLYCOL CONTROL VALVES (CASE)			F/I/T				FACTORY INSTALLED AND WIRED AT EACH CASE/CONDENSING UNIT
GLYCOL CONTROL VALVES (LOOP)			F		I/T		FACTORY PROVIDED, FIELD INSTALLED
WIRING TO EQUIPMENT (LINE VOLTAGE)						F/I/T	PROVIDE CONDUIT AND ACCESSORIES AS REQUIRED
WIRING TO EQUIPMENT (LOW VOLTAGE)					F/I/T		PROVIDE CONDUIT AND ACCESSORIES AS REQUIRED
ROOF PENETRATIONS	F/I/T						
STRUCTURAL SUPPORT FOR ROOFTOP EQUIPMENT	F/I/T						

NOTES
ALL REFRIGERATED CASES, EVAPORATORS/GLYCOL COOLERS, DRY COOLERS, HEAT PUMPS, AND WALK-IN COOLERS AND FREEZERS SHALL BE PURCHASED BY LIDL. REM SHALL BE RESPONSIBLE FOR COORDINATING THE DELIVERY OF THIS EQUIPMENT TO CONSTRUCTION SITE.


LEGEND		
OWNER - LIDL SUPERMARKET COMPANY	EC - ELECTRICAL CONTRACTOR	
POWERWALL - ELECTRICAL POWERWALL SUPPLIER	GC - GENERAL CONTRACTOR	
F = FURNISH I = INSTALL T = TERMINATE	REM - REFRIGERATION EQUIPMENT MANUFACTURER	EMC - ENERGY MANAGEMENT CONTRACTOR
	RIC - REFRIGERATION INSTALLATION CONTRACTOR	

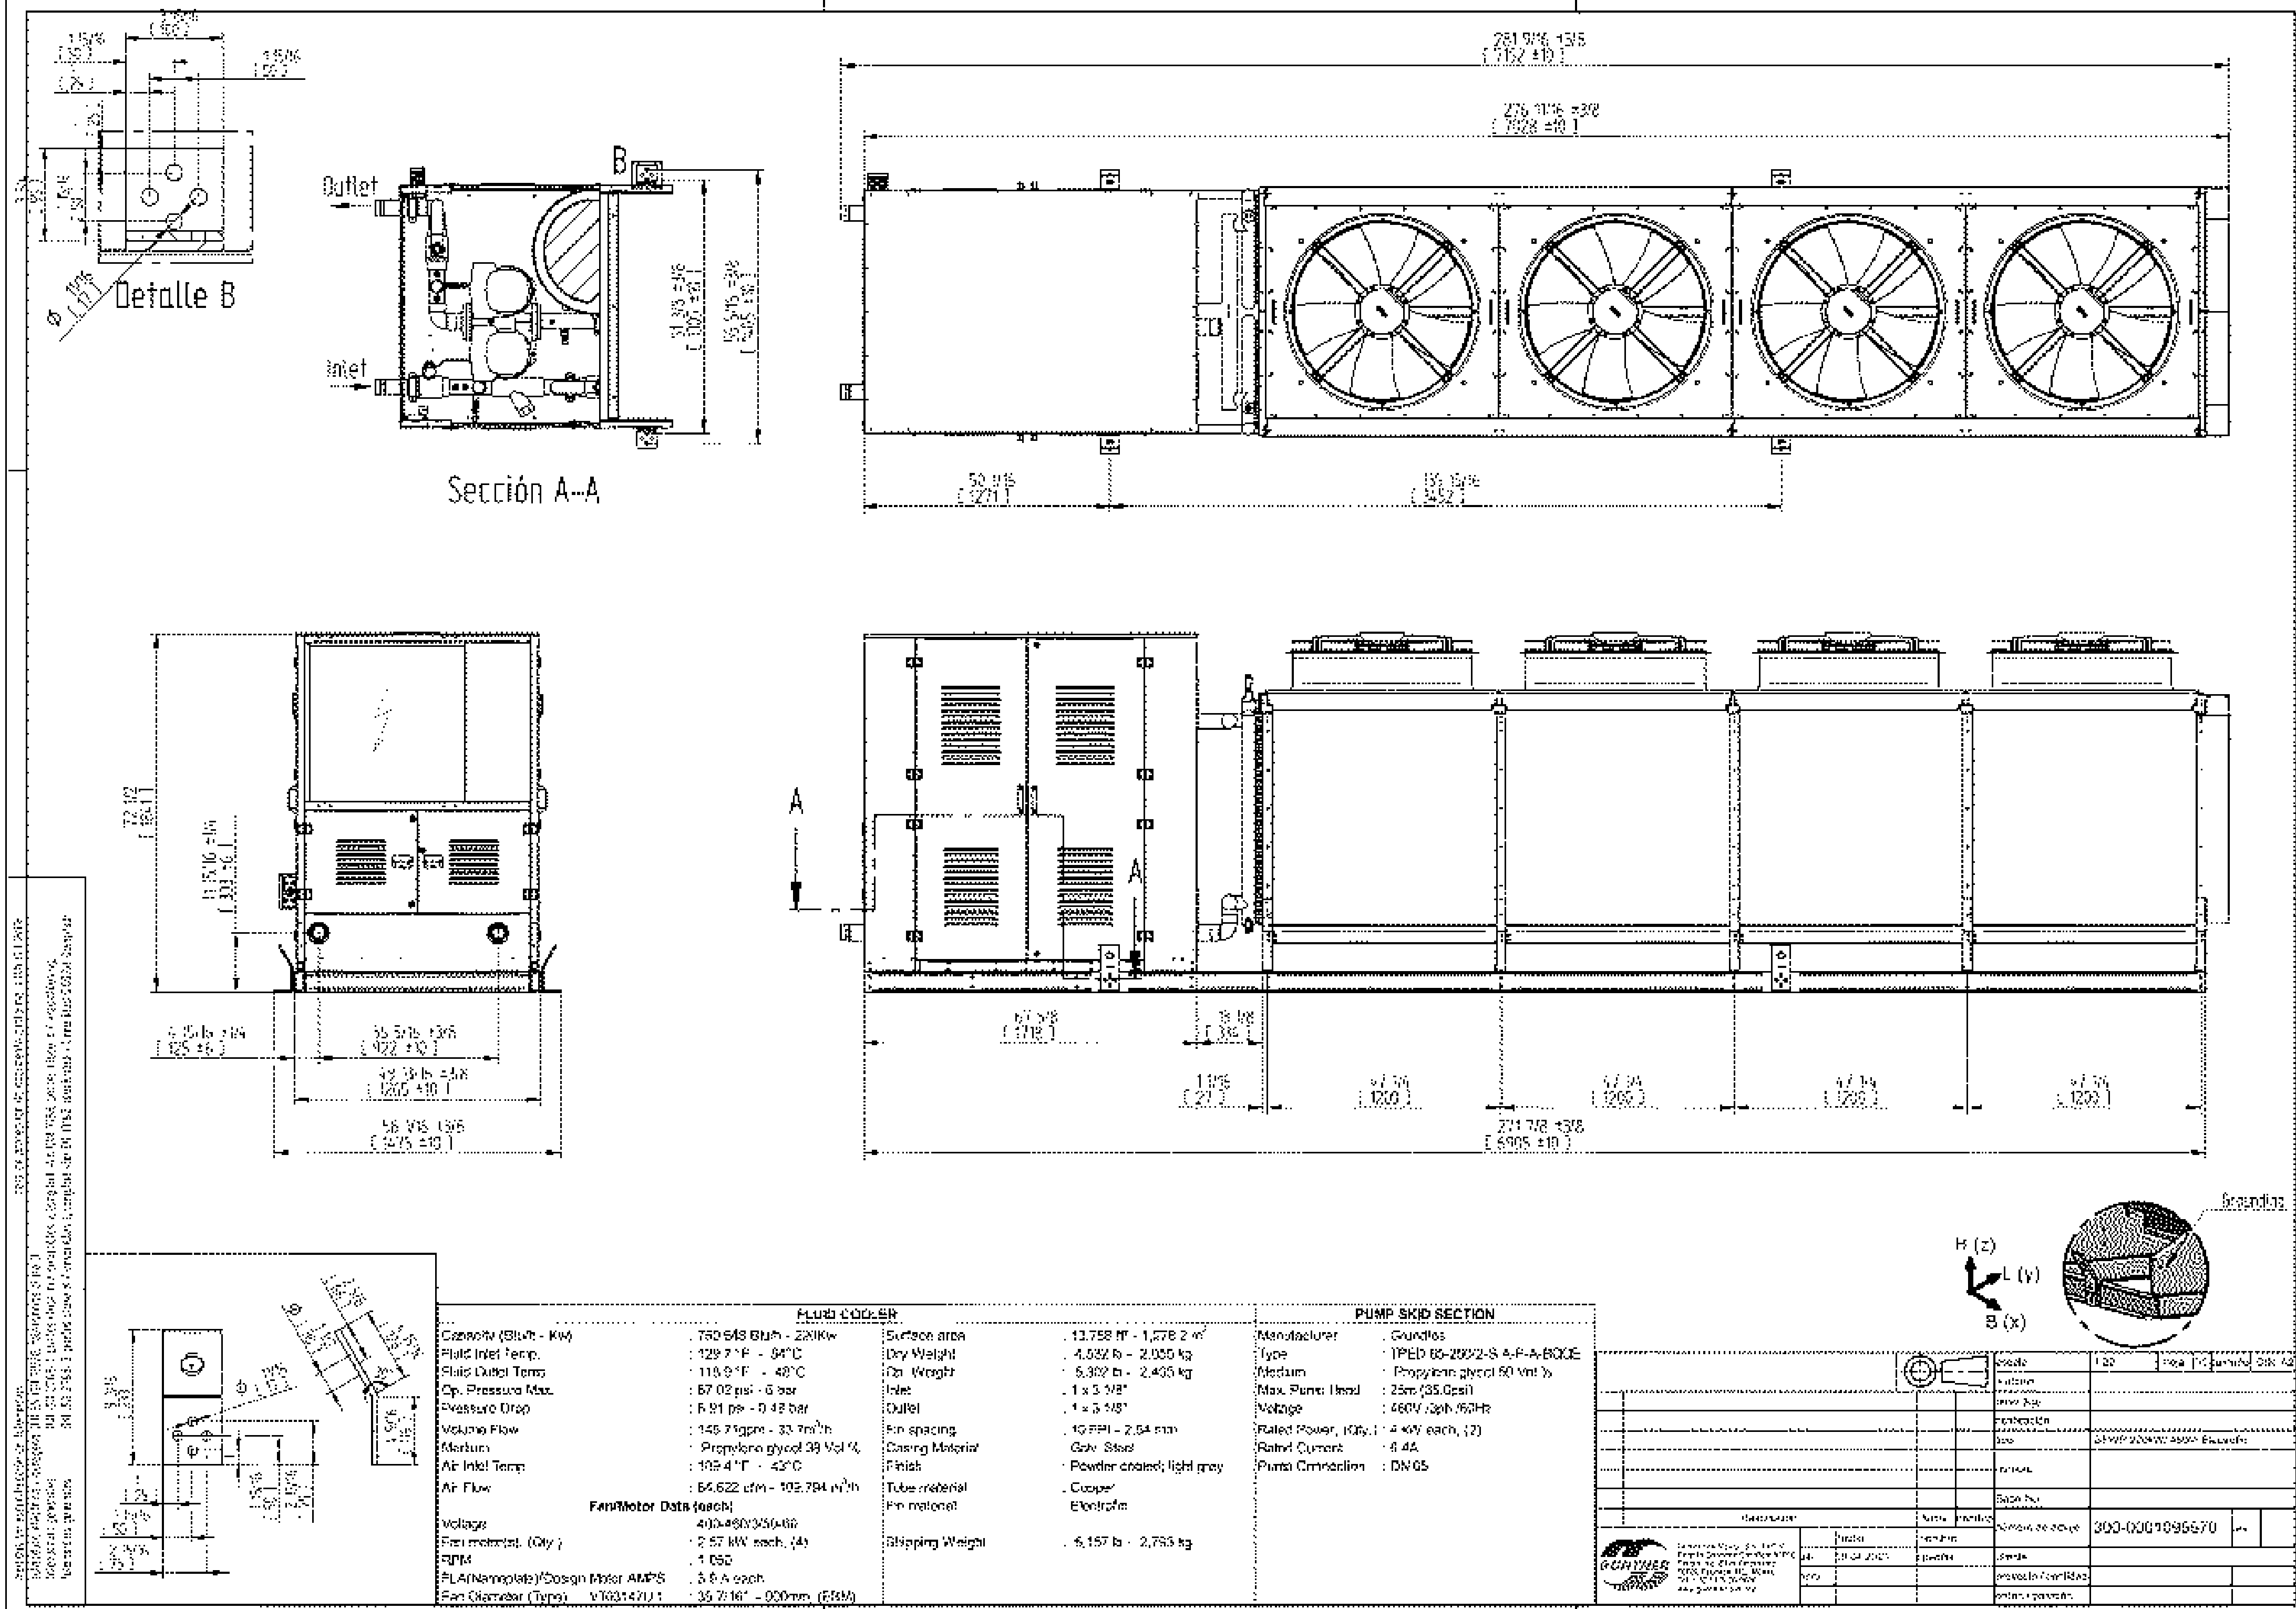

4-FAN DRY COOLER DETAIL

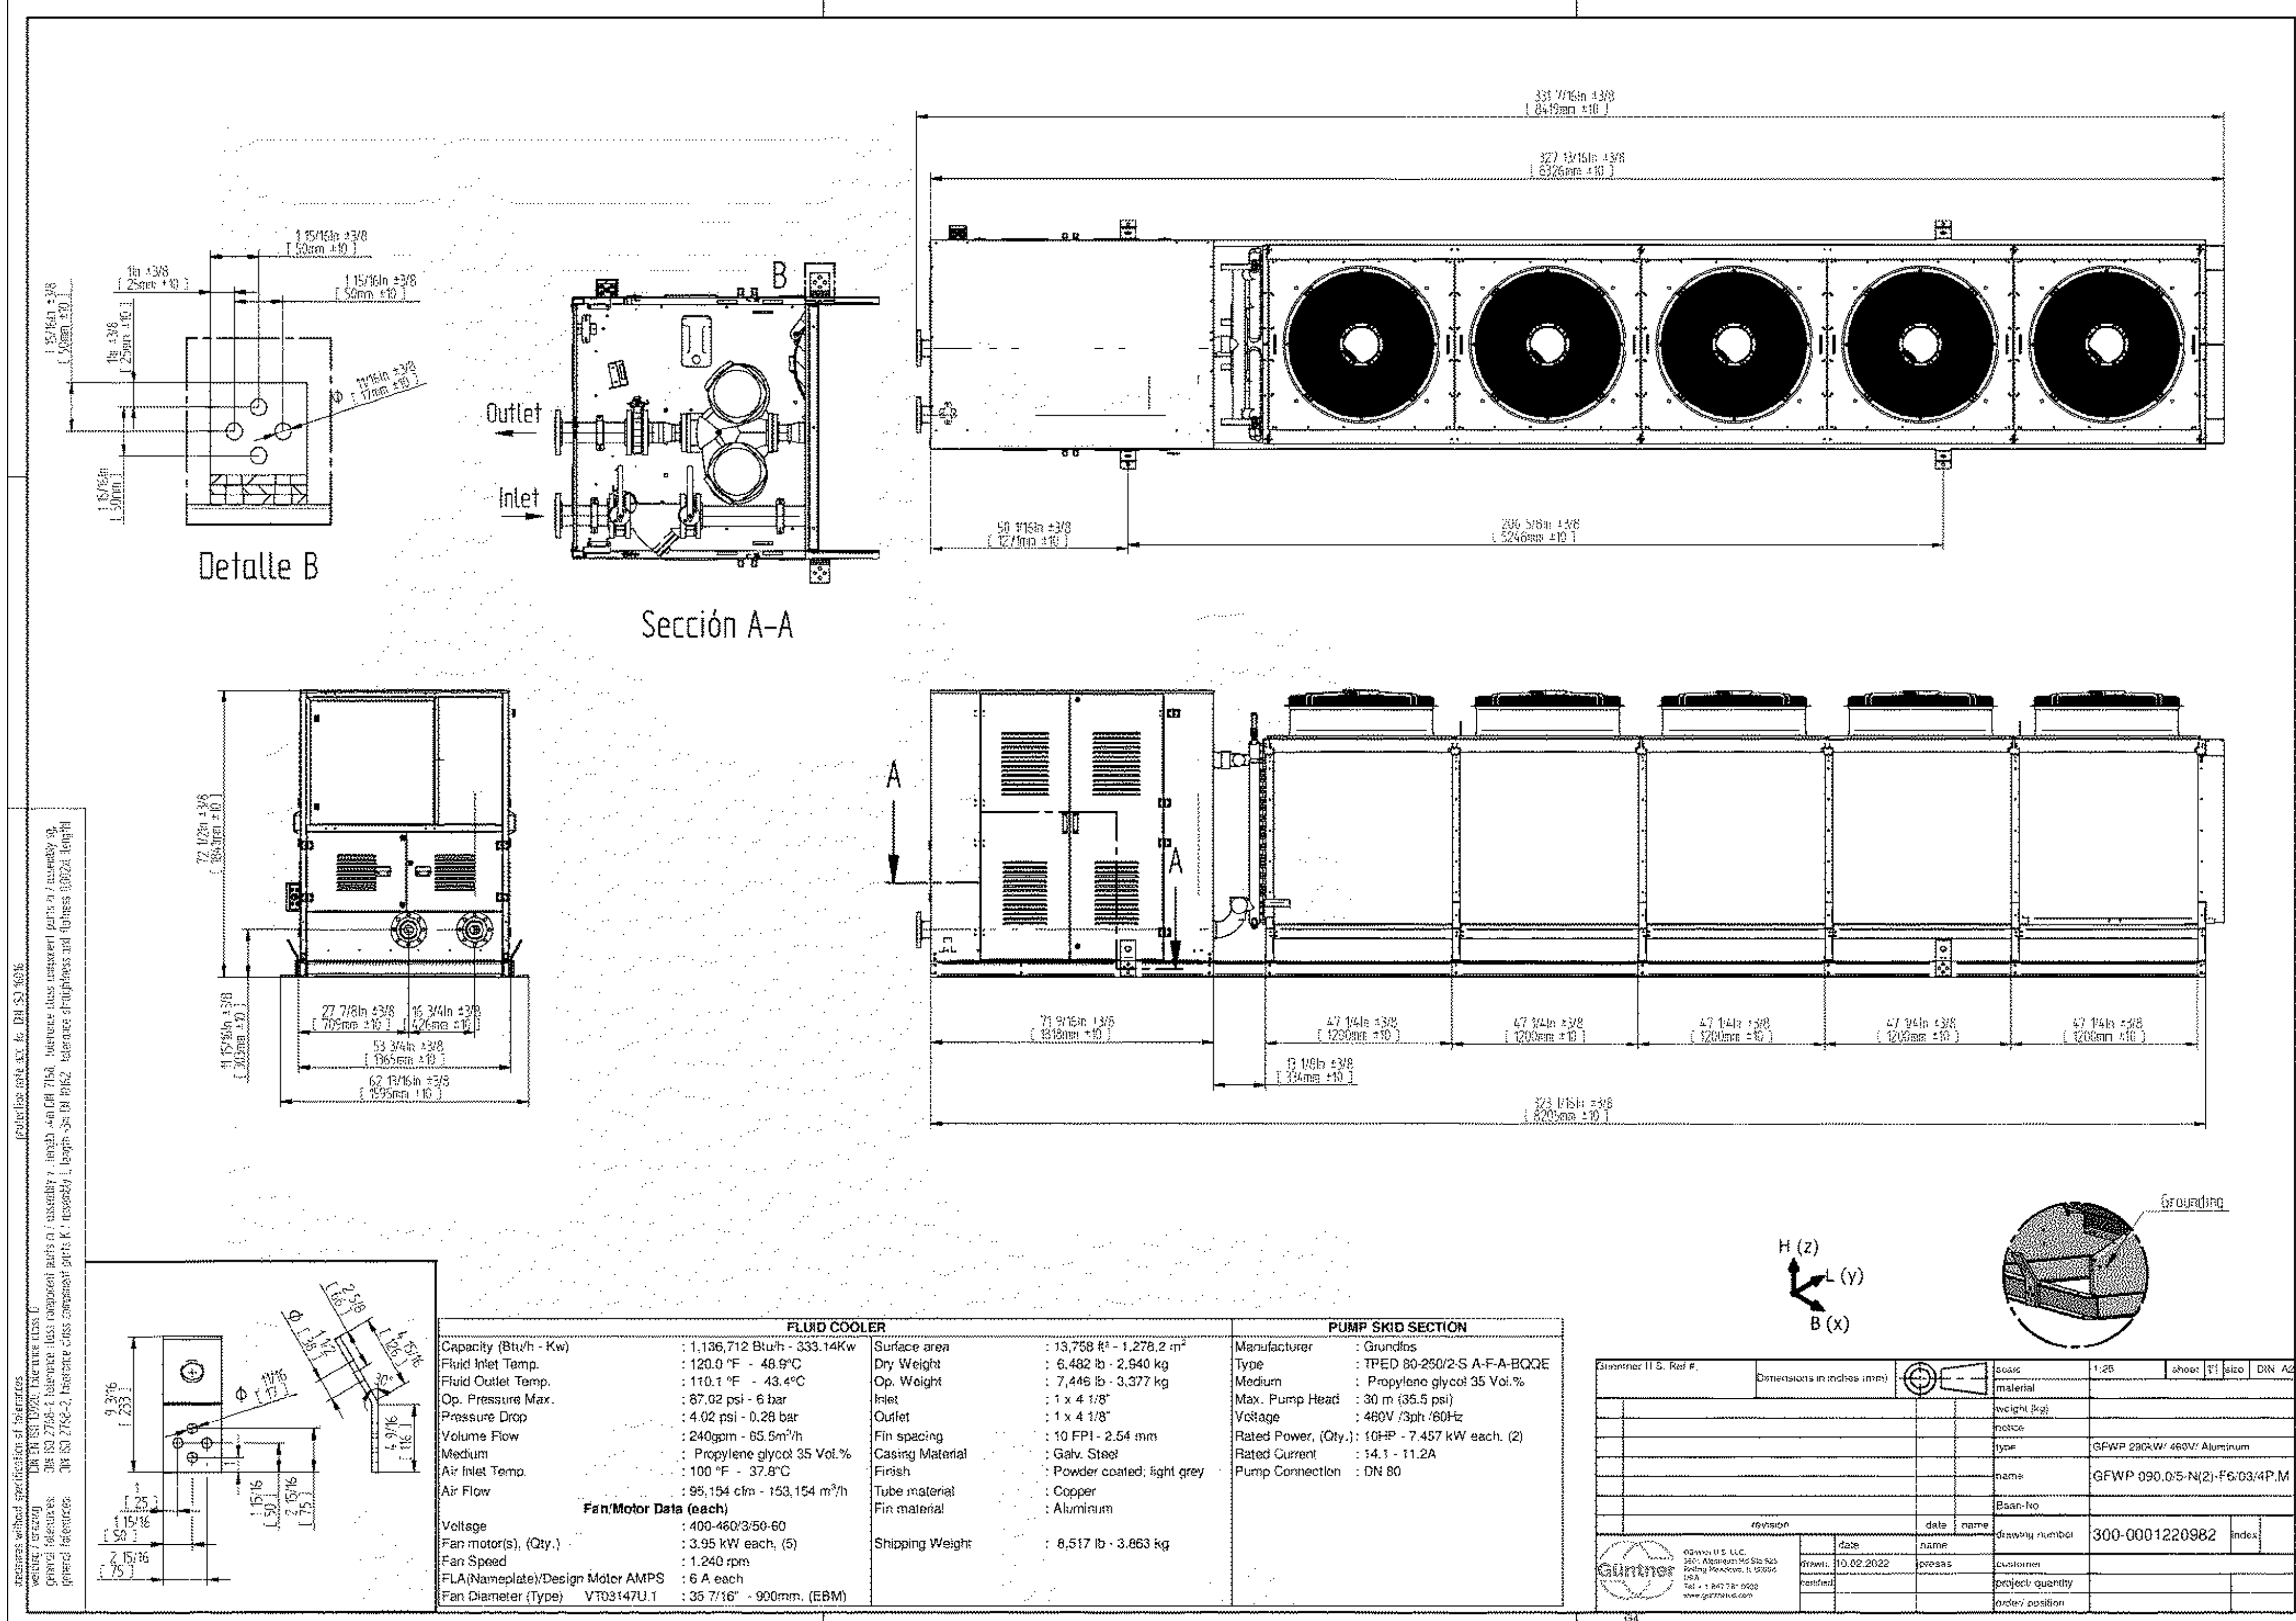

5-FAN DRY COOLER DETAIL

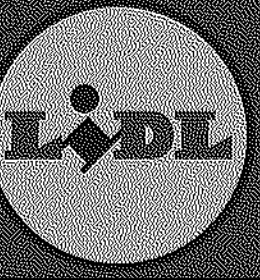

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION. ALL RIGHTS ARE RESERVED. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE PROPERTY OF HUSSMANN CORPORATION.

NOTICE OF LIABILITY
Hussmann Corporation and its subsidiaries and affiliates shall not be held responsible for any damages, losses, or expenses, including reasonable attorneys' fees, arising from the use of this document. The user of this document shall be responsible for the accuracy, completeness, and reliability of the information contained herein. The user shall be responsible for the accuracy, completeness, and reliability of the information contained herein. The user shall be responsible for the accuracy, completeness, and reliability of the information contained herein.

REV #	DATE	DESCRIPTION	REVISIONS
1	10/31/2025	REVISED PER SUPPLIER LAYOUT	1

DATE: 10/31/2025
SCALE:
DRAWN BY: SEAN A.
CHKD BY: CHRIS G.
APPROV BY: CRAIG P.
DESIGNED BY: TYLER R.
PLAN: 105113R_LIDL1517


Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell
cushingterrell.com
800.757.9522




DRY COOLER DETAILS

R9.0

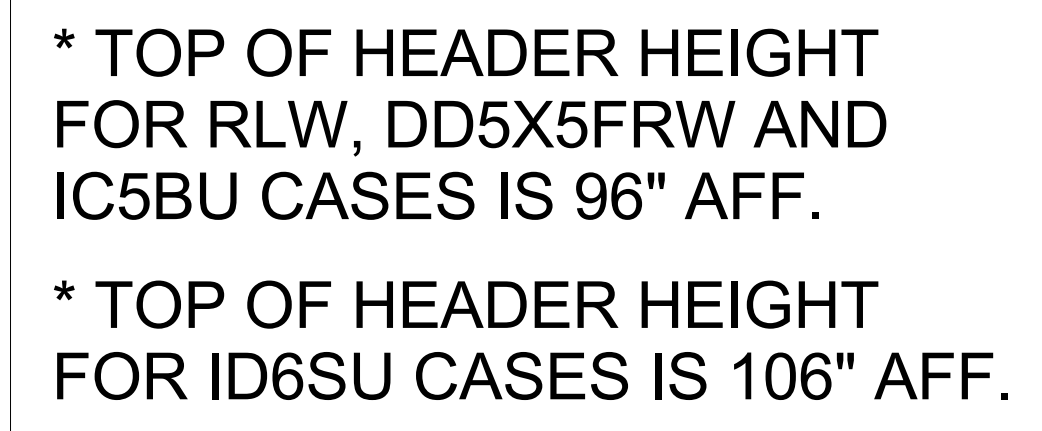

- ## CASE & COOLER HEADER PIPING

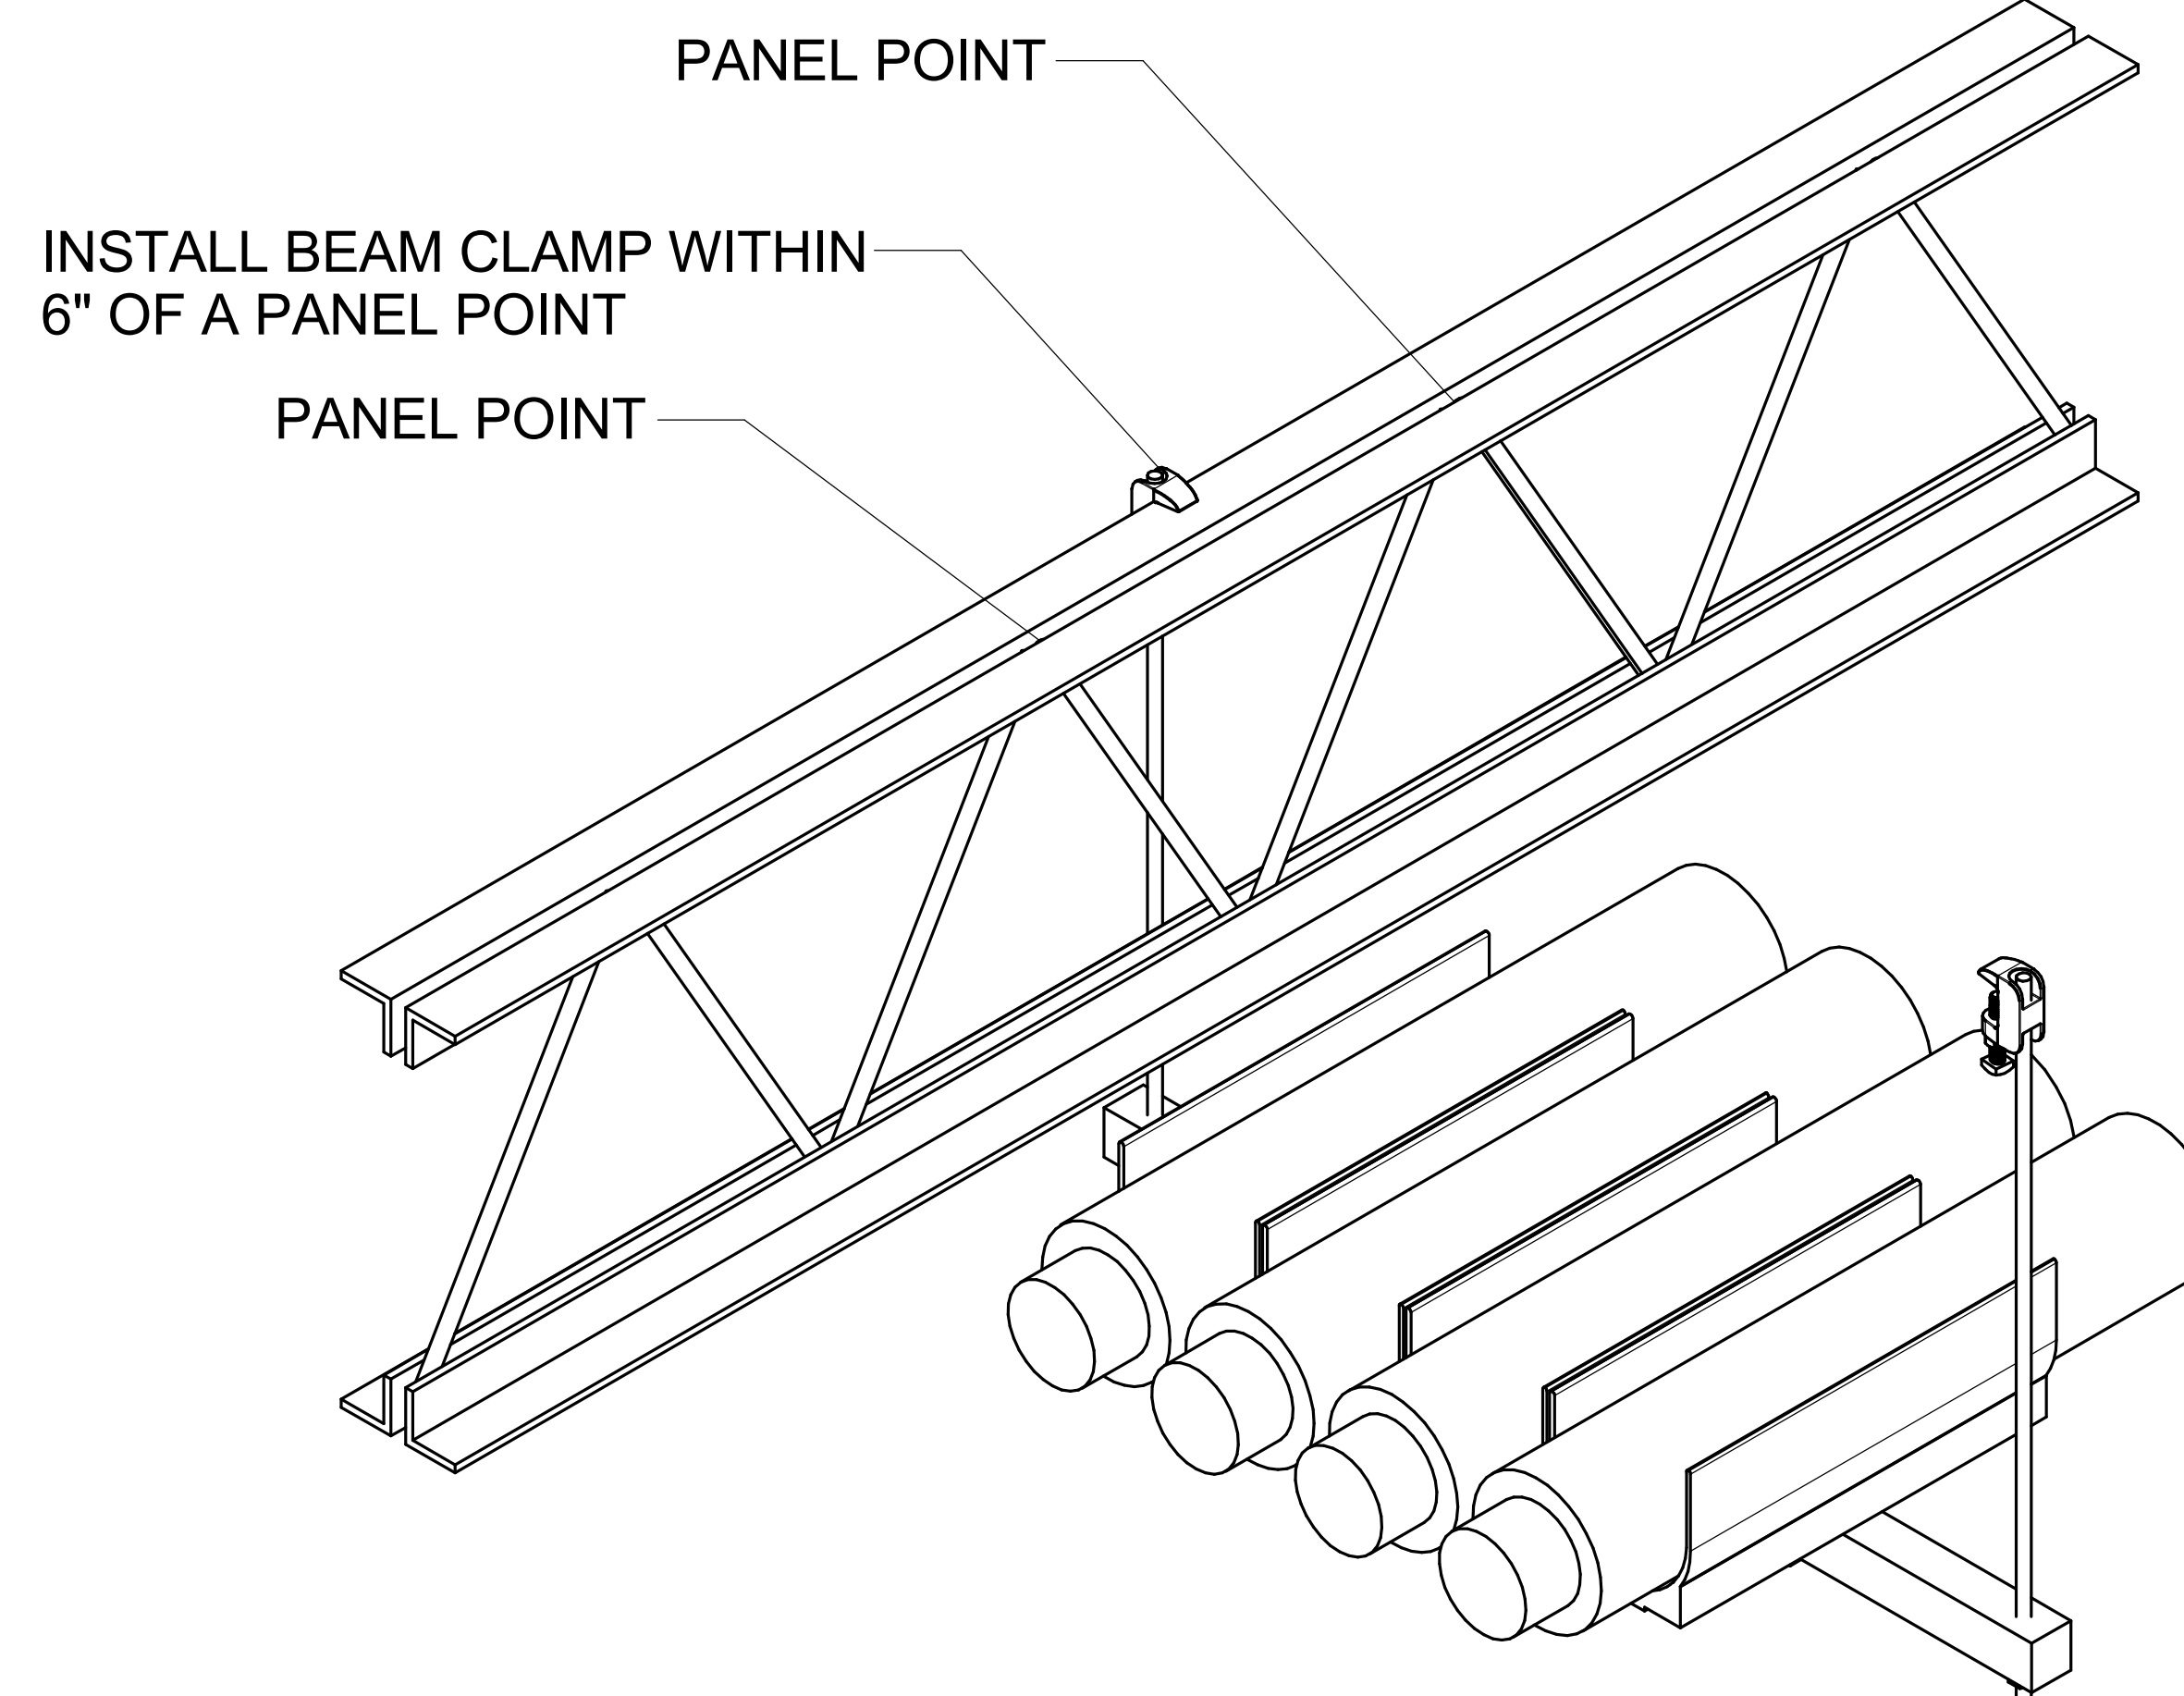

1. ALL TRAPEZE AND INDIVIDUAL PIPE HANGERS WILL BE INSTALLED FROM THE TOP OF THE BAR JOIST AND WITHIN 6" OF A PANEL POINT UTILIZING ALL THREAD ROD AND DEEP THROAT BEAM CLAMPS.
2. IF SADDLES ARE CENTERED IN THE HANGER, INSTAL A 5/16 SELF-TAPPING SCREW IN THE OUTSIDE SADDLES. IF THE SADDLES ARE PUSHED UP AGAINST THE ROD, PUT A SCREW IN THE OUTSIDE SADDLE
3. THIS APPLIES TO ALL GLYCOL, DX, AND EVAC PIPING SYSTEMS
4. SAMMYS THREADED ROD HANGERS ARE NOT APPROVED


HORIZONTAL PIPING SUPPORT




1. THE PREFERRED INSTALLATION METHOD IS THE INSTALL A TEE AND AIR VENT ASSEMBLY IN THE EXAMPLE SHOWN FOR BOTH THE SUPPLY AND RETURN LINE.
2. THE TEE MAY BE FLIPPED AND THE AIR VENT ASSEMBLY INSTALLED IN THE BULLHEAD OF THE TEE BUT THIS IS NOT THE PREFERRED METHOD.
3. AIR VENTS TO BE INSTALLED AT THE HIGHEST POINT OF THE PIPING AND NEED TO BE FIELD VERIFIED BASED ON SITE CONDITION AND PIPE ROUTING.




VERTICAL PIPING SUPPORT

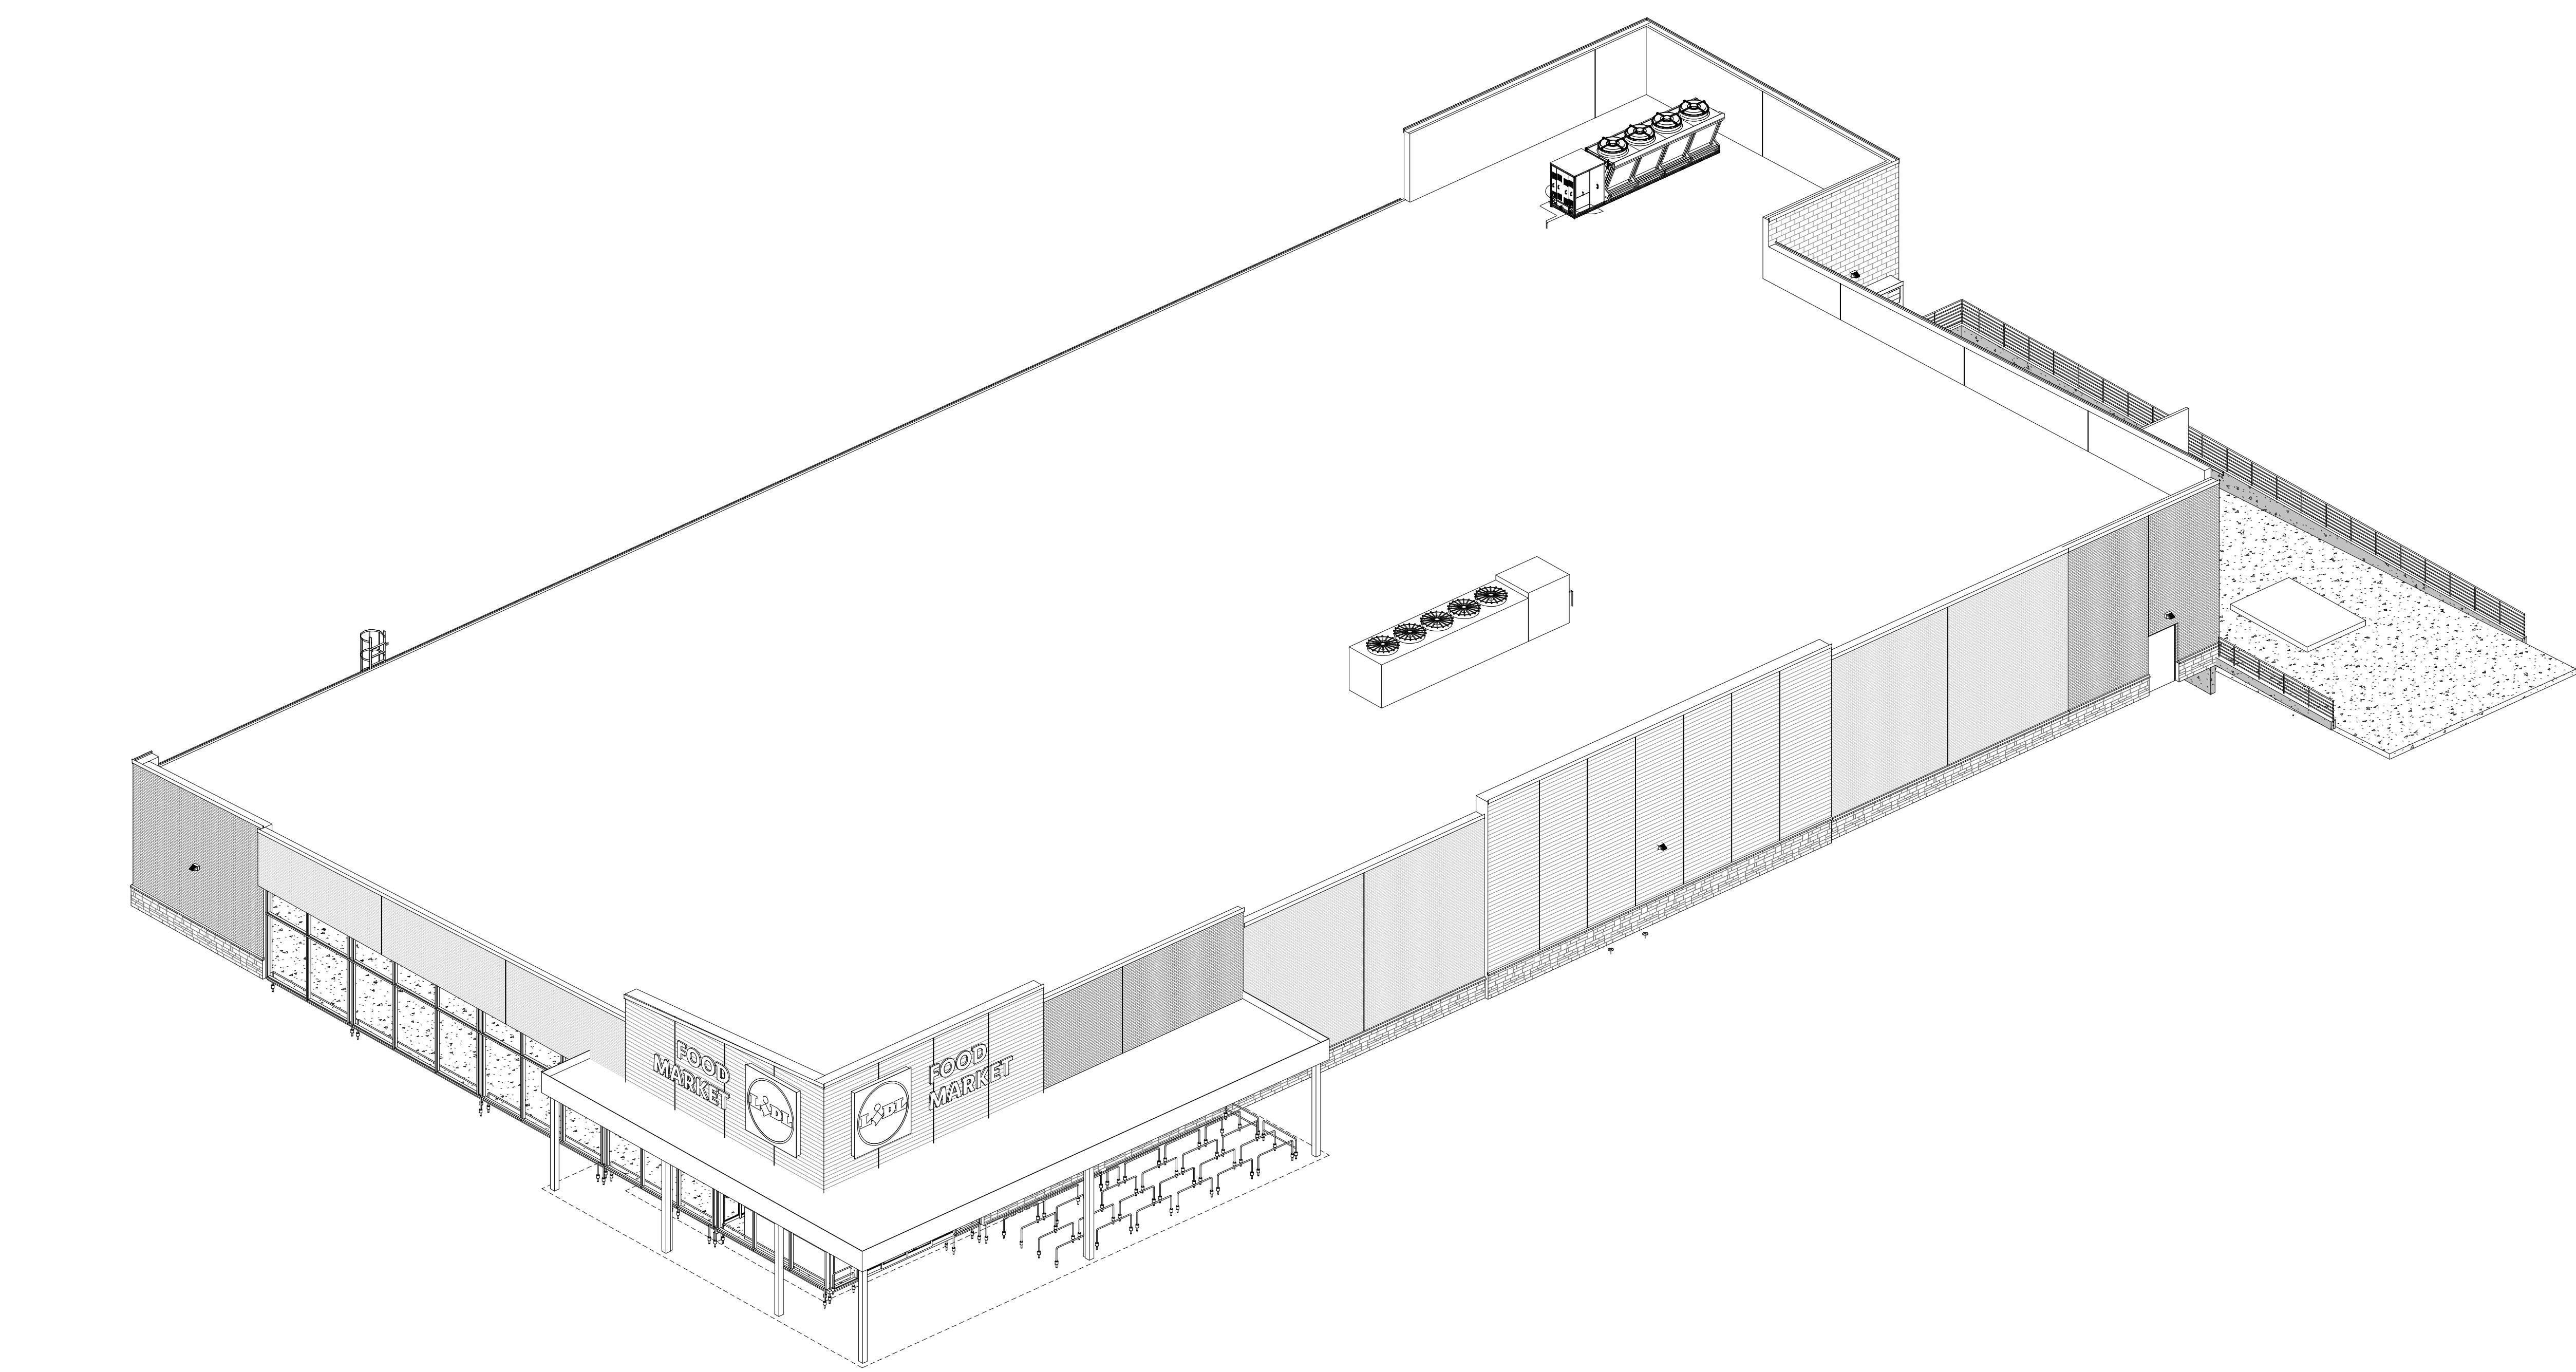


1 3D ROOF PLAN

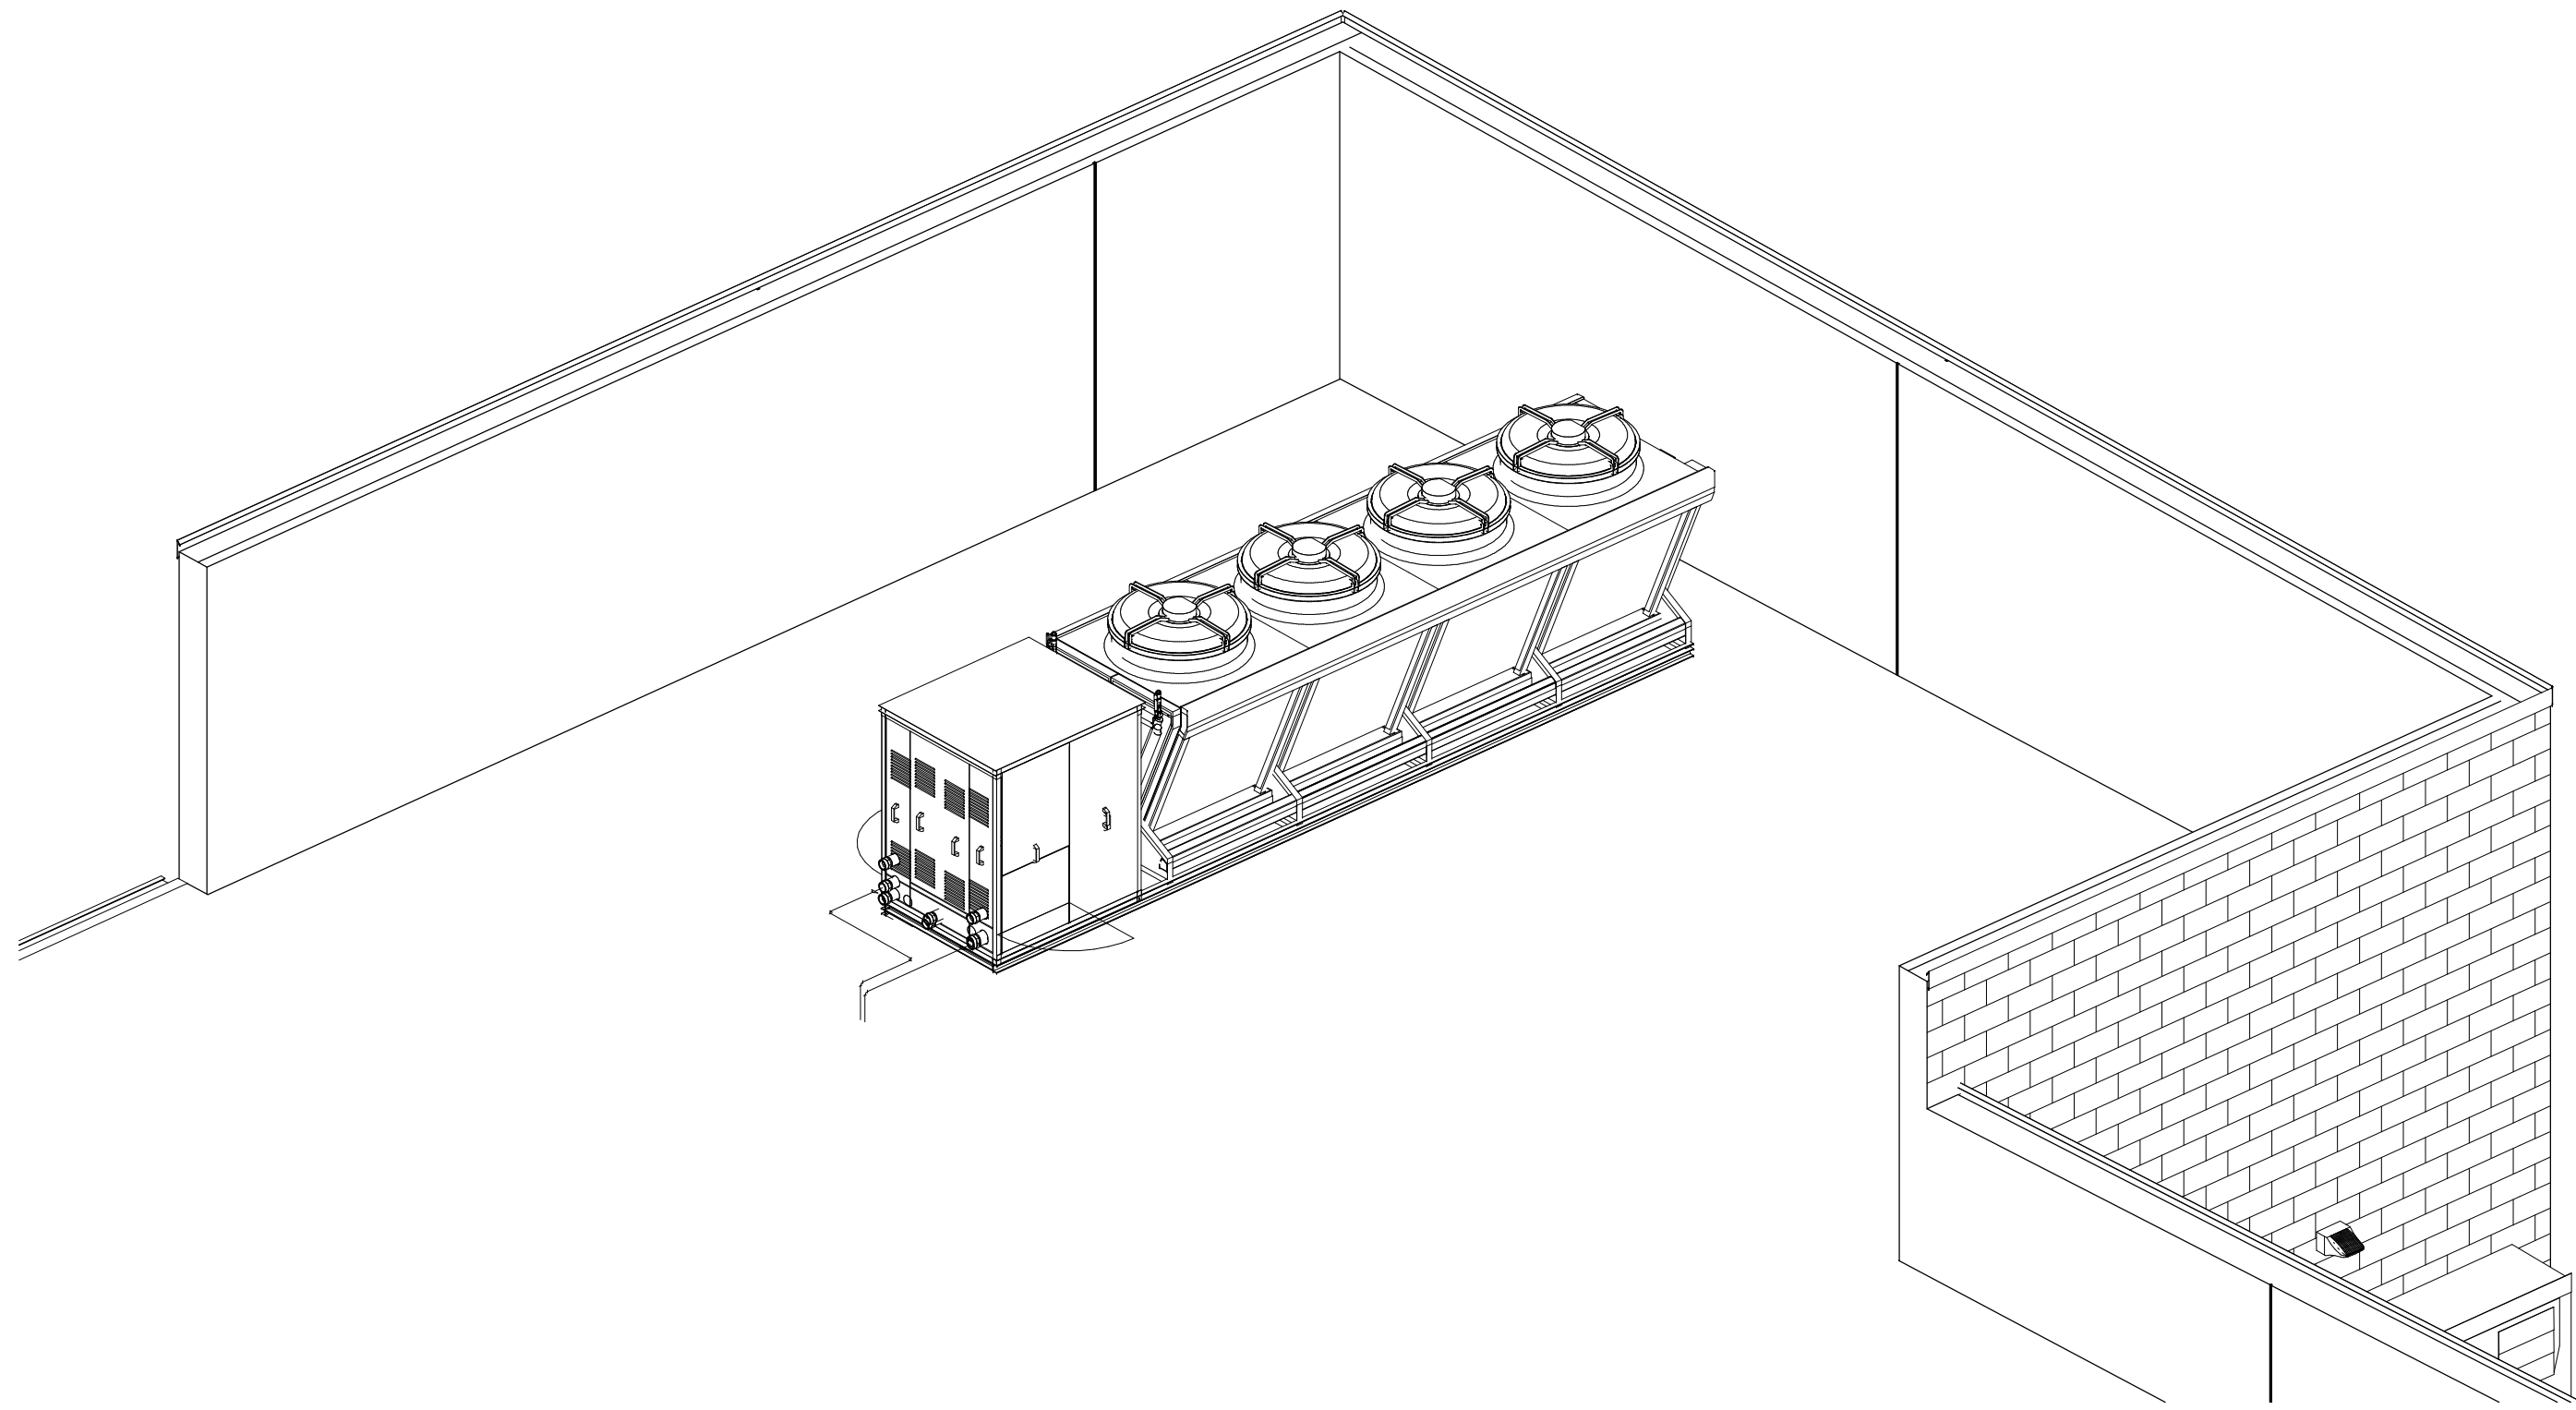

3 3D VIEW DRY COOLER #1

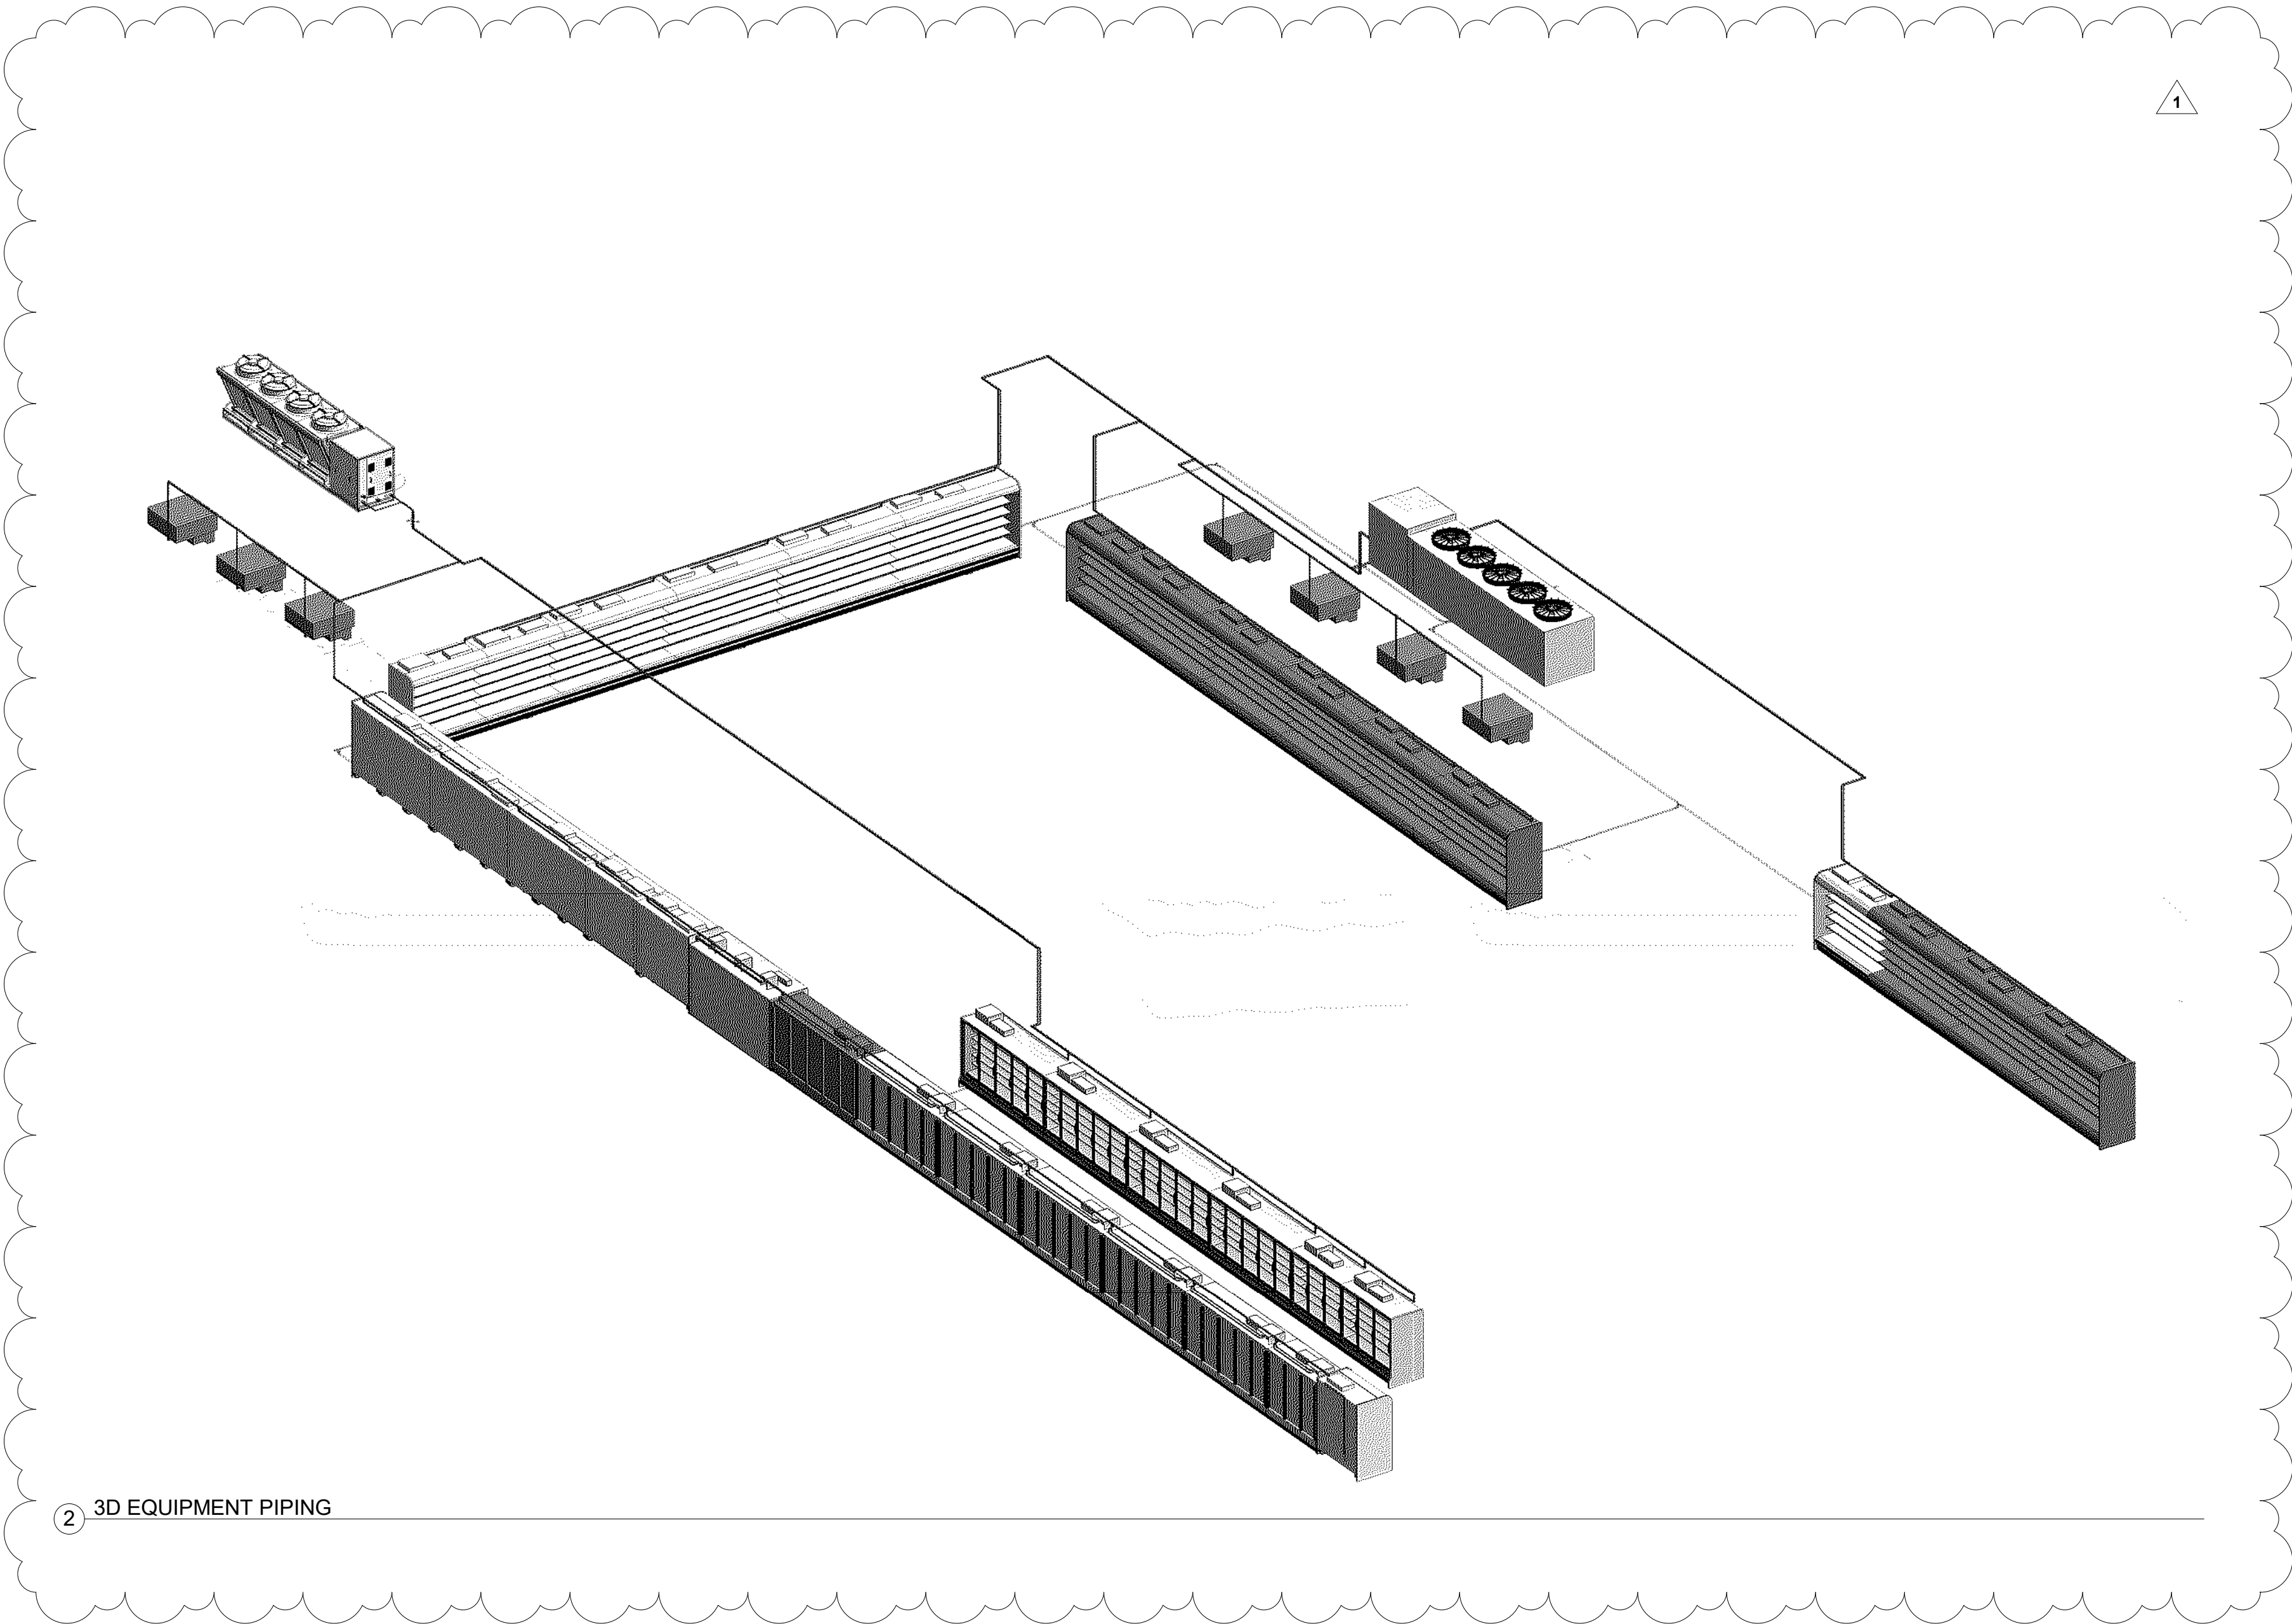


2 3D EQUIPMENT PIPING

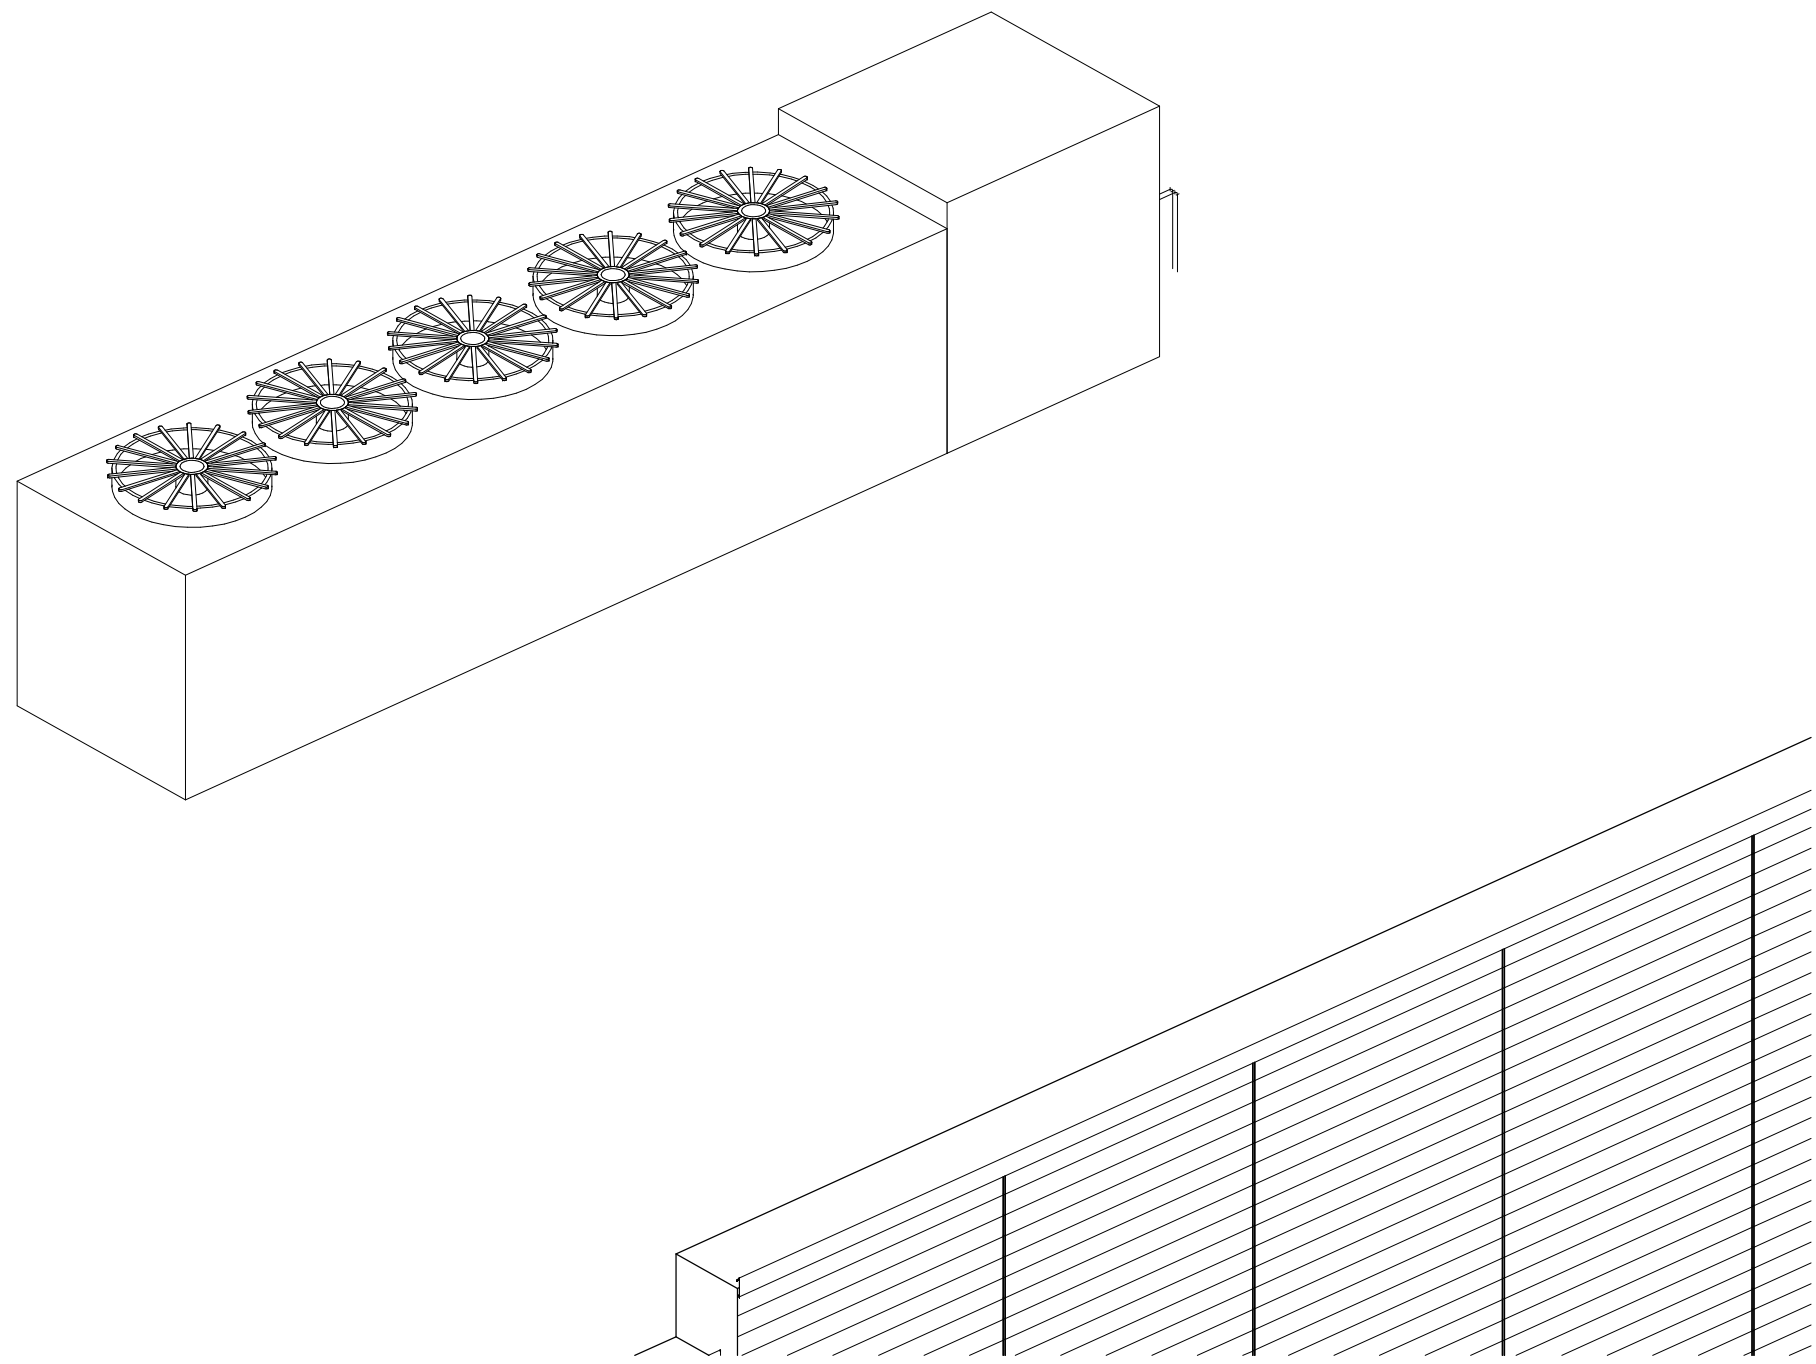

4 3D VIEW DRY COOLER #2

HUSSMANN®

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

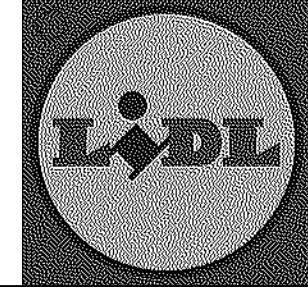

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT CONTAINS PROPRIETARY INFORMATION. ALL RIGHTS IN THE INFORMATION ARE RESERVED. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE PRIOR WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE PROPERTY OF HUSSMANN CORPORATION AND SHALL BE RETURNED TO HUSSMANN CORPORATION UPON REQUEST.

WARRANTY OF MERCHANTABILITY
All drawings and details are the property of HUSSMANN CORPORATION. HUSSMANN CORPORATION warrants that the drawings and details are the property of HUSSMANN CORPORATION and that the drawings and details are the property of HUSSMANN CORPORATION. HUSSMANN CORPORATION warrants that the drawings and details are the property of HUSSMANN CORPORATION and that the drawings and details are the property of HUSSMANN CORPORATION.

REV #	DATE	DESCRIPTION
1	10/31/2025	REVISION PER UPDATED SUPPLY CHAIN LAYOUT

DATE: 10/31/2025
SCALE:
DRAWN BY: Author
CHKD BY: Checker
APPRD BY: Approver
DESIGNED BY: Designer
PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.


Cushing Terrell

cushingterrell.com
800.757.9522




3D VIEWS

R11.0

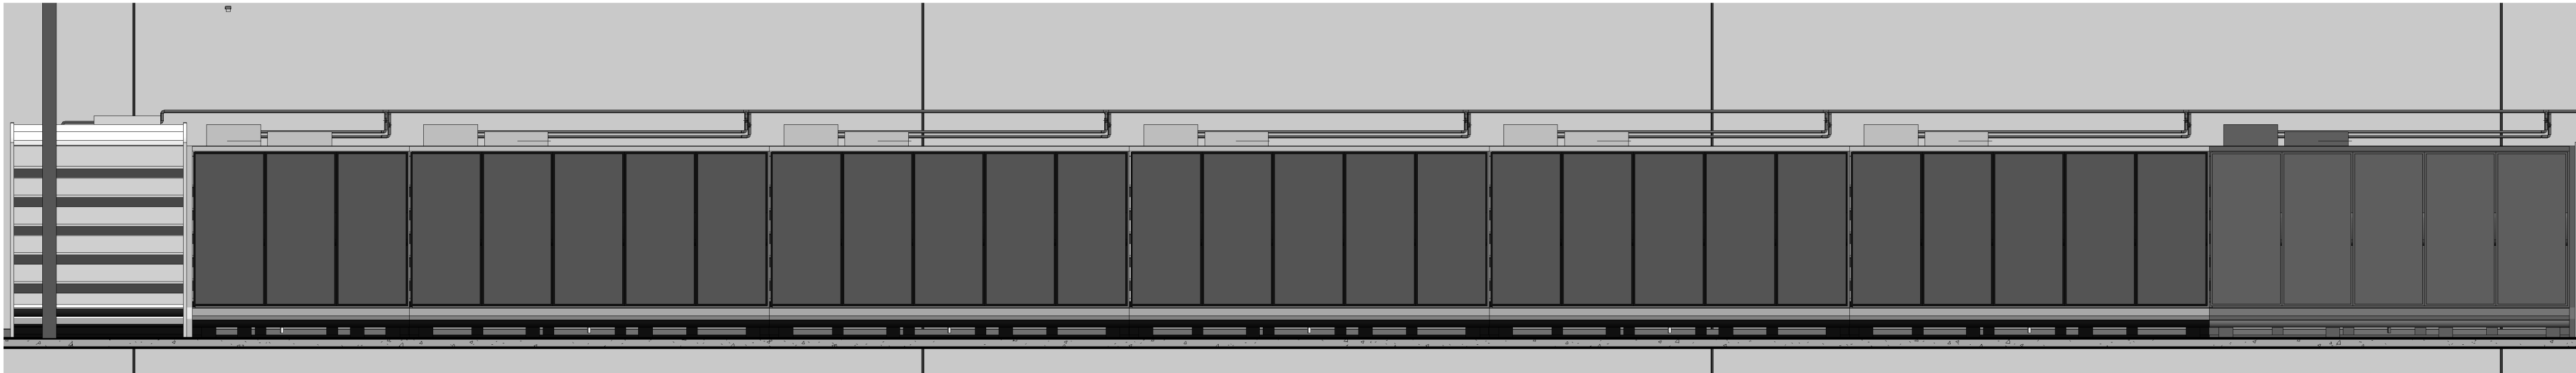


1 FREEZER WALL CASES
1/4" = 1'-0"

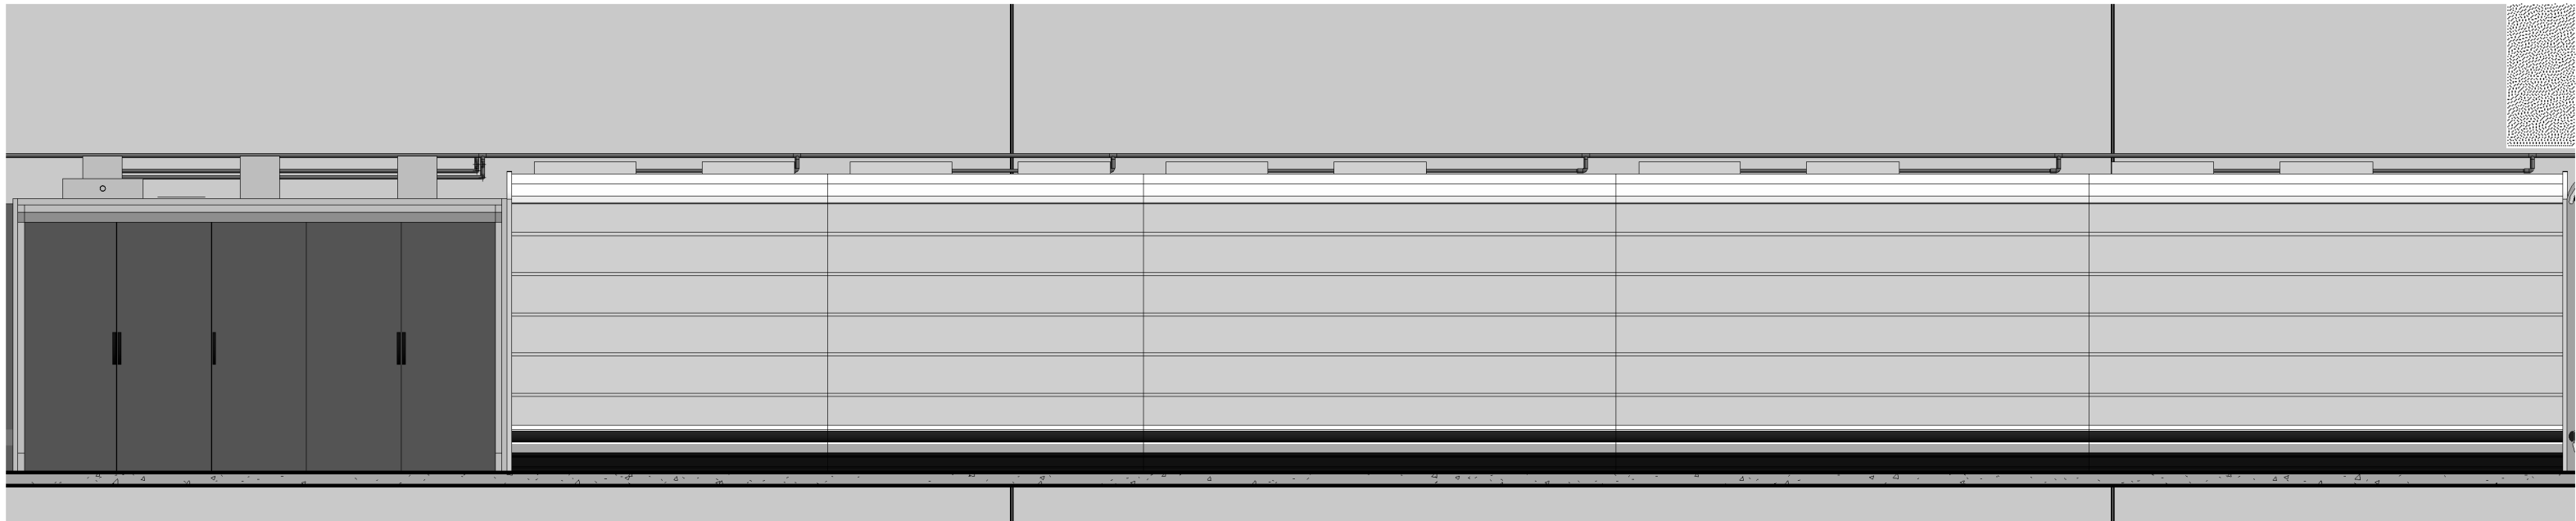

2 CHILLER WALL CASES #1
1/4" = 1'-0"




3 CHILLER WALL CASES #2
1/4" = 1'-0"

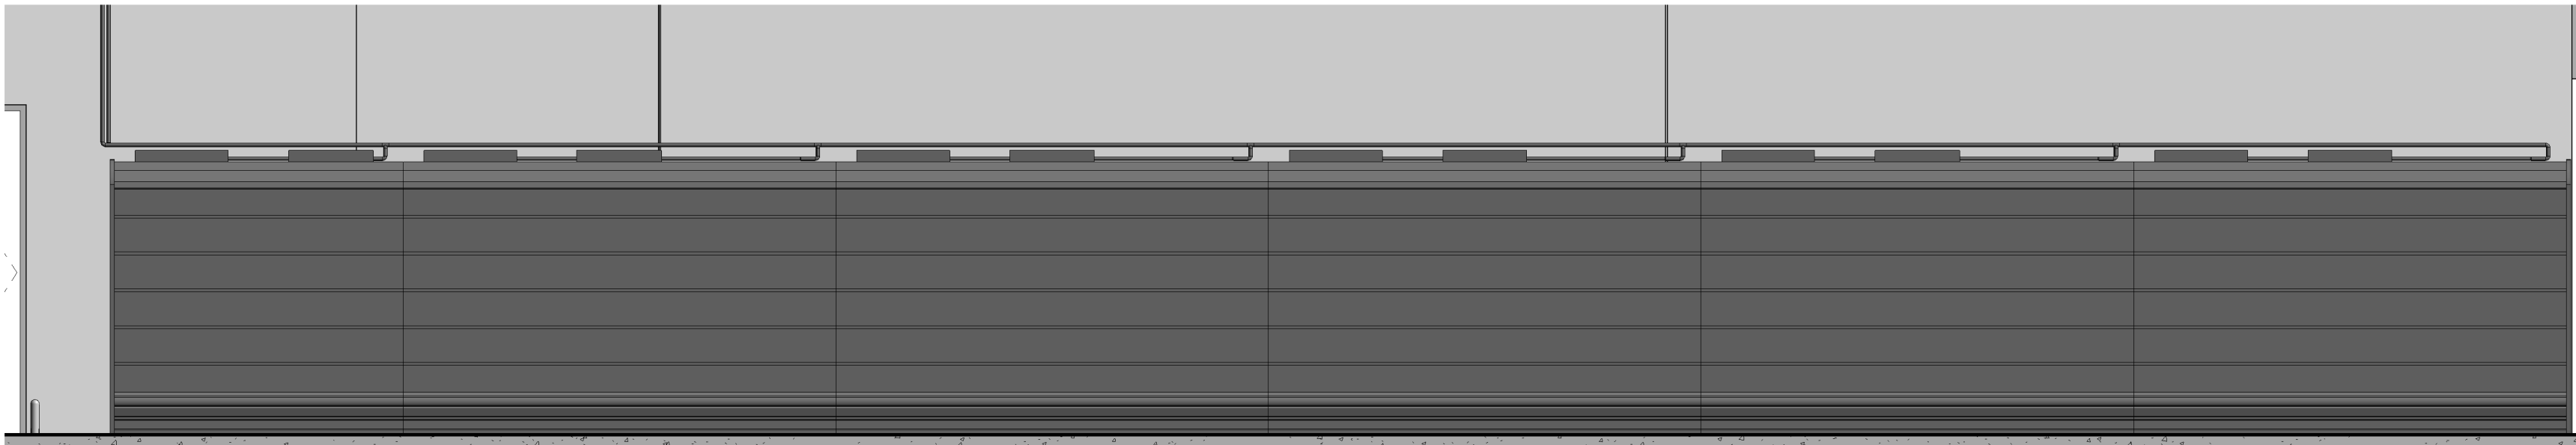


4 CHILLER WALL CASES #3
1/4" = 1'-0"




5 CHILLER WALL CASES #4
1/4" = 1'-0"

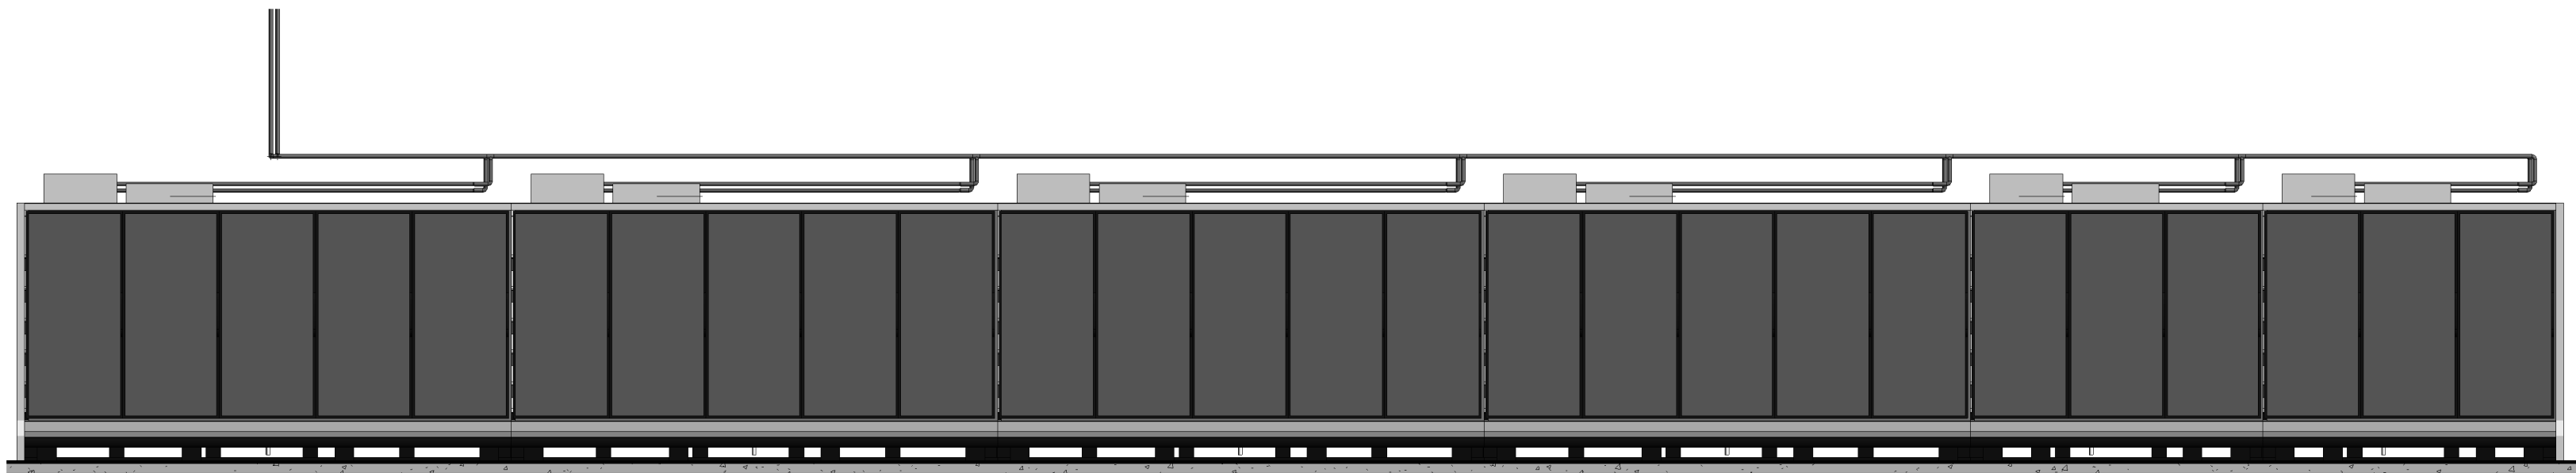


6 C.O.S. FREEZER CASES
1/4" = 1'-0"

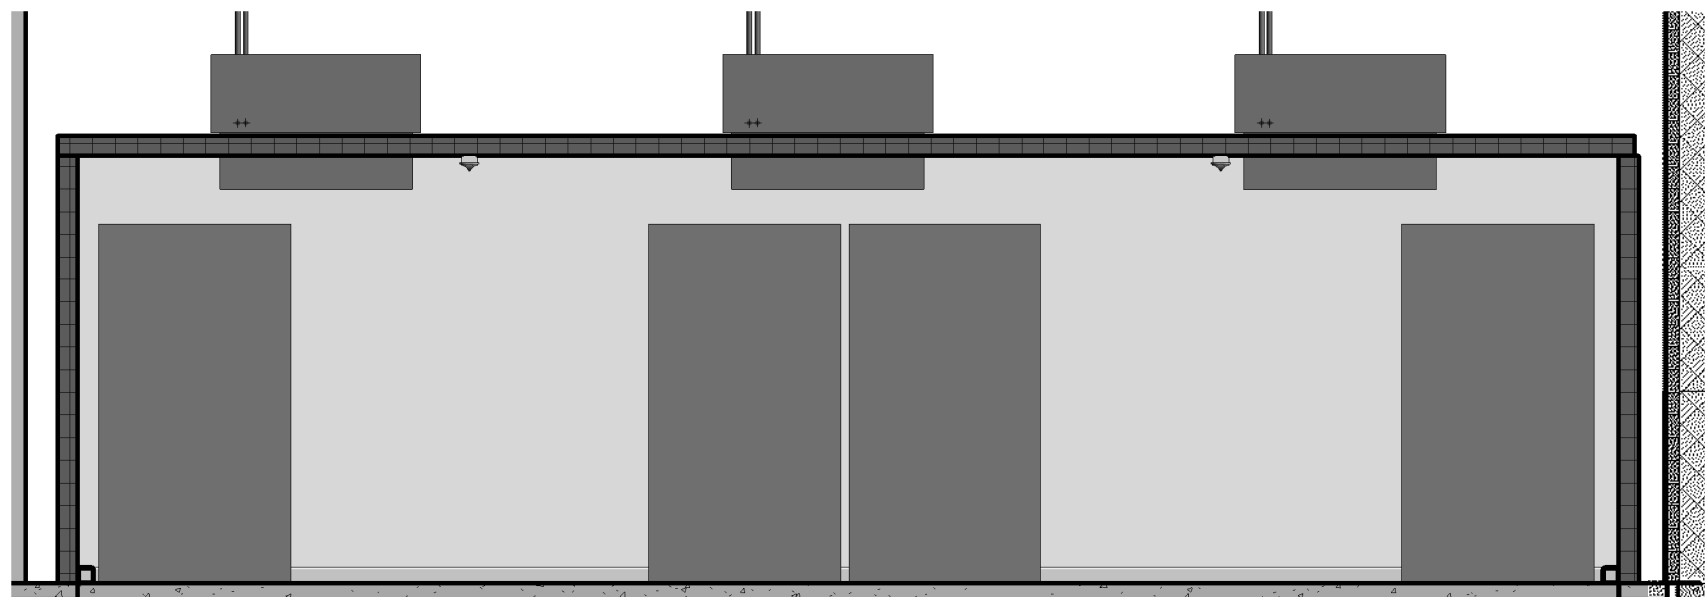


7 GENERAL COOLER
1/4" = 1'-0"

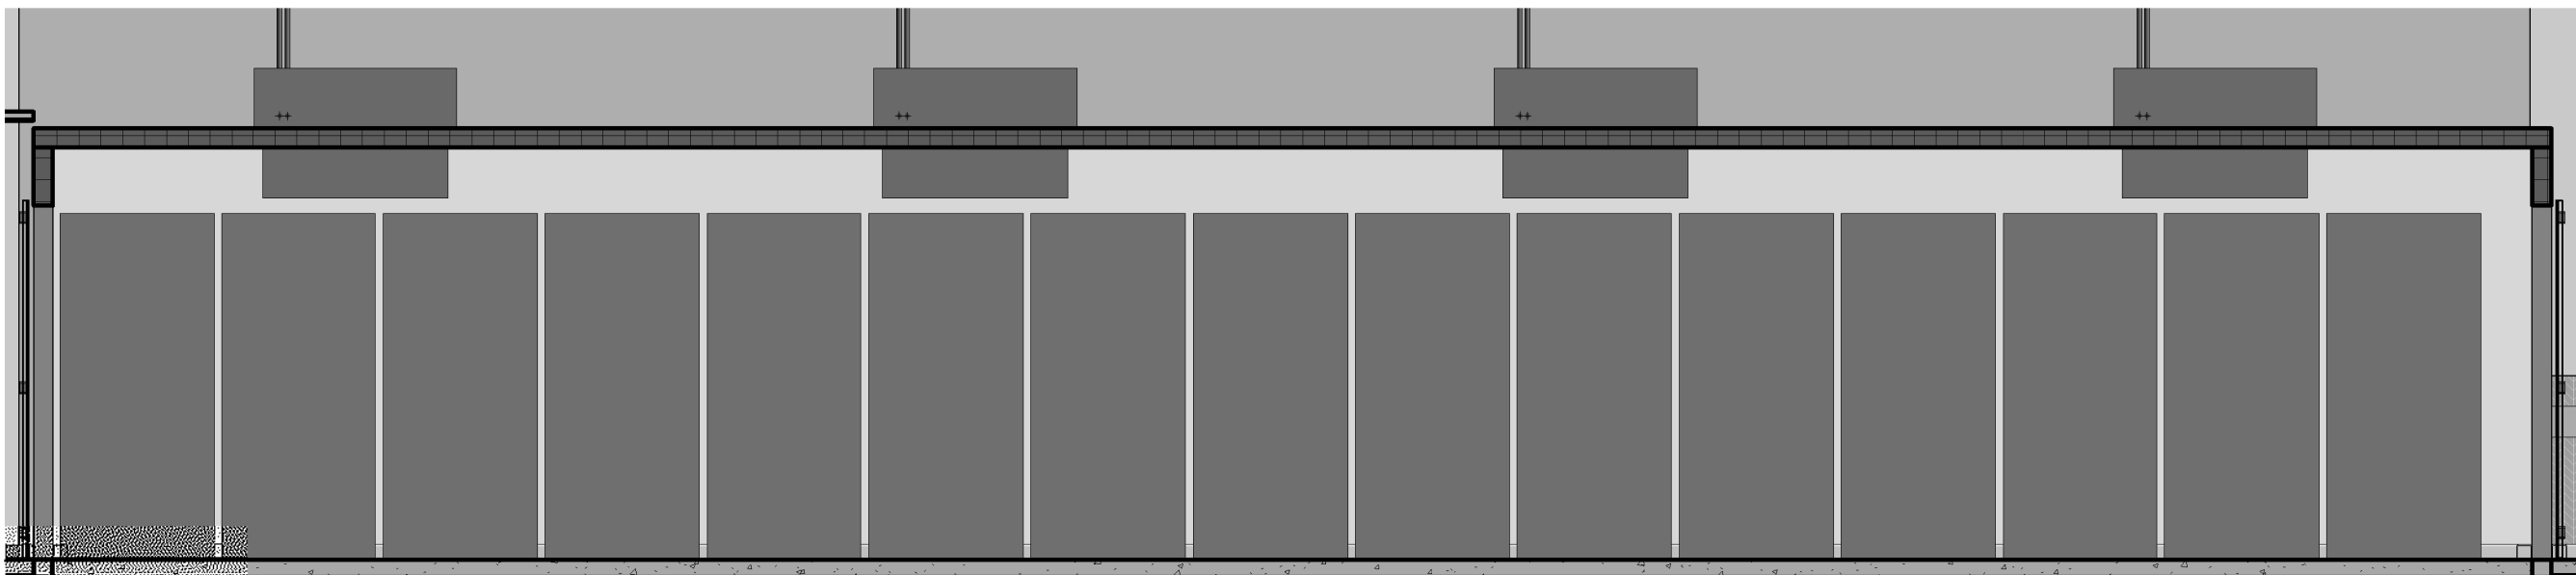

8 GENERAL FREEZER
1/4" = 1'-0"

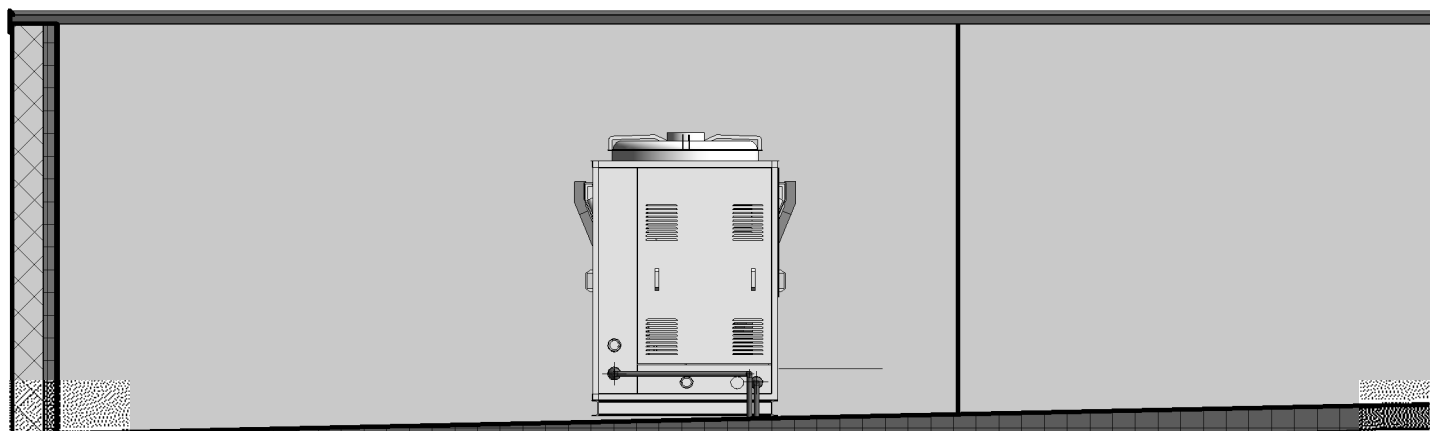


9 DRY COOLER #1
1/4" = 1'-0"

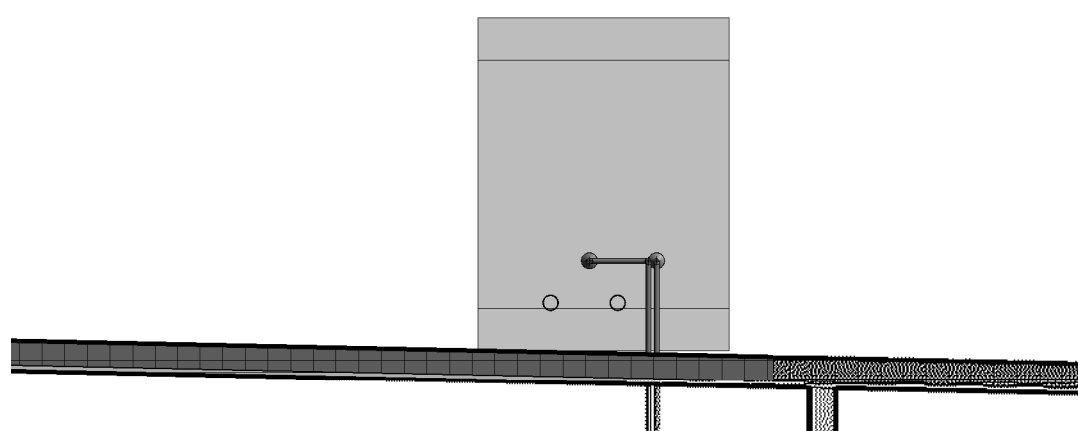

10 DRY COOLER #2
1/4" = 1'-0"

HUSSMANN®

Hussmann Corporation
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910
(909) 590-5113 Fax

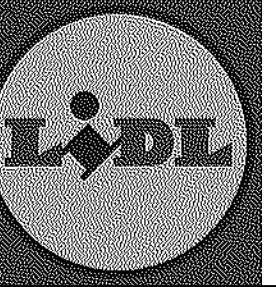

SALES PERSON

PROJECT MANAGER

THIS DOCUMENT IS THE COPYRIGHTED WORK OF HUSSMANN CORPORATION. IT IS CONTAINED HEREIN FOR THE EXCLUSIVE USE OF THE CUSTOMER. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF HUSSMANN CORPORATION. IT SHALL BE THE CUSTOMER'S RESPONSIBILITY TO OBTAIN NECESSARY PERMITS AND APPROVALS FROM ALL APPLICABLE AGENCIES AND AUTHORITIES.

NOTICE OF LIABILITY: HUSSMANN CORPORATION AND ITS EMPLOYEES, AGENTS, AND SUBCONTRACTORS SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PERSONS OR PROPERTY, INCLUDING BUT NOT LIMITED TO, PERSONAL INJURY, DEATH, OR DAMAGE TO PROPERTY, ARISING OUT OF THE USE OF ANY EQUIPMENT, MATERIALS, OR INFORMATION PROVIDED BY HUSSMANN CORPORATION, EVEN IF SUCH DAMAGE IS CAUSED BY THE NEGLIGENCE OF HUSSMANN CORPORATION. THE USER OF THE INFORMATION PROVIDED BY HUSSMANN CORPORATION SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM ALL APPLICABLE AGENCIES AND AUTHORITIES.

REVISIONS

DESCRIPTION

REV # DATE DRAWN CHECKED

1 10/30/25 B. ALLEN

REVISIONS PER UPDATED SUPPLY CHAIN LAYOUT

DATE: 10/31/2025

SCALE: 1/4" = 1'-0"

DRAWN BY: Author

CHKD BY: Checker

APPRVD BY: Approver

DESIGNED BY: Designer

PLAN: 105113R_LIDL1517

Lidl #1517
Norcross, Georgia 30093
New Store
499 JIMMY CARTER BLVD.

Cushing Terrell

cushingterrell.com
800.757.9522



1/12/2026

ELEVATION
VIEWS

R11.1